AUGUST · 1951
PRICE 75 CENTS

electronics

A McGRAW-HILL PUBLICATION

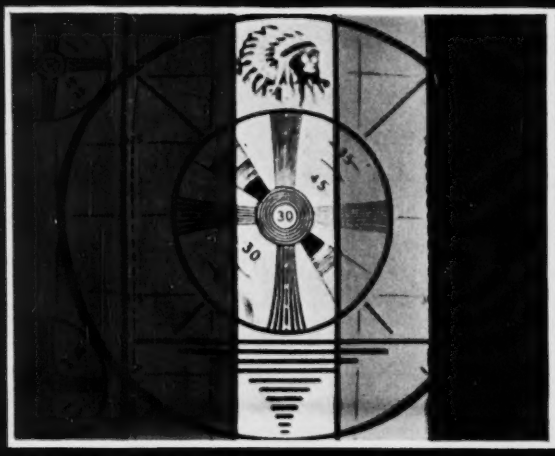

A SINGLE, DOUBLE AND TRIPLE COMBINATIONS

B SINGLE PRIMARIES—blue, red, green

C PAIRS OF PRIMARIES—yellow, cyan, magenta

Color-TV Signal-Generator Patterns

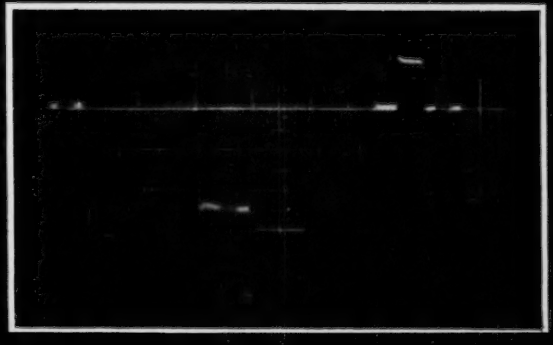

D DOT-SEQUENTIAL WAVEFORM—corresponding to picture A

ULTRA COMPACT UNITS...OUNCER UNITS

HIGH FIDELITY . . . . SMALL SIZE . . . . FROM STOCK

UTC Ultra compact audio units are small and light in weight, ideally suited to remote amplifier and similar compact equipment. High fidelity is obtainable in all individual units, the frequency response being ± 2 DB from 30 to 20,000 cycles.

True hum balancing coil structure combined with a high conductivity die cast outer case, effects good inductive shielding.

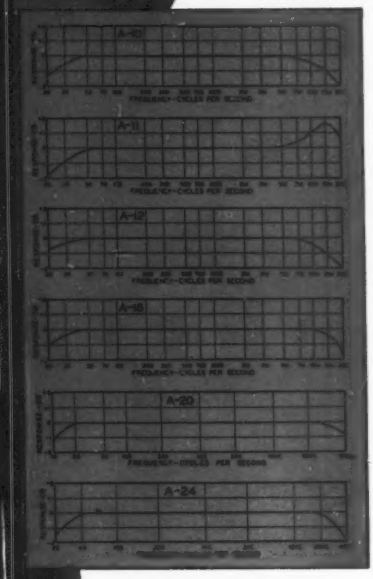

Type No.	Application	Primary Impedance	Secondary Impedance	List Price
A-10	Low impedance mike, pickup, or multiple line to grid	50, 125/150, 200/250, 333, 500/600 ohms	50 ohms	$16.00
A-11	Low impedance mike, pickup, or line to 1 or 2 grids (multiple alloy shields for low hum pickup)	50, 200, 500	50,000 ohms	18.00
A-12	Low impedance mike, pickup, or multiple line to grids	50, 125/150, 200/250, 333, 500/600 ohms	80,000 ohms overall, in two sections	16.00
A-14	Dynamic microphone to one or two grids	30 ohms	50,000 ohms overall, in two sections	17.00
A-20	Mixing, mike, pickup, or multiple line to line	50, 125/150, 200/250, 333, 500/600 ohms	50, 125/150, 200/250, 333, 500/600 ohms	16.00
A-21	Mixing, low impedance mike, pickup, or line to line (multiple alloy shields for low hum pickup)	50, 200/250, 500/600	50, 200/250, 500/600	18.00
A-16	Single plate to single grid	15,000 ohms	60,000 ohms, 2:1 ratio	15.00
A-17	Single plate to single grid 8 MA unbalanced D.C.	As above	As above	17.00
A-18	Single plate to two grids. Split primary	15,000 ohms	80,000 ohms overall, 2.3:1 turn ratio	16.00
A-19	Single plate to two grids 8 MA unbalanced D.C.	15,000 ohms	80,000 ohms overall, 2.3:1 turn ratio	19.00
A-24	Single plate to multiple line	15,000 ohms	50, 125/150, 200/250, 333, 500/600 ohms	16.00
A-25	Single plate to multiple line 8 MA unbalanced D.C.	15,000 ohms	50, 125/150, 200/250, 333, 500/600 ohms	17.00
A-26	Push pull low level plates to multiple line	30,000 ohms plate to plate	50, 125/150, 200/250, 333, 500/600 ohms	16.00
A-27	Crystal microphone to multiple line	100,000 ohms	50, 125/150, 200/250, 333, 500/600 ohms	16.00
A-30	Audiochoke, 250 henrys @ 5 MA 6000 ohms D.C., 65 henrys @ 10 MA 1500 ohms D.C.			12.00
A-32	Filter choke 60 henrys @ 15 MA 2000 ohms D.C., 15 henrys @ 30 MA 500 ohms D.C.			10.00



TYPE A CASE
1½" x 1½" x 2" high

UTC OUNCER components represent the acme in compact quality transformers. These units, which weigh one ounce, are fully impregnated and sealed in a drawn aluminum housing ⅞" diameter...mounting opposite terminal board. High fidelity characteristics are provided, uniform from 40 to 15,000 cycles, except for O-14, O-15, and units carrying DC which are intended for voice frequencies from 150 to 4,000 cycles. Maximum level 0 DB.

OUNCER CASE
⅞" Dia. x 1⅛" high

Type No.	Application	Pri. Imp.	Sec. Imp.	List Price
O-1	Mike, pickup or line to 1 grid	50, 200/250 500/600	50,000	$14.00
O-2	Mike, pickup or line to 2 grids	50, 200/250 500/600	50,000	14.00
O-3	Dynamic mike to 1 grid	7.5/30	50,000	13.00
O-4	Single plate to 1 grid	15,000	60,000	11.00
O-5	Plate to grid, D.C. in Pri.	15,000	60,000	11.00
O-6	Single plate to 2 grids	15,000	95,000	13.00
O-7	Plate to 2 grids, D.C. in Pri.	15,000	95,000	13.00
O-8	Single plate to line	15,000	50, 200/250, 500/600	14.00
O-9	Plate to line, D.C. in Pri.	15,000	50, 200/250, 500/600	14.00
O-10	Push pull plates to line	30,000 ohms plate to plate	50, 200/250, 500/600	14.00
O-11	Crystal mike to line	50,000	50, 200/250, 500/600	14.00
O-12	Mixing and matching	50, 200/250	50, 200/250, 500/600	13.00
O-13	Reactor, 300 Hys.—no D.C.; 50 Hys.—3 MA. D.C.,		6000 ohms	10.00
O-14	50:1 mike or line to grid	200	½ megohm	14.00
O-15	10:1 single plate to grid	15,000	1 megohm	14.00

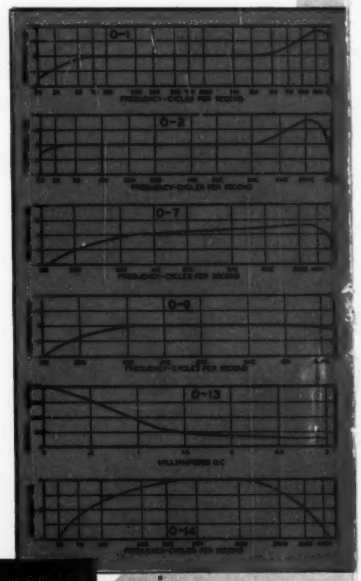

150 VARICK STREET • NEW YORK 13, N. Y.
EXPORT DIVISION: 13 EAST 40th STREET, NEW YORK 16, N. Y. CABLES: "ARLAB"

electronics

A McGRAW-HILL PUBLICATION

AUGUST • 1951

COLOR-TV SIGNAL-GENERATOR PATTERNS ..... COVER
Three monitor images and a waveform, photographed on Ektachrome film at Hazeltine Laboratories (see p. 116)

DEFENSE DEPARTMENT PLANS FOR BASIC RESEARCH, by H. Zahl, E. Piore and J. Marchetti 82
Army, Navy and Air Force spokesmen tell what's ahead

AIRBORNE SUBMARINE DETECTION SYSTEMS, by T. B. Schillo 88
Survey of recent improvements in submarines and antisubmarine aircraft, with emphasis on electronic equipment

PLANS FOR COMPATIBLE COLOR TELEVISION 90
Recommendations for "composite system" proposed by AD Hoc Committee of NTSC

WAR-EMERGENCY OPERATION OF BROADCAST STATIONS 94
The plan for assuring broadcast service without revealing the source of the program

ELECTRONIC PROTECTION FOR WAR PLANTS, by Richard Y. Atlee 96
Advanced designs offer increased safeguarding of plants engaged in military production

INDUSTRIAL TRISTIMULUS COLOR MATCHER, by George P. Bentley 102
Constant-current multiplier phototube circuit accurately matches colors of even darkest plastics, textiles and dyes

NEW CATHODE DESIGN IMPROVES TUBE RELIABILITY, by D. R. Hill 104
Structure contains reservoir of electron-emitting substance

SIDEFIRE HELIX UHF-TV TRANSMITTING ANTENNA, by L. O. Krause 107
Provides power gain of 20 with structural simplicity and ease of adjustment

TRAVELING-WAVE AMPLIFIER MEASUREMENTS, by F. E. Radcliffe 110
Quick and accurate measurement of amplifier characteristics for microwave television program circuits

HIGH-SPEED SAMPLING TECHNIQUES, by B. R. Shepard 112
Ways and means for scanning more circuits with better accuracy and in less time

PICTURE GENERATOR FOR COLOR TELEVISION, by R. P. Burr, W. R. Stone and R. O. Noyer 116
Simple equipment is added to black-and-white picture generator to provide color-striped pictures

STEP MULTIPLIER IN GUIDED-MISSILE COMPUTER, by Edwin A. Goldberg 120
Circuit details of missile and target simulator that minimizes costly test firings of new missile designs

BEAM STABILIZER FOR INDUSTRIAL X-RAYS, by John E. Jacobs 125
Automatic device uses cadmium crystals to keep beam intensity constant

D-C AMPLIFIER WITH REDUCED ZERO-OFFSET, by W. McAdam, R. Tarpley and A. Williams, Jr. 128
Input required to bring output to zero is less than one microampere in new contact-modulated measuring amplifier

FIELD-POWER CONVERSION, (Reference Sheet), by Robert E. Perry 134
Shows directly power density corresponding to field strength and levels above 1 μv or 1 μw

BUSINESS BRIEFS 76
CROSSTALK 81
TUBES AT WORK 136
ELECTRON ART 140
NEW PRODUCTS 142
NEWS OF THE INDUSTRY 148
NEW BOOKS 150
BACKTALK 152
INDEX TO ADVERTISERS ..... (Last Page)

DONALD G. FINK, *Editor;* **W. W. MacDONALD,** *Managing Editor;* John Markus, Vin Zeluff, A. A. McKenzie, *Associate Editors;* William P. O'Brien, James D. Fahnestock, Ronald K. Jurgen, *Assistant Editors;* John M. Carroll (on Military Leave), Ann Mastropolo, Marilyn Wood, *Editorial Assistants;* Gladys T. Montgomery, *Washington Editor;* Harry Phillips, *Art Director;* Eleanor Luke, *Art Assistant*

KEITH HENNEY, *Consulting Editor*

H. W. MATEER, *Publisher;* **WALLACE B. BLOOD,** *Manager;* R. S. Quint, *Buyers' Guide Manager;* D. H. Miller, James Girdwood, *New York;* Wm. S. Hodgkinson, *New England;* Warren W. Shew, *Philadelphia;* C. D. Wardner, *Chicago;* J. L. Phillips, *Cleveland;* J. W. Otterson, *San Francisco;* J. H. Allen, *Los Angeles;* Ralph C. Maultsby, *Atlanta;* Bernard H. Butler, *London, England*

August, 1951 ELECTRONICS Vol. 24, No. 8

Member ABC and ABP

Published monthly with an additional issue in June by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. **Publication Office, 99-129 North Broadway, Albany 1, N. Y.**

Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., New York 18, N. Y. Curtis W. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.

Subscriptions: Address correspondence to Electronics—Subscription service, 99-129 N. Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 18, N. Y. Allow ten days for change of address. Please indicate position and company connection on all subscription orders.

Single copies 75¢ for United States and possessions, and Canada; $1.50 for Latin America; $2.00 for all other foreign countries. Buyers' Guide $2.00. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years; $12.00 for three years. Canada, $10.00 a year; $16.00 for two years; $20.00 for three years. Pan American countries, $15.00 a year; $25.00 for two years; $30.00 for three years. All other countries $20.00 a year; $30.00 for two years; $40.00 for three years. Entered as second class matter August 29, 1936, at the Post Office at Albany, N. Y., under act of Mar. 3, 1879.

Printed in U. S. A. Copyright 1951 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved.

BRANCH OFFICES: 520 North Michigan Avenue, Chicago 11, Ill.; 68 Post Street, San Francisco 4; Aldwych House, Aldwych, London W.C. 2; Washington, D. C. 4; Philadelphia 3; Cleveland 15; Detroit 26; St. Louis 8; Boston 16; Atlanta 3, Ga.; 1111 Wilshire Blvd., Los Angeles 17; 738-9 Oliver Building, Pittsburgh 22. ELECTRONICS is indexed regularly in The Engineering Index.

marion methods

MEASURE HAIRSPRING *TORQUE* WITH SOUND WAVES

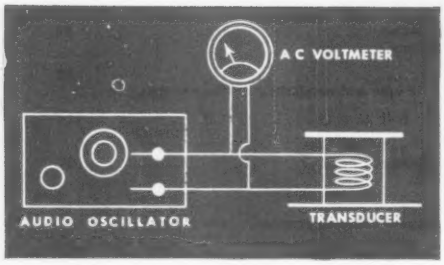

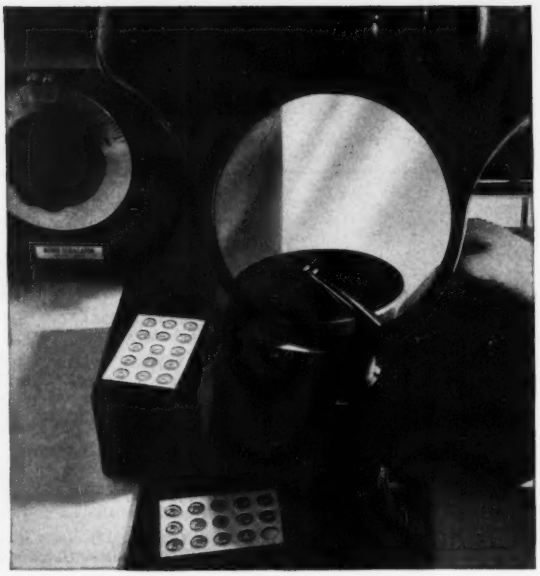

Marion's Hairspring inspection method permits *100% inspection and control of hairspring characteristics* at high production rates.

Help yourself to marion methods

THE MARION METHOD of hairspring inspection takes advantage of the relationship between the torque of the hairspring and its natural resonant frequency. Initial calibration is made with a standard torsiometer and frequency is adjusted to resonate a hairspring of known torque. Hairsprings of correct torque specifications resonate when held in tweezers placed against the vibrating surface. Amplitude adjustment permits "Go-No-Go" Inspection to $\pm 1\%$ of specified torque. With this method, inspection rates of 500 to 600 springs per hour may be achieved. This technique affords production torque control to close limits on a 100% basis, rather than the normal spot checking provided by standard torsiometers.

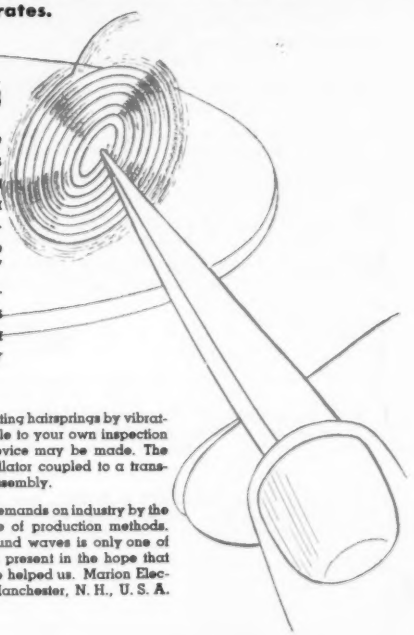

NOT FOR SALE — Marion's Method of inspecting hairsprings by vibrating them at audible frequencies may be adaptable to your own inspection problems. The illustrations show how such a device may be made. The one pictured uses a Hewlett-Packard audio oscillator coupled to a transducer which may be a modified P. M. speaker assembly.

OTHER MARION METHODS — Current demands on industry by the mobilization program accentuate the importance of production methods. Hairspring torque measurement by means of sound waves is only one of a number of methods which Marion proposes to present in the hope that some of them can help you as much as they have helped us. Marion Electrical Instrument Company, 401 Canal Street, Manchester, N. H., U. S. A.

MANUFACTURERS OF MARION RUGGEDIZED PANEL INSTRUMENTS

marion meters

THIS INFORMATIVE QUARTERLY WILL BE MAILED TO YOUR ADDRESS WITHOUT CHARGE

FILL IN THIS COUPON NOW

MUIRHEAD & CO. LTD · BECKENHAM · KENT · ENGLAND

Please mail me, free of charge, your quarterly journal "TECHNIQUE"

NAME_____

POSITION_____

COMPANY_____

ADDRESS_____

MUIRHEAD & Co. LTD.

PRECISION ELECTRICAL INSTRUMENT MAKERS

BECKENHAM · KENT · ENGLAND

Telegrams and Cables: MUIRHEADS ELMERS-END

PRECISION MUIRHEAD ELECTRICAL INSTRUMENTS

MU.29

Low temperature is

in resistors too!

Any resistor can reduce voltage and dissipate heat. Amazingly few can do it without overheating themselves! Chief among those who *can* are IRC Resistors. Advanced, yet practical design—unusual use of heat-dissipating materials—and a rigid quality-control system—all combine to give these resistance units low operating temperatures, greater efficiency and longer life.

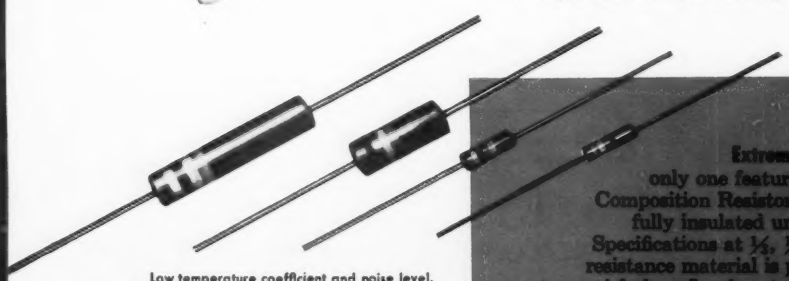

Low temperature coefficient and noise level. Meet and beat JAN-R-11 Specifications.

½, ½, 1 and 2 watts—available in ±5%, ±10%, and ±20% tolerance.

Easily meet critical requirements of television.

Fully tested by independent agencies under actual field conditions.

Extremely low operating temperature is only one feature of Advanced Type BT Fixed Composition Resistors. These compact, lightweight, fully insulated units actually surpass JAN-R-11 Specifications at ½, ½, 1 and 2 watts! In BT's, the resistance material is permanently cured and bonded to special glass. Leads extend into filament for faster heat conductivity. Molded bakelite seals element against moisture and prevents grounding. BT's are available in standard RTMA resistance ranges. Send for full details in 12-page technical data Bulletin B-1.

essential

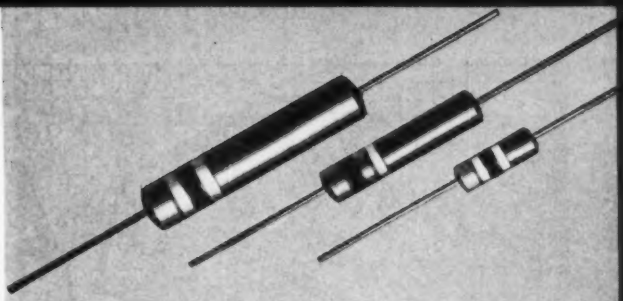

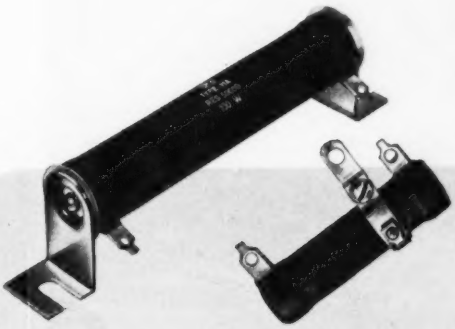

Temperature coefficients cover many resistance values in IRC Type BW Insulated Wire Wound Resistors. At ½, 1 and 2 watts, they are exceptionally stable, economical units for low range applications such as meters, analyzers, spark suppression units, TV circuits, low power ignition circuits. Resistance elements are wound uniformly on insulated core. Molded phenolic housing protects against humidity and grounding. Noise and aging are negligible. Technical data Bulletin B-5 contains full details.

Besides unusually rapid dissipation of heat, IRC Fixed and Adjustable Power Wire Wound Resistors give balanced performance in every characteristic. Special cement coatings are designed for low range high temperature requirements—or for maximum protection against extreme atmospheric conditions. For exacting, heavy-duty applications—high voltage bleeders, bias supply, grid and filament dropping resistors—PWW's are available in a full range of sizes, types and terminals. Leading industrial, aircraft and broadcasting users have specified them for more than 14 years. Technical data Bulletin C-2 gives complete information.



For extremely fast heat dissipation, the unique mounting brackets of Type MW Wire Wound Resistors actually transfer heat from chassis to outside. Other radical departures from conventional design give MW's widest adaptability to individual requirements. MW's are flat wire wound resistor strips, permanently enclosed by high pressure molding in a special mica-filled phenolic compound. Special feet permit mounting on any flat metal surface. Low initial cost, lower mounting cost, flexibility in providing taps at low cost, and savings in space, all offer amazing economies. Ask for technical data Bulletin B-2.

When you're in a hot spot and need experimental or maintenance quantities of standard resistors *double-quick*, phone your IRC Distributor. IRC's Industrial Service Plan provides him with a full stock of uniformly dependable standard resistors; he can give you fast, round-the-corner delivery of small-order requirements. We'll be glad to send you his name and address.



Power Resistors • Voltmeter Multipliers • Insulated Composition Resistors • Low Wattage Wire Wounds • Volume Controls • Voltage Dividers • Precision Wire Wounds • Deposited Carbon Precisions • Ultra-HF and High Voltage Resistors • Insulated Chokes

IRC

Wherever the Circuit Says —WW—

INTERNATIONAL RESISTANCE COMPANY
401 N. Broad Street, Philadelphia 8, Pa.
In Canada: International Resistance Co., Ltd., Toronto, Licensee

INTERNATIONAL RESISTANCE COMPANY
403 N. BROAD ST., PHILADELPHIA 8, PA.

Please send me complete information on the items checked below:—

- ☐ Advanced BT Resistors (B-1)
- ☐ BW Resistors (B-5)
- ☐ Power Wire Wounds (C-2)
- ☐ MW Resistors (B-2)
- ☐ Name and Address of nearest IRC Distributor

NAME_____

TITLE_____

COMPANY_____

ADDRESS_____

CITY_____ ZONE____ STATE_____

J. F. ARNDT & CO., ADV. AGENCY

specify Sorensen

AC VOLTAGE REGULATORS

Accuracy, with rugged construction, economical and trouble-free operation, reasonable cost — those are features that you expect, *and get*, when you specify Sorensen regulators!

ALL SORENSEN REGULATORS HAVE THESE ADVANTAGES:

- WIDE INPUT RANGE
- ADJUSTABLE OUTPUT VOLTAGE THAT STAYS SET
- REGULATION ACCURACY OF ± 0.1%
- EXCELLENT WAVEFORM
- FAST RECOVERY TIME
- INSENSITIVITY TO LINE FREQUENCY FLUCTUATIONS.

MODEL NO. 500-S

STANDARD AC SPECIFICATIONS

VA capacity	150 500	250 1000	2000 3000	5000 10000 15000
Harmonic Distortion	3% max.	2% max.	3% max.	3% max.
Regulation accuracy	± 0.1% against line or load			
Input voltage	95-130 VAC; also available for 190-260 VAC single phase 50-60 cycles			
Output voltage	Adjustable between 110-120; 220-240 in 230 VAC models			
Load range	0 to full load			
P.F. range	Down to 0.7 P.F. All models temperature compensated			

NOTE: THREE PHASE AND 400 CYCLE REGULATORS ALSO AVAILABLE. ALL REGULATORS CAN BE HERMETICALLY SEALED.

Write for Complete Literature

For regulated DC problems investigate Sorensen's line of Voltage Reference Standards, DC Supplys, and NOBATRONS

controlled POWER converted

Sorensen and company, inc.
375 FAIRFIELD AVE. • STAMFORD, CONN.

MANUFACTURERS OF AC LINE REGULATORS, 60 AND 400 CYCLES; REGULATED DC POWER SOURCES; ELECTRONIC INVERTERS; VOLTAGE REFERENCE STANDARDS; CUSTOM BUILT TRANSFORMERS; SATURABLE CORE REACTORS

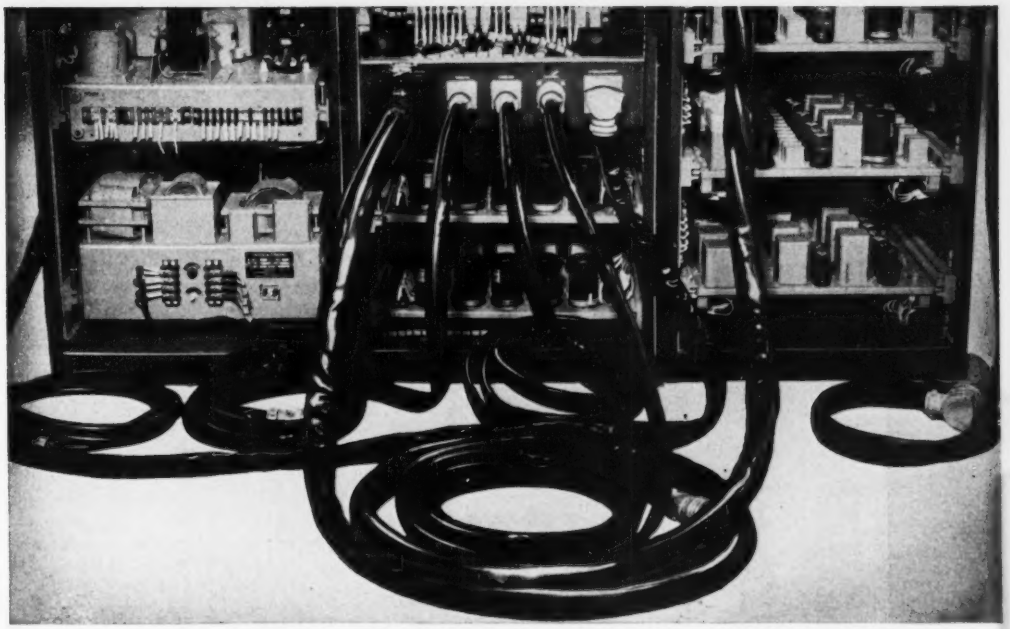

Reeves *saves space* in its Electronic Brain . . . with IRV-O-LITE Tubing

The Reeves Electronic Analog Computer (REAC) * saves plenty of man-hours in performing complex calculations. And in this Electronic Brain's complicated wiring system, shielding and terminal labeling are done exclusively with IRV-O-LITE XTE-30 Plastic Tubing—saving plenty of *space*.

XTE-30's high dielectric strength of 1,000 vpm (dry) frequently permits the use of *thinner-walled* tubing. Where space is at a premium, follow the example of Reeves and hundreds of other manufacturers—use XTE-30!

You get these *other* advantages, too, with XTE-30 Plastic Tubing: high mechanical strength; lasting flexibility; excellent chemical and moisture resistance.

XTE-30 comes in a standard range of sizes from .022" to 2" ID and even larger for special applications. Six contrasting colors simplify identification of leads and speed up complex wiring jobs. See for *yourself* what XTE-30 will do for you—just mail the coupon for free Technical Data Sheet.

** Manufactured by Reeves Instrument Corp. of N. Y., one of the outstanding producers of high precision electronic and electro-mechanical computing equipment.*

Send this convenient coupon now

Irvington
VARNISH & INSULATOR COMPANY
Irvington 11, New Jersey

EL-8/51

Irvington Varnish & Insulator Company
6E Argyle Terrace Irvington 11, N. J.

Gentlemen:
Please send me your Technical Data Sheet on IRV-O-LITE XTE-30 tubing.

Name.....Title.....
Company.....
Address.....
City.....State.....

Tophet RESISTANCE WIRE

de-ices the new television "TOTEM POLE"

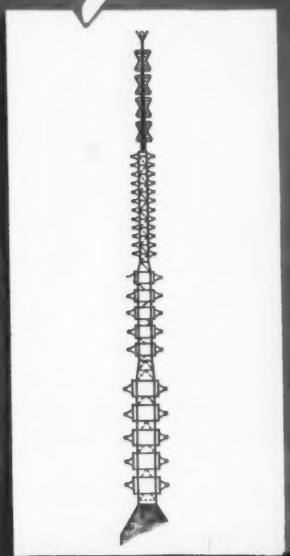

—towering above the Empire State Building in New York City

The new five channel "totem pole" antenna atop the world's tallest building posed many difficult-to-solve problems. One of these—severe icing conditions—was solved with specially-designed de-icers, manufactured by Electro-Therm, Inc., of Silver Spring, Maryland and installed by RCA engineers. Tophet heating elements in the de-icers effectively prevent ice accumulations. Wherever an extra margin of dependability is required, engineers specify Tophet for greater dependability. For Tophet Resistance Wire has been proven over the years to provide top heat and top performance in applications ranging from household appliances to heavy duty industrial furnaces.

It's TOPHET for Top Heat

WILBUR B. DRIVER COMPANY

150 RIVERSIDE AVENUE, NEWARK 4, NEW JERSEY

Plasticon GLASSMIKES

have been solving your engineering problems since 1943!

We originally designed Glassmikes for the Metallurgical Laboratory at the University of Chicago for use in radiation counter equipment. The Glassmike construction (metal ferrules soldered to silvered bands at each end of a glass tube) proved ideal for small, high voltage filter and coupling capacitors. As the only exclusive producers of plastic film dielectric capacitors, we use many different films and impregnation combinations. Our application experience enables us to recommend the best dielectric combination for your particular application.

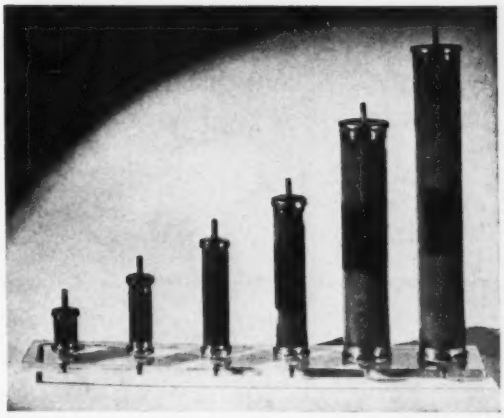

Some of the more common Glassmike types are as follows:

Type **ASG**—High temperature, high voltage filter coupling and by-pass service.
Type **AAG**—High resistance, low voltage coupling and storage service.
Type **LAG**—Very high resistance, extremely low dielectric absorption.
Type **LSG**—High "Q", high voltage replacement for mica capacitors.
Type **TAG**—Similar applications to Type LAG, but for higher temperatures.
Type **TSG**—Similar application to Type LSG, but for higher temperatures.
Type **PAG**—High DC resistance, low dielectric absorption for temperatures up to 85° C.
Type **FAG**—Ultra high resistance, high voltage capacitor.

Send us your requirements and we will recommend the proper capacitor.

MANUFACTURERS
Glassmike Capacitors
Plasticon Capacitors
HiVolt Power Supplies
Pulse Forming Networks

All Phones: **AMbassador 2-3727**

Condenser Products Company

7517 North Clark Street • Chicago 26, Illinois

ADLAKE RELAYS AT WORK—One of a series of advertisements on specific ADLAKE applications.

Adlake
TRADE MARK

Relays Are Used in

LORAN Transmitters

Manufactured by Federal Telephone and Radio Corporation

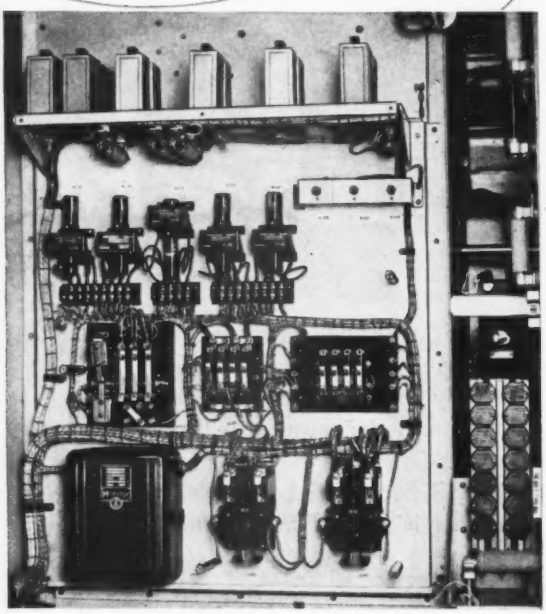

Relay control panel of Loran Transmitter Model T-137, built by Federal Telephone and Radio Corporation. Five ADLAKE Relays are used to control plate and filament power and to provide overload protection—operations calling for the utmost stability in time delay.

Loran transmitters (LOng RAnge Navigation) are of prime importance to both naval and merchant fleets. The builder of these transmitters, Federal Telephone and Radio Corporation, Clifton, N. J., uses ADLAKE Relays—because ADLAKE assures the utmost reliability under all operating conditions.

ADLAKE Relays are designed and built to meet the most exacting requirements. Their mercury-to-mercury contact prevents burning, pitting and sticking, and their sturdy construction armors them against outside vibration or impact. And most important of all, *they require no maintenance,* for they are hermetically sealed against dust, dirt and moisture.

For the full story on the part ADLAKE Relays can play in *your* business, just drop a card to The Adams & Westlake Company, 1107 N. Michigan, Elkhart, Indiana. No obligation, of course.

Every ADLAKE Relay Gives You These Advantages:

HERMETICALLY SEALED—dust, dirt, moisture, oxidation and temperature changes can't interfere with operation.

MERCURY-TO-MERCURY CONTACT—prevents burning, pitting and sticking.

SILENT AND CHATTERLESS • ABSOLUTELY SAFE • REQUIRES NO MAINTENANCE

THE
Adams & Westlake
COMPANY

Established 1857 • ELKHART, INDIANA • New York • Chicago

Manufacturers of ADLAKE Hermetically Sealed Relays

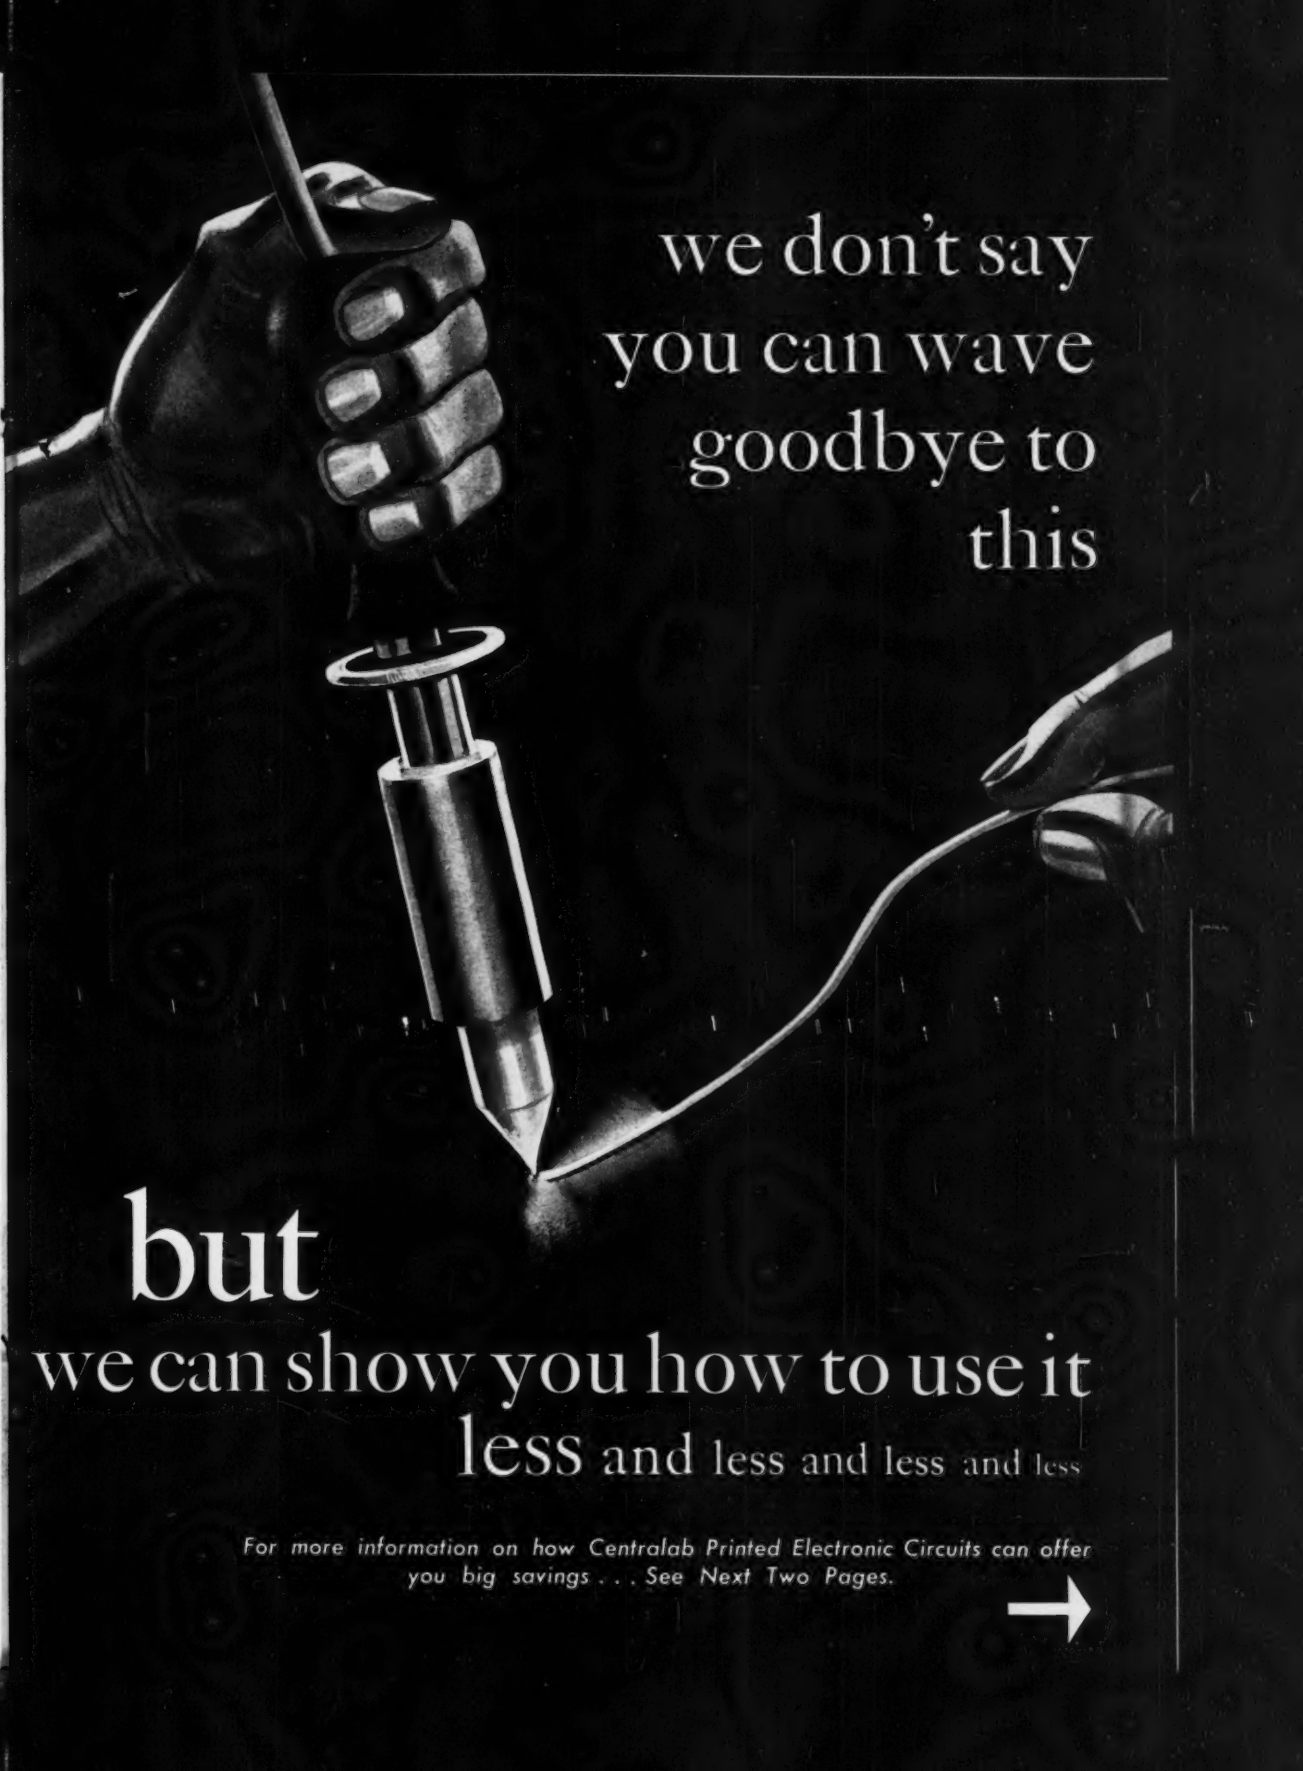
we don't say
you can wave
goodbye to
this
but
we can show you how to use it
less and less and less and less
For more information on how Centralab Printed Electronic Circuits can offer
you big savings . . . See Next Two Pages.

Here's Proof: Printed Electronic

What are Printed Electronic Circuits?

Printed Electronic Circuits are complete or partial circuits (including all integral circuit connections) consisting of pure metallic silver and resistance materials fired to CRL's famous Steatite or Ceramic-X and brought out to convenient, permanently anchored external leads. They provide compact miniature units of widely diversified circuits — from single resistor plates to complete speech amplifiers. No other modern electronic development offers such tremendous time and cost saving advantages in low-power applications. ***Important to note:*** All PEC's illustrated are developed for standard applications. Numerous other circuit complements can be furnished for volume requirements.

How Do They Save Time and Money — Space and Weight?

Because Printed Electronic Circuits combine several components on a single plate unit, they eliminate approximately 25% to 80% of formerly required soldered connections within the circuits they replace. This means simplified assembly — savings in material. What's more, because they replace several individual components, they cut down your purchases and inventory. Because they are complete assembled circuits, they do much to eliminate wiring errors. Their small size (note illustrations) means less space needed as well as less weight . . . important factors in today's crowded chasses.

60% Less Soldered Connections with Centralab Triode Couplates

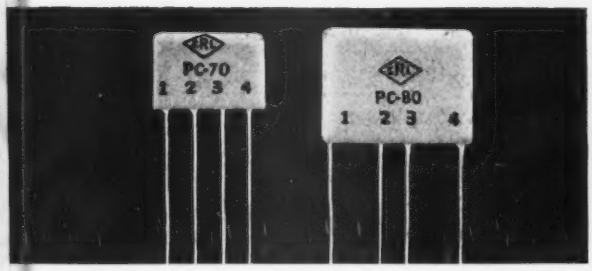

Centralab Triode Couplates replace 5 components normally used in audio circuits. Triode Couplates are complete assemblies of 3 capacitors and 2 resistors bonded to a dielectric ceramic plate. Available in a variety of resistor and capacitor values. Technical Bulletin 42-127.

Plate Capacitor and Resistor-Capacitors Excellent for Miniature Use

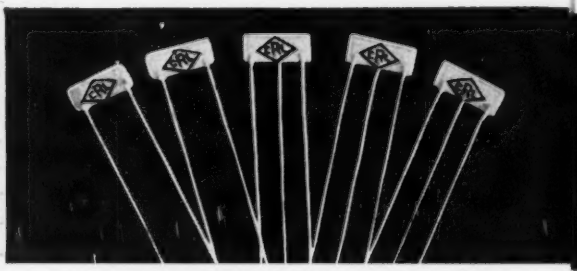

Actual size photograph of plate capacitor, resistor, and resistor-capacitor units. Because of size, they readily fit all types of miniature and portable electronic equipment...overcome crowded conditions in TV, AM, FM and record-player chassis. Technical Bulletin 42-24.

50% Less Soldered Connections with Centralab's AUDET

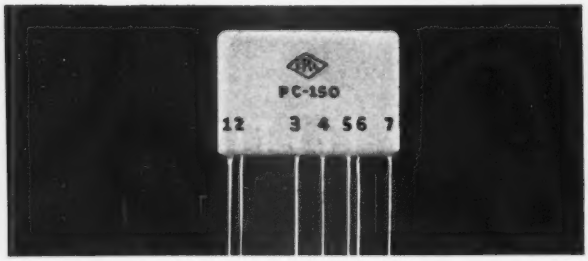

Audet Printed Electronic Circuits furnish all values of all components generally found in the output stage of AC-DC radio receivers. They provide 4 capacitors and 3 resistors on a small plate with only 7 leads. Technical Bulletin 42-129.

NEW Model 3 AMPEC — A Sub Miniature 3 Stage Speech Amplifier

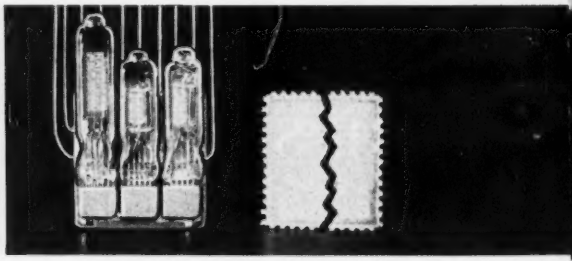

Here's the latest outgrowth of Centralab's constant research in Printed Electronic Circuit development. The remarkably small dimensions of this new amplifier unit are approximately 1 1/32" x 15/16" x 11/32". Check coupon for Technical Bulletin 42-130.

Circuits = BIG SAVINGS

50% Less Soldered Connections With Centralab's NEW PENDET

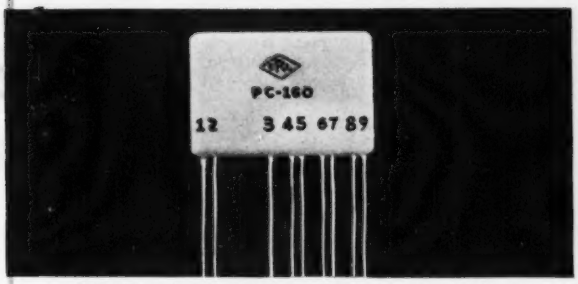

PENDET consists of 5 capacitors and 4 resistors in a single plate with only 9 leads. Similar to the popular AUDET, it is designed to couple the diodetriode and pentode tubes in the output stage of AC-DC sets. Check coupon for Technical Bulletin 42-149.

82% Less Soldered Connections With P.E.C. VERTICAL INTEGRATOR

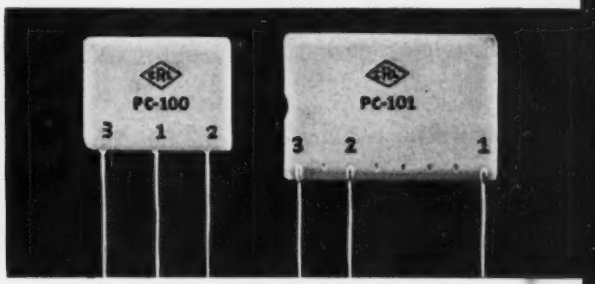

Centralab Vertical Integrators give you big savings in assembly of TV vertical integrator networks. One type consists of 4 resistors and 4 capacitors brought out to 3 leads . . . reduces former 16 soldered connections to 3! Check coupon for Technical Bulletin 42-126.

50% Less Soldered Connections With Centralab's PENTODE COUPLATE

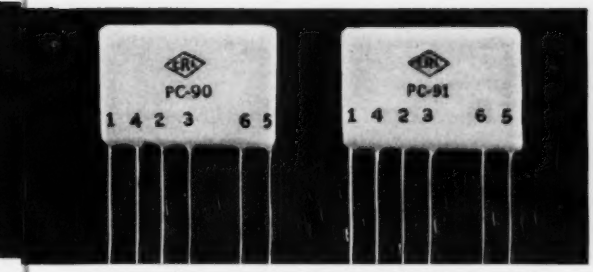

Pentode couplates are complete interstage coupling circuits consisting of 3 capacitors and 3 resistors on a small 6 lead ceramic plate. Compared with old-style audio circuits, they actually reduce soldered connections 50%—wiring errors accordingly. Technical Bulletin 42-128.

28% Less Soldered Connections With NEW FILPLATE

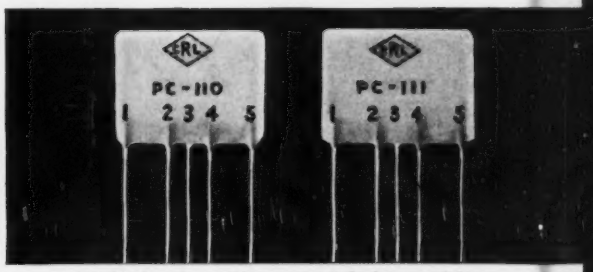

FILPLATES (2 resistors and 2 capacitors) for bypass and filter application in TV, FM and AM, where filter networks of comparable component values and layout are needed. Smaller than special delivery stamp. Save vital low wattage resistor stocks. Technical Bulletin 42-131.

Standard Model 2 AMPEC Miniature 3 Stage Speech Amplifier

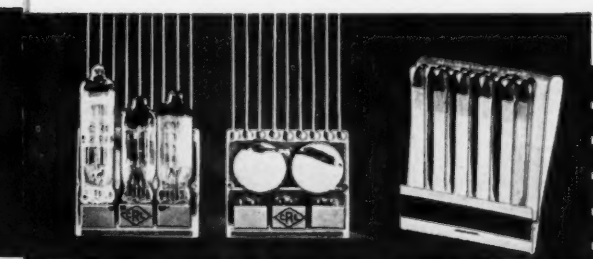

AMPEC — A full 3-stage speech amplifier. Provides highly efficient performance. Size 1¼" x 1⅛" x .340" over tube sockets! Used in hearing aids, mike preamps and other applications where small size and outstanding performance counts. Technical Bulletin 42-117.

Centralab

Division of GLOBE-UNION INC. • Milwaukee

Centralab, Div. of Globe-Union Inc.
914 East Keefe Avenue, Milwaukee 1, Wisconsin

Please send me the Technical Bulletins on Printed Electronic Circuits as checked below:

☐ 42-24 ☐ 42-117 ☐ 42-126 ☐ 42-127 ☐ 42-128
☐ 42-129 ☐ 42-130 ☐ 42-131 ☐ 42-149

Name.....

Address.....

Company.....

Title.....

How to get any TV

TAKE ONE OF THESE TV TRANSMITTERS...

500 watts, for **VHF**
Type TT-500 A/B
(All Air-Cooled)



1 kw, for **UHF**
Type TTU-1B
(All Air-Cooled)

2 kw, for **VHF**
Type TT-2AL/H
(All Air-Cooled)



10 kw, for **VHF**
Type TT-10AL/H
(All Air-Cooled)



10 kw, for **UHF**
Type TTU-10A



20 kw, for **VHF**
Type TT-20BL/H
(All Air-Cooled)

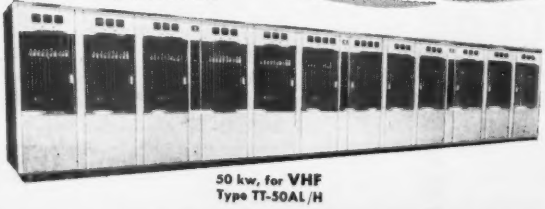

50 kw, for **VHF**
Type TT-50AL/H

power up to 200 KW!*

...ADD ONE OF THESE TV ANTENNAS... = YOUR POWER

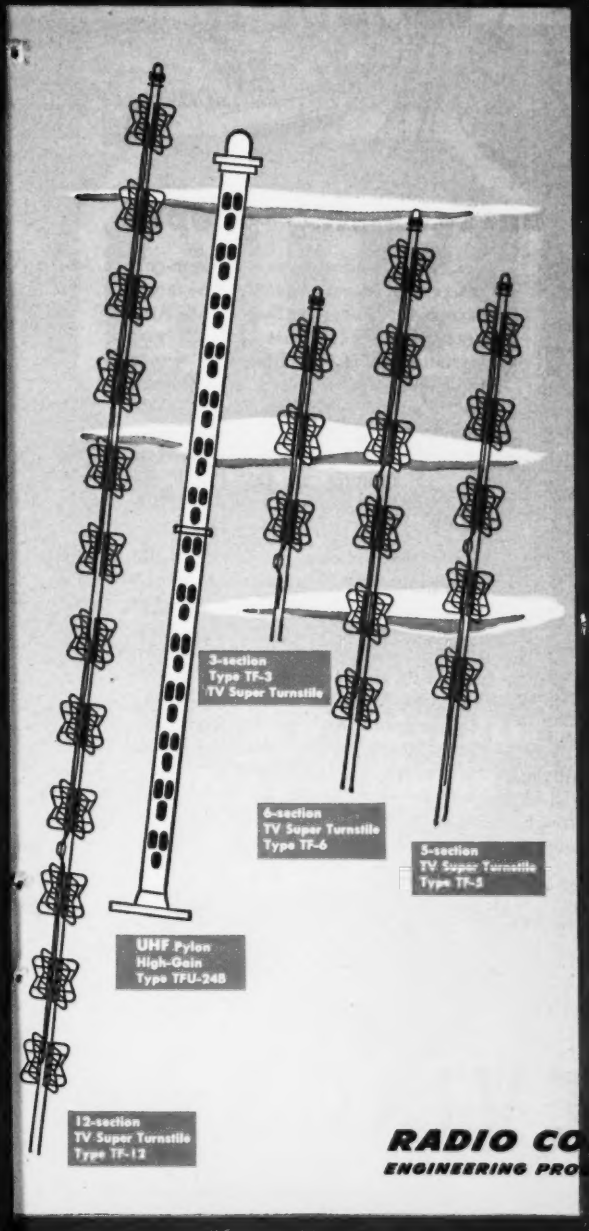

With RCA's complete line of transmitters (seven different models), you can get any ERP* up to 200 kw—on any channel from 2 to 83. And in most cases, *you can get the power you want in several different ways!*

If your requirements are best met with a low-power transmitter and a high-gain antenna, *RCA has the combination!* However, if your needs are better met with a higher-power transmitter and a lower-gain antenna, *RCA has that combination too!*

Ask your RCA Sales Representative to sit down and help you plan the most practical and economical equipment setup for your station. He has an intimate knowledge of station planning—knows TV equipment from A to Z. He can tell you exactly what you'll need to get "on the air" . . . with the power you want . . . at the lowest cost.

Call him today. Or write RCA Engineering Products Department, Camden, N. J.

*Effective radiated power

RCA

RADIO CORPORATION of AMERICA
ENGINEERING PRODUCTS DEPARTMENT, CAMDEN, N.J.

" . . . losing friends and antagonizing people"

With her new hearing aid, Grandma Crane was really enjoying life. My it was nice to hear clearly again . . . like now, talking to her grandson at camp. Then—silence—the hearing aid was dead! Nothing to do but go back to the office where she bought it. The technician will be in for a hard time—especially when Grandma Crane finds out that the trouble was just a bit of electrical insulation that failed.

That manufacturer saved a few pennies in costs—and lost dollars in good will.

The failure of electrical insulation in your product is a serious matter—for your customer and for you.

Leading electrical equipment and appliance manufacturers use BH "649"† Fiberglas Sleeving and Tubing to minimize the possibility of insulation breakdown.

Here is a superior, high voltage, Fiberglas insulation available in three grades—A-1, B-1 and C-1 . . . tough, abrasion resistant and permanently flexible. It is non-fogging and non-corrosive with unusual chemical resistance, except for Ketones, Esters and Aromatic Hydrocarbons. It will not crystallize at -67° F. BH "649" won't crack, peel, fray or split. It will take plenty of abuse without loss of these physical properties, or its dielectric strength even after the following tests . . . 15 minutes at 425°-450° F; 24 hours at 302° F; 1500 hours at 220°-230° F.

BH "649" is one of a family of BH insulations, each designed to meet particular conditions in service. Whether your problem is heat, cold, flexibility, abrasion, high voltage or resistance to chemicals, there is a BH insulation to help you. Give us a few facts about your requirements—products, temperatures, voltages. We will furnish samples for testing. Address Dept. E-8

†Patent Pending

Bentley, Harris Manufacturing Co.
Conshohocken, Pa.

BH *Fiberglas** SLEEVINGS

*BH Non-Fraying Fiberglas Sleevings are made by an exclusive Bentley, Harris process (U. S. Pat No. 2393530). "Fiberglas" is Reg. TM of Owens-Corning Fiberglas Corp

TUNG-SOL

6U8

miniature

{ triode-
pentode

PROVIDES NEW FLEXIBILITY IN TV RECEIVER CIRCUIT DESIGN

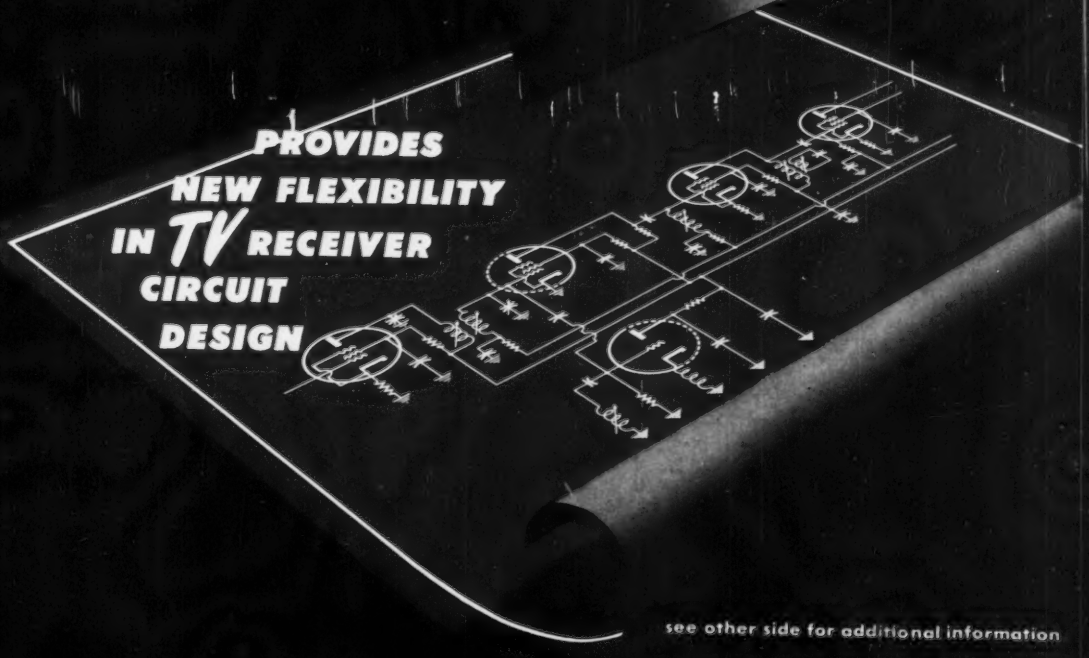

see other side for additional information

TUNG-SOL

6U8



miniature

triode-pentode

✓ Completely independent sections
✓ Versatility in circuit application
✓ Improved circuit performance

This tube has two electrically independent sections—a triode and a pentode and is intended as a local oscillator mixer for FM and TV receivers. Each section is adequately shielded, and both are capable of exceptionally good performance at the higher frequencies.

Because the two sections are completely independent, a high degree of flexibility of circuit design is available—especially valuable in TV tuner oscillator use. Performance of the 6U8 triode at low voltages is superior to that of many types previously used for this service. It has sufficient reserve emission to operate efficiently under widely varying supply voltage conditions.

The pentode provides excellent gain with low local oscillator voltage injection resulting in low oscillator radiation from TV receivers. Use of the pentode section as the mixer permits the high (40 m. c.) I. F. so desirable to reduce interference and increase stability.

The construction and characteristics of the 6U8 provide designers with extremely desirable flexibility in combining circuit functions. The pentode section of the tube may be used as an I. F. amplifier, video amplifier, sound limiter or synchronizing separator. The triode performs satisfactorily as a horizontal or vertical oscillator, or sync clipper.

Wherever there is need for a triode and a pentode in a receiver, they can be combined in the 6U8.

MECHANICAL DATA

Coated unipotential cathodes—2

Outline drawing	RTMA 6—2	Bulb	T—6-1/2
Base	RTMA E9—1	Miniature button	9-pin
Maximum diameter			7/8"
Maximum overall length			2-3/16"
Maximum seated height			1-15/16"
Base pin connections		RTMA basing	9 AE

Pin 1—triode plate
Pin 2—pentode grid #1
Pin 3—pentode grid #2
Pin 4—heater
Pin 5—heater
Pin 6—pentode plate
Pin 7—pentode cathode grid #3, shield
Pin 8—triode cathode
Pin 9—triode grid

Mounting position: Any

ELECTRICAL DATA

Interelectrode Capacitances	With Shield #315	Without Shield	
Pentode grid #1 to pentode plate	0.006	0.010 max.	μμf.
Pentode input	5.0	5.0	μμf.
Pentode output	3.5	2.6	μμf.
Triode grid to triode plate	1.8	1.8	μμf.
Triode grid to cathode	2.5	2.5	μμf.
Triode plate to cathode	1.0	0.4	μμf.
Cathode to heater (either section) approx.	3.0	3.0	μμf.

ELECTRICAL DATA

Ratings

Heater voltage (ac or dc)	6.3	VOLTS
Maximum heater-cathode voltage	90.0	VOLTS
Maximum plate voltage (pentode)	300.0	VOLTS
Maximum plate voltage (triode)	300.0	VOLTS
Maximum grid #2 supply voltage	300.0	VOLTS
Maximum plate dissipation (pentode)	2.8	WATTS
Maximum grid #2 dissipation	0.5	WATTS
Maximum positive dc grid #1 voltage	0	VOLTS
Maximum positive dc grid voltage (triode)	0	VOLTS
Maximum plate dissipation (triode)	2.5	WATTS

Typical Operating Conditions and Characteristics

	Triode	Pentode	
Heater voltage		6.3	VOLTS
Heater current		450	MA.
Plate voltage	150	250	VOLTS
Grid #2 voltage	...	110	VOLTS
Cathode resistor	56	68	OHMS
Transconductance	8300	5200	μMHOS
Grid #1 voltage (approx.) for Ib=10 ua.	-12	-10	VOLTS
Plate current	18	10	MA.
Grid #2 current	...	3.5	MA.
Plate resistance (approx.)	.005	0.40	MEG.
Amplification factor	40	...	

TUNG-SOL
ELECTRON TUBES

The TUNG-SOL engineering which has produced the 6U8 is constantly at work on a multitude of special electron tube developments for industry. Many exceptionally efficient general and special purpose tubes have resulted. Information about these and other types is available on request to TUNG-SOL Commercial Engineering Department.

TUNG-SOL LAMP WORKS INC., NEWARK 4, NEW JERSEY

SALES OFFICES: ATLANTA · CHICAGO · DALLAS · DENVER · DETROIT · LOS ANGELES · NEWARK

TELEVISION TUBES · RADIO TUBES · DIAL LAMPS · ALSO ALL-GLASS SEALED BEAM LAMPS AND SIGNAL FLASHERS

AUGUST, 1951

FOR MAXIMUM PERFORMANCE AND LONG LIFE OF ELECTRICALLY-OPERATED EQUIPMENT

Invest in **STABILINE**

Automatic VOLTAGE REGULATORS

TYPE IES1002R



TYPE IES1005



TYPE IES101R

TYPE IES101

Manufacturers faced with the need for increased production and lower costs are becoming extremely conscious of the importance of maintaining constant voltage to electrical apparatus. The Superior Electric Company's line of STABILINE Automatic Voltage Regulators offers equipment to suit the needs of each application. Two types are available: Type IE (Instantaneous Electronic) and Type EM (Electro-Mechanical).

STABILINE Type IE is a completely electronic unit with no moving parts . . . is used where instantaneous and extremely close correction is required. It maintains a constant output voltage regardless of line variations at no load, full load or any intermediate load. The output voltage is held to within ± 0.1 volts of nominal for wide line variations; within ± 0.15 volts of nominal for any load current change or load power factor change from lagging .5 to leading .9. Maximum waveform distortion never exceeds 3%.

Standard models are available in cabinets or for relay rack mounting in numerous ratings as listed below. In the event you have a special requirement involving other frequencies or ratings, SECO voltage control engineers will study your specific problem and make recommendations without obligation.

INSTANTANEOUS ELECTRONIC CABINET MODELS

Input Voltage Range	Output Voltage Range	Frequency In Cycles	Load Range In Amperes	Load Power Factor Range	Rated Output KVA	Type
95-135	110-120	60 ± 10%	0 - 2.2		0.25	IE51002*
195-255	220-240	60 ± 10%	0 - 1.1		0.25	IE52002*
95-135	110-120	60 ± 10%	0 - 4.5	.5 lagging	0.5	IE51005*
195-255	220-240	60 ± 10%	0 - 2.2		0.5	IE52005*
95-135	110-120	50 ± 10%	0 - 4.5		0.5	IEL51005*
195-255	220-240	50 ± 10%	0 - 2.2		0.5	IEL52005*
95-135	110-120	60 ± 10%	0 - 8.5	to	1.0	IE5101*
195-255	220-240	60 ± 10%	0 - 4.5		1.0	IE5201*
95-135	110-120	50 ± 10%	0 - 8.5		1.0	IEL5101*
195-255	220-240	50 ± 10%	0 - 4.5		1.0	IEL5201*
95-135	110-120	60 ± 10%	0 - 22.0		2.5	IE5102*
195-255	220-240	60 ± 10%	0 - 11.0	.9 leading	2.5	IE5202*
195-255	220-240	50 ± 10%	0 - 11.0		2.5	IEL5202*
95-135	110-120	60 ± 10%	0 - 43.5		5.0	IE5105
195-255	220-240	60 ± 10%	0 - 22.0		3.0	IE5205

* Also offered in rack models.

REMEMBER, STABILINE TYPE EM (ELECTRO-MECHANICAL) UNITS ARE ALSO AVAILABLE. RATINGS FROM 2 TO 100 KVA. LITERATURE ON REQUEST.

There's a STABILINE Automatic Voltage Regulator for every need. Send today for literature and specific information. Write The Superior Electric Co., 408 Church St., Bristol, Conn.

THE SUPERIOR ELECTRIC CO.
BRISTOL, CONNECTICUT

POWERSTAT VARIABLE TRANSFORMERS • VOLTBOX A-C POWER SUPPLIES • STABILINE VOLTAGE REGULATORS

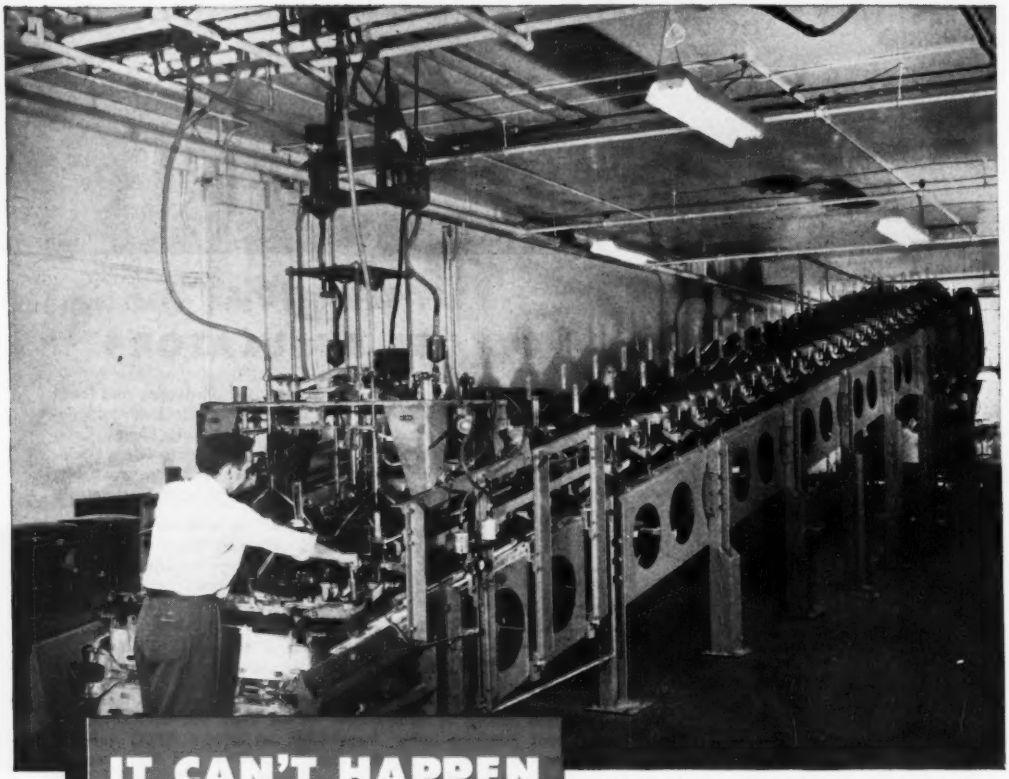

IT CAN'T HAPPEN HERE!

Hytron's unique automatic settling conveyor. Machine dispenses and settles precisely uniform TV picture-tube screens. Automatic dispenser in foreground is an achievement of Hytron mechanical engineering. Vibration-proof chain-link conveyor was constructed for Hytron by Trutner and Boumans, Inc.

NO LIGHT SCREENS . . . NO HEAVY SCREENS . . . NO HOLES . . . NO UNEVENNESS

Another engineering first for you! Hytron's unique, automatic machine for dispensing and settling the screens of TV picture tubes.

What does it mean to you? A guarantee of the most uniform and finest-textured TV screens in the business. No light screens. No heavy screens. No specks from foreign particles. No unevenness.

Automatic dispenser pours exactly the right amount of chemicals into the big bottles as they travel slowly up the ramp. Conveyor's motion is so smooth a nickel standing on edge can ride it! Phosphors fall uniformly out of suspending solution . . . undisturbed — a "must" for perfect screens. Decanting or pouring off of chemical residue, loading, and unloading are equally shock-free. And there's precise electro-mechanical control throughout . . . with human errors barred!

That is why you can pick *any* Hytron picture tube. Depend on it. Any one will give you the finest screen money can buy. Yes, it pays to buy from Hytron . . . the most modern picture-tube plant in the world.

HYTRON

MAIN OFFICE: SALEM, MASSACHUSETTS

HYTRON PROBING TWEEZERS

35¢ net

Long-sought answer to probing into a "hot" set without danger . . . without detuning effects. Get your Probing Tweezers today from your Hytron Jobber.

for INSULATING WATER SYSTEMS

for cooling High-Power Electron Tubes

For insulating the water system for water-cooled tubes, use of Lapp porcelain obviates troubles arising from water contamination and conductivity, sludging, and electrolytic attack of fittings.

Lapp porcelain, in pipe, coils and fittings is a completely vitrified, non-porous ceramic, non-deteriorating and chemically inert. It assures permanent cleanness and high resistance of cooling water, eliminates need for frequent inspection, changing of water or failure of the water system, provides positive cooling for long tube life.

LAPP PORCELAIN PIPE Inside pipe diameters of ¾, 1, 1¼, 1½, 2 and 3". Available in straight pipe up to 60" lengths, 90° and 180° elbows, and fittings. All connections are swivel-type. Stand off insulators attach directly to bolts which hold pipe sections together. Metal fittings are bronze, polished heavy chrome plated.

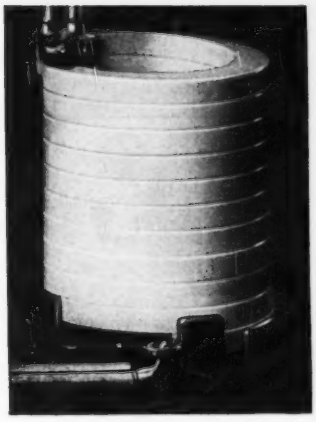

LAPP PORCELAIN WATER COILS

Twin hole coils with inside pipe diameters ¼, ¾, 1". Single hole coils with inside pipe diameters ⅜, 1¼, 1½". Provide for flow of cooling water from 2 to 90 gal. per min. Coils provided with cast aluminum mounting bases, fittings, and three-foot sections of lead pipe for attachment to coil terminals.

Write for complete description and specifications. Radio Specialties Division, Lapp Insulator Co., Inc., Le Roy, N. Y.

Lapp

AMP SOLDERLESS WIRING DEVICES
for the electronics industry

SPECIAL SOLDERLESS PINS, PLUGS, CONTACTS, AND CONNECTORS

Eliminate unnecessary parts, speed production, and reduce costs by designing with AMP'S special connectors in mind. We stock many unusual items, and can make new ones for your particular needs. These terminals are all applied to wire at high speed (from 2,000 to 4,000 per hour) by special AMP Automatic Machines. (see below)

PRE-INSULATED DIAMOND GRIP
Trade-Mark
SOLDERLESS TERMINALS

No extra insulation sleeving necessary. One operation installs completely insulated, vibration-proof connection.

Plastic insulation of high dielectric properties is bonded to full-length copper sleeve—cannot slip or be removed. Min. breakdown voltage: 2500 volts D.C. in air at sea level. Will withstand high pressure crimp, temperatures at 350° F. for 10 hours without damage. Wire is supported to prevent fraying of wire insulation and torsional stress. Color-coded in wire size ranges from #22 to #10. Available in a variety of tongue shapes and connector styles.

U S. Patents #2,410,321; 2,379,567; 2,405,111; 2,468,169; other U. S. Patents Pending.



SOLISTRAND SOLDERLESS TERMINALS
Trade-Mark U. S. Patents Pending

Unique crimp makes this non-insulated terminal equally valuable for solid, stranded, square, or irregular shaped wire. Brazed seam. One piece construction of high conductivity pure copper, electro-tinned for corrosion resistance. Available in a wide variety of tongue shapes and connector styles from #22 to #4/0.

TOOLING

Whatever your production requirements, there is an AMP tool for the purpose. Strong, positive-action hand tools; light weight, compact pneumatic tools; bench presses; dies; hydraulic tools; and Automatic Machines. Terminals feed into AMP Automatic Machines in strip form to yield crimping rates up to 4,000 complete terminations per hour.

WRITE FOR COMPLETE "WIRE SIZE" CATALOG

98 page catalog lists all AMP tools and terminals. BY WIRE SIZE RANGES. Send for your copy today!



AMP Trade-Mark Reg. U. S. Pat. Off.

AIRCRAFT-MARINE PRODUCTS INC.
ELECTRONICS DIVISION
2100 Paxton Street, Harrisburg 10, Pa.

MICROWAVE POWER MEASUREMENTS

COMPLETE COVERAGE! 10 to 12,400 mc!

Instantaneous, direct readings! No adjustment during operation! No tedious computations! Complete new instrumentation for fundamental measurements of CW or pulsed power!

Instrument	Frequencies—Coaxial	Frequencies—Waveguide	Price (f. o. b. Factory)
475B Tunable Bolometer Mount	1,000 to 4,000 mc		$200.00
476A Untuned Bolometer Mount	10 to 1,000 mc		$125.00
54B5A Detector Mount*		2,600 to 3,950 mc	$125.00
G485B Detector Mount †		3,950 to 5,850 mc	$95.00
J485B Detector Mount †		5,850 to 8,200 mc	$90.00
H485B Detector Mount †		7,050 to 10,000 mc	$85.00
X485B Detector Mount †		8,200 to 12,400 mc	$75.00
430B Microwave Power Meter	For use at any microwave frequency. Operates with mounts listed above.		$250.00

*For use with bolometer only. †For use with bolometer or crystal.



-hp- 485 Detector Mounts

For rf power measurements in waveguide systems, 2,600 to 12,400 mc (see table) in conjunction with -hp- 430A or 430B Power Meter and Sperry 821 barretter. Also may be used to measure relative level, or detect rf energy using a type 1N21 crystal. Semi-tuned by means of a built-in movable short.



-hp- 475B Bolometer Mount

Tunable from 1,000 to 4,000 mc for universal application, greatest convenience in making microwave power measurements. Double-stub design, coupling energy from 50 ohm coaxial systems into 100 or 200 ohm bolometers. Uses Sperry 821 barretter, thermistor or 1/100 ampere instrument fuse.

New! -hp- 430B Microwave Power Meter—measures pulsed or CW power—.02 to 10 mw

Model 430B gives you *instantaneous* rf power readings *direct* in db or mw at any frequency. (Operates with bolometer mount. Table at left shows -hp- mounts now available.) Measures CW power with instrument fuse or barretter as bolometer element; also measures CW or pulsed power using negative temperature coefficient thermistor at 100 or 200 ohm levels. Reads power direct .02 to 10 mw or in dbm from −20 to +10. 5 ranges selected on front panel switch. Accuracy ±5% of full scale. Higher powers may be measured by adding attenuators (-hp- Models 370, 380) to rf system. Directional couplers may be used to sample rf energy.

New!

-hp- 476A Universal Bolometer Mount

Requires no tuning, no adjustment; measures rf power at any frequency 10 to 1,000 mc. Extremely low VSWR: Less than 1.15, 20 to 500 mc; less than 1.25, 10 to 1,000 mc. Reflected power less than 0.1 db under normal conditions. In combination with -hp- 430A or 430B Power Meter gives automatic, instantaneous readings from 0.02 to 10 milliwatts. Measures higher power with addition of attenuators and directional couplers. 50 ohms impedance. Has Type N connector and terminates flexible cables RG8/U, RG10/U, etc.

Get complete information! See your local -hp- representative or write to factory.

HEWLETT-PACKARD COMPANY

2161A PAGE MILL ROAD • PALO ALTO, CALIFORNIA, U.S.A.

Export: Frazar & Hansen, Ltd., San Francisco, New York, Los Angeles

HEWLETT-PACKARD (hp) INSTRUMENTS

CROLOY RADIO RODS
Replacing wound loops. Spell new reception standards. Permit mounting on chassis, and final test before placement in cabinet. "Q" of order of 200 as against 80 for small loops. Usual Croloy radio rod is 8" l. by ½" d. Other sizes available.



CROLOY CORES
Molded in widest range of shapes and sizes. Deflection yoke expand TV-tube deflection angles without corresponding voltage increase. Croloy cores slash TV transformer bulk.



CROLOY RADIO CORES
Croloy slug tuners and I. F. coils reduce cost and raise gain. Made in widest variety of designs, sizes and modifications. With screw inserts; with threaded bodies; cup-shaped; tiny closed cores; etc. Choice of compositions to meet electronic characteristics.



EXTRUDED CROLITE
From tiny tubes no bigger than pencil lead and with one or two longitudinal holes, to tubes, rods and blocks up to 6" dia. Widest variety of cross-sectional shapes. The Crowley extrusion technique minimizes machining.

PRESSED CROLITE
Formed in standard or custom molds into the widest choice of shapes and sizes, thereby minimizing machining. High degree of accuracy to fit with metal parts in any assembly. Plain or glazed finish.

MACHINED CROLITE
Elaborate shapes, including grooves, bobbins, holes, threads, fins and other features, can be included in Crolite machined pieces. Precision machined tools in the hands of skilled specialists, insure the matching of rigid mechanical specifications.

parts from powders

Consider Crowley your No. 1 source of supply for magnetic and ceramic pieces. For here, under one roof, are specialists who have pioneered the "parts from powders" art for the radio-electronic industry.

Crowley means production facilities that have supplied the major portion of magnetic cores in peace and war alike. Here are extrusion, molding and machining facilities that can provide steatite and other severe-service insulators in the widest range of characteristics, sizes, shapes.

By all means try Crowley! You can save time, money and trouble, just as other electronic designers, engineers and production men are doing.

Let us collaborate on your TV, radio or electronic problems. Samples, engineering aid, and quotations on request.

HENRY L. CROWLEY & COMPANY, INC.
Pioneering POWDER-IRON and STEATITE products
1 Central Avenue
West Orange, N. J.

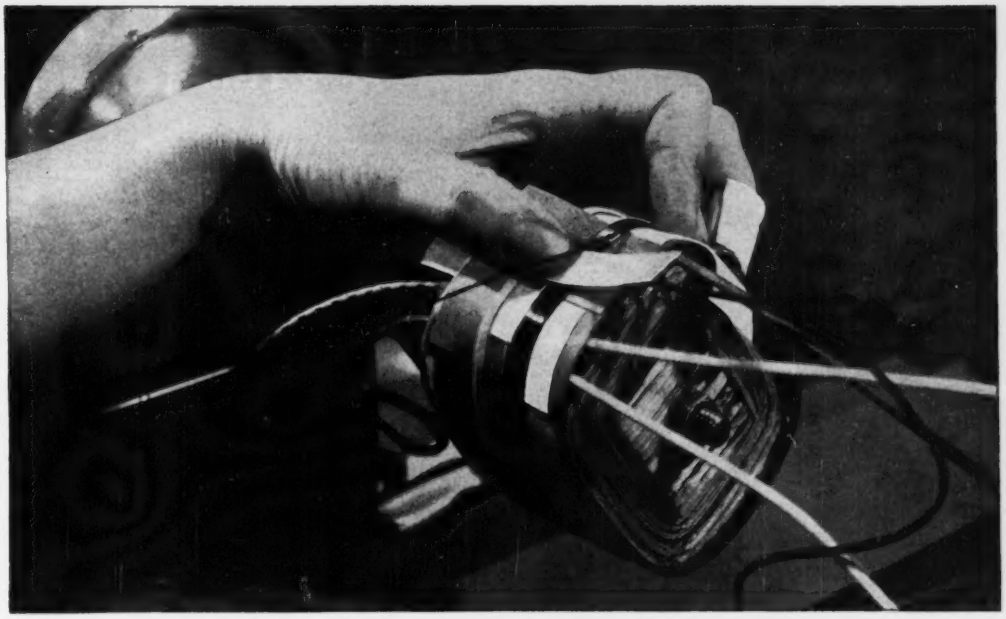

Tape speeds 25 jobs on this TV transformer!

Rigid quality-control gives "SCOTCH" Electrical Tape uniform, dependable performance

Why do experienced manufacturers like the Woodward-Schumacher Electric Corp., and the Electric Coil Co., Chicago, specify "SCOTCH" Electrical Tape on their TV transformers and coils? Because they can depend on these tapes for uniformly high quality performance.

And uniformity doesn't "just happen." It's the result of a control system carefully engineered to make every roll of "SCOTCH" Electrical Tape run true to its prescribed formula in physical and chemical properties. *Most* important, this uniform quality stays the same year after year.

No wonder so many quality-conscious manufacturers insist on "SCOTCH" Electrical Tapes.

If you haven't tried the "SCOTCH" Brand, make the switch today. See for yourself how high dielectric, mechanical strength and thin caliper equip these tapes for use in television.

CORROSION-FREE ACETATE CLOTH TAPE holds deflection yoke coils in shape during handling and forming. ¼ in. tape is used in long strips and cut between coils. Tape is available in four colors for quick identification.



SUPER-STRONG FILAMENT TAPE anchors leads on the primary of a television power transformer. Heavy wire (#18) used in this winding called for a tape that would really hold. This tape does it!

FREE BOOKLET "Tapes for Television" gives you many uses of these modern, pressure-sensitive "SCOTCH" Electrical Tapes. Write Minnesota Mining & Mfg. Co., Dept. E-851, St. Paul 6, Minnesota.

The term "Scotch" and the plaid design are registered trademarks for the more than 100 Pressure-sensitive adhesive tapes made in U. S. A. by **MINNESOTA MINING & MFG. CO.**, St. Paul 6, Minn.—also makers of "Scotch" Sound Recording Tape, "Underseal" Rubberized Coating, "Scotchlite" Reflective Sheeting, "Safety-Walk" Non-slip Surfacing, "3M" Abrasives, "3M" Adhesives.

General Export: Minn. Mining & Mfg. Co., International Division, 270 Park Avenue, New York 17, N. Y. In Canada: Canadian Minnesota Mining & Mfg. Co., London, Canada.

for MILITARY
A COMPLETE LINE OF

Never Before!

DELIVERS TOP PERFORMANCE IN AN UNPRECEDENTED TEMPERATURE RANGE FROM THE BITTEREST COLD IN ARCTIC REGIONS OR EXTREME ALTITUDES TO FIERY HOT TROPICAL BATTLEFIELDS . . . AND IN AN UNPARALLELED HUMIDITY RANGE FROM COMPLETE ARIDITY TO THE SATURATION POINT.

Highly recommended for use in jet and other planes, guided missiles, tanks, ships and submarines, portable or mobile equipment and all other military communications.

Manufactured from specially developed materials, this absolutely unique variable resistor is available in *miniaturized* size (Type 65) or in conventional size (Type 95) in resistance ranges from 250 ohms to 10 megohms.

TYPE 65
MINIATURIZED







TYPE 95







EXCEPTIONALLY GOOD DELIVERY CYCLE

. . . on military orders due to enormous mass production facilities . . . Please give complete details on your requirements when writing or phoning for further information.

REPRESENTATIVES

S. J. Hutchinson, Jr.
401 North Broad Street
Philadelphia 8, Pennsylvania
Phone: Walnut 2-5369

W. S. Harman Company
1638 So. La Cienega Blvd.
Los Angeles 35, California
Phone: Bardshaw 2-3321

IN CANADA
C. C. Meredith & Co.
Streetsville, Ontario

SOUTH AMERICA
Jose Luis Pontet
Buenos Aires, Argentina
Montevideo, Uruguay
Rio de Janeiro, Brazil
Sao Paulo, Brazil

OTHER EXPORT
Sylvan Ginsbury
8 West 40th Street
New York 18, N. Y.

CHICAGO TELEPHONE SUPPLY
Corporation
ELKHART • INDIANA

Specialists in

APPLICATIONS

VARIABLE RESISTORS (COMPOSITION and WIRE WOUND)

MEETS ALL JAN-R-19 SPECIFICATIONS



JAN Type RA 20A
2 Watt (CTS Type 252)



JAN Type RA 20B
2 Watt (CTS Type GC-252)



JAN Type RA 25A or 30A
3 or 4 Watt (CTS Type 25)



JAN Type RA 25B or 30B
3 or 4 Watt (CTS Type GC 25)

JAN-R-94, Type RV-3A
CTS Type 35, 1⅛" Diameter
Composition



JAN-R-94, Type RV-2B
CTS Type GC 45 with Switch

JAN-R-94, Type RV-4A
CTS Type 45, 15/16" Diameter
Composition



JAN-R-94, Type RV-2B
CTS Type GC 35 with Switch





Type D-C-35-45 Composition
Shaft Tandem

Type 33-B2D Alternating Shaft

Type 33-B2A Plane Shaft

ILLUSTRATIONS ARE ACTUAL SIZE

Precision Mass Production of Variable Resistors

FOUNDED 1896

BURTON BROWNE ADVERTISING

ohm-art

DEPOSITED CARBON RESISTORS

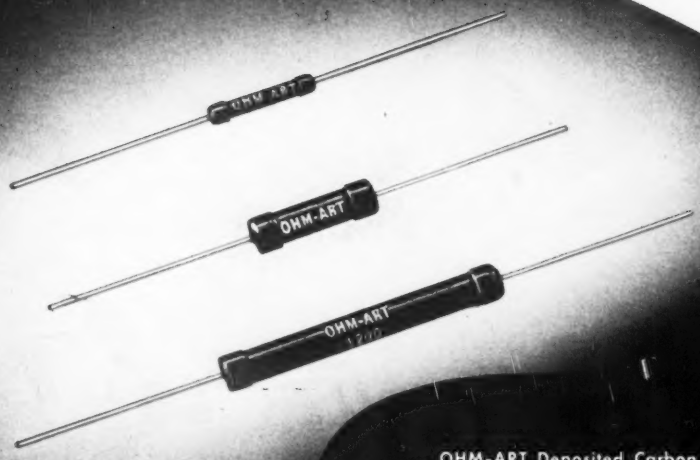

ACTUAL SIZE

OHM-ART Deposited Carbon Resistors are available in values from 30 Ohms to 100 Megohms and in power ratings from 0.5 to 2 watts. Tolerances available are 1%, 2%, 5% and 10%. These resistors have an extremely low temperature and voltage co-efficient. They have an extremely high degree of stability and will withstand peak voltages as high as 15,000 volts. In any precision electronic circuit where close control of the resistance value is required and where stability is of importance, OHM-ART Deposited Carbon Resistors will unquestionably fit the application.

Your inquiries will receive prompt, courteous attention.

OHM-ART Resistors are made under license arrangement with the Western Electric Company, Incorporated

ohm-art division

CHICAGO DIAL CO.
2919 S. La Salle Street • Chicago 16, Illinois

Fabricators of precision glass parts for the Electronic and allied industries.

In U-H-F it's

G-E LIGHTHOUSE TUBES

...for stronger construction and a stand-out efficiency record!

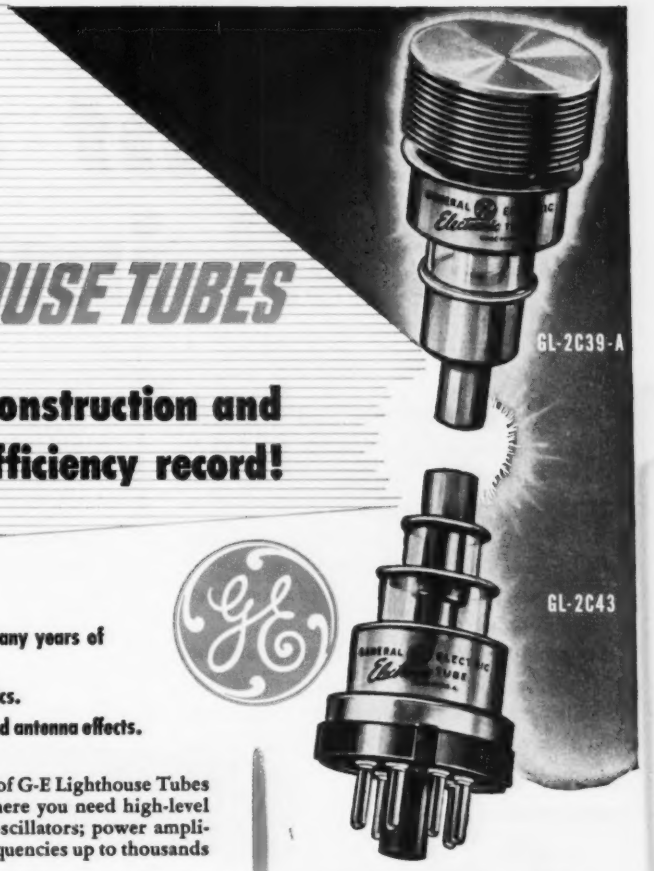

- Built for hard service.
- Pioneering u-h-f types, with many years of successful application.
- Superior electrical characteristics.
- Excellent isolation from load and antenna effects.

Check these *specific* advantages of G-E Lighthouse Tubes in v-h-f and u-h-f circuits where you need high-level detectors and mixers; pulsed and CW oscillators; power amplifiers, and frequency multipliers . . . at frequencies up to thousands of megacycles!

You can't beat G-E Lighthouse Tubes for—

- Aircraft traffic and location control equipment.
- Radio, TV, and other microwave relay equipment.
- Microwave test apparatus.
- Emergency communications equipment (police, taxi, and other fixed and mobile).
- Military and commercial communications and common-carrier equipment.

In applications such as these, General Electric tube engineers will be glad to work closely with you, and with the circuit designers at your drawing-boards. Available at all times, is G.E.'s experience with u-h-f types that goes back nearly two decades, and which you may draw on at will.

Wire or write for comprehensive Bulletin ETD-120. Learn more about G-E Lighthouse Tubes—how they'll improve the performance, increase the dependability of *your* new u-h-f circuit! *Electronics Department, Section 5, General Electric Co., Schenectady 5, N.Y.*

GL-2B22—High-frequency, high-perveance detector to beyond 1,500 mc.

GL-2C40—Radio-frequency amplifier, converter, and oscillator to 3,370 mc. Plate dissipation 6.5 w.

GL-2C43—Radio-frequency amplifier, oscillator, and frequency converter from 150 mc to 1,500 mc, and in special pulsed circuits to 3,370 mc. Plate dissipation 12 w.

GL-2C39-A—Radio-frequency amplifier, oscillator, and frequency converter from 150 mc to 2,500 mc. Plate input to 100 w.

GENERAL ELECTRIC

185-X3

the *right* relay will improve

To be exactly RIGHT for your purpose, relays and stepping switches must be easy to "design into" your product—easy to specify, mount and connect. They must be readily available as you need them, to meet your production schedules. Most important, they must operate dependably—help your designers toward the goal of a completely trouble-free product.

Automatic Electric relays and stepping switches are RIGHT on all counts! A wide range of standard types (including hermetically sealed relays, low-capacitance relays and the most compact stepping switch on the market!) permits your engineers to select and specify exactly the units they need. Assembled and adjusted to your exact specifications, they'll be shipped on schedule, ready to assemble into your production. And once in service, they'll go far to give your product a reputation for dependable, trouble-free operation.

For any product—for any purpose involving the use of relays or stepping switches—there is an Automatic Electric unit that's exactly RIGHT. We'll be glad to help you find it.

switches

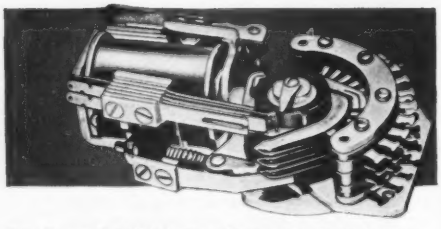

The Type 44 Miniature Stepping Switch You'll be amazed at this spring-driven d-c switch—it's so tiny and so light in weight. Yet it accommodates up to 6 bank levels, each with 10 points plus "home", and is adaptable to 10-, 20- or 30-point selection. Operation can be impulse-controlled or self-interrupted (using interrupter springs). Furnished with off-normal springs for mechanical "homing" (springs can also control auxiliary circuits). On 48 volts d-c, this switch runs 80 steps a second self-interrupted, 35 steps or more a second impulse-controlled. In rigid tests it averaged 200,000,000 steps—then required only minor readjustment.

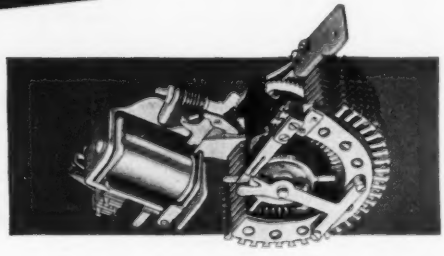

The Type 45 Stepping Switch This spring-driven switch is available both for d-c operation and with built-in rectifier for a-c operation. Accommodates up to 10 or more bank levels, each with 25 points plus "home", and is adaptable to 25- or 50-point selection. Provides for impulse-controlled or self-interrupted operation (using interrupter springs). Can be supplied with off-normal springs for mechanical "homing" (springs can also control auxiliary circuits). Runs 75 steps a second self-interrupted, and 35 steps a second impulse-controlled, on 48 volts d-c or 115 volts a-c. Has long service life, too—averaged 250,000,000 steps in rigid tests—then required only minor readjustment.

Wherever a relay or stepping switch is used in your product, it is likely to be important far beyond its cost. In fact, the performance of these components usually sets the standard of performance of the entire assembly. Thus, the use of the RIGHT relay or switch is often the simplest, most inexpensive way to make a good product better!

your product

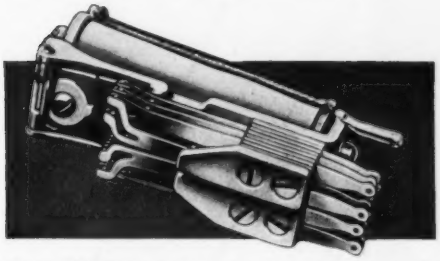

Class "B" Relays Types for extremely high speed operation and for time delays on either the operate or release strokes are available for d-c service; others for a-c operation. Independently operating "twin" contacts assure perfect contact operation. Contact points are dome-shaped to maintain uniformly low contact resistance. May be arranged in one or two pile-ups with maximum of 13 springs in each pile-up.



Hermetically Sealed Relays All Automatic Electric relays can be obtained in hermetically sealed housings. The "sealed-in" controlled atmosphere protects them from electrical or mechanical failure resulting from varying conditions of temperature, dust, humidity, acid, fungus or air pressure—and makes them completely tamper-proof.

relays

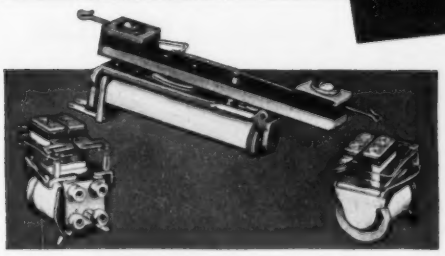

Low-Capacitance Relays For chatter-free control of high-frequency circuits. Two types, each providing exceptionally low capacitance between contact springs and between springs and ground. Equipped with "twin" contacts. Unusually small in size for compact mounting. The Class "C" relay shown above is especially suitable for strip mounting; it is only 0.687" wide and 2⅛" high and is 5-15/32" in over-all length. The Class "S" relay (above foreground) is 1" wide, 1-1/38" high and 1-19/32" over-all.

Write for our new 88-page catalog No. 4071F which gives complete specifications, performance and mounting data on the many types of relays and stepping switches manufactured by Automatic Electric Company, makers of telephone, signaling, communications and industrial electrical control apparatus. Address: AUTOMATIC ELECTRIC SALES CORPORATION, 1033 West Van Buren Street, Chicago 7, Ill. In Canada: Automatic Electric (Canada) Ltd., Toronto. *Offices in Principal Cities.*

AUTOMATIC ELECTRIC

RELAYS CHICAGO SWITCHES

"Tiny-but Mighty!"

SANGAMO
MINIATURE SILVERED
MICA CAPACITORS

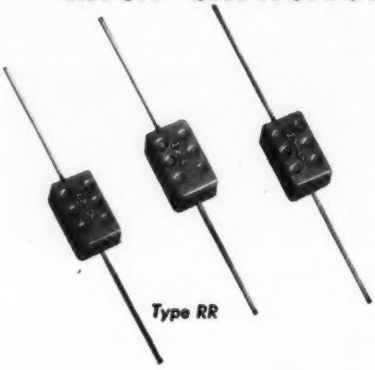

Do a "Heap Big" job in a minimum of space

Exceptionally small, easy-to-install capacitors that can do a *big* job in *minimum* space are a helpful factor in speeding production.

Where space limitations exist, the tiny—but mighty Sangamo "Shawnee," Type RR Miniature Silvered Mica Capacitor will solve your problem without sacrificing stability or high quality. These capacitors are designed and constructed to meet the Tentative Joint Army and Navy Specification JAN-C-5A for the CM-15 case size. Whether you require Sangamo RR miniature, or standard size types KR and CR silvered mica capacitors, you can safely specify any of them for use in all types of military, or commercial radio and electronic equipment. These and many other types of Sangamo Mica Capacitors are fully described in Catalog No. 800. Write for your copy.

SANGAMO
STANDARD SIZE
SILVERED MICA
CAPACITORS



Your Assurance of The SANGAMO Tribe *Dependable Performance*

PAPER · MICA · SILVER · ELECTROLYTIC CAPACITORS

SANGAMO ELECTRIC COMPANY

SPRINGFIELD, ILLINOIS

IN CANADA: SANGAMO COMPANY LIMITED, LEASIDE, ONTARIO

This Free New Booklet—

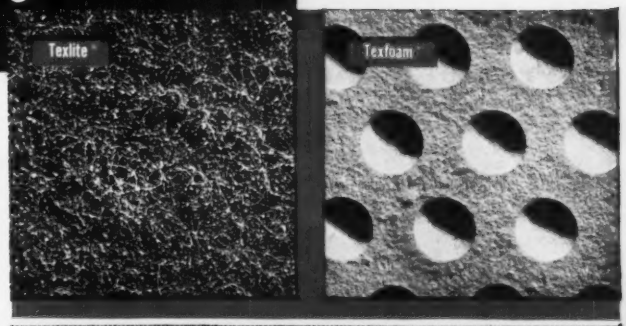

PACKAGE CUSHIONING

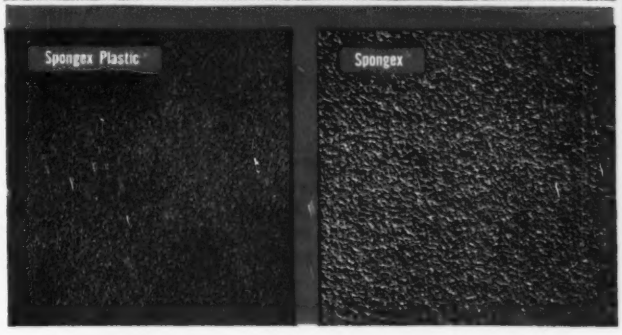

discusses what to look for in materials used in package cushioning

A concise, factual guide to aid in the *safe shipment of products sensitive to rough handling.* Tells how compression, compression set, damping, density, dusting, corrosiveness, fungus resistance, moisture and temperature affect performance of cushioning materials.
Send for your free copy today.

THE SPONGE RUBBER PRODUCTS COMPANY
Shelton Connecticut

Director of Packaging Laboratory
The Sponge Rubber Products Company
469 Derby Place, Shelton, Conn.

Please send me free "Package Cushioning."

Name _____
Street _____
City _____ State _____
Name of Firm _____

PROBLEM:

How to Prevent Contact Sticking in a Vacuum Tube

GENERAL PLATE:

Provided the Solution with a Composite Metal Combination

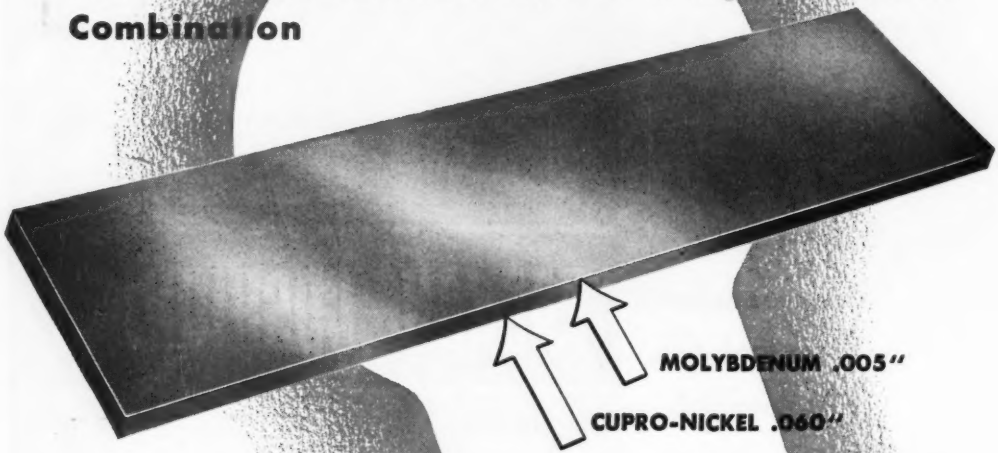

A leading manufacturer of radio and industrial tubes and electronic equipment was faced with a problem of finding the right metal for use as a sliding contact in vacuum tubes.

Copper provided a mechanical problem because it tended to gall.

Molybdenum was ideal but was too thick to form and too costly to machine out of solid material.

● The problem was presented to General Plate whose engineers quickly found the solution by bonding *two metals into one* . . . a thin layer of molybdenum (.005") to a thicker layer of cupro-nickel (.060").

The result was a General Plate *Composite Material that was easily fabricated, gave the performance of solid molybdenum, reduced costs considerably.*

No matter what your problems, it will pay you to *check with* General Plate. Their vast experience in combining precious to base metals or base to base metals can overcome your problems . . . often reduce costs.

General Plate Products include — Precious to base metal laminations . . . Base metal laminations . . . Alcuplate (copper and Aluminum) . . . Silver solders . . . Laminated contacts, buttons, rivets . . . Platinum-fabrication-refining . . . Age-hardening Manganese Alloy 720.

Have You a Composite Metal Problem?
General Plate can solve it for you

GENERAL PLATE

Division of Metals & Controls Corporation

38 FOREST STREET, ATTLEBORO, MASS.

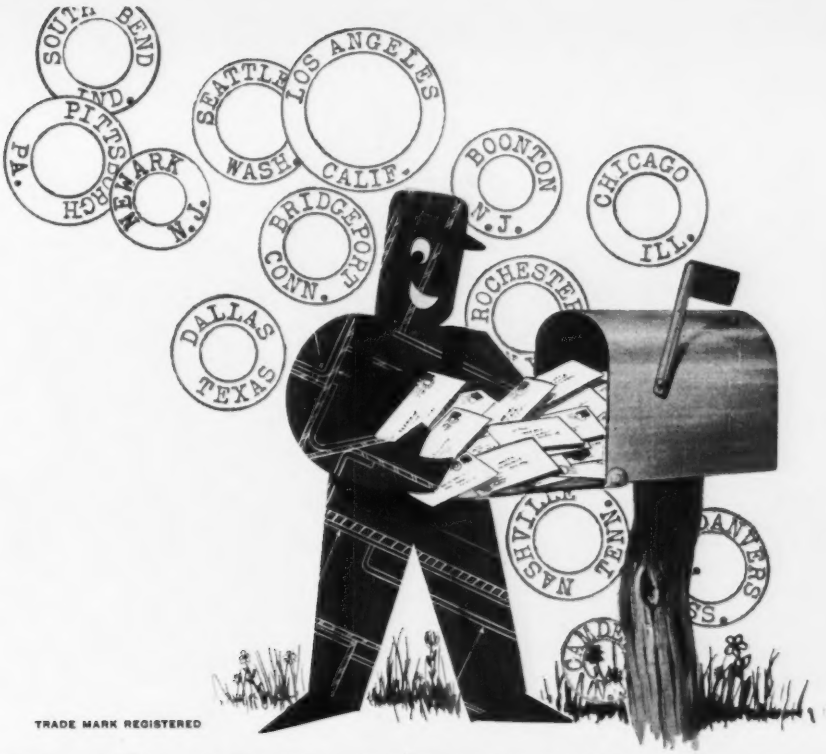

TRADE MARK REGISTERED

WE GET SUCH INTERESTING MAIL!

We grow in Brooklyn, like the Tree,
But we're a *national* industry.
Our customers are far and wide,
And we produce their jobs with pride.
We build their cabinets plain and thrifty
Or housings intricate and nifty.
And no one ever need be nervous
About our workmanship or service.
It's custom-built from A to Z—
And these big benefits you'll see:
Your own design, distinctive style—
A better product by a mile!
With all details so very fine
They'll speed up your assembly line.
And here's a point that isn't funny:
Our dies can save you time and money.
Come visit our big plant and look—
Or send for our new data book.

We Invite You To Visit Our Booth #420 at the I.R.E. West Coast Convention and Pacific Electronic Exhibit—San Francisco, August 22-24



KARP METAL PRODUCTS CO., INC.

215 63rd Street, Brooklyn 20, N. Y.

Specialists in Fabricating Sheet Metal for Industry

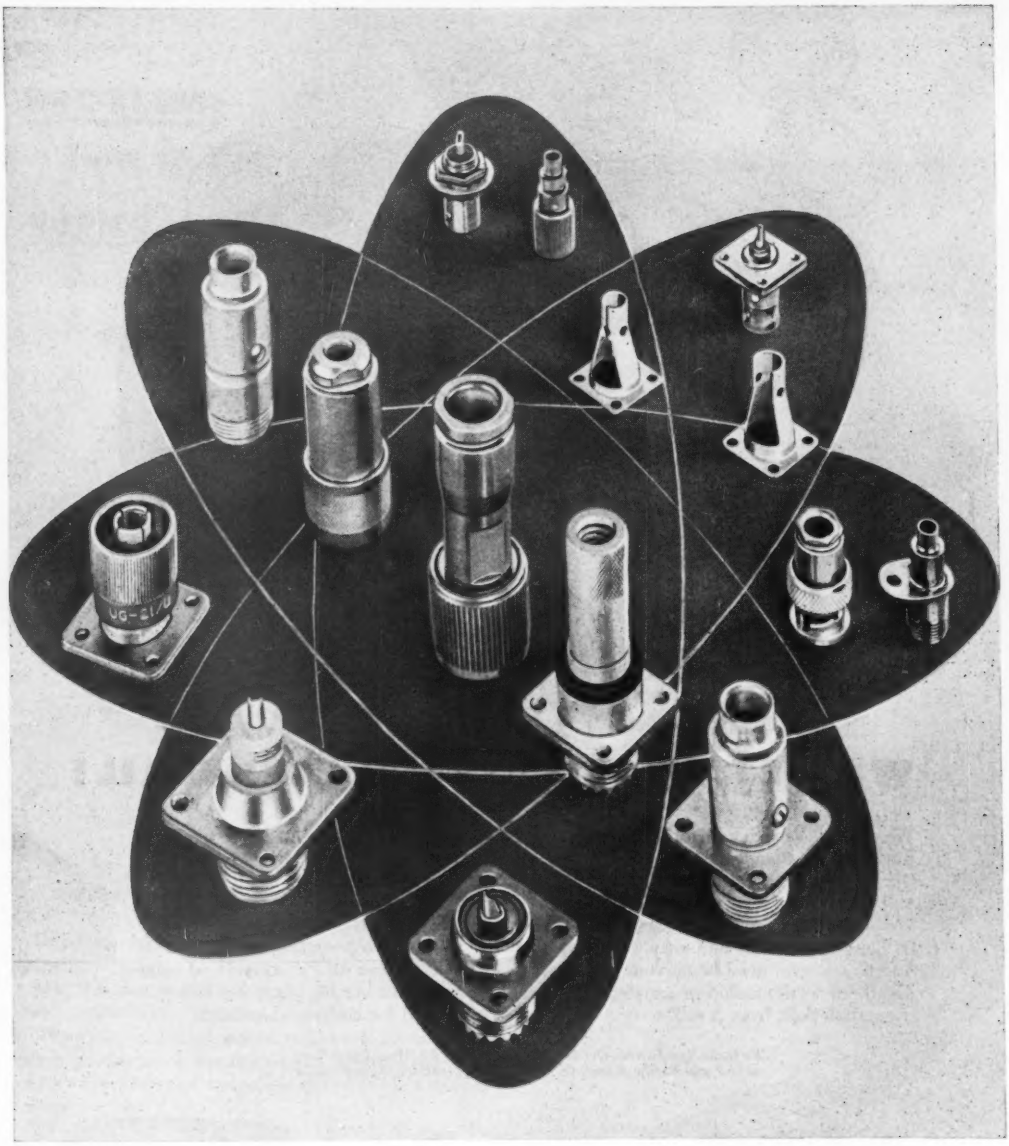

The UCINITE CO.

Newtonville 60, Mass.

Division of United-Carr Fastener Corp.

Specialists in

ELECTRICAL ASSEMBLIES,

RADIO AND AUTOMOTIVE

5 WALDES TRUARC RINGS ELIMINATE 4 TOOLING OPERATIONS... SAVE 22½¢ PER 100 UNITS



OLD WAY

Unit requires 4 hex head nuts, 4 washers, 4 shoulders, threading of 4 shafts. Clearance and end-play specifications necessary... constant maintenance.

NEW WAY

Just 5 Truarc "E" Rings set into predetermined grooves secure parts permanently. Assembly is simple, economical. No clearance specifications ...no maintenance!

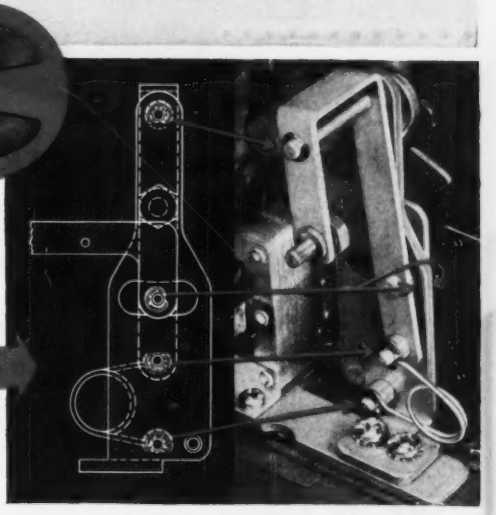

5 Waldes Truarc Retaining Rings in one assembly of the Dictaphone Time-Master dictating machine brought great savings to Dictaphone Corp., Bridgeport, Conn. And this is just one of three different applications where Truarc Rings cut material, tooling and assembling costs for this product.

Redesign with Truarc Rings and you too will cut costs. Wherever you use machined shoulders, bolts, snap rings, cotter pins, there's a Waldes Truarc Retaining Ring designed to do a better job of holding parts together.

Truarc Rings are precision-engineered...quick and easy to assemble and disassemble. Always circular to give a never-failing grip. They can be used over and over again.

Find out what Truarc Rings can do for you. Send your blueprints to Waldes Truarc engineers for individual attention, without obligation.

Waldes Truarc Retaining Rings are available for immediate delivery from stock, from leading ball bearing distributors throughout the country.

REDESIGN WITH 5 TRUARC "E" RINGS BRING THESE BIG SAVINGS...

Assembly time per unit using screws and washers . 24 seconds

Assembly time per unit using Truarc Rings . . . . 15 seconds

- Time saved per unit with Truarc Rings . . . . . 9 seconds
- Eliminates skilled labor milling and threading operations
- Eliminates maintenance
- **TOTAL MATERIAL AND LABOR COST SAVINGS PER 100 UNITS . . 22½¢**

SEND FOR NEW BULLETINS



WALDES

TRUARC

REG. U. S. PAT. OFF.

RETAINING RINGS

WALDES KOHINOOR, INC., LONG ISLAND CITY 1, NEW YORK

WALDES TRUARC RETAINING RINGS ARE PROTECTED BY THE FOLLOWING PATENT NUMBERS: U. S. PAT. 2,382,948; 2,420,921; 2,411,781; 2,487,803; 2,487,802; 2,491,306 AND OTHER PATS. PEND.

EO83

Waldes Kohinoor, Inc., 47-16 Austel Place
Long Island City 1, N. Y.

Please send Bulletins 6, 7 and 8—giving engineering specifications for all types of Waldes Truarc Rings.

Name_____

Title_____

Company_____

Business Address_____

City_____ Zone_____ State_____

678

Be sure to see the Truarc display-Booths 215 & 216 at the Pacific Electronic Exhibit, August 22-23-24

ELECTRONICS

Designers

OIL-FILLED, HERMETICALLY SEALED, COMPACT

HIGH VOLTAGE COMPONENTS

- **Withstand Mechanical Shocks**
- **Operate Continuously for Long Periods in Widely Varying Temperatures**

Available in a wide range of ratings, high-voltage components shown here are typical of units manufactured by General Electric for applications 5000 volts and above where corona must be held to a minimum. They represent many years of experience in meeting Armed Services requirements, and can be built for today's military specifications. Because these components are usually tailored for each job, please include functional requirements and any physical limitations with your inquiry. Write to *43-328A, General Electric Company, Pittsfield, Mass.*



RECTIFIERS—A-c to d-c power-supply units especially built for precision work where unusually low regulation, light weight, and small size are necessary. Typical outputs available are 7, 9, and 13 kv. Illustrated 7-kv unit measures 6 x 6 x 7 in., weighs 8 lb.



PULSE TRANSFORMERS—For use with either hard-tube or line-type modulators. Available in peak-voltage ratings from 10 to 100 kv or higher; peak-power ratings up to 30,000 kva or more. Designed for operation on pulse durations from 0.1 to 20 microseconds at rates up to 4000 pps.

RESONANT REACTORS—Accurately designed and built for radar service. Currently available in peak operating voltages from 5 to 45 kv, current ratings up to 2.25 amp. Higher ratings can be provided. Inductance ratings ranging from 0.25 to 300 henrys remain constant within 5 percent at above 50 percent load current.

FILAMENT TRANSFORMERS—For special applications or for use with standard high-voltage rectifier tubes. Supplied with or without tube socket mounted integrally with high-voltage terminal. Insulated to nearly any required level.

MODULATION TRANSFORMERS—High-fidelity, low-phase shift, Pyranol* or oil-modulation transformers and reactors for high-power AM transmitters are available as integral or separate units. Highly developed designs in ratings from 3.5 to 500 kw provide wide transmission frequency range, keep down harmonic-voltage insertion. Low phase shift gives flexibility and range.

*Reg. TM of General Electric Co.

GENERAL ELECTRIC

667-16

Digest

TIMELY HIGHLIGHTS ON G-E COMPONENTS

DELAY LINES—ORDER IN BULK, CUT OFF AS MUCH AS YOU NEED

Signals with band widths up to 2 megacycles can be delayed from 0.25 to 10 microseconds. Available in lengths up to 100 ft. Delay equals approximately ½ microsecond per foot. Characteristic impedances of 1100 and 400 ohms per foot are available. By ordering in bulk, lengths can be cut to fit specific needs. Can be bent into 4-inch diameter coils. Uses include research and development of special circuits for electronic devices. See Bulletin GEC-459 for further information.

PHOTOVOLTAIC CELLS—MINIATURE POWER PLANTS



For accurately detecting, controlling, and measuring light and for detecting and measuring even the smallest variations in colors. These cells are especially useful where long life and stability are required or where electronic amplifiers are not practical. Available in a new hermetically sealed series with standard mounting and a wide variety of unmounted sizes. More G-E photovoltaic cells than any other make are used in scientific instruments. Characteristics, dimensions, circuits, and technical data are available in Bulletin GEC-690.

TRANSFER AND CONTROL SWITCH—OVER 10,000 POSSIBLE COMBINATIONS



Built for reliability and long service life, the G-E Type SB-1 transfer and control switch can be used for more than 10,000 possible circuit-sequence combinations. Precision construction permits as many as 40 stages—four banks of ten stages each—to be operated in tandem. Switches with up to 16 stages and 12 positions are commonly furnished. Ratings go up to 20 amp at 600 volts a-c or d-c. Standard components are interchangeable. Complete description in Bulletin GEA-4746.

SELENIUM RECTIFIERS . . . HIGH-VOLTAGE UNITS HAVE LIFE EXPECTANCY OF OVER 60,000 HOURS

Now available from General Electric, these 26-volt RMS selenium rectifier cells have a continuous-service life expectancy of over 60,000 hours. Their initial forward resistance is very low and samples tested after 10,000 hours of operation show an average resistance increase of less than 6 per cent.

The high-voltage output means that stacks made up of these units are about 25 percent smaller than is possible with 12-volt cells. Low resistance means cooler operation and the space saving that goes with it.

If your application calls for compact selenium stacks for use in cramped quarters, these cells provide the solution. Stacks made with the new G-E cells may be obtained with rated outputs from 18 to 126 volts d-c at 0.15 to 3.75 amp. Check Bulletin GEA-5280.

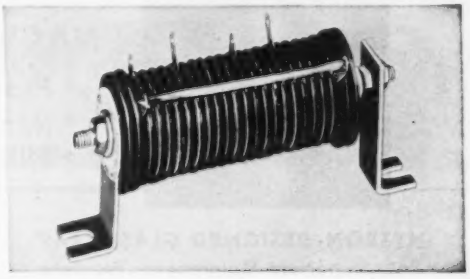

General Electric Company, Section D667-16
Schenectady 5, N. Y.

Please send me the following bulletins:

(V) Indicate for reference only
(x) For planning an immediate project

- ☐ GEC-459 Delay Lines
- ☐ GEC-690 Photovoltaic Cell
- ☐ GEA-4746 Here's the All-Purpose Switch
- ☐ GEA-5280 Selenium Rectifiers

Name_____

Company_____

Address_____

City_____ State_____

The Modern Way to Build Rotary Exhaust Equipment for Miniature Tubes

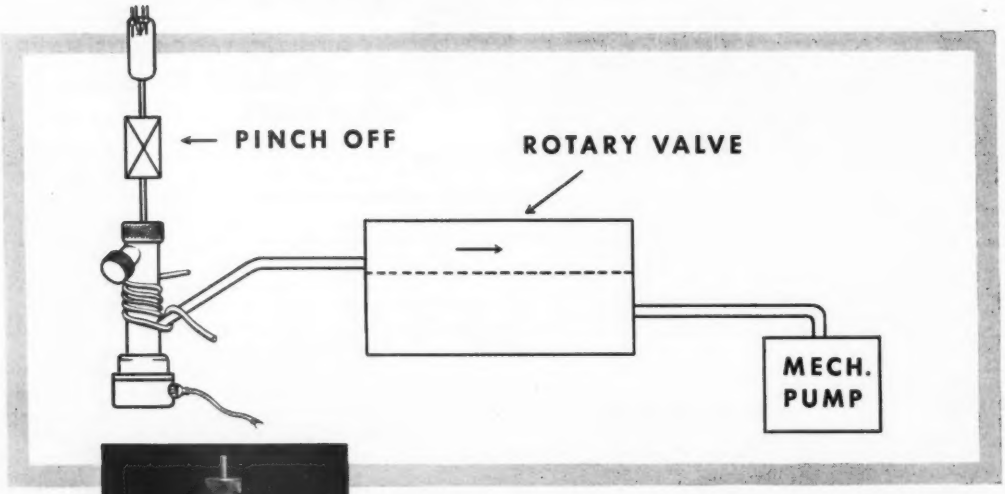

NRC's TYPE B-1 BOOSTER PUMP

- *Provides Higher Vacuum*
- *Reduces Exhaust Cycle*
- *Eliminates Troublesome Oil Vapors*

Our Type B-1 Booster Pump was built to meet ideal production methods as outlined by Hytron production engineers. On the production line it exactly meets their specifications in every detail — step by step. This Booster Pump lowers production costs. Its high speed reduces the exhaust cycle. Write for details.

HYTRON-DESIGNED GLASS TRAP
Ends Important Maintenance Problem



This glass trap, designed by Hytron production engineers, is made and sold by National Research. As you can see by the drawing at the left, the trap catches and holds broken glass particles. It works on the principle of a cyclone separator. The trap can be easily cleaned. Write for full details.

INDUSTRIAL RESEARCH
PROCESS DEVELOPMENT
HIGH VACUUM ENGINEERING
AND EQUIPMENT

METALLURGY
DEHYDRATION
DISTILLATION COATING
APPLIED PHYSICS

National Research Corporation

Seventy Memorial Drive, Cambridge, Massachusetts

In the United Kingdom: BRITISH-AMERICAN RESEARCH, LTD., Head Office — Wishaw, Lanarkshire

It's a fact that

- 30% more production will soon be available from American Lava Corporation as new units rapidly near completion.
- Continuous expansion to meet customers' requirements has made American Lava the world's largest producer of custom made technical ceramics exclusively.
- Average daily production approximates four million parts and is rapidly increasing.
- This expansion program is an all out effort to supply you with custom made technical ceramics in the quality and quantity you need—when you need them.

ALSIMAG

TRADE MARK REG. U.S. PAT. OFF.

30% MORE PRODUCTION

This building, photographed in May 1951, will be completed about the time this picture is published. Other units will speedily follow.

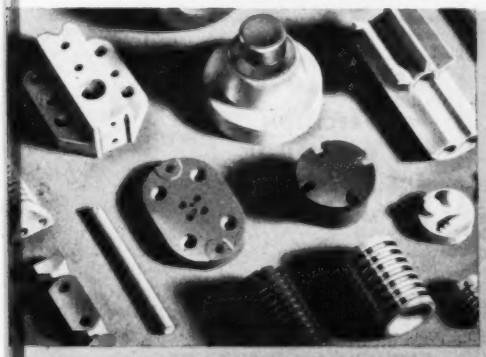

- What is your MOST RELIABLE source for custom made technical ceramics? American Lava Corporation has an enviable reputation for delivery according to specifications—and for ability to produce ceramics of a type and quality which are frequently considered "impossible."
- New production facilities are speeding deliveries. The experience gained in half a century of specialization is available to you on request. You are most apt to find at American Lava Corporation the solution to any problem involving technical ceramics.
- Equipment shown in this mock up is under construction. Carefully selected personnel has been added to the present skilled staff to provide experienced operators for all plants.

AMERICAN LAVA CORPORATION

CHATTANOOGA 5, TENNESSEE

50TH YEAR OF CERAMIC LEADERSHIP

OFFICES: METROPOLITAN AREA: 671 Broad St., Newark, N. J., Mitchell 2-8159 • CHICAGO, 228 North LaSalle St., Central 6-1721
PHILADELPHIA, 1649 North Broad St., Stevenson 4-2822 • LOS ANGELES, 332 South Hill St., Mutual 9076
NEW ENGLAND, 30-B Brattle St., Cambridge, Mass., Kirkland 7-4498 • ST. LOUIS, 1123 Washington Ave., Garfield 4950

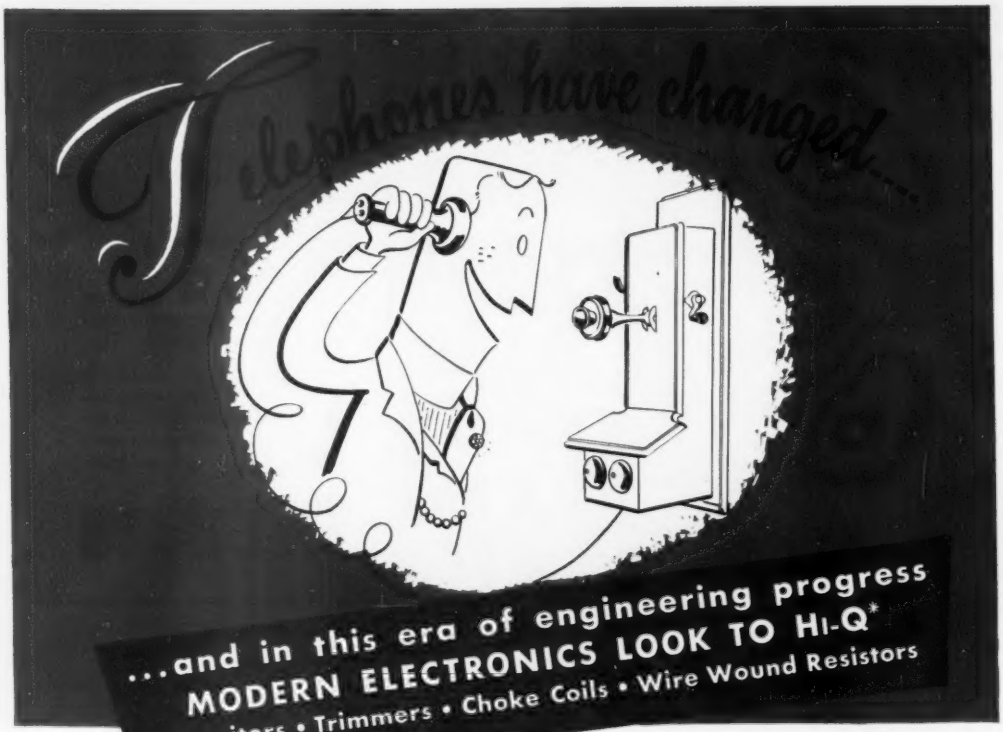
Telephones have changed...
...and in this era of engineering progress
MODERN ELECTRONICS LOOK TO HI-Q*
Capacitors • Trimmers • Choke Coils • Wire Wound Resistors

Yes, telephones have changed, and countless developments have played a part in electronic progress since the day of those old stem winders on the wall. Compactness, engineering precision and never-failing dependability are now demanded where the only question once was, will it work at all? In meeting these modern demands of modern electronics for modern ceramic components, **HI-Q** has led the way.

The **HI-Q** trademark is unquestioned assurance of capacitors, trimmers, choke coils and wire wound resistors that are uniformly dependable in every respect and rigidly meet specifications and tolerances. As the leading specialists in the ceramic field, **HI-Q** has come to be regarded by producers of radio, television, communications and other electronic equipment, as their best source of technical assistance in developing new components to meet the special needs of any circuit. **HI-Q** engineers are at your service any time you see fit to call them.

METAL CLAD STANDOFF



(Illustration Actual Size)

Ceramic tube of this quick mounting capacitor is enclosed in Cadmium plated metal case with special end seal for protection against humidity and temperature changes. Capacity 1500 mmf ± 500 mmf.

BETTER 4 WAYS

- **PRECISION**
- **UNIFORMITY**
- **DEPENDABILITY**
- **MINIATURIZATION**

JOBBERS—ADDRESS: 740 Belleville Ave., New Bedford, Mass.

* *Trade Mark Registered, U. S. Patent Office*

HI-Q*

Electrical Reactance Corp.
OLEAN, N. Y.

SALES OFFICES: New York, Philadelphia, Detroit, Chicago, Los Angeles

PLANTS: Olean, N. Y., Franklinville, N. Y. Jessup, Pa., Myrtle Beach, S. C.

NOW... GPL

Makes TV's Outstanding Camera Chain

Even Better!



GPL's 1951 Image Orthicon Chain is delivering even more features – better performance – than the previous model which itself set new industry standards! Compare it for ease of operation, uniform high quality, flexibility in studio or field.

Set this camera up to meet varying requirements . . . control it remotely if desired . . . select any of four lenses at the press of a button . . . adjust focus from right *or* left side of camera, with the same 300° arc of focus adjustment for all lenses . . . choose color filters, masks, at the flick of a thumb . . . control the motor-driven iris from camera or camera control unit. Normal optical focus range automatically adjusts for constant 9" diagonal at close-up, for all lenses except telephoto. Overtravel switch provides *extended* focus range, obtaining full optical focus on all lenses.

In every way, GPL's is a "human-engineered" camera chain, built to do a tough job more easily, built to do *your* specific job *best!* Arrange to see this great new model at the earliest opportunity.

Compare

THESE FEATURES WITH ANYTHING ON THE MARKET TODAY

- Three Compact Units
- Push-button Lens Change
- Right or Left Hand Focus Knobs
- Right or Left Hand Lens Iris Control Buttons
- Turret, Focus and Iris Controls from remote location if desired
- High Resolution Integral View Finder
- Enclosed I.O. Controls
- Iris Setting Indicator
- Pre-loaded Color Filter Wheel
- Swing-up Chassis
- Focus Range Selector Switch
- Equal Flexibility in Studio or Field

WRITE, WIRE OR PHONE FOR DETAILS

FINGER-TIP OPERATION from CAMERA or REMOTE LOCATION

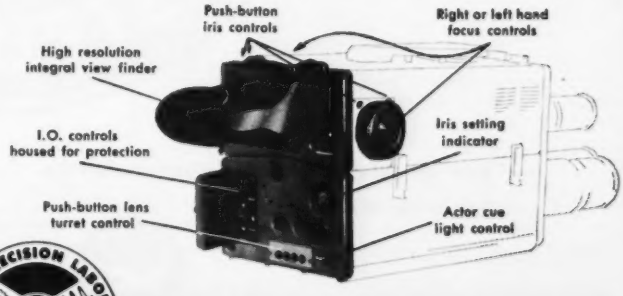
Push-button iris controls
Right or left hand focus controls
High resolution integral view finder
Iris setting indicator
I.O. controls housed for protection
Push-button lens turret control
Actor cue light control

TV Camera Chains • TV Film Chains
TV Field and Studio Equipment
Theatre TV Equipment

GENERAL PRECISION LABORATORY
INCORPORATED
Pleasantville New York

Aircraft Instruments and Controls

For precision and dependability look to Kollsman

KOLLSMAN INSTRUMENT CORPORATION

Elmhurst, New York • Glendale, California

How CLARE Engineers improved the performance of a relay without increasing its size

SPECIFICATIONS

Size: Length: 1 3/4"; Height: 1 1/32"; Width: 1". Dimensions vary with type of coil terminal used. Height shown is maximum (with 8 springs in pileup). **Weight:** Approx. 2 oz. **Coil:** Single or double wound. **Operating Voltages:** to 175 volts d-c. **Armature:** Single- or double-arm. **Contact Arrangement:** Forms A to C available. Maximum 8 springs in pileup. **Mounting:** Two #4-40 screws. Can also be furnished with 2 or 4 mounting studs tapped for #4-40 screws.

• The Clare Type "K" Relay, first of the famous Clare line of small, lightweight, telephone-type relays, is still the mainstay of design engineers who must have superior relays to operate in extremely small space.

Its fast operation, adequate contact pressure, high resistance to shock and vibration, long life and complete all-around dependability have met many complex requirements. Once in a while, however, Clare engineers have been confronted with customers' specifications which this Clare Type "K" Relay would not quite meet.

More often than not this was due to the small spool which limited coil winding to a maximum of 6500 ohms. Clare engineers have met this situation with the new Type "KX" whose sensitivity and operating range are increased by use of a slightly longer coil which can be safely wound to a maximum resistance of 8000 ohms. This additional winding space is gained by a slight change in the design and suspension of the armature which enables the length of the coil to be increased without adding materially to the over-all length of the relay.

The Type "KX", like the Type "K" and Type "R" relays, has the reed armature suspension of special alloy which engineers recognize as one of the subtler reasons for the superior performance of these small Clare relays. The Type "KX" is interchangeable with the Type "K" for mounting.

This new relay is available as either an open or hermetically sealed relay. Call your nearest Clare sales engineer . . . located in principal cities to serve you . . . or write C. P. Clare & Co., 4719 West Sunnyside Avenue, Chicago 30, Illinois. In Canada: Canadian Line Materials, Ltd., Toronto 13. Cable Address: CLARELAY.

Write for Clare Bulletin No. 116

CLARE RELAYS

First in the Industrial Field

SPECIAL **HARNESSES, CABLES, CORDS** for Military Equipment

If you have a wiring problem on any of your Defense Projects, always consult Lenz. Here is a dependable source for Harnesses, Cables and Cords, constructed of JAN-C-76 Approved Wire, that can speed up your assembly operations.

Lenz, with almost a half century of experience in the production of wires and cables—for the communications industries, is producing Thermo-Plastic Insulated Hook-Up Wires, with or without Lacquered Braids, and constructing Cables, Cords and Harnesses for many leading manufacturers of Defense Equipment.

For all your wiring needs, consult Lenz.

LENZ

LENZ ELECTRIC MANUFACTURING CO.

IN BUSINESS SINCE 1904 • 1751 North Western Avenue, Chicago 47, Illinois

PRESTO selected for

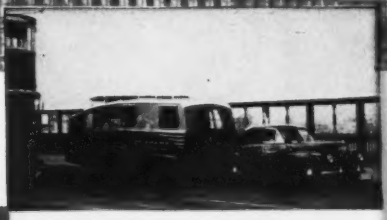

"The biggest job of radio journalism ever undertaken in the United Kingdom"

KENNETH MELVIN,
New Zealand's No. 1 radio personality tours three continents with his PT-900.

wherever you go there's PRESTO

From a Hindu temple in Singapore to the dank tomb of King Tut in Egypt . . . from the imposing balcony of Mussolini's palace in Rome to the historic tower of Big Ben in London, Kenneth Melvin has taken his PRESTO tape recorder . . . recording strange voices, sounds, music, that have become living commentaries on people's customs, habits and surroundings. As official reporter for the British Festival, he is now travelling throughout the British Isles recording material for a 52-week series of network broadcasts.

"I shall be interested to discover", says Kenneth Melvin, "whether any tape-recording equipment has ever been subjected to so grueling a test as my PT-900 . . . not on a single occasion—over four months of constant operation, averaging six hours a day, under murderous variations of temperature, current, voltage and with constant man-handling from car to scene, upstairs and down cellars—*not once has it failed me.*"

Every day, thousands of PRESTO owners are discovering, just as Mr. Melvin did, that PRESTO equipment is made to give the utmost in performance and dependability. That's why . . . wherever you go there's PRESTO.

PRESTO RECORDING CORPORATION
PARAMUS, NEW JERSEY

In Canada: Walter P. Downs, Ltd., Dominion Square Bldg., Montreal
Overseas: M. Simons and Sons Company, Inc., 25 Warren St., New York, N. Y.

WORLD'S LARGEST MANUFACTURER OF PRECISION RECORDING EQUIPMENT AND DISCS

NEW Minipower Relay



TYPE ME RELAY

AVAILABLE HERMETICALLY SEALED

HERE ARE THE FACTS AND FIGURES

DIMENSIONS: 1-3/16 x 13/16 x 1-3/8

CONTACTS: 5 amp. standard. 28 volts D.C., 115 volts A.C. Up to 4 P.D.T. D.C. and up to D.P.D.T. A.C.

SENSITIVITY: D.C. 0.7 watts D.P.D.T. (0.1 watt in special applications)

A.C. 3 volt-amperes (operating range: 80% to 110% of nominal voltage)

COIL: Available for A.C. or D.C.

HEAT RISE

D.C. 50°C Rise—2 watts
85°C Rise—3.5 watts

A.C. 45°C at nominal voltage
65°C at 10% overvoltage

MOUNTING: One-screw mounting with locating pin.

HERMETICALLY SEALED DATA

DIMENSIONS OF CAN: Base: 1" x 1-1/8"
Height above chassis: 1-11/16"
Lugs: 3/8"

Available with solder terminals or special miniature plug-in base.

VERSATILE—
FROM SIGNAL TO 5 AMP. POWER

This latest addition to Allied's line of quality relays will meet the vibration, shock and environmental requirements for air, marine and ground applications.

BULLETIN ME
GIVES COMPLETE DETAILS.
SEND FOR YOUR COPY TODAY

Also, be sure to send for your copy of Allied's Relay Guide. It gives engineering data for 27 Allied relays in a concise tabular form for easy reference.

ALLIED CONTROL COMPANY, INC., 2 EAST END AVE., NEW YORK 21, N.Y.

WRITE FOR BULLETIN FC-5101

APPLICATIONS:
ANTENNA CORES • I-F TRANSFORMERS • PERMEABILITY TUNING DEVICES • LOW-LOSS INDUCTORS • SATURABLE CORE REACTORS • HORIZONTAL OUTPUT TRANSFORMERS • DEFLECTION YOKES • TELEPHONE LOADING COILS

Be certain of top performance and an uninterrupted supply of deflection yokes and horizontal output transformers by specifying Ferroxcube 3C, the nickel-free ferrite core material.

Improved Ferroxcube 3C gives you these basic advantages: 1. High saturation flux density. 2. High permeability. 3. Improved temperature stability.

The broad experience gained during 15 years of research and manufacture since the initial development of Ferroxcube, *can be helpful to you!* Take advantage of our technical "know-how" in solving your own design problems. Ferroxcube engineers are always ready to assist you without obligation. ★ ★ ★ ★ ★ ★ ★ ★ ★ ★

FERROXCUBE

THE MODERN CORE MATERIAL

FERROXCUBE CORPORATION OF AMERICA

A Joint Affiliate of Philips Industries and Sprague Electric Co., Managed by Sprague

50 East 41st Street • New York 17, New York • Factory: Saugerties, New York

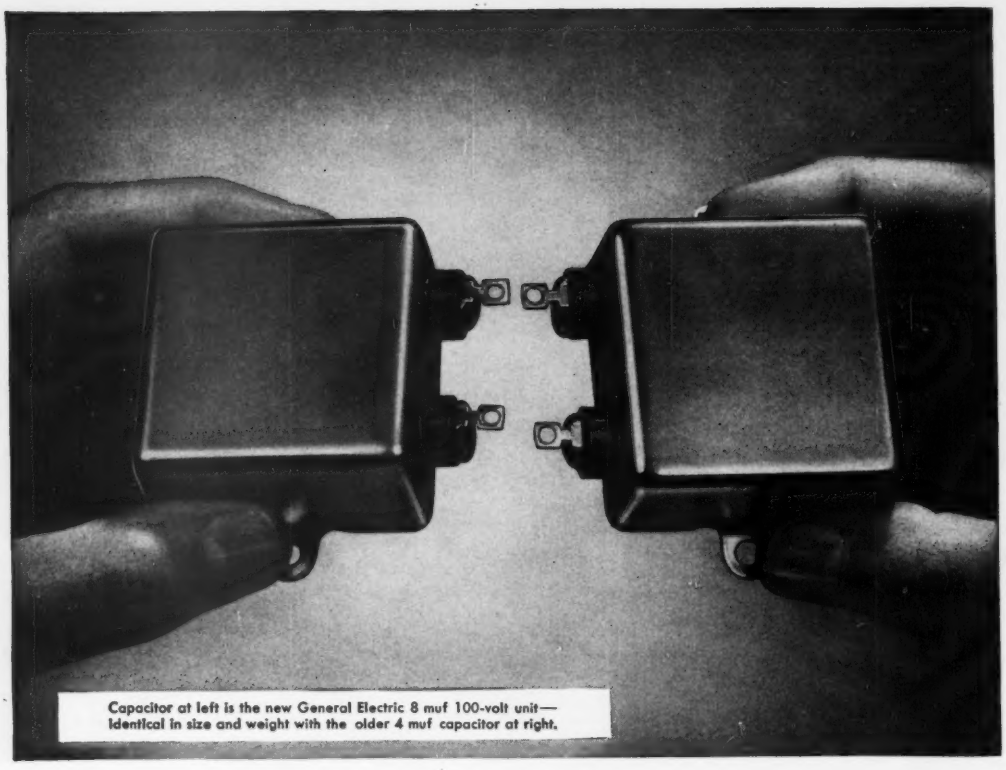

Capacitor at left is the new General Electric 8 muf 100-volt unit—identical in size and weight with the older 4 muf capacitor at right.

8 muf...in the space of 4

New General Electric line of 100-volt d-c capacitors marks another important step in reducing size and weight of electronic equipment.

Here is another outstanding G-E capacitor development—thinner paper, thinner foil, so that double or triple the capacitance can be designed into a cubic inch.

These new capacitors are comparable in all ways with previously offered paper dielectric units, are equally dependable, and in addition are smaller in size and lighter in weight. They will not introduce noises into the system. They will satisfactorily pass signal voltages approaching zero. Their insulation resistance values remain high after long periods of service. While primarily intended for d-c applications with allowable ripple voltages in accordance with JAN-C-25, they will withstand occasional discharges, and can be used in low-voltage a-c circuits.

In Regular Production. Units of 3, 8 and 10 muf in Case Style 53 and 4 muf in Case Style 61 are in regular production. Other ratings can be built in mass-production quantities.

These capacitors meet all requirements of "F" characteristics of JAN-C-25 for 100-volt d-c units. For applications where an expected life of 1000 hours at 40 C is satisfactory, rating can be increased to 150 volts. For ambients above 40 C, units should be derated in accordance with JAN-C-25 Specifications. There is negligible change in capacitance from −40 C to 105 C—and units will give full life at temperatures as low as +55 C.

If you have applications involving reasonable quantities, get in touch with us. Your letter, addressed to Capacitor Sales Division, 42—304, General Electric Company, Pittsfield, Mass. will receive prompt attention.

General Electric Company, Schenectady 5, N. Y.

GENERAL ELECTRIC

407-305

RECOGNIZED LEADERS IN
SUPPLY AND SERVICE
TO THE ELECTRICAL
AND ELECTRONICS
INDUSTRIES
RELY on REPUBLIC
FOR
ALUMINUM CONDENSER FOIL
OF UNIFORM HIGH QUALITY
Leading condenser manufacturers specify Republic aluminum condenser foil because, based on long experience, they recognize that the straight cut edges, accurate gage and uniform strength of Republic foil give maximum performance. As specialists in the production of condenser foil, Republic makes available its entire facilities for the solution of your individual problems. Your orders and inquiries will receive prompt and individual attention.
REPUBLIC FOIL & METAL MILLS
INCORPORATED
DANBURY
CONNECTICUT
BRANCH SALES OFFICES:
209 W. Jackson Blvd., Chicago 6, Ill.
666 Mission St., San Francisco 5, Calif.
REPUBLIC

NEW! Synchronous Motor Driven SINGLE CAM and MULTI-CAM RECYCLING TIMERS

The new Industrial Cam Recycling Timer continuously repeats a constant cycle consisting of definite ON and OFF periods which can be adjusted from 2% to 98% of the cycle. By means of percentage calibrations on the cam face any desired setting is quickly and accurately obtained. The time cycle itself can also be changed easily by substituting simple gear-rack assemblies. Thus, from one timer, by using different gear racks you can obtain 50 different cycles ranging from the lowest cycle of the timer up to nine times that cycle. The snap action switch operated by the timer is a single pole double throw, totally enclosed 10 ampere type. We can supply 500 different time cycles in this model ranging from one revolution in 15 seconds to one revolution in 72 hours.

The Multi-Cam Recycling Timer is identical to the Single Cam Timer but operates from 2 to 6 circuits and incorporates several additional features. On this timer all cams are mounted on a single driving shaft which assures a common time cycle for all circuits. Each cam, however, is independently adjustable for a specific timing sequence. This is accomplished by actually rotating the cam with finger pressure using the drum calibrations for guidance. Thus a range of timing sequences from 0% to 100% is obtainable on each circuit with ease. The elimination of cam followers and other types of moving parts makes possible this compact unit. 11 models are available with time cycles ranging from one revolution in 1 minute to one revolution in 72 hours.

REMOTE CONTROL FOR SINGLE CYCLE OPERATION AVAILABLE.

Send today for complete details—or, if you would like to send us specifications, we shall be glad to make recommendations based on your particular needs.

Manufacturers of These and Other Timers and Controls for Industry

TIME DELAY TIMERS

INSTANTANEOUS RESET TIMERS

MANUAL SET TIMERS



TANDEM AUTOMATIC RECYCLING TIMERS

RUNNING TIME METERS

Timers that Control the Pulse Beat of Industry

INDUSTRIAL TIMER CORPORATION

115 EDISON PLACE, NEWARK 5, N. J.

1951-1952 ELECTRONICS BUYERS' GUIDE

YOUR BOOK with the ORANGE and BLACK cover

The 650-page 1951-1952 ELECTRONICS BUYERS' GUIDE is now in the hands of every ELECTRONICS' subscriber. Sent as a bonus issue of ELECTRONICS through the cooperation of over 2,000 manufacturers of electronic and allied products, it is a valuable working tool that will be kept at the elbow of every ELECTRONICS' subscriber and reader throughout the year.

Use it . . . refer to it constantly. Mention ELECTRONICS BUYERS' GUIDE when you write to the manufacturers listed in the directory section and when you purchase products advertised in it. Such evidence of use will insure continued manufacturer cooperation in making this annual your most comprehensive source of buying information.

The products and services of 475 companies are advertised in this 13th issue of ELECTRONICS. In the directory section, more than 2,000 manufacturers are listed under 1,400 product classifications. 2,500 trade names are listed, and the names and addresses of 850 distributors of electronic products are arranged alphabetically by states. It also supplies a 36-page cumulative index to articles published in ELECTRONICS from April 1930 to December 1939.

The 1951-1952 ELECTRONICS BUYERS' GUIDE had the largest print order, and has more total pages, more pages of advertising, and more individual companies' advertising in it than any issue of ELECTRONICS published since the first in April 1930.

A publication's value to an industry is measured by the service it renders to subscribers and readers. When we can mail to every one of our over 30,000 paid subscribers—as a separate, 13th issue—a valuable working tool such as the 1951-1952 BUYERS' GUIDE, we feel we are rendering a valuable service to our subscribers, advertisers, and industry.

The 1952-1953 ELECTRONICS BUYERS' GUIDE will be published Mid-June 1952.

ABC

electronics

ABP

12 REGULAR ISSUES supplying latest technical information, design and product news

A McGraw-Hill Publication • 330 West 42nd St., New York 18, N. Y.

ANNUAL BUYERS' GUIDE supplying all basic product source and technical specifying data

INDIANA hyflux ALNICO V

. . . gives you Stronger Permanent Magnets

INDIANA HYFLUX Alnico V develops the *highest energy-product* of any magnet material—an average of 5½ million BHmax or more, with 5¼ million *guaranteed.* Think what this can mean to you in greater strength and smaller size, especially since HYFLUX—*a premium product*—costs no more than regular Alnico V.

Everything in Magnets —from Design to Delivery

INDIANA Permanent Magnets are component parts of so many mechanical and electrical devices because they're compact, easy to install, deliver uniform high energy without wires, heat, or operating parts. As the *world's largest* magnet maker, INDIANA points with pride to more than 30,000 different applications—including radar, sonar, ranging equipment, aircraft magnetos, proximity fuses, guided missiles, communication, and a host of other uses. This broad experience is *yours without cost* when you call in INDIANA.

Greater Production —now, when you need it!

INDIANA, sole maker of HYFLUX, makes permanent magnets exclusively—all materials, all shapes, all sizes. During the past eighteen months, production facilities have been expanded 50% to meet the growing demand. For your present needs and those of the future, let's get our engineers together. INDIANA designing and unified service save *you* time and money.

• *Many types and sizes of INDIANA HYFLUX Permanent Magnets are available for your immediate experimentations. Ask for new Stock Magnet Catalog No. 11. For magnet design information, ask for free Magnet Manual No. 4E-81.*

INDIANA PERMANENT MAGNETS

THE INDIANA STEEL PRODUCTS COMPANY

VALPARAISO, INDIANA • • • Sales Offices Coast to Coast

SPECIALISTS IN "PACKAGED ENERGY" SINCE 1908

FOR READY REFERENCE...

A Complete List of Welded GERMANIUM DIODES

PLANT CAPACITY UP 200%!

With new plant facilities devoted entirely to the manufacture of germanium products, we can now deliver 12,000,000 diodes a year—industry's total estimated needs. Whatever your diode requirements, let us show you that we can fill them with precision-tested units at prices as low as any in the business. Complete specifications and prices on request. Write: *General Electric Company, Section 481, Electronics Park, Syracuse, N. Y.*

CATEGORY	RTMA DESIGNATION	G-E TYPE	PEAK INVERSE VOLTAGE	CONTIN. OPER. INV. VOLTAGE	MIN. FORWARD CURRENT (MA) AT +1V	MAX. INV. CURRENT (@) AT −50V	AV RECTIFIED CURRENT (MA)	PEAK RECTIFIED CURRENT (MA)	SURGE CURRENT (MA)	SIZE
GENERAL PURPOSE	1N48	G5	85	70	4.0	833	50	150	400	A
	1N51	G5C	50	40	2.5	1667	25	100	300	A
	1N52	G5D	85	70	4.0	150	50	150	400	A
	1N63	G5E	125	100	4.0	50	50	150	400	A
	1N75	G5M	125	100	2.5	50	50	150	400	A
TV	1N64	G5F	20	Min. dc current in 44 mc rectifier—100@a						A
	1N65	G5G	85	70	2.5	200	50	150	400	A
JAN	1N69	G5K	75	60	5.0	850	40	125	400	A
	1N70	G5L	125	100	3.0	410	30	90	350	A
VHF		G6	15	Min. Rect. Eff. at 100 mc and 2 v signal—60%						A
UHF	1N72	G7		+3db max. noise factor over 1N21B in 500 mc mixer CKT			25	75		B
		G7A					25	75		A
		G7B	5	75% min. rect. eff. at 100 mc for detector			25	75		B
		G7C	5				25	75		A
		G7D	5	Tested for sharpness of break E-I char. for freq. multiplier			25	75		B
		G7E	5				25	75		A
		G7F	5	60% min. rect. eff. at 100 mc for detector			25	75		B
		G7G	5				25	75		A
MATCHED PAIRS Note (1)		G8	85	70	4.0	833	50	150	400	A
		G8A	85	70	4.0	150	50	150	400	A
		G8B	125	100	4.0	50	50	150	400	A
		G8C	125	100	2.5	50	50	150	400	A
QUADS	1N73	G9	75		Note (3)	50@ −10v	22.5	60	100	D
	1N74	G9A	75		Note (3)	50@ −10v	22.5	60	100	D
TRANSISTORS Note (4)		G11	Max. RMS emitter signal level—.3v, max. DC emitter current—.5 ma;							C
		G11A	Max. DC collector current—2.0 ma; power gain 17 to 21 db; power output 25 mw							C



(1) Matched at +1v so that current through higher resistance unit is within 10% of lower resistance unit.

(2) Consists of 4 balanced diodes. With 15 ma forward current; the voltage drop of each diode is 1.3v min. and 1.7v max., all diodes are within 0.1 volt of each other, and voltage drop of a pair is 0.03 volts of each other.

(3) Consists of 4 balanced diodes. With 15 ma forward current; the voltage drop of each diode is 1.2v min. and 1.8v max., all diodes are within 0.2v of each other, and voltage drop of a pair is 0.1v of each other.

(4) Additional test over G11 for negative resistance of base current vs. base voltage characteristic for trigger circuit operation.

You can put your confidence in—

GENERAL ELECTRIC

FOR RELIABLE RADIO PRINTER COMMUNICATIONS

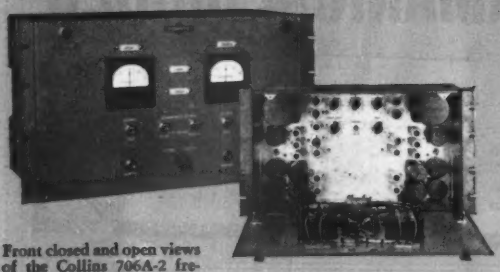

Front closed and open views of the Collins 706A-2 frequency shift converter

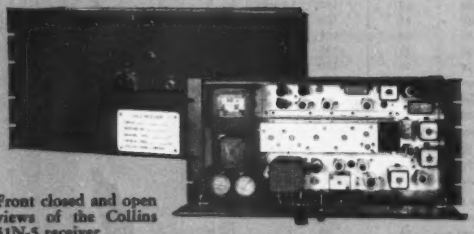

Front closed and open views of the Collins 51N-5 receiver

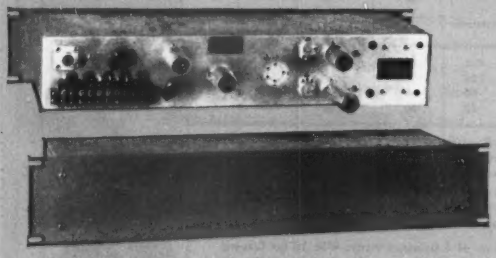

Front and rear views of the Collins 709D-1 frequency shift keyer

Here are three basic Collins units for maximum performance and complete dependability in frequency shift radio receiving and transmitting applications.

The 706A-2 converter is designed to operate from the outputs of two 51N-5 receivers arranged for diversity reception of radio printer transmissions. In practice, both receivers operate on the same frequency within the range of 2 to 24 megacycles. However, each derives radio frequency signals from a separate directional antenna.

The 706A-2 converter automatically balances the signal from one receiver against that obtained from the other, instantaneously selects the best, and feeds it to the d-c keyer circuits and thence to the printer line. Both the receivers and the converter are engineered for unattended continuous duty, and will give long, trouble-free operation with only routine maintenance.

The 709D-1 frequency shift keyer was developed to provide a simple yet dependable unit for adapting existing transmitters to frequency shift operation. For such service it is most commonly coupled to the transmitter through a modified crystal holder inserted in the transmitter's crystal socket.

You will find it well worth while to consult us about your radio printer requirements.

IN RADIO COMMUNICATIONS, IT'S . . .

COLLINS

COLLINS RADIO COMPANY, Cedar Rapids, Iowa

11 W. 42nd Street, NEW YORK 18 2700 W. Olive Avenue, BURBANK

MYCALEX

low-loss miniature TUBE SOCKETS

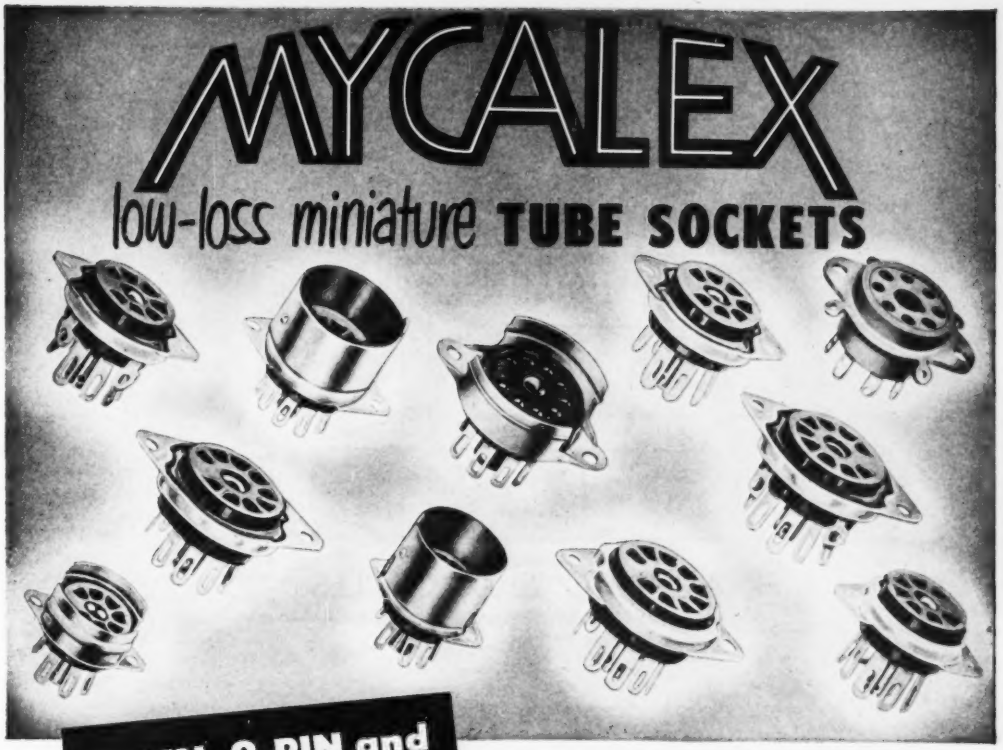

7-PIN, 9-PIN and SUBMINIATURES

—available in two grades:

MYCALEX 410 priced comparable to mica-filled phenolics. Loss factor is only .015 at 1 mc., insulation resistance 10,000 megohms. Approved fully as Grade L-4B under N.M.E.S. JAN-1-10 "Insulating Materials Ceramic, Radio, Class L".

MYCALEX 410X — low in cost but insulating properties greatly exceed those of general purpose phenolics. Loss factor is only one-fourth that of phenolics (.083 at 1 mc.) but cost is comparable. Insulation resistance 10,000 megohms.

PREMIUM INSULATION — Bodies are MYCALEX glass-bonded mica, the dielectric that combines every characteristic required in a modern insulation including low dielectric loss, high dielectric strength, high arc resistance, non-hygroscopic and great dimensional stability.

COMPETITIVELY PRICED — Although manufacture is to the most exacting quality standards and fully meets RTMA recommendations, an exclusive MYCALEX manufacturing process permits pricing at a level competitive with low cost phenolic types.

PRECISION MOLDED — An exclusive MYCALEX injection molding technique affords great dimensional accuracy, exact uniformity, superior low loss characteristics and perfect homogeneity.

MYCALEX TUBE SOCKET CORPORATION

Under Exclusive License of Mycalex Corporation of America

30 ROCKEFELLER PLAZA • NEW YORK 20, N. Y.

INFORMATIVE DATA SHEETS

Include them in your files — Complete information including dimensional data, specifications and other pertinent facts on MYCALEX low-loss, low-cost, tube sockets. Write for your set complete with loose-leaf binder that permits the inclusion of subsequent releases and data sheets.



SINCE 1919 MYCALEX THE INSULATOR TRADE MARK REG U.S. PAT. OFF.

MYCALEX CORPORATION OF AMERICA

Owners of 'MYCALEX' Patents and Trade-Marks

Executive Offices: 30 ROCKEFELLER PLAZA, NEW YORK 20 — Plant & General Offices: CLIFTON, N.J.

40.109
240.65
1174.6
20000.
– OR ANY OTHER

precision FREQUENCY

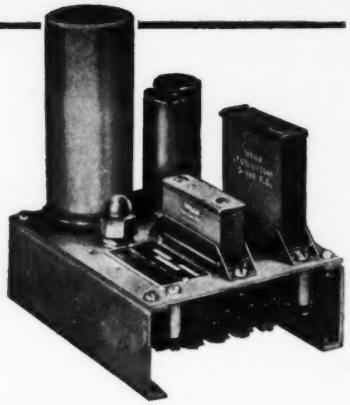

FROM 40 TO 20,000 CYCLES

CONSERVATIVE ACCURACY UNDER USUAL CONDITIONS

1 PART IN 100,000—(.001%)

CALIBRATED AGAINST A STANDARD ACCURATE TO 1 PART IN 10-MILLION

The basic unit of this frequency standard is an electronically driven fork,—temperature compensated and hermetically sealed against changes of humidity and barometric pressure. Through its use, any frequency or multi-frequencies between 40 and 20,000, fractional or otherwise, are obtainable.

Have you a need for any specific number of cycles in precision frequencies?

Can a source of such frequency solve your design problem or increase its factor of safety?

Have you a system that requires great accuracy, stability and dependability?

The frequencies shown at the top of the page are but a few among hundreds furnished for precision application in industries, laboratories and Government departments.

OUR ENGINEERS ARE AVAILABLE TO COOPERATE ON ANY PROBLEM

American Time Products, Inc.

580 Fifth Avenue ***New York 19, N. Y.***

MANUFACTURING UNDER PATENTS OF WESTERN ELECTRIC CO.

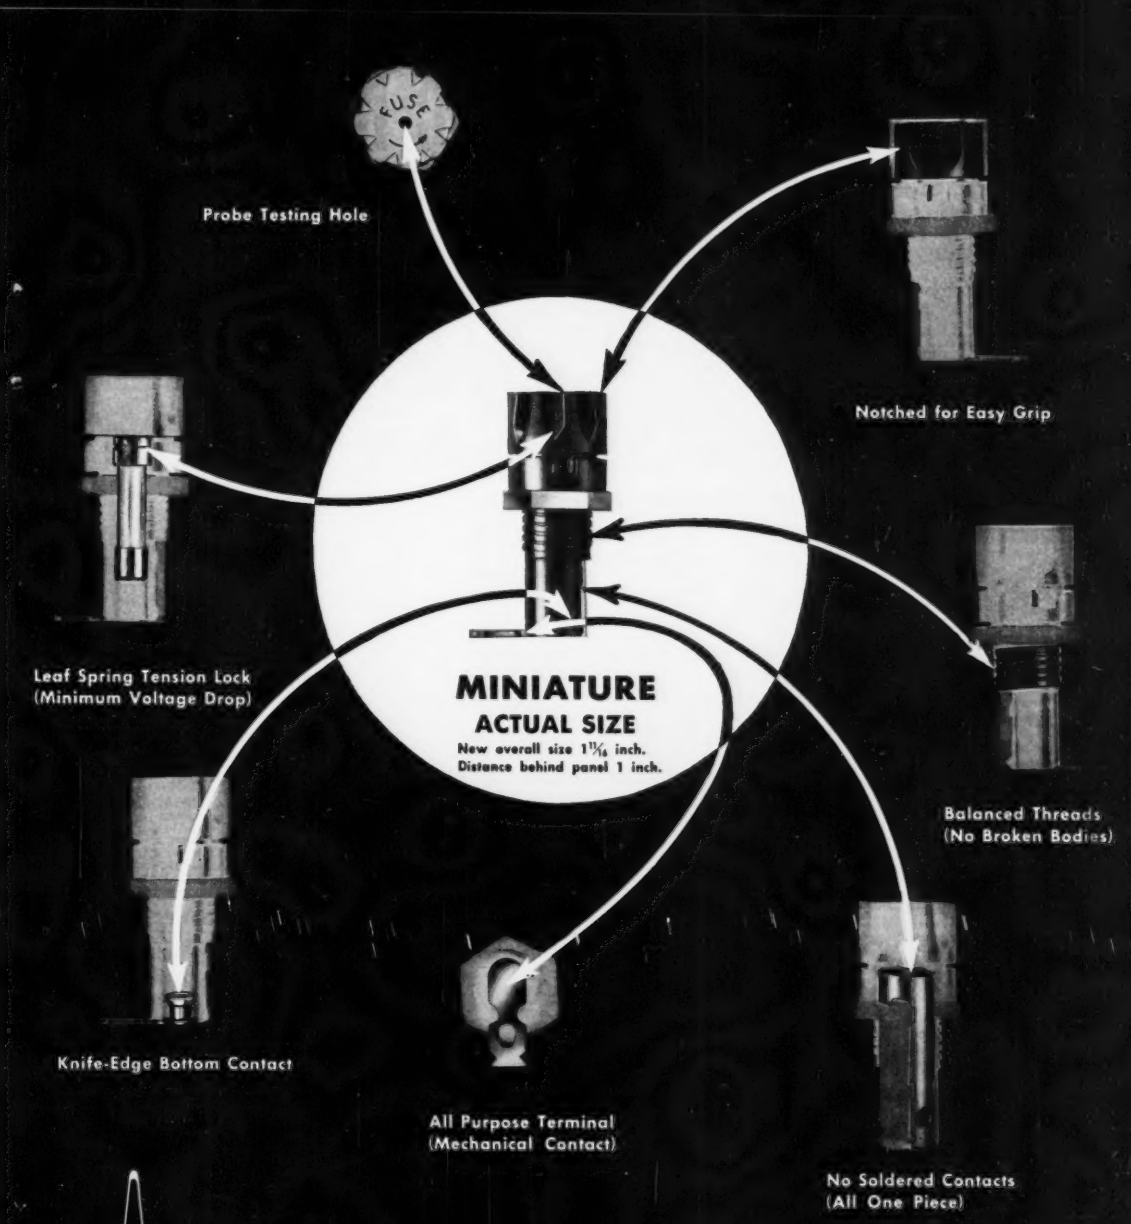

LITTELFUSE FUSE EXTRACTOR POST

Littelfuse, maker of fine fuses, now pioneers another design development with the new, miniature Fuse Extractor Post.

Write Littelfuse today – 4757 North Ravenswood, Chicago 40 – for your free sample of the newest and smallest FUSE EXTRACTOR POST.

BURTON BROWNE ADVERTISING

Where "Photographic Memory" Counts!

When you're comparing waveshapes it takes the "photographic memory" of a camera to give you the whole story in accurate, permanent form.

Until recently, photographic oscilloscope recording called for considerable trouble in setting up equipment and a long time period for developing the results. But today, with the Fairchild-Polaroid Oscilloscope Camera, it's an easy job to record as many traces as are needed.

Take a look at the prints below. They provided the engineer with valuable but inexpensive records for immediate evaluation. All were removed from the camera *one minute* after the final exposure was made.

The stories of 3 "One Minute" Oscillograms

1. BEFORE AND AFTER. A visual comparison of "before and after" conditions is an easy job for the "one step" camera. Here, the upper trace shows the output of a full wave rectified power supply with insufficient filtering. The lower trace shows the effectiveness of the addition of a filtering condenser. The camera is easily adjusted to two positions (upper and lower) for two exposures; traces are exactly one half scope size.



2. SUPERIMPOSING FOR COMPARISON. The problem—determine the maximum time-interval variation between successive camera shutter openings and flash circuit closings. Instead of carefully measuring successive scope traces, the engineer superimposed several exposures for easy comparison. The length of the trace before the shutter opened is a measure of the time between the electrical contact closing and camera shutter opening.



3. MULTIPLE EXPOSURE PRE-SOLARIZATION. Here, by making 5 successive exposures on each half of the print, the engineer was able to record performance of a camera shutter at its 1/100, 1/200, 1/400 second (upper) and 1/25, 1/50, and 1/100 second settings (lower). "Pre-solarizing," the process of pre-exposing the print with the trace off the screen, made it possible to record the high writing speeds involved.



A minute after you've pulled the tab a finished print is ready for evaluation.

for still or *continuous-motion* oscilloscope recording on 35-mm film or paper

—THE FAIRCHILD OSCILLO-RECORD CAMERA

The Fairchild Oscillo-Record Camera is the first unit specifically designed for the purpose of recording cathode-ray tube images. Features: records still or continuous motion on standard 35-mm film or paper, film footage indicator, electronic speed control—1 to 3600 in./min., film capacity—100, 400 or 1000 feet.

SPECIFICATIONS

Lens and Shutter—Choice of 75mm f2.8 Wollensak Oscillo-Anastigmat with ±2 Alphax shutter having speeds of 1/25 sec. to 1/100 sec., "time" and "bulb"; or, 75mm f1.9 Wollensak Oscillo-Anastigmat with ±3 Alphax shutter having speeds of 1 sec. to 1/100 sec., "time" and "bulb".

Picture Size—3¼ x 4¼ in. (2 or more images per print; 16 exposures per roll of film.)

Image Size—One-half reduction of scope image.

Writing Speed—With f2.8 lens, up to 1 in/μsec at only 3000V accelerating potential; higher speeds at higher voltages. With f1.9 lens these values are approximately doubled.

Dimensions—Camera, 10½ x 5¼ x 6¼ in.; hood, 11 in. length, 7½ in. dia; adapter, 2 in. width, 6⅝ in. max. dia.

Weight—Complete, 7¾ lb.

Fairchild-Polaroid Oscilloscope Camera Kits include camera, carrying case and film. Write today for complete data on the Fairchild-Polaroid and Fairchild Oscillo-Record Cameras. *Fairchild Camera and Instrument Corp., 88-06 Van Wyck Blvd., Jamaica 1, N. Y. Dept. 120-15A1.*

FAIRCHILD

OSCILLOSCOPE RECORDING CAMERAS

Visit us at booth 519 — Pacific Electronic Exhibit

STOKES HIGH VACUUM EQUIPMENT... for every requirement of vacuum processing

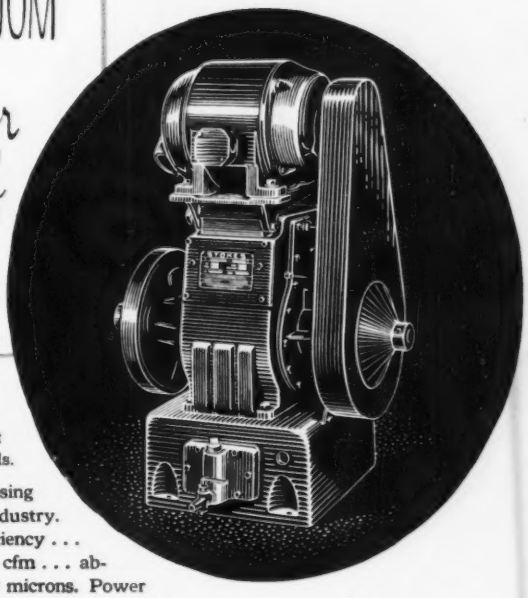

Modern design of Stokes vacuum equipment develops from the continuing contact of Stokes Engineers with processors in many fields.

Stokes Microvac Pumps — basic to vacuum processing —are designed for the broadest requirements of industry. They have high volumetric and mechanical efficiency . . . capacities of 15 to 500 cfm . . . absolute pressures to 10 microns. Power consumption is low. Compact design with top-mounted motor requires minimum floor space.

There are but four moving parts including the high speed, full-opening exhaust valve of corrosion-resistant Teflon. Lubrication is completely automatic, without packing, stuffing-boxes or grease fittings. Wear is kept to a minimum, and long trouble-free service assured. Parts are precision-finished, standard and interchangeable.

Stokes is the only manufacturer of equipment for complete vacuum systems, including Microvac mechanical pumps, oil diffusion pumps, McLeod Gages and Vacuum Valves.

Send for Catalog 700, "Stokes Microvac Pumps for High Vacuum", now a standard reference work on High Vacuum, containing charts, graphs, diagrams, schematics, typical problems, tables, formulas, constants, conversion factors.

Consult with Stokes on the application of vacuum to rotary exhaust machines, house vacuum systems, vacuum impregnation, vacuum furnaces, vacuum metallizing, and to other applications in which vacuum deserves exploration.

STOKES MAKES

Plastics Molding Presses,
Industrial Tabletting and Powder Metal Presses,
Pharmaceutical Equipment,
Vacuum Processing Equipment,
High Vacuum Pumps and Gages,
Special Machinery

STOKES

F. J. STOKES MACHINE COMPANY, 6046 TABOR ROAD, PHILADELPHIA 20, PA.

federated ROSIN CORE SOLDER

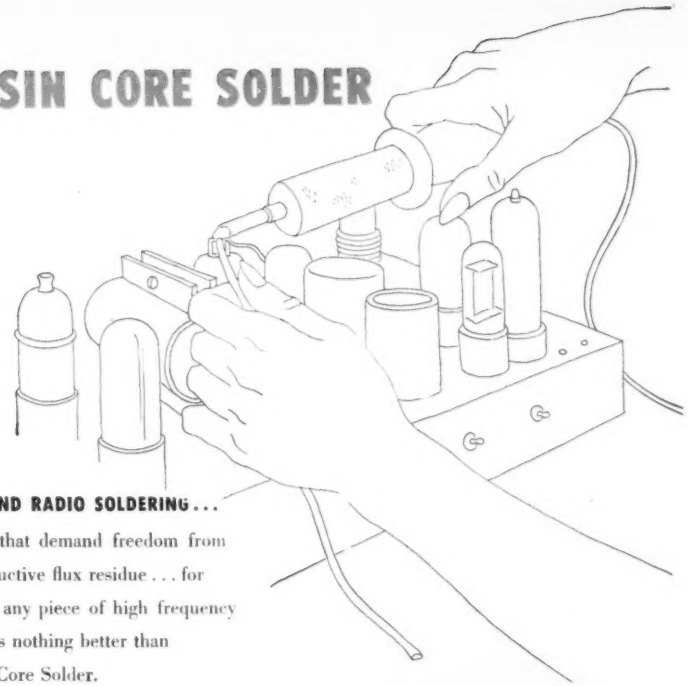

***for* TELEVISION AND RADIO SOLDERING...**

for operations that demand freedom from corrosion and conductive flux residue . . . for soldering on any piece of high frequency equipment . . . there is nothing better than Federated Rosin Core Solder.

Each Rosin Core Solder composition is a precise alloy of tin and lead with a pure turpentine distillate flux that is effective but not corrosive. This means that current leakage at radio frequencies is prevented.

Federated Rosin Core Solder is unequalled for consistency and ease of working . . . for the permanence of the bond it produces. Look for it on the familiar orange and black metal spool. 1, 5, and 20-pound sizes.

Federated Metals Division

federated first in the non-ferrous field. FMD

AMERICAN SMELTING AND REFINING COMPANY • 120 BROADWAY, NEW YORK 5, N. Y.

FOR RUGGED SERVICE

the new Eimac ceramic 2C39 type triode

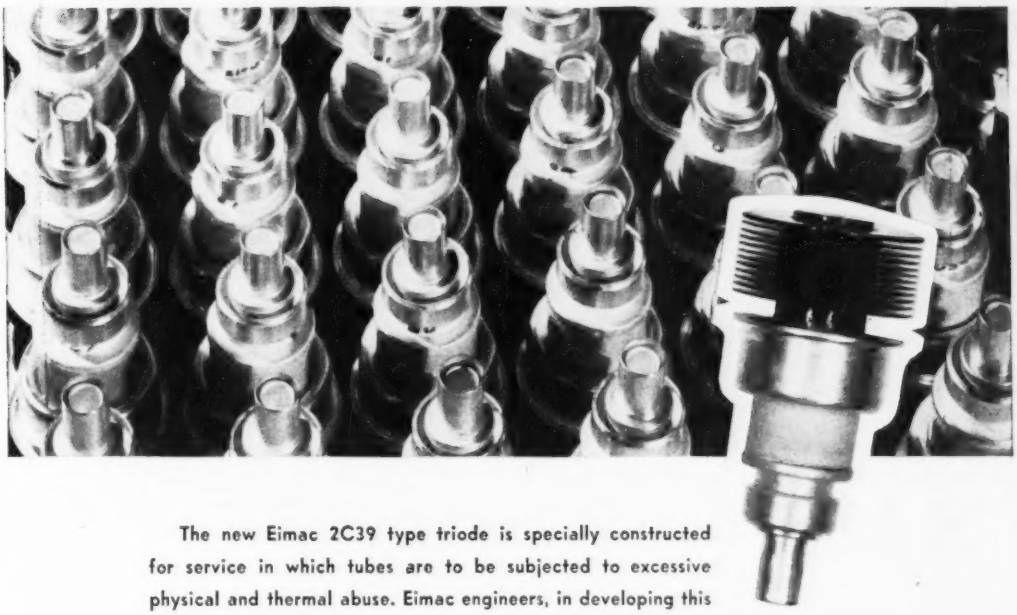

The new Eimac 2C39 type triode is specially constructed for service in which tubes are to be subjected to excessive physical and thermal abuse. Eimac engineers, in developing this improved version of the 2C39, have replaced glass with rugged ceramics. Through the use of new manufacturing techniques and ceramic materials, this new tube will operate at appreciably higher ambient operating temperatures than the glass-envelope type tube. Resistance to physical shock is also increased to a degree beyond that which is customarily associated with vacuum tube structures.

If you anticipate requirements for a tube of this type, we suggest you contact our application engineering department immediately.

EITEL-McCULLOUGH, INC.
San Bruno, California

292

Follow the Leaders to Eimac TUBES The Power for R-F

Export Agents: Frazar & Hansen, 301 Clay St., San Francisco, California

Eimac ceramic 2C39 type triodes are another outstanding contribution to electronic progress.

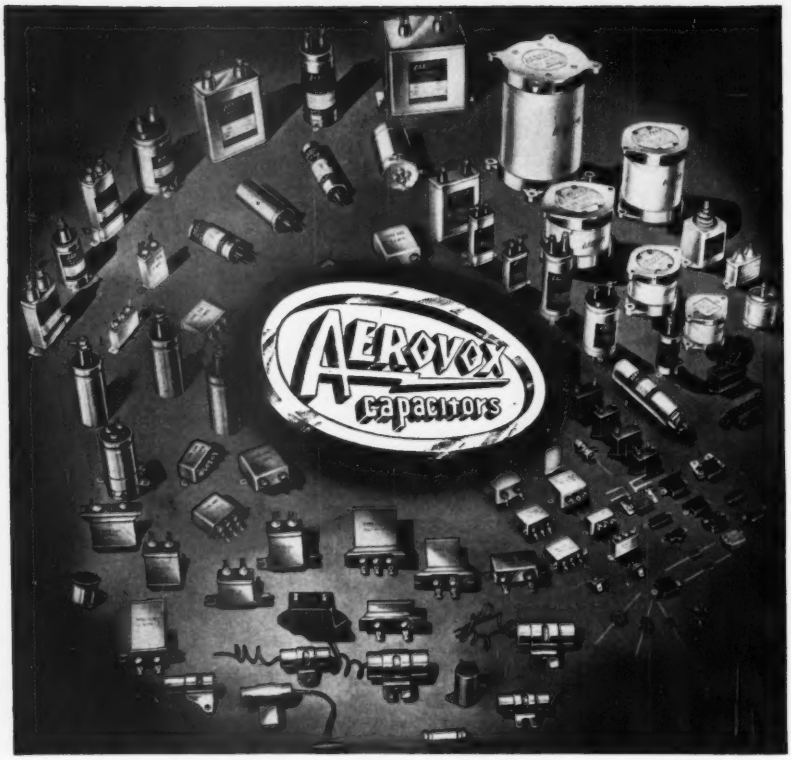

SAFE Capacitor Specifications

● From tiniest metallized-paper capacitor symbolizing ***miniaturization,*** to giant oil capacitor for atom-smashing Betatron, you are SAFE in ***specifying Aerovox.*** For Aerovox makes ***all*** categories, types, sizes and ratings. More than that: with a background experience second to none, Aerovox engineers are always ready to study your circuitry, components, operating conditions and anticipated life. Thus capacitor selection is custom-fitted to your exact requirements. And that is why Aerovox capacitors have such outstanding service records.

• Literature on request. Submit that capacitance problem for engineering aid and quotations.

INTERFERENCE FILTERS

For military and civilian needs, particularly aircraft and radio-equipped vehicles.

MICA CAPACITORS

Dozens of different types, including low-loss molded casings and the silver micas.

MOLDED PAPER TUBULARS

For extra-severe service. Aerolene impregnant eliminates necessity of stocking both oil and wax tubulars. No deterioration in stock.

OIL CAPACITORS

From tiniest tubulars to giant steel-case units in ratings up to 50,000 volts.

HIGH-TEMPERATURE MINIATURES

Hermetically-sealed with vitrified ceramic seal, in tubular metal case.

METALLIZED-PAPER

Full utilization of space-saving factor, together with self-healing feature.

MICRO-MINIATURES

Molded thermo-plastic tubulars. Two sizes: 3/16" d. x 7/16" l.; ¼" d. x 9/16" l.

ELECTROLYTICS

Widest choice of containers, terminals, mountings, combinations. In 85° C. and higher temperature ratings.

AEROVOX CORPORATION

THE HOME OF CAPACITOR CRAFTSMANSHIP

AEROVOX CORPORATION, NEW BEDFORD, MASS., U.S.A.

Export: 41 E. 42nd St., New York 17, N.Y. • Cable: AEROCAP, N.Y. • In Canada: AEROVOX CANADA LTD., Hamilton, Ont.

SALES OFFICES IN ALL PRINCIPAL CITIES

NEO-SIL CORPORATION

Master Pieces of Hermetic Sealing

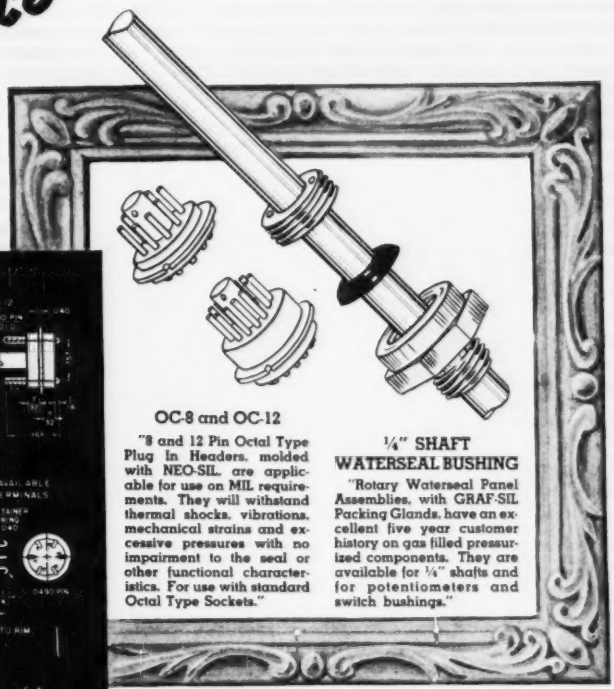

OC-8 and OC-12

"8 and 12 Pin Octal Type Plug In Headers, molded with NEO-SIL, are applicable for use on MIL requirements. They will withstand thermal shocks, vibrations, mechanical strains and excessive pressures with no impairment to the seal or other functional characteristics. For use with standard Octal Type Sockets."

¼" SHAFT WATERSEAL BUSHING

"Rotary Waterseal Panel Assemblies, with GRAF-SIL Packing Glands, have an excellent five year customer history on gas filled pressurized components. They are available for ¼" shafts and for potentiometers and switch bushings."

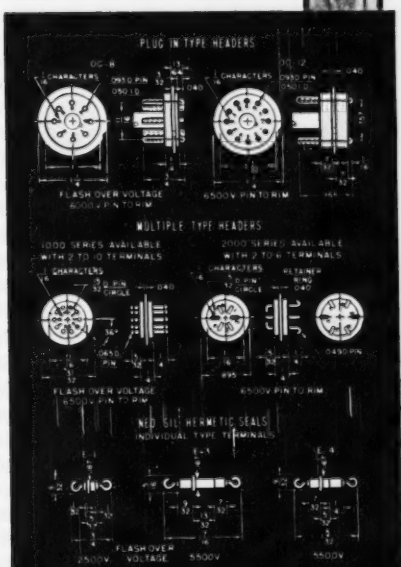

TEST DATA

The result of the Electrical Testing Laboratories Inc., Report #330655, dated March 18, 1949, on this material shows the following:

Volume Resistivity at 800 Volts d-c

Room Temperature 25°C R.H. 30 percent

Megohm-inches	*ohm-centimeters*
1.4×10^{6}	3.5×10^{5}

Dielectric Constant and Dissipation Factor

Dielectric Constant	*Dissipation Factor*	*Loss Factor*
@ 60 cycles per second		
9.22	.058	5.32
@ 1 megacycle per second		
6.17	.0455	.28
@ 50 megacycles per second		
5.35	0.20	1.1

Dielectric Strength at 60 cycles
Volts per mil — 370

Durometer Average — 80 ± 5

Temperature — Rated as a Class A material conservatively + 160° to —70° centigrade.

The Flashover Voltages indicated were taken at a temperature of 68° Fahrenheit, and 47% Relative Humidity.

"NEO-SIL's proven Hermetic sealing components will eliminate rejects resulting from breakage, strains, cracks, etc. Each NEO-SIL component is pressure checked at 25 psi — to meet military requirements and as applied to our units, NEO-SIL rubber will resist abusive temperature cycling, salt water, most acids and alkalies, and withstand high pressures and vacuums."

"In addition to the items illustrated above, NEO-SIL offers many other components, such as Hermetically Sealed Fuse Holders, Hermetic Sealing Terminals, Multiple Pin Headers, Hermetically Sealed Cables, Hermetically Sealed Line Cords With Plugs for European use, Meter Gaskets, Panel Gaskets, Adapters (U. S. to Continental), Coil Forms, Crystal Contacts and other molded bakelite and NEO-SIL rubber units."

"Hermetically Sealed Fuse Holders are available for 3-AG and 4-AG fuses. These units are completely sealed from moisture with or without the cap or fuse inserted and are applicable for use on vacuum or gas filled units."

Your special problems are solicited.

NEO-SIL CORPORATION

26 CORNELISON AVE., JERSEY CITY 4, N. J.

Which do you need more?



Miniature
permeability-tuned
(455 kc.) I.F. unit



Permeability-tuned
R.F. transformer
for personal receiver



Precision tuning unit
for broadcast radio receiver

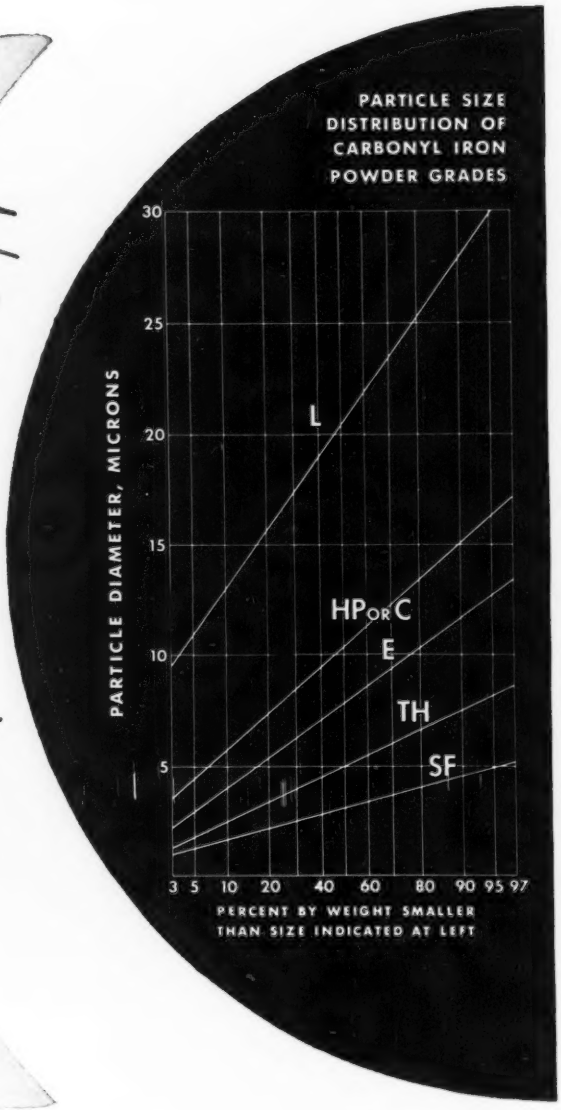

G A & F® Carbonyl

Greater purity means *greater permeability*
Smaller size means *lower power loss*

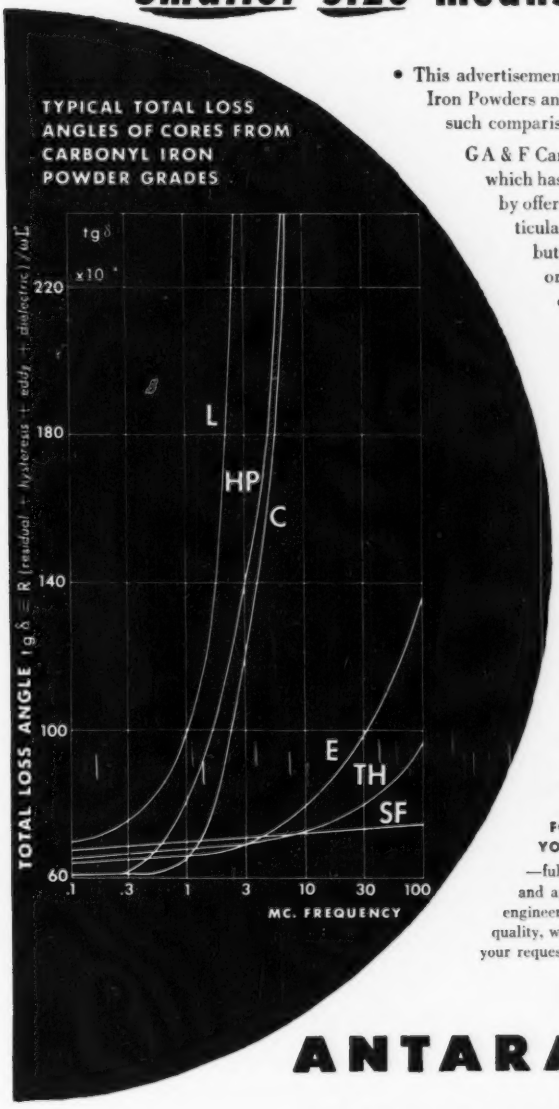

• This advertisement makes no comparisons between GA & F Carbonyl Iron Powders and any other material. (We assume that you will make such comparisons as your own specifications may indicate.)

GA & F Carbonyl Iron Powders are made in six grades—each of which has its own particular combination of qualities and thereby offers its own special advantages. Your selection of any particular grade will be determined by size, shape, size distribution, internal structure, condition of surface, desirable or undesirable ingredients. The particles are all spherical; the particle size distribution differs—from one grade to another.

Collectively, the six grades blanket a wide range of applications—in electronic cores over the whole frequency spectrum, in metallurgy, in chemistry, in pharmacy and in magnetic fluids. The particles may be large, soft crystals—or extremely small, hard crystals arranged in concentric spherical-shell layers. The surfaces are free and active. The purity is invariably high, with non-ferrous metals in traces only; some grades contain beneficial small amounts of carbides, nitrides and oxides.

In the smaller sizes, these powders show exceptionally low power losses in electronic cores. Thus they offer the optimum combination of permeability, particle size and structure.

The chart at the left shows the range in particle size distribution; the chart at the right shows the typical total power loss angle for each grade.

FOR FURTHER DETAILS, WE INVITE YOU TO WRITE FOR A FREE BOOK

—fully illustrated with performance charts and application data. It will help any radio engineer or electronics manufacturer to step up quality, while saving real money. Kindly address your request to Department 87.

ANTARA® PRODUCTS

DIVISION OF

GENERAL DYESTUFF CORPORATION

435 HUDSON STREET • NEW YORK 14, N. Y.

Iron Powders . . .

MEMBER mpa METAL POWDER ASSOCIATION

High Dielectric Strength
Low Power Factor
Heat Resistance
Low Moisture Absorption
High Impact Resistance
Dimensional Stability
Light Weight
Tensile Strength
Abrasion Resistance

new uses for an old friend... Lamicoid®

You probably know LAMICOID (Laminated Plastic) as an old friend for such uses as tube socket supports, coil forms, dials, panels, antenna parts and many other applications.

The same qualities that make it adaptable to these uses may also provide practical answers to your material shortage problems . . . and perhaps even bring you savings or improvements!

LAMICOID is made with fillers such as glass, nylon, paper, fabric, etc. and a variety of resins. This wide range of materials makes it almost certain that LAMICOID can give you the essential mechanical, structural, or insulating characteristics your product requires.

LAMICOID is supplied as standard sheets, rods and tubes, or fabricated into parts to your specification. Why not let us put our 58 years of experience to work on your electrical insulation problems. Send your blueprints and specifications to us today for prompt quotation.

MICA Insulator COMPANY

Schenectady 1, New York

Offices in Principal Cities

LAMICOID (Laminated Plastic) • MICANITE (Built-up Mica) • EMPIRE (Varnished Fabrics and Paper) • FABRICATED MICA

RANGE — is continuously adjustable from a minimum of —0.1 to +1 mv . . . up to a maximum of —2 to +20 mv.

ZERO SUPPRESSION — uncalibrated coarse and fine . . . is continuously adjustable from —50 to +50 mv.

range and zero suppression are continuously adjustable

Just turn a knob . . . twist a dial . . . and you have adjusted this new Speedomax Recorder to the exact specs required for the automatic data-charting job at hand.

Turning the ZERO knob varies zero suppression . . . pushes off-scale that portion of the range in which you are not interested . . . spreads the few millivolts you want to watch across full width of the 9⅞" Speedomax chart.

Twisting the RANGE dial calibrates the recorder so that its scale represents the range span in which changes occur.

With full scale pen speed of 3, 2, even 1 second . . . limit of error only 0.3% of range, Speedomax proves especially useful for measuring:

Force, weight, etc.—with load cells. Adjustable zero compensates for tare. Range is adjusted to provide desired calibration.

Temperature or temperature-difference—with thermocouples. Minute changes can be measured with extreme sensitivity.

Speed—with electric tachometers. Change of speed can be measured over a narrow band in detailed studies of motors, engine governors, etc.

Voltage—from other transducers and amplifiers.

For further information write-

LEEDS NORTHRUP

4979 Stenton Ave.
Philadelphia 44, Pa.

Jrl Ad EM9(3)

RECORDING INSTRUMENTS

PORTABLE INSTRUMENTS

PANEL INSTRUMENTS

SWITCHBOARD INSTRUMENTS

Only a *complete line*

answers *all your* electrical measuring requirements

The case of Mastic Tile Corporation demonstrates how the complete line of Westinghouse Instruments holds answers to your electrical measurement problems.

Mastic's problem was one of predetermining load on a Banbury Mixer motor in order to facilitate the operator's job and speed the mixing cycle. It was answered by the standard Westinghouse GY-40 Recording Wattmeter with proper choice of scale, current and potential transformers, and chart speed. In fact, so well did this standard instrument accomplish its job that final results show—a 15 percent reduction in mixing cycle time along with the elimination of damaging surge shocks which can now be anticipated and prevented by the machine operator.

Westinghouse will continue to give you a wider selection for every need . . . whether it be a-c or d-c current and voltage, single or polyphase circuits, watts or vars, frequency, power factor, synchroscopes, temperature indicators, ground detectors or synchrotie. You get assurance of quality too, because every applicable instrument . . .

Meets A. S. A. Performance Requirements!

All Westinghouse Instruments are built to meet the rigid performance requirements of the American Standards Association. No more exacting guarantee of an instrument can be made. And you get . .

Competent Application Assistance!

Westinghouse Instrument Application Engineers are available to help you in selecting and applying the proper instruments for your application. Simply call your nearest Westinghouse office.

For complete information about Westinghouse Instruments write for Booklet B-4696, address: Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pennsylvania. J-40407

YOU CAN BE SURE.. IF IT'S
Westinghouse
INSTRUMENTS

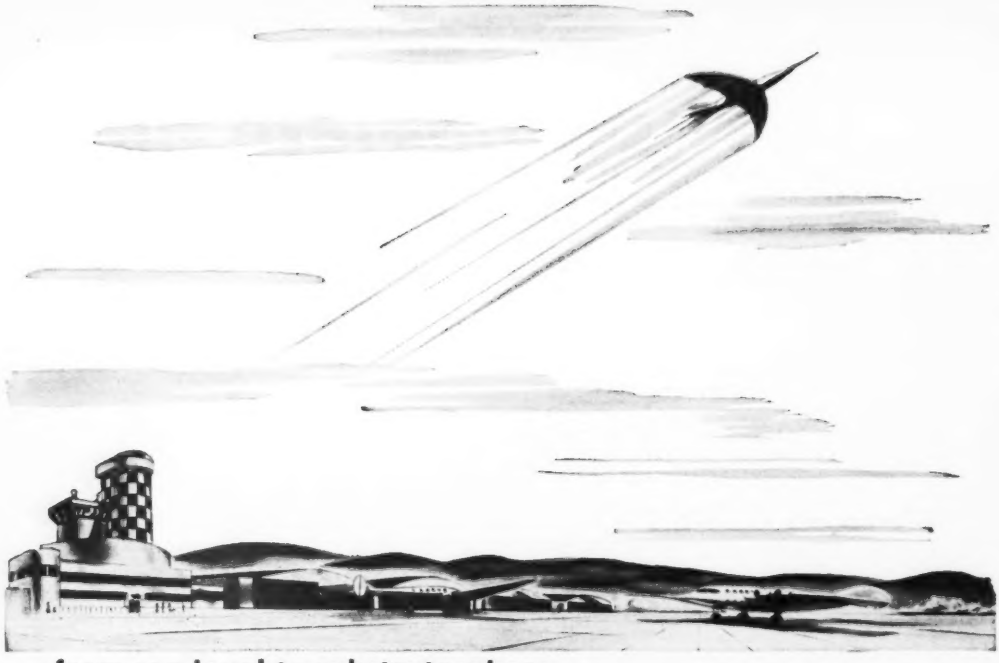

from sea level to substratosphere . . .

VARGLAS SILICONE

Electrical Insulating Tubing and Sleeving

WITHSTANDS TEMPERATURES FROM 500° TO —85°F

VARGLAS SILICONE is a high dielectric, dimensionally stable insulating material developed by Varflex during World War II to assure dependable performance in the drastic temperatures aircraft might encounter from sea level to substratosphere. Today, Varglas Silicone serves industry in many of the tough insulating jobs that defeat ordinary insulators. A combination of *Varglas* (continuous filament Fiberglas) and *Silicone High Temperature* Resin, Varglas Silicone is the first and only Class H insulation with these features:

EFFICIENT AT 500°F. – flexible at —85°F.

MOISTURE AND FUNGUS-RESISTANT – has excellent resistance to moisture and fungus.

FIRE-RESISTANT – flame resistant and self-extinguishing.

ABRASION-RESISTANT – pliable and non-fraying.

DIELECTRICALLY STRONG – average readings up to 7,000 volts.

Available in various NEMA colors in several types and grades of tubing and sleeving – lead wire and tying cord, too.

Varflex CORPORATION

Makers of Electrical Insulating Tubing and Sleeving

VARFLEX *Sales Co., Inc.*

308 N. Jay St., Rome, N. Y.

Check YOUR NETWORK PROBLEM WITH LOGIC

In any technical business the specialist has a unique value in his specific field. It is logical that a manufacturer of a specialty product should be of greater value in his particular field.

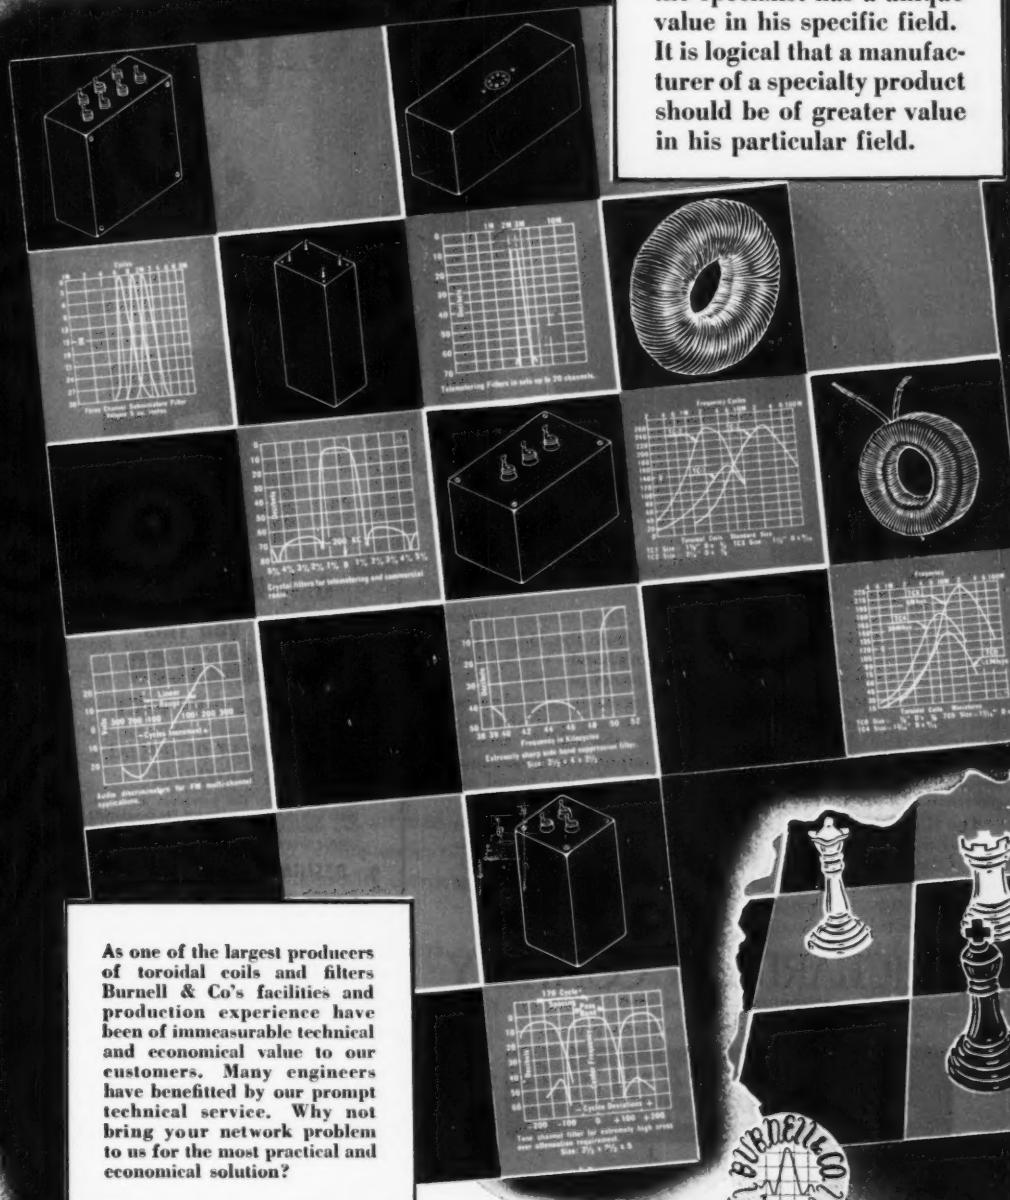

As one of the largest producers of toroidal coils and filters Burnell & Co's facilities and production experience have been of immeasurable technical and economical value to our customers. Many engineers have benefitted by our prompt technical service. Why not bring your network problem to us for the most practical and economical solution?

EXCLUSIVE MANUFACTURERS OF
COMMUNICATIONS NETWORK COMPONENTS

WRITE FOR TECHNICAL INFORMATION
ALL INQUIRIES WILL BE PROMPTLY HANDLED

BURNELL & CO.

Burnell & Company
YONKERS 2, NEW YORK
CABLE ADDRESS BURNELL

SPECIALIZED PLASTICS MOLDINGS

Large OR Small!



Every one of the plastics parts shown—from the 33-inch circular filter plate to the tiny part in the man's hand—was molded by The Richardson Company to solve a *special* problem.

For each of these parts, Richardson engineers developed a *new material*, a plastic with just the right combination of physical, electrical, and chemical properties to do the job. In several cases, the material had been considered "impossible" to produce before Richardson plastics engineers applied their broad experience and skill to the problem.

The Richardson Company stands ready to help *you* with this specialized plastics service. With its six plants, Richardson is one of the world's largest molders of plastics. Its extensive facilities are admirably geared for volume production of standard or special plastics parts—large or small.

Write for full information, today.

Only Richardson offers you this SPECIALIZED PLASTICS SERVICE

1 DEVELOPMENT OF SPECIAL PLASTICS MATERIALS

Richardson has the personnel and complete laboratory equipment for developing new plastics — including combinations of resin, rubber, etc.—for special applications.

2 DESIGN OF SPECIAL PARTS

Richardson handles your problem from beginning to end—analyzes requirements; designs for appearance, performance, low cost; and develops the proper tools for quality and efficient production.

3 FACILITIES FOR SPECIAL MOLDING OR LAMINATING

Richardson can select just the right production method for your special plastics part, because they use *all* methods—including molding, laminating, fabricating, post-forming, and laminate-molding.

The RICHARDSON COMPANY

FOUNDED 1858—LOCKLAND, OHIO

2797 Lake Street, Melrose Park, Illinois (Chicago District)

INSUROK®
Molded and Laminated Plastics

MELROSE PARK, ILL. INDIANAPOLIS, IND. NEW BRUNSWICK, N. J. NEWNAN, GA. TYLER, TEX. OGDEN, UTAH

DE-MORNAY BONARDI

DESIGNED FOR HIGHER STANDARDS OF PERFORMANCE

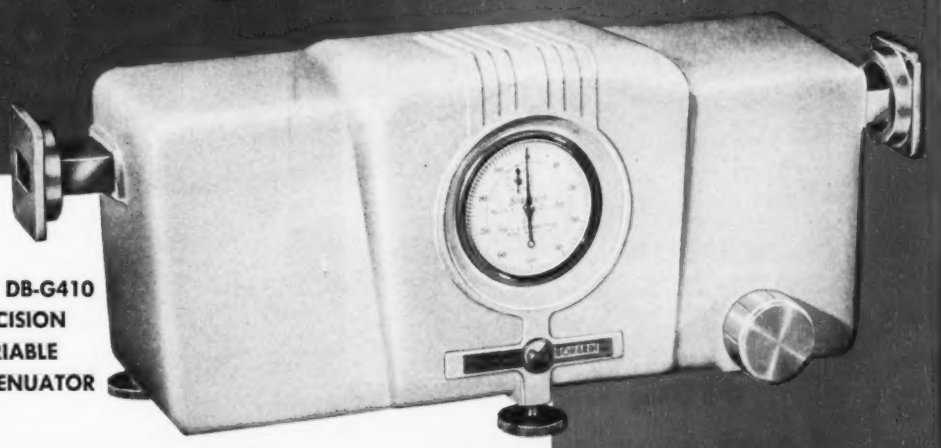

NO. DB-G410 PRECISION VARIABLE ATTENUATOR

COMPLETE COVERAGE

2,600 TO 90,000 Mc/s

It is now possible to obtain standard components from the new DeMornay-Bonardi line of Microwave System Components and Laboratory Instruments, in every frequency band, to provide a solution to the most exacting and diversified "plumbing" requirements. Mechanical design and construction of this equipment insures maximum accuracy and reliability of measurement by elimination of errors normally caused by backlash, mechanical wear, friction and temperature variations.

Electrical design provides for uniformly efficient operation over the entire band of frequencies allocated to each waveguide size, and re-settability characteristics are consistently accurate at all times.

All instruments and components are available in the following Waveguide sizes:

RG-48/U; 49/U; 50/U; 51/U; 52/U; 91/U; 53/U; 96/U; 97/U; 98/U and 99/U.

- Absorbing material is a thin metallic layer vacuum evaporated on mica.
- Two position control knob for fast positioning and vernier adjustment.
- Three point leveling adjustment.
- Kinematic design assures consistent re-settability.
- A calibration curve is supplied with each instrument giving attenuation in db versus dial reading.

SPECIFICATIONS

Frequency range	8,200 to 12,400 Mc/s
Overall length	14"
Coupling	Broad band
Tubing dim.	1"x½"x.050"
Maximum attenuation	40 db
Insertion loss	Less than .5 db
Accuracy of calibration	—.5 db to 10 db —1.0 db to 20 db —1.5 db to 40 db
Flaring	Gold 50 m.s.l.
Approximate wt.	10 Lbs.

MANUFACTURED AND DISTRIBUTED EXCLUSIVELY BY

the CALNEVAR COMPANY
Microwave DIVISION
1758 W. WASHINGTON BLVD., LOS ANGELES 7, CALIFORNIA

Send for the CALNEVAR CATALOG of the new "DeMornay-Bonardi" Standard Microwave Equipment. Please forward your request on company letterhead.

Easy on the ear

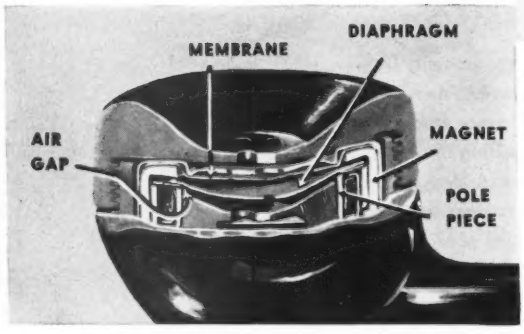

More naturally than ever, your voice comes to the ear that listens through the latest telephone receiver developed at Bell Telephone Laboratories. The reason: a new kind of diaphragm, a stiff but light plastic. Driven from its edge by a magnetic-metal ring, the diaphragm moves like a piston, producing sound over all of its area. Effective as are earlier diaphragms of magnetic-alloy sheet, the new one is better, gives more of the higher tones which add that personal touch to your voice.

To work the new receiver, telephone lines need deliver only one-third as much power. So finer wires can do the job. This is another new and important example of the way scientists at Bell Telephone Laboratories work to keep down the cost of telephone service, while the quality goes up.

BELL TELEPHONE LABORATORIES

WORKING CONTINUALLY TO KEEP YOUR TELEPHONE SERVICE ONE OF TODAY'S GREATEST VALUES

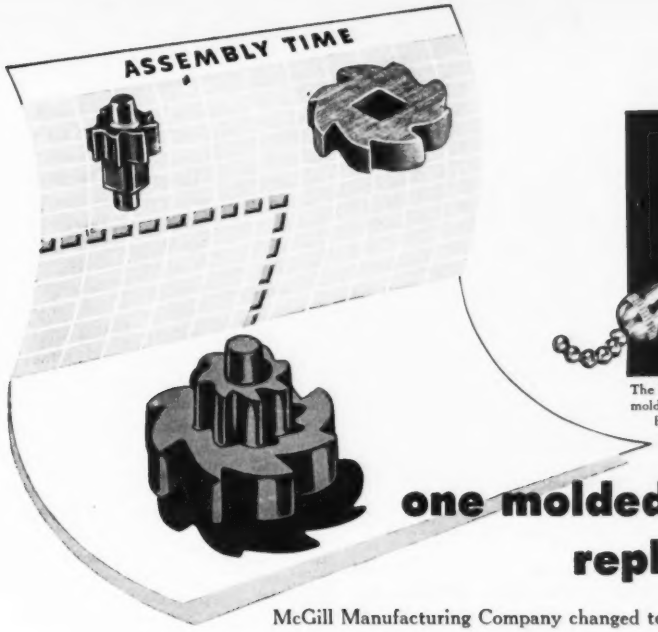



The LEVOLIER lighting switch ratchet is molded of Plaskon Alkyd by Tietz & Baur Plastics, Inc., Melrose Park, Illinois.

one molded piece replaces two!

McGill Manufacturing Company changed to Plaskon Alkyd Molding Compound for contact ratchets in its Levolier Switches — with these surprising results: One molded piece replaced two — no assembly was required! And the exceptional arc-resisting and non-tracking electrical properties of molded Plaskon Alkyd produced a better performing, longer-lasting one-piece ratchet. The most popular type Levolier switch using this ratchet is backed by an unconditional guarantee. It passes Underwriters' tests of a minimum of 24,000 operations carrying maximum electrical load and 100 operations carrying 50% overload!

Many other inherent properties of Plaskon Alkyd are helping to improve a constantly increasing variety of products. And faster production is achieved at lower cost in practically every application—thanks to the high-speed of compression molding with this amazing thermosetting plastic which cures in seconds instead of minutes.

Let us send you data on all of the desirable properties of Plaskon Alkyd — and the complete explanation of why many electrical insulating parts can be compression molded faster at less cost with Plaskon Alkyd.

mold it better and faster with

PLASKON DIVISION • LIBBEY • OWENS • FORD GLASS COMPANY
2136 Sylvan Avenue, Toledo 6, Ohio
In Canada: Canadian Industries, Ltd., Montreal, P.Q.
Branch Offices: Boston, Chicago, Los Angeles, New York, Rochester
Manufacturers of Molding Compounds, Resin Glues, Coating Resins

PLASKON®
ALKYD

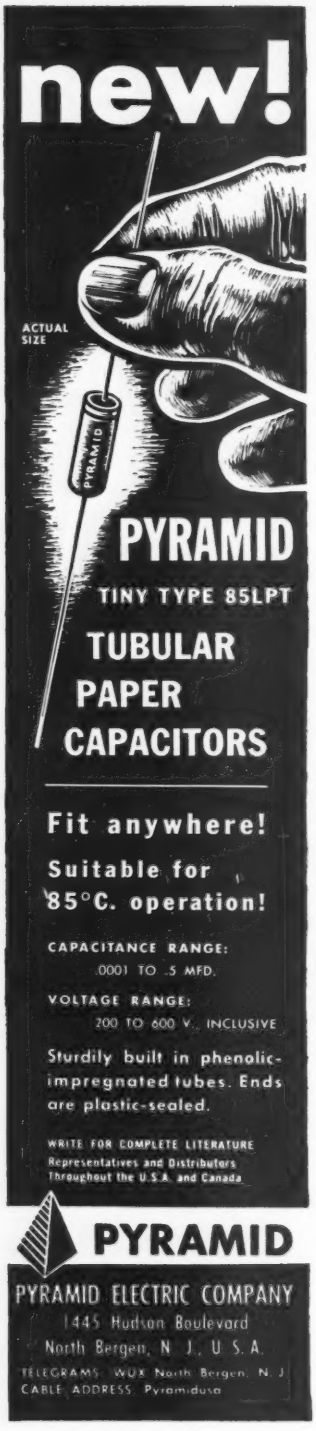

BUSINESS BRIEFS

By W. W. MacDONALD

Sixty-Four Percent of the total military bookings of the electronics and x-ray division of Westinghouse were subcontracted during 1950. Subcontracts ranged all the way from a $62 order for brass caps that went to Hamilton Associates to a $2,938,488 order for radar antennas given to Dalmo-Victor.

The Westinghouse division mentioned sold $400,000,000 worth of radar and other electronic equipment to the armed forces during World War II.

TV Shipments to dealers in the first quarter of 1951 totalled 1,814,767, according to RTMA.

Registration at the 7th Annual Pacific Electronic Exhibit and Western IRE Convention to be held in San Francisco August 22, 23 and 24 is expected to reach 9,000, according to exhibit committee chairman Al Fry.

Fry says there will be 165 exhibit booths, showing the products of about 300 makers of electronic and nucleonic components and equipment. At press time a partial list of exhibitors indicated that there were 94 manufacturers, 22 reps exhibiting the products of 168 manufacturers, three universities and four government agencies.

Philadelphia's Chamber Of Commerce has set up permanent exhibit space at 1413 Walnut, where the armed forces and local defense-equipment contractors display new gear made for the military every two weeks. Object is to familiarize other manufacturers in the area with military requirements and so stimulate subcontracting.

Out of a similar effort by the San Francisco Chamber of Commerce has come the formation of Bay Area Electronic Resources, an organization in which 15 manufacturers of electronic equipment are members. Sargent-Rayment, Commercial Electronics, E. R. Vinson, Applied Electronics, H-K Division of Robert Dollar, Clayton F. Bane, Ampex, Electronic Engineering Associates, Huggins, Birdsell, Thor Transformer, Kaar Engineering, Lenkurt, Imperial Television and K-F Development offer their services jointly or individually for the performance of defense contracts.

Business Forecast: "I believe that by the end of 1952, the combined civilian and military production of electronic equipment by our industry will be at the rate of 4½ billion dollars a year. From the standpoint of facilities and manpower, this will be equivalent to an industry production of 3¼ billion dollars of civilian electronic equipment, which is a very substantial expansion in facilities even from recent production records."—*Robert C. Sprague, Chairman of the Board, RTMA.*

Brazil had 10,500 television receivers in use at the close of 1950. Two transmitters were in active operation, one in Rio de Janeiro and the other in Sao Paulo. Two more are scheduled for erection in 1951.

Book entitled *Industrial Research Laboratories of the United States* (see *New Books*, June, ELECTRONICS) lists 2,845, of which 350 are active in the field of electronics. Their interest in various projects within the field is indicated by the following tabulation:

Acoustics	51
Antennas	16
Coatings, protective	73
Control devices	94
Dielectric	14
Capacitors	19
Circuits, printed	6
Facsimile	3
Gamma rays	2
Geophysics	47
Germanium	3
Getters	2
Hearing devices	5
High-freq. phenomena	22
Instruments	184
Insulation, electrical	37
Isotopes	4
Liquid control devices	7
Luminescence	16
Magnetic devices	26
Measuring devices	19
Meters	15
Microwaves	13
Navigational apparatus	15
Nuclear physics	13

(Continued on p 78)

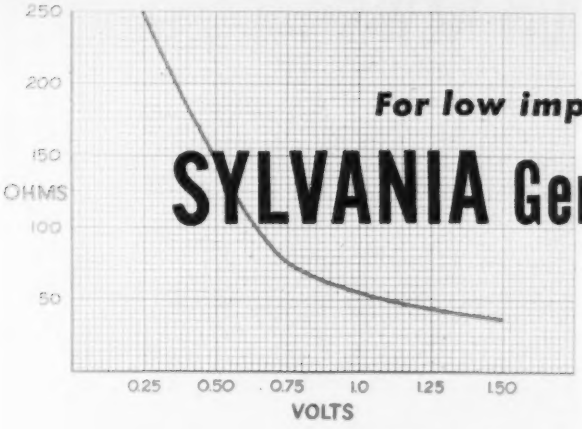

Typical 1N56 Resistance Characteristic

For low impedance applications...

SYLVANIA Germanium Diodes

All Germanium Diodes are notable for their low forward impedance. But the 1N56 is specially engineered to make the most of this quality.

Use this diode for high efficiency circuits with low input and output impedances. Use it for relay activation, heavy current and surge applications with low impedance coils, transformers and condensers.

Try the 1N71 varistor in carrier telegraphy and telephony work. The low shunt capacitance insures high efficiency throughout the high frequency range. You will find this varistor equally efficient in low impedance modulator circuits of the carrier suppression or carrier transmission type.

1N56 DIODE with a potential of +1 volt will pass a current of 15 ma. or more. With a potential of −30 volts, less than 300 μa. will flow.

For Carrier Communications

1N71 VARISTOR—The 1N71 consists of 4 matched low impedance diodes each of which, with +1 volt impressed, will pass a current within one ma. of the average current of the four.

Both the 1N56 Germanium Diode and 1N71 Varistor are available from your Sylvania Distributor. Ask him for copies of the two books shown below. Price of each is only 25¢, together they comprise the most complete collection of Germanium Diode applications yet published.

SYLVANIA

ELECTRONIC DEVICES; RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

Sylvania Electric Products Inc.
Dept. E-1008, Emporium, Pa.

☐ *Please send me "40 Uses for Germanium Diodes." Enclosed is 25¢*

☐ *Please send me "Electronic Shortcuts for Hobbyists." Enclosed is 25¢*

*Name*_____

*Street*_____

*City*_____ *Zone*_____ *State*_____

Visit us at Booths 401-402—Pacific Electronic Exhibit

SHOCK and VIBRATION NEWS

BARRYMOUNTS FOR ASSURED CONTROL OF SHOCK AND VIBRATION

NEW ALL-METL BARRYMOUNTS

for Unusual Airborne Applications



These new Barrymounts provide the aircraft and electronic engineer with a vibration isolator designed to meet the unusual temperature and environmental conditions encountered in high-altitude, high-speed flight. Employing no organic materials, these mountings are not subject to temperature influences that may affect the performance of other mountings.

ALL-METL Barrymounts offer a wide load range with uniform performance. They have a natural frequency of about 7½ cycles per second, with low horizontal stiffness for maximum isolation of horizontal vibration. Transmissibility at resonance is only 4½. There is no snubber contact nor resonance carry-over when ALL-METL Barrymounts are vibrated at government-specified amplitudes.

These mountings are designed especially for unusual military conditions. They meet the vibration requirement of JAN-C-172A, MIL-E-5272 (USAF), and MIL-T-5422 (BuAer). For details of sizes, ranges, and construction of unit mounts and bases using ALL-METL Barrymounts, see catalog 509.

FREE CATALOGS

- 502 – Air-damped Barrymounts for aircraft service; also mounting bases and instrument mountings.
- 509 — ALL-METL Barrymounts and mounting bases for unusual airborne applications.
- 504 — Shock mounts and vibration isolators for marine, mobile, and industrial uses.
- 607 — How to cut maintenance costs by using Barrymounts with punch presses.

"RUGGEDIZED" BARRYMOUNTS AND MOUNTING BASES

Now Available to Meet Shock Requirements of AN-E-19

Barry vibration isolators and mounting bases are now available in "ruggedized" construction, to withstand the severe shocks of arrested landings in aircraft carrier service and of crash landings. These units are tested to meet the shock-test requirements of Specification AN-E-19, for the equipment sizes listed in JAN-C-172A.



"Ruggedized" Barrymounts are available in both the air-damped type and the ALL-METL type. Air-damped Type 770R covers load ranges between ¼ lb. and 9 lbs. Air-damped Type 780R covers load ranges between 4 lbs. and 35 lbs. ALL-METL Type 6600R covers load ranges between 4 lbs. and 35 lbs. Type M-112R covers ranges between 2 and 10 lbs.



"Ruggedized" mounting bases, equipped with Barrymounts of the above types, are available in standard JAN sizes (JAN-C-172A) and in special sizes to meet customers' requirements. A conspicuous advantage of these "ruggedized" Barry bases is the gain in strength of the base framework itself — beyond JAN requirements — achieved with very little increase in weight for loads up to 60 lbs. by design modification of standard JAN bases. For greater loads, the "ruggedized" Barry bases are of stainless steel instead of aluminum. Write for data sheet.

THE BARRY CORP.

707 PLEASANT ST., WATERTOWN 72, MASSACHUSETTS

SALES REPRESENTATIVES IN

New York · Rochester · Philadelphia · Washington · Cleveland · Dayton · Detroit
Chicago · Minneapolis · St. Louis · Seattle · Los Angeles · Dallas · Toronto

BUSINESS BRIEFS (continued)

Oscilloscopes	12
Photoelectricity	9
Physics	33
Piezoelectricity	7
Pressure control	23
Radar	22
Radiation	19
Radio	67
Radioactivity	15
Radiography	5
Recording, sound	24
Rectifiers	13
Relays	9
Resistors	18
Servomechanisms	24
Signaling devices	7
Soldering	10
Sound and noise	28
Spectrography & spectroscopy	21
Spectrometry	4
Spectrophotometry	10
Telegraphy	7
Telemetering	1
Telephony	8
Television	43
Temperature control	33
Transducers	11
Vacuum tubes	35
Vacuum technique	18
Varnishes, insulating	57
Voltage regulators	10
Wire	19
X-Rays	25

Receiver Sales by licensees for the first quarter of 1951 totalled 5,227,834, worth $486,245,840. Here's the way the total broke down:

Type	Units	Dollars
Electric		
Table (Under $12.50 billing price)	430,415	$4,239,979
Table (over $12.50 billing price)		
A-M	1,169,840	20,160,302
A-M/F-M	131,346	3,996,623
F-M (including converters)	4,550	85,022
Consoles		
A-M	7,158	161,221
A-M/F-M	4,739	560,406
Table-Radio-Phonos		
A-M	109,860	5,101,357
A-M/F-M	5,566	566,213
Console-Radio-Phonos		
A-M	21,987	2,238,769
A-M/F-M	159,989	19,925,864
Battery		
Portable A-C/D-C	291,808	5,521,916
Table	13,842	299,125
Consoles	.....	.....
Auto	721,989	21,504,400
Television		
Converters	914	144,409
Table Models	693,789	108,608,799
Consoles		
Direct-Viewing	1,083,742	229,454,471
Projection	861	225,341
Radio Phonos		
Direct-Viewing	186,175	56,559,541
Projection	12	5,149
Phonographs		
Phono only	159,465	3,297,290
With radio attachment	2,846	70,801
Without Cabinets		
A-M	1,393	89,453
A-M/F-M	1,427	178,008
Television	24,121	3,251,411

Chicago Parts Show was particularly successful in that it attracted top brass from the country's leading distributing organizations, including many who stayed away last year and the year before for political reasons.

To get into the Show you had to prove you *were* a legitimate dis-

tributor or rep, and we mean *prove*. Most exhibitors liked this rigidity, which held down overall attendance a little but confined it to quantity buyers. A few said they wouldn't have minded talking to some people from manufacturing plants, amateurs and servicemen just to keep their hand in.

Show hours were from 10 a.m. to 6 p.m. on all three days, which gave upstairs room exhibits a lively play. For our particular newshawking purposes the hours seemed a little short.

Manpower Pinch is being felt at Wright-Patterson Field as well as in industry.

The civilian personnel division has approximately 100 types of engineering, scientific and technical positions open and considered critical, plus about 40 other types of jobs proving very hard indeed to fill.

Among the types of jobs offered: Electronic engineers specializing in instrumentation, radio, wire communications and testing; General electronic scientists and specialists in instrumentation, microwave communications and tubes; Maintenance technicians specializing in electronics; Air technical intelligence specialists in bombing systems, electronics, electronuclear systems, aircraft instrument and navigation systems and electron physics; Engineering aides for electronics.

Unemployment in the television receiver manufacturing business was well over 50,000 in June, according to Robert C. Tait, president of Stromberg-Carlson and a spokesman for RTMA. Inventories were at an all-time high at 500,000 sets, with 25 carried in inventory for every one sold as against one in inventory for every set sold in the first five months of 1950.

A Laboratory engaged in precision work discovered an excellent source of soft, lint-free cloth to be used in a cleaning process prior to evacuation and sealing. Later, it took some explaining to convince the Navy accountant that he should ok a bill for "one bale of diapers."

SIGMA

CLOSE DIFFERENTIAL ADJUSTMENT AND D. C. RELAY PERFORMANCE

1 As a remotely operated switch, a relay must have a structure which moves through a distance (to separate a pair of contacts) and develops force (to maintain closure of contacts). An electromagnet acts on an armature to bring this about, under the influence of variations in energizing power. (Fig. 1)



FIG. 1

2 In addition to magnetic force, a spring is used to return the armature to its de-energized position and to "make" normally-closed contacts, if used. Its effect may be shown by adding to Fig. 1 as follows (Fig. 2):-



FIG. 2

3 It is most convenient to re-draw Fig. 2, showing the spring plot in the same quadrant as the magnet characteristics, but remembering its opposite direction. One then observes a series of combinations of gap and coil power, which will just cancel the effect of the spring.



FIG. 3

4 A typical relay operating cycle may be represented on this same plot, as in Fig. 4. "F1" is the force holding closed the normally-open contact with relay "just operated"; "F2" is the force holding closed the normally-closed contact with relay "just released," and S is the armature stroke, which is of course directly related to contact air gaps. This is a WIDE DIFFERENTIAL ADJUSTMENT.



FIG. 4

5 If the relay in Fig. 4 is readjusted to "release" at a power level close to that of "operate" the result is, as shown in Fig. 5, to reduce the values of F1, F2 and S. The marginal (just operated or just released) contact pressure and contact spacing of the switch have been considerably reduced to produce a CLOSE DIFFERENTIAL ADJUSTMENT.



FIG. 5

6 The values of F1, F2 and S in Fig. 5 could be made equal to those in Fig. 4 if we build a different relay, having the effect of changing the scales of the plot. Total magnetic force and spring force will both be increased, which will require more iron, and if sensitivity is desired, more copper. In effect — a larger relay.

Such a relay will have many problems of design and execution, relating to the control of small fractions of large forces, to vibration immunity and thermal stability. Thus, in general it is desirable to compromise. By adding gain and negative feedback to the system in which the relay will be used, the relay operating differential may be kept reasonably large, while desired system performance is not sacrificed.

SIGMA INSTRUMENTS, INC., 62 Pearl St., South Braintree, Boston 85, Mass.

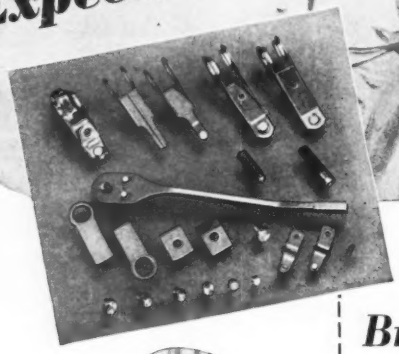

MALLORY TUNGSTEN CONTACTS

Although all Mallory tungsten is chemically the same, the size, shape and distribution of the grain particles are carefully controlled, since these factors vitally affect its electrical and mechanical properties. Mallory will gladly work with you to find the right contacts to meet your specifications. Write today.

Mallory Contact Finish *Brings Laboratory Standards To Production Operations*

The Mallory "E-Treat" finish is one of the many ways in which Mallory metallurgical developments are improving performance and reducing costs of electrical contacts.

A typical example is the real help provided by Mallory for a manufacturer of automotive equipment who faced the problem of excessive failures of tungsten contacts. The application involved a critically heavy electrical load with light contact pressure. Mallory contacts with "E-Treat" finish . . . a chemically pure, highly polished face . . . were tested and enthusiastically approved. The "E-Treat" finish afforded lower contact resistance and less material transfer . . . tripled the minimum contact life. What is more, the Mallory contacts *cost less* than those formerly used!

That's value beyond expectation!

Mallory contact know-how is at your disposal. What Mallory has done for others can be done for you!

In Canada, made and sold by Johnson Matthey and Mallory, Ltd., 110 Industry St., Toronto 15, Ontario

Electrical Contacts and Contact Assemblies

P. R. MALLORY & CO. Inc.

MALLORY

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

SERVING INDUSTRY WITH

Electromechanical Products
Resistors *Switches*
TV Tuners *Vibrators*

Electrochemical Products
Capacitors *Rectifiers*
Mercury Dry Batteries

Metallurgical Products
Contacts *Special Metals*
Welding Materials

CROSS TALK

► **ASIA** . . . The current debate on our foreign policy in Asia emphasizes our need to support our friends in that part of the world. One such opportunity will appear in February next year, when the International Radio and Electronics Exhibition (IREE) of India will take place. We sometimes forget that there are a billion people in Asia who enjoy virtually none of the benefits of electronic science, people whose leaders are well aware of these benefits and their social and political implications. Concerned as we are with our domestic market, with its shortage of unassembled components and its oversupply of assembled television sets, we should not lose sight of the great opportunity, for service as well as profit, in the Far East. We hope that our industry will be well represented at the Indian exhibition.

► **AETAT** . . . Dr. Walter Schottky, to whom we owe much of our early knowledge of electron emission and the behavior of vacuum tubes, was 65 on July 23rd. When notice of this even came to our attention, we were reminded that electronics is a young man's game, even as it starts its second half century. The 25th anniversary of IRE in Canada was celebrated in Toronto only last month, as was the same anniversary of the founding of the Detroit Section.

Marconi would have been 77 this year if he had lived. Many of his contemporaries have achieved three score and ten years and are still with us: Alexanderson (73) Langmuir (70), Zenneck (80), Lynde Wheeler (76), G. W. Pierce (79), Donald McNicol (75), DeForest (77), Hoyt Taylor (72). With Schottky in the three-score bracket are many other illustrious founders of our science: Armstrong (60), T. L. Eckersley (64), Hazeltine (64), Heising (62), Van der Pol (62) and Zworykin (61). To Dr. Schottky and his colleagues, our felicitations!

► **STAGES** . . . One of KGGF's engineers recently took a long look at their 10-kw transmitter at Coffeyville, Kansas, contemplating what manner of gadget it was. He found that said transmitter employs 51 tubes, a quartz crystal, several germanium diodes, in 47 separate a-f and r-f stages, and that the signal undergoes 14 changes in frequency from microphone to antenna. The ratio works out to be about three tubes per frequency change, which we hereby christen the "Gillette factor" after the engineer in question. In receivers, things happen more quickly, three frequency changes (r-f, i-f, a-f) in as few as four tubes. All of which sets us to wondering how many tubes and frequency changes are involved in transmitting a television image from a camera in a New York studio to a receiver picture tube in St. Louis, Missouri. The first reader who sends us a reasonable answer, backed up with full evidence, will have his subscription to this journal extended for a three-year term. The second reader so doing is out of luck. This offer expires September 30, 1951.

DEFENSE DEPARTMENT

Equipment of tomorrow frequently depends upon today's basic research

DO YOU NEED TO KNOW . . .

What the short and long-term prospects are for you personally in basic research?

What is ahead for your company or college in the way of military research contracts?

What types of projects are most likely to receive Defense Department support?

What kind of coordination the Services are apt to arrange between similar projects?

This Article May Provide the Answers

The ARMY

By HAROLD A. ZAHL

Director of Research
Signal Corps Engineering Laboratories
Fort Monmouth, N. J.

WITH THE CLOSE of World War II, there followed a rapid dispersal of the greatest collection of scientific manpower ever mobilized against a single objective. The nation was all-out for defense, but technologically this inferred applied research, engineering, production, training, and combat. Ironically, with almost total mobilization of the nation's scientists and engineers, basic research was neglected in the rush to quickly make weapons using the science of the day. In retrospect, we see that had the war extended over a substantially greater period of time, the absence of basic research as part of our defense plan might well have been disastrous.

Following the close of the war, numerous reports prepared by such notables as Vannevar Bush, John R. Steelman, and others, strongly urged that intensive basic research be considered as our principal bulwark for long-term defense, and that a National Science Foundation be established immediately to augment the military effort and further carry research into areas where military interests, ostensibly at least, appeared more remote. Legislative delays in establishing the Foundation resulted in the military services, and later also the Atomic Energy Commission, contributing the major portion of the funds and many of the facilities for the country's post-war basic research program. Through this effort, combined with that of private support, basic research within the U. S. reached an all-time high in 1950. Many results of this research have already been put to use in our weapons program and also in strictly civilian interests.

In the aftermath of the President's declaration on December 16th of a state of national emergency, and in the following rearmament rush, there appeared some signs suggesting that basic research within the U. S. might in part at least be forced to yield to the exigencies of the emergency. In reaction to this general feeling, the Department of Defense has taken the position that while production must be accelerated and development activities greatly increased, it is also imperative that basic research continue apace, since by the time-scale on which the present emergency and possible all-out conflict appears to be plotted, basic research and success therein may well be necessary to our very survival. Implementing this policy, each Service has agreed separately to support basic research by a percentage of its research and development budget; and further, should the present international tension

PLANS for Basic Research

Mobilization requirements have speeded up applied research, development and production engineering to meet current military electronic needs. To many it appears that this rules out expansion of basic research and even involves curtailment of existing projects. Such is not the case, however, according to spokesmen for all three branches of our armed forces

ease and permit a reduction in military expenditures, then a fixed minimum will still be maintained for continuity and stability. This broad agreement will again be reviewed in three years from the present.

Manpower Policy

Obviously, during the initial phases of the present emergency, there must be a considerable reshuffling of technological personnel within industry, institutions of learning and government laboratories. Full-scale war would naturally impose still greater changes. Even now, however, it is a serious fact that industry is desperately in need of high-caliber personnel for development and engineering work on defense orders, while government laboratories with almost equal vigor are reaching for similarly qualified men.

Paradoxical to the apparent manpower shortage, because of greatly reduced enrollments due to direct military demands for young men, there exists in the staffs of our universities an increasing number of high-caliber technical men who apparently will be forced to make adjustments due to reduced university budgets. Many of these scientists and engineers will, of necessity or through the magnetism of higher remuneration or personal desire to contribute more directly to the cause of the emergency, yield to the call for work in industry or government. In many instances such shifts represent a direct or potential loss of basic research workers. That some such personnel changes occur, however, is required as the nation girds itself for defense; in fact, is absolutely necessary for quick and intelligent rearmament where technology and production are our strongest weapons. Still, with the university being the traditional home of basic research, such turnovers in manpower must be watched with caution, lest they become so great as to seriously threaten our major means for keeping truly creative effort at a level consistent with a long-term emergency. Even more important on a long-term basis, if the educational structure of our schools becomes too weakened a prolonged crisis would confront us with a grave shortage of scientists and eventually even a loss of the system which produces them. This in effect would, in less than a generation, precipitate a national catastrophe of the first order.

Selection of Projects

Recognizing that strong forces do exist, pulling many individuals with outstanding research reputations into the generally more remunerative applied fields, it must also be admitted that a reasonable number of private and government dollars still appear to be going into basic research. Hidden in this situation, however, is the danger that basic research, while admittedly important, is never urgent, and in the rush many of us too easily shift our thinking toward the urgent and accept the dollar statement as satisfactory, without the realization that unless the vast military-supported program is watched with great care there may be a considerable proportion of technical mediocrity eventually supported, instead of research capable of adding real and significant contributions to our fund of knowledge. We shall never win a war or hold our own technically in an indefinitely long emergency solely on the number of reports delivered to a contracting officer and added to a collection. To truly remain technologically ahead of our potential enemies research must produce and hold world leadership in our scientific knowledge, which at the same time must also be geared to the direct military effort, for the criterion of research success, in a military sense, lies in the performance of military weapons in the hands of our troops.

The above leads to the obvious fact that the problem of the military services effectively contributing toward and maintaining a basic research program is not solved merely by the availability or expenditure of dollars. While there are many volunteers for basic research, those obviously deserving of unquestioned support, together with full freedom for their creative effort, are unfortunately very small. Thus the question arises—by what ground rules does one determine whose efforts should be supported with the military dollar? Many of those who wish to participate in the

DEFINITION

BASIC RESEARCH, as defined by the Research and Development Board, refers to theoretical or experimental studies directed toward the increase of knowledge, either by advance into unknown areas or by detailed filling-in of areas whose general boundaries are already known. Immediate practical application is not necessarily a direct objective of the investigation

program on a relatively undirected basis without change of their peacetime environments would actually require guidance in order to make their efforts effective. For the government to militarily gain in a direct sense from a program substantially more geographically diversified than today's widespread contractual effort, with its host of attendant administrative and technical coordination problems, would also require a proportionate increase in top-notch scientists diverted to assure program coordination, absence of undesirable duplication, and concurrent application studies. Coordination is further complicated in that, while basic research as such is generally considered unclassified, once important findings are made classification almost invariably follows, regardless of the volumes written on the desirability of a free interchange of information.

Choice of Facilities

It would appear that the present situation in regards to military support of basic research calls more for expanding proven existing research centers, both externally and in military laboratories, rather than for further decentralization. This trend is already being felt and will undoubtedly continue toward establishment of numerous scientific groups of substantial size under direct Service sponsorship, largely in universities, for concentrated effort of direct military interest. Highly qualified individuals are now needed to help organize, join, or assist groups in translating the results arising from these more concentrated approaches into weapons. While within such laboratories direct military interests must of necessity be emphasized, considerable opportunity will also exist for work on basic problems related to the applied aspects of the group's technical assignment.

In the physical sciences, a number of such laboratories under joint Service sponsorship are already functioning; some since 1946—for example, at Harvard, Princeton, Columbia, Stanford, Massachusetts Institute of Technology, Bell Telephone Laboratories and the General Electric Company, while at the time of this writing others are in varying stages of planning or negotiation.

Long-Term Objective

It must be noted, however, that while establishment of larger units and team play of necessity appears to be today's organizational trend, it is also true that individuals whose previous background indicates outstanding qualifications for lone effort, or effort with a small assisting group, should be privately supported or, if private support is not available, should be supported by the military. Equally important, such persons must be further encouraged by allowing them to continue their work on geographical coordinates of their own choosing, for success in basic research begins with the choice of the individual and not necessarily by regimenting all research personnel into million-dollar facilities.

The Signal Corps, with its major development interest in electronics, fed from basic and applied research within the field of the physical sciences—in addition to substantial contractual participation — plans continuance of a basic and particularly a strong applied research effort within its own laboratories to supplement the fast-moving development and engineering program which naturally constitutes its principal laboratory effort. This internal research program carries a threefold objective: first, while it is hoped such effort may lead to discoveries vital to the military effort, as a guaranteed by-product, it is certain to assist in maintaining the scientific environment necessary for leadership in the field of electronics; second, to maintain a corps of specialists available in an advisory capacity to development engineers working on new or improved equipments; and third, to stand ready as a highly trained technological reserve for the possible eventuality, when all existing facilities capable of assisting must be directed toward the solution of intricate problems thrown back from combat areas for immediate solution.

In all the above, a strong stand has been taken in support of continuing a steady level of truly basic research during the emergency, or in fact even during total mobilization or major combat should such be thrust upon us. However, it is only through the orderly superposition of applied research, development and production that new military weapons can be born and made available in time to troops. The intricacies pertaining to the interrelationship between elements of the scientific-engineering-military team structure, further, make it imperative that everyone in the chain appreciate the contributions of the others. Applied research, development and particularly production have long occupied pedestals of distinction in the minds of those charged with military planning. For basic research, it may be said that never before in our history has a better understanding and greater appreciation of its importance existed than now. In spite of apparent vicissitudes born through the early rushes of the emergency, it is still felt that the conditions remain for keeping a vigorous program underway, and as we move into the uncertainties of the future, the Department of the Army, in its contributions to the national defense, does not intend to lower its long-range technical sights.

The NAVY

By E. R. PIORE

Deputy Chief and Chief Scientist
Office of Naval Research
Washington, D. C.

THE HONORABLE Dan A. Kimball, Under Secretary of the Navy, and Commissioner Gordon Dean, Chairman of the Atomic Energy Commission, issued a joint statement on December 15, 1950, which read in part: "One very essential condition for maintaining our national strength, whether for peace

Checking growth of crystals at Squier Signal Laboratory

or for war, is that research in the sciences, which is basic to all technological progress, be kept at a high level." This is a broad statement of the Navy policy in regard to basic research during this period of increased military effort to improve the readiness of our forces in the field.

The Office of Naval Research, after very careful thought, has taken the following action to implement the policy stated above:

(a) It is continuing the basic research program at the same annual fiscal level that the program enjoyed prior to the recent increase in military appropriations.

(b) At the same time, ONR has increased the average life of contracts for research.

It is hoped that these procedures will give stability to the basic research program and some assurance to scientists and engineers during this period of uncertainty and rapid expansion of the military technical effort in the country.

Basic Research Problems

The policy, and its implementation, is due to the expanded demand for technical people occasioned by the procurement program initiated by the military services, and the additional sums of money available for research and development. A large production effort in military equipment always reflects itself in an increased demand on development facilities and engineering manpower. It is felt that this demand for manpower should not come initially from those engaged in basic research. This group, although small, is highly competent and imaginative. It is the hope that, pursuing the policy stated above, this small group could be kept initially as a reserve—scientific shock troops. The policy is an attempt to introduce some countermeasure, however small, to the potential flow of all technical manpower to development of new weapons. We are not prepared at this time to commit all our technical reserves in ideas and manpower to weapons and weapons systems. It is desirable that the transition from basic research to development of weapons be gradual and thoughtful, and that the rate of this transition be determined by the character of present and future military needs.

Actually, at present, there is a drift in university, industrial, and governmental laboratories from basic research to the study of more urgent military problems. ONR obviously is involved in this drift by making funds available and by indicating the existence of very urgent unsolved problems. We are calling on our reserves to some extent, but only after a very careful examination of the areas that need attention and the talents of the people that can make an important and vital contribution to those technical and military areas. This is always done in consultation with the engineers and scientists involved. It is necessary to assure ourselves that the problems being tackled have a high probability of successful solution—in a technical and military sense—in a comparatively short time.

Study-Group Approach

One finds at this time that the major effort among those groups which in the past have been engaged in basic research is on analysis and study of technical areas and needs in the military services, thus determining the new and additional problems in applied research and development that should be undertaken now in our laboratories throughout the country. In other words, the emphasis is on studying the situation rather than on setting up large laboratories, such as the Radiation Laboratory at MIT during the last war. ONR is encouraging this approach. It may insure the proper and intelligent use of our reserves. In addition, it commits our reserves for a limited period of time—for the duration of a study. We are in a period of identifying technical problems in the military setting, and engineers and scientists are familiarizing and identifying themselves with these problems. The state of readiness for an intensified emergency is being improved.

When the studies have been concluded and the validity of the results determined, it becomes necessary to examine the recommendations and to ascertain how large a load can be carried in the existing laboratories and research and development facilities. If the laboratories and research and development facilities are inadequate, an assessment must be made relative to expanding the facilities and adding new manpower to them on the one hand, or establishing new facilities and organizing new teams. Then additional manpower may have to be drawn from those groups that are engaged in basic research. Actually, certain critical technical areas have already been found that require at this time the establishment of new groups so that our military effectiveness can be increased in those areas at the earliest possible date.

In summary, the Office of Naval Research has been trying to maintain its program of basic research,

superimposing on it study groups and, when necessary, intensifying work in certain applied and development areas. At this time an attempt is being made to keep to a minimum disrupting influences on basic research.

How does electronics, an engineering field, live in terms of this brief and general summary? For a moment we might as well forget the definition of electronics—the editors of ELECTRONICS solve this problem daily—and look at the more troublesome problem of basic research in an engineering field.

Broad Electronic Needs

Normally one looks to the sciences for basic research and to engineering for the application of this information. The transistor came from scientists who were concerned with the solid state, rather than from those who were trained in electronics. However, one can rightly argue that the future of the transistor, as an important component in electronic systems, depends on basic and fundamental investigation from the engineering rather than from the scientific point of view. The control of various parameters that make the transistor an important electronic device may not have a profound effect on the theory of the solid state.

Another example of basic research in electronic engineering is the current activity in the statistical theory of communication, analyzing the problem in the time domain. Still another is continued investigations of the interaction of electron beams with themselves and the electromagnetic field—exemplified by the traveling-wave-tube type of research.

Basic research in electronic engineering is a fundamental and philosophical approach to a problem with the goal of controlling nature in a reproducible manner, as contrasted to basic research in science where the interest is in a more profound understanding of the external world. In presenting an argument for the retention of some manpower for basic research, it is necessary that these engineering problems have a broad and revolutionary impact on some aspects of art.

Nature of Current Work

The three examples are cited to indicate that basic research is to be found in engineering as well as in the scientific fields. At this time it does not appear that new functions for electronic systems in warfare, such as radar, which saw its baptism of fire in the last war, will be found. But unless we maintain a strong basic research program in electronics, the improvements in existing electronic warfare systems will be marginal, accompanied by an ever-increasing number of components, tubes, and knobs, usually with a reduction in overall reliability of the system. We are looking to those areas that will permit us to modify radically the character of the system so that its utility on the battlefield can be increased. Automotive power, the automobile, was used in 1914-1917 and yet the Jeep in the last war had a profound effect on the maner in which the war was fought.

To be a bit more explicit, in a certain sense the single factor that imposes a severe limitation on greater exploitation of electronic equipments is lack of reliability. The solution may come, not from the direct-development approach to increase the reliability of each component, but rather from the introduction of redundancy into the components of the systems in a premeditated fashion. Further analysis may show that many components are vestigial, and that other components are obsolescent.

A more general, venturesome statement can be made to the effect that within the next few years profound changes may be seen in the design and application of electronic systems. The backbone of these changes is the current work in progress in basic and fundamental engineering investigations in various laboratories. Some of the laboratories are managed by industry, others by government, and still others by academic institutions. Already there are results that need further development to be incorporated into the military system.

It is well to point out that in the last war we had and maintained electronic superiority on all battlefronts and in all types of operations. This very important advantage we may not be able to maintain. If perchance we lose it, one available way to regain this advantage is to have a reserve in being—a reserve not only of brainpower but also of fundamental ideas on which the brainpower can draw.

With the large post-war expansion in academic, industrial, and governmental research and development facilities and activities, one may ask why we are already facing the problem of committing our reserve. The answer is simple. The expansion mentioned above kept pace with the expansion of the national income. The new defense effort is expanding our economy. This imposes an additional load on our research and development manpower and facilities.

The AIR FORCE

By J. W. MARCHETTI

Director of Radio Physics Research
Air Force Cambridge Laboratories
Cambridge, Mass.

THE AIR FORCE as an organization is a relative newcomer to the field of basic research. During the years of World War II, it leaned heavily on Office of Scientific Research and Development organizations for getting its research done, particularly in the field of electronics. During the past five years, however, we have had to develop a certain maturity in this field.

The signs are very clear that this maturity is indeed being realized. Only recently a new command has been set up called the Research and Development Command. The organizational level of this command is an indication of the seriousness attached to its technical problems by the Air Force. Although the new command will carry the primary responsibility for equipments needed by our fighting airmen, it will also be vitally interested in basic or background research. Just as in-

dustrial concerns have found that aggressive research departments are their best guarantee of solvency in periods five to ten years ahead, so also do we realize that the outcome of future wars may well be determined by the quality and quantity of basic research efforts during years of peace.

Distribution of Contracts

The distribution of basic research in electronics depends on the location of personnel best fitted to carry on that research. College laboratories are the major recipients of basic research support and usually such support is on an unclassified basis. Industrial laboratories occasionally handle our basic research problems, but only in those instances where the particular skills desired happen to obtain in men having industrial affiliations. Service laboratories are mainly dedicated to applied research and development engineering. The Air Force Cambridge Research Laboratory is an example of a laboratory dedicated entirely to research in the fields of electronics and geophysics. At this laboratory, no development work is done. Models are built on an experimental basis or theoretical analyses of problems conducted. The choice between theoretical or experimental approach depends for the most part on suitability to the problem at hand. The typical output of this Service laboratory is a report telling how a certain job might be done and, perhaps, some experimental gear on which proofs of performance and measurements can be made. The research output of a Service laboratory such as this may require considerable engineering before a useful end item is ready for use. This additional engineering is done either by another Service laboratory or industry.

Future Military Needs

Military operations are becoming more and more a pitting of scientific skill against scientific skill. Under such conditions, the easy-to-do technical things are quickly put to the test of battle and further progress in weapons can only be made by increasing our store of basic knowledge. In the present emergency, one might suppose the urgency of immediate equipments would relegate to the background any efforts on basic research. We do not intend to follow any such pattern, but will continue the support of basic things regardless of any emergency that may obtain. Experience has shown that both basic and applied work need one another's mutual stimulus, and striking a happy balance between these two is as important as striking the balance between theory and experiment.

One might wonder just how the line is drawn between basic research to be supported and research that should not be supported. There is little knowledge of a scientific nature which in time of war has no military application. Practically all knowledge can be used in one way or another in a battle and the support thereof. Drawing the line is a serious Service responsibility. A decision must be made on the basis of potential usefulness, cost, likelihood of success, capability of the manpower available, and need for security. It is not our intent to draw this line so tightly that due to lack of breadth and scope of research we will be unable to do our job well. Nor can the Service draw the line so loosely that it will be criticized for getting into fields of endeavor that are beyond its interest or, in fact, interfering with the interests of others. In making decisions on research we will operate quite similarly to a progressive business organization in which the profit motive has been replaced by the motive of contributing to the national security by assuring a strong air arm.

Electronic engineers are vitally needed by the Air Force as they are indeed needed by almost everyone else. The present scarcity often seems to be a hopeless situation, but for those whose memory goes back a decade or so it is difficult to resist a silent chuckle at the young graduate who cannot make up his mind what job to take because he has at least three or four to choose from. At least from his point of view it is a healthy situation and indeed I believe it is a healthy situation since it indicates to us that as a nation we are making a concerted effort to solve our technical problems, be they in research, development or production engineering. The scarcity of talent is a real incentive to the more effective utilization of our present manpower. All of us must be as effective as possible regardless of the particular field we have chosen.

Mobilization Period Planning

During the past six years a technical type has evolved which General Roger B. Colton has called a "military engineer". He is an unusual sort of individual with technical training who knows in quite some detail the inside workings of our military equipment and carries around in his mind an odd assortment of such letters and numbers as AN/42; JAN7 and XDQ. This man is usually a systems man and his evolution indicates quite clearly the major role of technical equipment in our military operations.

From military engineer to tester on the one hand and research scientist on the other, one will find within the Service the full gamut of technical opportunity. In times of stress the development and production engineering is of course expanded, but very definitely not at the expense of our efforts on basic research or applied research for that matter. While the nut-and-bolt portion of our work must expand at a terriffic rate, it is quite true that our research effort gets only a modest increase, but it gets an increase nevertheless, not curtailment.

Just as we derive benefit from sponsoring basic research I would also like to feel that the art as represented by its frontiers is also advanced by this partnership. It is rather the exceptional case today when research can be done with "love and string and sealing wax", or an occasional "ice pail". More often than not, it requires the teamwork of experienced men and financial support in excess of that available to private individuals. The same forces which have created the large industrial laboratory for the solution of these problems have also been responsible for the trend research has taken in the Air Force. We are very definitely in research, for its sake and for our sake.

Martin P5M-1 Marlin, latest design of antisubmarine flying boat built for U. S. Navy. Keel of hull goes under water from nose to tail, giving greater stability when landing in heavy seas to listen for submarine that has submerged after being detected by radar or other airborne electronic equipment

——Airborne Submarine

Recent improvements in submarine weapons and electronic equipment, and corresponding improvements in the equipment of aircraft designed especially for detecting and sinking submarines. Sonar and hydrophones are carried on some air units

By T. B. SCHILLO

Electronics Engineer
The Glenn L. Martin Co.
Baltimore, Md.

SUBMARINE WEAPONS and equipment are improving. Equipment now includes radar, radar search receivers, radio and radar jamming transmitters, hydrophones and sonar. New torpedoes have longer ranges and are more dependable. They can be fired from beyond the range of underwater detecting devices, leave no tell-tale wake and are often equipped with homing devices that guide the torpedo to the sound made by the ship's propellers.

The submarine itself now uses the snorkel breathing tube, so small that it practically defies radar detection yet permits diesel-engine propulsion while submerged. Engines themselves are being improved, making it logical to assume that submerged speeds will increase to 25 knots. Furthermore, if the Walter closed-cycle hydrogen-peroxide engine can be cured of its habit of blowing up, there will be no need for air intake and exhaust tubes. This would eliminate the snorkel, our last radar target.

If there should be another full-scale war, we can be sure that the submarine will be used by both sides, not only for attacks against shipping and naval units but also for mine laying, as troop and cargo carriers, as radar pickets to give advanced warning of air raids, and as guided-missile launchers.

Antisubmarine weapons and equipment are improving too. In addition to radar, we have added magnetic airborne detectors, sonobuoys, radar search receivers, depth charges, heavy-caliber guns and rockets to antisubmarine aircraft.

The magnetic airborne detector is usually suspended below the airplane by a cable while sweeping an ocean area. Unfortunately, its range is so limited that it is useful only for localization when a submarine is known to be in the vicinity, or for continuous patrol of restricted areas like harbor entrances or channels.

Sonobuoys are dropped into the water in a pattern by an airplane when a radar-sighted submarine submerges. A hydrophone on each sonobuoy sinks below the surface and a telescoping antenna shoots above the surface. The hydrophone picks up the noise made by the submarine propellers, and the unit transmits this noise by radio to the aircraft overhead. Depth charges are then dropped on or near the noisiest sonobuoy.

In the early hectic days of World War II, aircraft were usually delivered to the Navy without special equipment. These aircraft were sent immediately to modification

New U.S. Navy long-range patrol plane for photo reconnaissance, mine-laying and antisubmarine duties. Known as the Martin P4M-1 Mercator, the plane carries jet engines in the same nacelles with the piston engines, to provide additional power and speed for take-off and when over the target area. Both radomes face downward

Detection Systems

centers. New equipments were becoming available so rapidly that it was not possible to install them for optimum performance and ease of operation. In fact, the end result was often a haphazard arrangement of antennas, radars, direction finders, bomb racks, searchlights and guns.

The aircraft manufacturers, and especially their aerodynamicists, were not too pleased to find their products resembling porcupines, with performance seriously impaired by all these appurtenances. As a result, even before the close of hostilities, the concept of naval aircraft design was changed to that of an integrated weapon especially configured for specific missions.

One example of integration of various equipment with an aircraft is the Martin P4M Mercator. This airplane was specifically designed for mine-laying and bombing, and is also an effective antisubmarine weapon. All Navy aircraft must be versatile. For that reason, the Mercator, with only minor modification, can be assigned secondary missions of area search and reconnaissance. Mine-laying missions require long range and heavy payload, along with fire power, armor, and speed for protection against enemy aircraft and ground defenses. Therefore, it was decided to install twin turrets fore and aft and a deck turret. Provision was also made for waist guns although these are not normally carried in peacetime. Allowance was made for installation of protective armor plate for the engines and crew.

The radar antenna is enclosed in a streamlined radome aft of the big bomb bay, and other antennas have been streamlined or imbedded in the ship. There are plastic sections in the leading edge of the wing which act as windows for these antennas.

The Mercator appears to be a twin - engine airplane. Actually there are two jet engines, one on each side, mounted just aft and below the piston engines. In spite of the Mercator's size, its take-off run is surprisingly short especially when all four engines are used. Under many load conditions, only the piston engines are necessary for take-off. If all four engines are used, the jets are secured after take-off because the piston engines are fully capable of producing cruising speed. The jets are again used over the target area to minimize the time spent in enemy territory under fire.

Another example of system engineering is the Martin P5M Marlin. Carefully specialized airplane design combined with a selected complement of electronic equipment make it ideal for its primary mission of submarine hunting and killing in the open ocean. Like all Navy aircraft, it has secondary missions which include air-sea rescue, transport, hospital and reconnaissance. With only minor modifications, it can perform any of these missions.

The P5M hull has a long, deep afterbody which permits it to land and take off in heavy seas.

Another forward step in improving the aerodynamics of modern aircraft is seen in the utilization of the P5M engine nacelles. Depth charges and torpedoes which used to be suspended under the wings, where they caused considerable drag, are now housed in the nacelles. Antennas have likewise been either streamlined or imbedded to improve over-all performance.

PLANS FOR COMPATIBLE

WHEN THE FCC announced its decision to adopt the CBS field-sequential color television system last October, the Commission stated that it would have been preferable to adopt a compatible color system, if such a system had been ready for commercial use. The National Television System Committee (NTSC) decided, shortly thereafter, to set up an Ad Hoc Committee to study compatible systems and to draw up broad standards on which field tests might be based.

The Committee, formed on November 20, 1950, consisted of D. B. Smith (Philco), Chairman, E. W. Engstrom (RCA), T. T. Goldsmith, Jr. (DuMont), I. J. Kaar (General Electric), A. V. Loughren (Hazeltine). R. M. Bowie (Sylvania) joined the committee later. The committee members were chosen to represent research organizations active in the development of color television systems. Axel G. Jensen of the Bell Laboratories served as observer. The Committee attended demonstrations of various system proposals at the Hazeltine, Philco, DuMont and GE laboratories and at the NBC-RCA color test facilities at Washington. On April 19, 1951 it issued a unanimous report to the NTSC.

The report contains five proposed color system standards, drawn in broad terms, but omits any detailed numerical values, stating the latter should be determined by industry field tests.

The system defined by the broad standards will, in the opinion of the committee members, "provide for the maximum utilization of the existing 6-mc channels . . . . . (that is) it will transmit the maximum amount of information useful to the viewer with regard to picture clarity, color fidelity, picture brightness, freedom from flicker and other deleterious effects, of any system of color television now known to us."

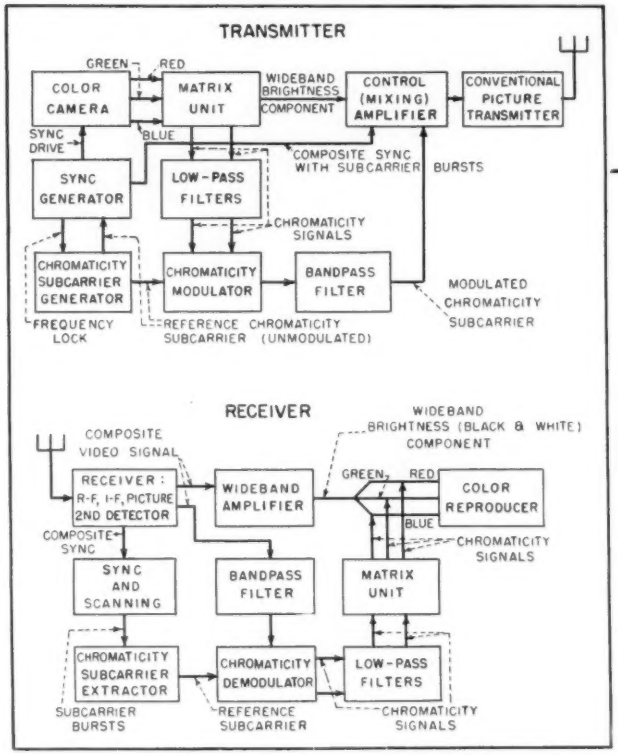

FIG. 1—Block diagram of composite color system as implied by the broad standards proposed by Ad Hoc Committee

Composite System

Essentially the proposed system involves the transmission of a high-quality black-and-white picture signal in accordance with the present FCC standards, which carries the brightness information, plus a subcarrier within the video band which carries the color (chromaticity) information. The color subcarrier is so synchronized and modulated that it causes minimum interference with the brightness component. Accordingly, portions of the color image which appear predominantly in shades of gray are substantially free from interferences due to the color subcarrier, while highly-colored portions of the image show dot-structure to a degree depending on the degree of overlap between the brightness carrier sidebands and the color subcarrier sidebands and the relative percentage of modulation. The technique of utilizing a color carrier which is an odd multiple of half the line scan frequency as proposed by Dome of General Electric is utilized further to reduce interference. Observers noted that this method of transmission was common to the experimental systems demonstrated by Hazeltine (March, 1950), RCA (December, 1950) and Philco (February, 1951).

"Color" as used herein implies the presence of brightness, hue and saturation. "Chromaticity" implies the presence of hue and saturation components only.

COLOR TELEVISION

Ad Hoc Committee of NTSC proposes broad standards for "composite system" using by-passed monochrome signal and color subcarrier, recommends industry conduct field tests to establish such items as chromaticity subcarrier frequency, manipulation of primaries, details, color sync method and bandpass limits

The standards proposed by the Ad Hoc Committee as a basis for the industry field tests are as follows:

"1. The present FCC transmission standards for black-and-white television shall continue to be used for the transmission of compatible color television.

"2. Chromatic information shall be transmitted by means of a color subcarrier modulated in amplitude and phase with respect to a reference subcarrier of the same frequency. The color subcarrier shall be transmitted simultaneously with the video signal and during only the video portion of the composite signal.

"Synchronizing signals to transmit information concerning the reference subcarrier shall be transmitted only during the synchronizing and blanking intervals of the composite video signal.

"2.1. To ensure practical invisibility of the color subcarrier its normal frequency, but not phase, shall be related to the horizontal scanning frequency in the following manner: The color subcarrier frequency shall be an odd multiple of half the horizontal scanning frequency.

"2.2. For standard operating conditions, the amplitude of the primary video signal and the amplitude and phase of the color subcarrier shall be specified in terms of a "proper" set of taking characteristics.

(Definition: A "proper" set of taking characteristics is defined as a set, each one of which is a linear combination of ICI distribution characteristics.)

"3. The color sync signal shall be transmitted by means of a burst of the reference carrier superimposed on the back porch following each horizontal sync pulse, in accordance with the detail shown in Appendix B (Fig. 2)."

The report does not contain a graphical illustration of the proposed system. The block diagram shown in Fig. 1, prepared by ELECTRONICS, illustrates the basic principles. At the upper left is a color camera which views the object and produces three signals, corresponding to a proper set (see Standard 2.2 above) of three primary colors (red, green and blue). The camera scanning is controlled by the sync generator, at the left, which produces standard FCC black-and-white sync signals, and generates the color sync burst (Fig. 2) under the control of the color subcarrier generator.

The three color signals from the camera are passed through a linear computer which transforms the color signals into another "proper set" of color signals, related to the original camera output signals by linear simultaneous equations with constant coefficients. This unit is sometimes known as a "matrix unit". Its purpose is to secure color signals whose form is better adapted to transmission, with respect to signal-to-noise ratio for example, than the signals generated by the camera.



FIG. 2—Recommended form of color synchronizing pulse. At left is FCC standard horizontal sync pulse, followed by a sinewave burst at the chromaticity carrier frequency. Exact dimensions and number of cycles in burst are to be established by field test

The output of the matrix computer consists of three signals, one representative of the brightness component, the other two of the chromaticity components. The brightness black-and-white component is passed with wide bandwidth to a control amplifier where it is combined with the sync signals and the chromaticity subcarrier as noted below.

The chromaticity components are passed through low-pass filters (cutoff frequency not specified in the report, but lower than that of the brightness signal to the chromaticity modulator. Here the chromaticity signals modulate the subcarrier in amplitude and phase. The subcarrier itself is generated, as shown at the left, in a generator, associated with the sync generator, such that the chromaticity subcarrier freqency is an odd multiple (455 or 507) of half the line-scanning frequency.

The output of the chromaticity modulator is a sinewave modulated by the chromaticity signals, in such a way that the chromaticity signals do not interfere with each other and may be separated at the receiver by a synchronous detector demodulator. The chromaticity subcarrier is then passed through a bandpass filter which confines the

signal to the upper portion of the video band.

At the control amplifier (upper center of Fig. 1) the black-and-white signal, the sync signal with sub-carrier bursts added, and the modulated chromaticity subcarrier are combined. The composite video signal thereby produced is passed to a conventional 6-mc picture transmitter and the resulting r-f signal is radiated in the usual manner.

At the receiver, shown at the bottom of Fig. 1, the r-f signal is amplified at r-f and i-f in the usual manner and demodulated. The composite video signal thus recovered is utilized in three ways: to operate the conventional sync and scanning circuits; to control (by means of the subcarrier bursts) the chromaticity demodulator; and to actuate a matrix unit.

At the chromaticity demodulator the two chromaticity signals (previously mentioned in the description of the transmitter) are recovered. The chromaticity signals and the composite video signal are then passed through a matrix unit which performs, in principle, a transformation similar to that carried out by the transmitter matrix unit.

The transmitter matrix and its complementary receiver matrix can perform in several ways. For instance, the transmitter matrix may deliver three color signals each containing chromaticity and brightness information, or the transmitter matrix may deliver only two *chromaticity* signals (no brightness) plus a separate signal containing brightness alone. In either case the receiver matrix must match the scheme chosen at the transmitter. Figure 1 illustrates the scheme wherein brightness is held independent of chromaticity after the transmitter matrix and right up to the color reproducer itself where recombination takes place in the reconstruction of the picture.

It must be emphasized that the diagram of Fig. 1 does not represent a specific system, and in particular it does not specifically represent the RCA, Hazeltine or Philco systems demonstrated up to the present. It is intended merely to show in simple form one embodiment of the elements of the system implied by the Ad Hoc Committee standards as stated in the report.

When the proposed compatible color signal is used with conventional (existing) black-and-white receivers, the chromaticity subcarrier has a secondary effect, and the image is produced essentially by the brightness black and white portion of the composite video signal. Moreover, the chromaticity sync bursts are so located in the sync wave form that they have no effect on the scanning of conventional black-and-white receivers. Consequently, when such receivers are tuned to the color transmissions, they produce images which are virtually indistinguishable from those produced by standard black-and-white transmissions. The principal difference, in the black-and-white reproduction of the color signal, is the presence of a dot structure in portions of the image corresponding to highly colored parts of the subject. The visibility of this dot structure depends on the relative amplitude of the chromaticity subcarrier sidebands and the degree of overlap between the bandpass regions assigned to the brightness and chromaticity sidebands. Among the important points to be established in the field tests are the amplitude and bandpass limits which represent the optimum compromise between faithful color transmission and the quality of compatible reception on black-and-white receivers.

Future Plans

The committee expressed the hope that various organizations in the industry would undertake field tests within the scope of the proposed standards, and recommended that NTSC set up a program to coordinate the tests and to publish the results to interested industrial and governmental agencies.

Several companies indicated to the committee their intention to conduct such tests and gave details in an appendix to the report. The DuMont Laboratories stated that they would conduct color tv tests on station KE2XDN, Passaic, N. J. on 608-614 mc and station KE2XDR, New York, N. Y. on 708-714 mc. In addition, station WABD in New York, channel 5, would be available during off hours for experimental transmission of compatible color images, upon proper authorization from the FCC. The General Electric Company stated that it would

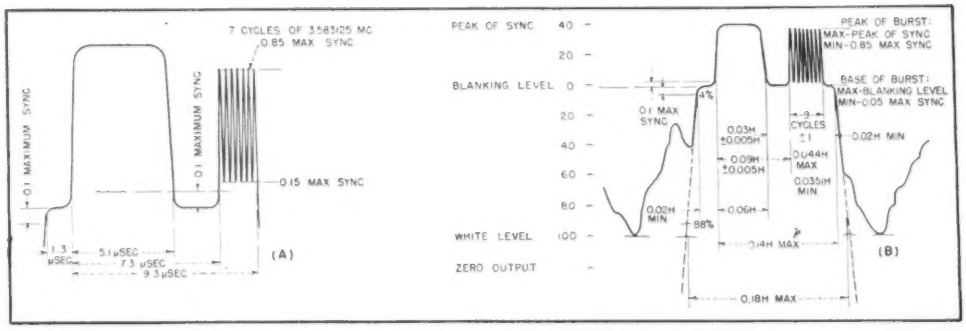

FIG. 3—Color sync pulses used by Philco (A) and RCA (B) during field tests

provide a uhf transmitter at Syracuse, New York which would operate in accordance with the proposed standards of the Ad Hoc Committee. Home-type receivers would be constructed and operated in the Syracuse area for sufficient time to accumulate the required field-test data.

The Hazeltine Corporation stated that color television signals would be available at their laboratory at Little Neck, N. Y., although it was not stated whether the signals would be put on the air. Among the types of signal to be tested was the original RCA proposal, with red, green and blue signals having equal weighting and equal phase intervals, with color subcarrier frequency of 3.58 mc. This signal is essentially that demonstrated by RCA in December, 1950 at Washington. A second system to be tested would employ the modified constant-luminance signal developed by Hazeltine, in which the color signals are weighted in approximate proportion to their luminance, with unequal phase intervals, with a 90-degree change in the subcarrier phase on odd fields, and with various color signal intensities relative to the brightness signal intensity. Also tested would be the use of oscillating color sequence (red, green, blue on even fields; red, blue, green on odd fields) at color subcarrier frequencies of 3.58 and 3.99 mc.

The Philco Corporation described the compatible color system currently being tested at station WPTZ, Philadelphia (channel 3) between 9:00 and 10:30 a.m., Monday through Friday. This is the so-called "X-Y-Z" system described by Philco engineers at the IRE convention last March. The brightness signal is of high definition and is represented by the Y black-and-white or brightness coordinate in the I.C.I. system of color specification. Two color-difference signals (rather than the three shown in Fig. 1), proportional to X-Y (red-minus-brightness and 0.33 (Z-Y) (blue-minus-brightness) are imposed in quadrature on the color subcarrier. The subcarrier frequency is 3.583125 mc, which is the 455th multiple of half the line-scanning frequency. The subcarrier burst used, shown in Fig. 3A, consists of seven cycles, phased to correspond with the phase of the 0.33 (Z-Y) component. The subcarrier phase is shifted 90 degrees on alternate fields, returning to reference phase during the intervening fields.

Test transmissions over the NBC-RCA transmitter in New York, station KE2XJV (WNBT, channel 4) were planned during off hours and have since begun. The color subcarrier is 3.583125 mc, as in the Philco transmissions. In addition, it was planned to test the frequency 3.992625 mc (the 507th multiple of half the line scanning frequency) following investigations of receiver i-f characteristics and the effect of oscillating the color sequence.

The color sequence is green, red, blue on one set of alternate fields, blue, red, green on the intervening fields, the reversal to be accomplished by interchanging the blue and red sampling signals. Three color-difference signals, with equal weighting and at equal phase intervals, are employed.

The subcarrier burst of the RCA-NBC tests, shown in Fig. 3B consists of nine cycles, plus or minus 1 cycle. The color difference signals contain information having a flat spectrum out to 2 mc, and a gradual slope to 30 db down at the sampling frequency. The by-passed black-and-white signal is flat to 3 mc and drops off 6 db at 4 mc. The camera taking characteristics are such as to produce proper color reproduction on a receiver color reproducer having the following primary colors: red $-x = 0.678$, $y = 0.322$; green $- x = 0.204$, $y = 0.732$; blue $- x = 0.146$, $y = 0.088$.

In releasing the report, W. R. G. Baker, Chairman of the NTSC, stated that the proposed standards were not intended for submission to the FCC but were designed to serve as a basis for cooperative industry field tests. When the remaining questions are settled by these tests, over the period of the next several months, definite numerical proposals for a full set of compatible color standards would be devised and offered for the approval of the industry, through NTSC, prior to submission to the FCC.—D.G.F.

NEW PANELS OF NTSC

Chairman	Vice Chairman
Panel 11. Subjective Aspects of Color	
A. N. Goldsmith	D. E. Hyndman, Eastman Kodak
Panel 12. Color System Analysis	
D. G. Fink, *Electronics*	A. G. Jensen, Bell Labs.
Panel 13. Color Video Standards	
A. V. Loughren, Hazeltine	W. T. Wintringham, Bell Labs.
Panel 14. Color Synchronizing Standards	
D. E. Harnett, General Electric	M. R. Briggs, Westinghouse
Panel 15. Compatibility	
D. E. Noble, Motorola	Rinaldo DeCola, Admiral
Panel 16. Field Testing	
T. T. Goldsmith, DuMont Labs.	G. E. Gustafson, Zenith
Panel 17. Network	
Frank Marx, A.B.C.	R. E. Shelby, N.B.C.
Panel 18. Coordination	
D. B. Smith, Philco	I. J. Kaar, General Electric
Panel 19. Definitions	
R. M. Bowie, Sylvania	M. W. Baldwin, Jr., Bell Labs.

War-Emergency Operation

WOR has no trouble shifting frequency on its emergency Western Electric transmitter (above). Some other broadcasters will find the job difficult

IN EVERY RECENT period of national or local emergency, the broadcast stations have played an important part in keeping the public informed and in maintaining morale. At present, as during World War II, the chief concern is their possible secondary role as navigation aids to enemy aircraft. Recently, the Federal Communications Commission, acting as the appropriate government agency for the several agencies concerned, outlined the problem to the broadcasters with one possible solution.

For the broadcasters, the plan indicates in a general way how they will operate their transmitters and what their program fare must be during an alert. Whether they will operate at all depends upon their desire to cooperate in the overall system. At present, there is no plan for the operation of television or frequency-modulation transmitters after they have sent their initial warning message. Only amplitude-modulation transmitters are considered for alert operation.

The engineering details are more complex and many of them should not be freely revealed. However, the present plan has been designed to furnish at least a minimum of fairly good broadcast reception to most parts of the country and to deny navigational information to aircraft equipped with any type of modern direction-finding equipment. Its nature is such that even if every single detail of the operation were known, direction finders would still be unable to use the signals. Only widespread sabotage and enemy control of the broadcast plant can compromise the system.

Synchronous Frequency

The basis of the plan is operation by all participating stations upon a common or synchronous frequency. Provided each transmitter maintains a tolerance of ±20 cycles (as presently required under normal service) great difficulty is experienced in obtaining a line of position with d-f equipment. And broadcast reception of a common program is excellent. In actual practice, stations can be grouped on a geographical basis using two or more common frequencies throughout the country. By this means, a greater number of programs (appropriate to the various areas) can be presented, one to a group, with good reception in the coverage areas of each group. Navigational information is only very slightly enhanced using several common frequencies.

It is known, however, that a modern automatic direction finder will indicate the direction of the strongest signal in a common-frequency group. Given sufficient time, or with the aid of espionage, an aircraft could eventually determine the location of the strongest signal and from that, the orientation of the desired target.

Sequential and Pulsating

To overcome the vulnerability of simple common-frequency operation two other techniques can be added, either of which practically eliminates compromising the system for military security. These techniques have been termed sequential operation and pulsating power operation. It should be remembered that in every case, each station in a common-frequency group transmits exactly the same program from a common source.

Common-frequency sequential operation requires that each station of a cluster or group operate intermittently for about a minute. As the first station leaves the air, another immediately comes on. Ideally, the sequence in which the

BROAD PROBLEM

The problem of how to deny navigational aid to enemy aircraft in the event of war is tremendous. Just how complex it is becomes apparent to anyone glancing at an aeronautical chart, or listening for a quarter hour to airways communications channels. How can we, for example, silence radio ranges, beacons, loran and all the rest without jeopardizing our own transportation at sea and in the air?

Making a minimum a-m broadcast service available at all times without offering aid and comfort to the enemy, and his missiles, is a small part of the whole task. The editors hope that this article may stir up ideas applicable to other services

# of Broadcast Stations

Stations in the a-m band, which have proved our best source of public information during disaster and flood, must remain on the air for Civilian Defense. How to prevent their being used as targets for enemy missiles during an alert is explained

stations follow one another should be varied. It will probably be necessary during the initial stages of the plan for each station to be manually controlled and remain on the air for as long as two minutes. Tests show that transmission periods of less than half a minute result in greater deception. Eventually, electronic equipment may be available so that the group sequence can be controlled from a central point.

Pulsating operation can be employed either by single stations or groups of stations and requires reducing the output power of the transmitter over a 10-to-1 ratio, preferably in periods varying from less than half a minute to not more than a minute. It will obviously be quite a trick to reduce power from a 50-kilowatt transmitter down to 5 kw and this technique may not be applicable in many cases. However, it is planned generally to limit alert power to 5 kw in order to equalize signal strengths. Under common-frequency pulsating operation it may often be possible for stations in adjacent towns or cities, if not too close together, to transmit different program material.

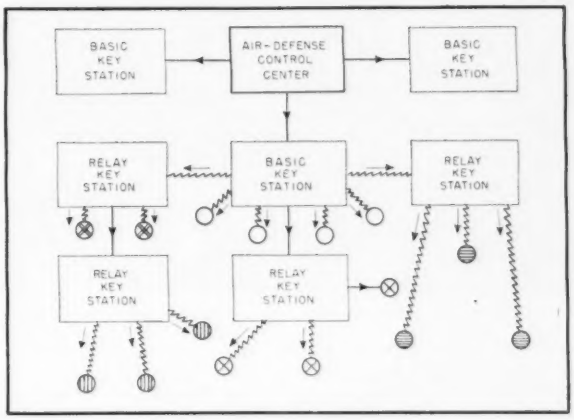

Chain of command for alert warnings from air-defense control centers via basic-key and relay-key broadcast stations to satellites. Solid lines are telephone; broken lines are radio links. Circles represent stations in common-frequency groups

Overall Plan

The block diagram gives a representative picture of the various station interconnections that would be necessary. Orders originate in the various air-defense control centers, but their implementation will largely reside in the basic key stations and the relay key stations. Programs and control signals or orders will progress to each individual station by any one means or combination of several means, including land-line and direct pickup of broadcasts.

While there is presently no compulsion for any broadcaster to enter into these plans, it is obvious that the effectiveness of the system increases directly with the number of stations in a group. Therefore, it might be necessary for the FCC to draft certain broadcast facilities. It is likewise apparent that the plan will cost money. Estimates vary from about $500 for a small station to many times this amount for the big ones. Costs of new crystals and ovens, frequency changing systems, antenna switching and retuning mechanisms running into many dollars will be paid for by the broadcasters, according to the plan. In addition, each station must provide itself with an alert receiver to supplement wire lines. Since non-directional operation will be used during the alert, it may be less expensive to use existing auxiliary antennas or even to erect simple antennas where switching off all but one tower of a directive array might prove cumbersome and expensive.

The block diagram indicates that a large number of permanent telephone lines and additional toll calls will be required just to set up the system and rehearse operations. These facilities will be paid for by the government.

Operation of television and f-m stations (as well as isolated a-m stations) will be a matter for further study. The former classes of stations are generally operated in the heart of a city and, as is particularly true of the Empire State installations in New York City, present an excellent target under normal conditions of service. Besides, in the event of widespread power failures their utility would be limited because there are so few automobile or battery operated tv and f-m receivers in the hands of the public.

Electronic Protection

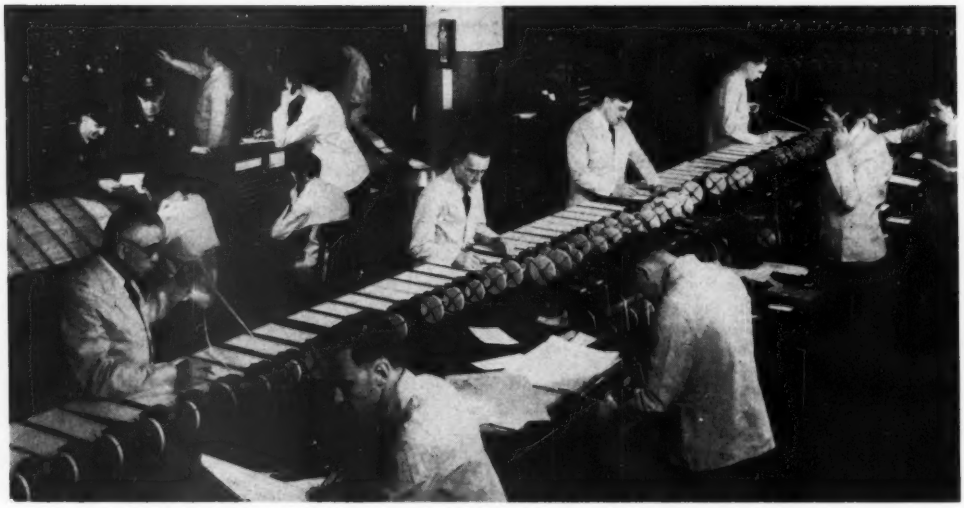

Central station in which alarm and supervisory signals from subscriber's premises are received and recorded

By RICHARD Y. ATLEE

Engineering Supervisor
A. D. T. Company, Inc.
New York, N. Y.

TODAY, the United States is facing much the same situation as in the early years of World War II. Every effort is being made to cut down any possibility of work stoppages in war plants. The electronic industry, through the establishment of security safeguards in the physical plant of each industrial concern, can have a far-reaching effect on this security program.

During World War II, the country embarked on a wholesale program of plant protection, both Governmental and industrial. New concepts of plant protection were developed and the use of protective equipment together with normal guard forces became essential in order that manpower be spared and the same ultimate plant safety conditions obtained.

In February 1942', a review of electronic intrusion-detection systems was presented in ELECTRONICS. This article pointed out how detection systems might be employed to improve plant security conditions.

Early equipment involved crudely constructed manual and semiautomatic alarm-initiating devices from which signals originated and were sent over simple signaling circuits to appropriate remote annunciation points. These early "switches" were sometimes supplemented by time-clock equipment which added a measure of safety against failure of patrols or guards to regularly send signals while making their rounds.

Branching out from this fundamental watchman type of circuit, additional "switches" were installed at points of entry, such as windows, doors, and skylights. Such switches were connected to remote annunciating points to give warning of entry ahead of the time an intruder actually completed his entrance. Later, windows themselves were supplied with metal-foil circuits and barriers of dowel screening were installed over skylights and vulnerable wall and door areas. Floor traps consisting of switches actuated by trip cords stretched about the premises further complicated the life of an intruder who had successfully avoided any of the previously mentioned entrance barriers.

Complete enclosures such as safes and vaults had similar protective devices applied to their doors and any duct openings. These devices were supplemented in more recent years by vibration, temperature and air-pressure-operated detecting equipment.

With very few exceptions, all the early protective devices were connected into simple d-c series circuits usually terminating in a relay or similar device. Dry-cell batteries were often used to power the system.

The use of vacuum tubes as opposed to simple d-c relay circuits, played a prominent part in subsequent development work. The theory of the newer developments was to provide equipment which would signal the approach of an intruder before, rather than after, an attack upon a premises had begun. As in the early stages of World War II and now, this latter consideration is of particular importance in the control of sabotage.

One of the first developments in

for War Plants

Electronic devices offer increased protection against burglary and sabotage in plants engaged in military production. Advanced design in photoelectric, capacity-alarm and sound-detection systems as well as proposed boundary protection systems are discussed

the early 1930's was the photoelectric intrusion - detection system. In the system, a beam of light projecting from a light source to a light detector or receiver was arranged to actuate a local or remote signal. At first, relatively crude phototubes were worked to their output limit in order to drive delicate intermediate control relays connected directly into phototube circuits. Maximum useful beam range rarely exceeded twenty feet.

Makers of most modern photoelectric detection equipment use standard prefocused or sealed-beam lamps of high candle power, usually modified to insure long life. Lenses used at both projector and receiver-detector are usually of the plano-convex or biconvex type mounted singly unless particularly sharp beam patterns are needed. In the latter case, multielement lenses are sometimes employed. Focusing adjustments are provided to make for easy maintenance and adjustment at time of installation and after.

Improvements in phototube manufacture at the present time allow the industry to use either photoemissive or photoconductive anode surfaces with photocells of the cesium oxide or lead-sulphide type, respectively. Higher outputs gained when using the photoconductive cell give a system added sensitivity and wider range of light frequency acceptance. The latter means that filtered light, normally used in systems extending into the infrared range for only a very short portion of the spectrum in early models, can now be successfully accepted over a wide range of infrared light because of the tremendously increased spectral response of the photocell itself. Increased knowledge in the design of filters makes the cell and the filter itself compatible.

Beam Lengths

Actual beam lengths used today in commercial and Government indoor applications do not often exceed 200 feet. Present day design, however, permits extension of such beams to several times this distance by the use of mirrors, if necessary. Interfering objects and other impediments normally found indoors frequently prevent installation of single beams over these longer distances. It is usually found more practical to break up the beam pattern using more than one set of light source and light detector-receiver.

Not long after photoelectric-beam intrusion-detection equipment became a reality, it was found necessary to establish some sort of guide relating to the speed of operation expected of the system to successfully detect normal intrusion. The guide was established by trial and error through tests made by reputable manufacturers and was subsequently adopted by the Underwriters' Laboratories as a standard. The standard states that the speed of operation of the equipment generally must be such that at their least sensitive settings, photoelectric detecting equipment must initiate a signal when a cylindrical object six inches in diameter with its axis and direction of motion perpendicular to the beam axis, travels through the beam at a speed of 8.8 feet per second (six miles per hour) or less.

The d-c amplifiers used in the static-beam photoelectric systems (in contrast to the modulated type) generally employ a single stage, single tube or two tubes to provide the necessary gain in an average installation. These must be a compromise between sensitivity and stability; excessive amplification renders systems susceptible to paralysis or triggering by slight variations in ambient light. The limiting effect of ambient light is frequently minimized by placing hoods over the projector and detector-receiver lenses. Masking of the phototubes themselves within the detector-receiver unit is effective and serves to exclude extraneous light from the phototube and to confine energy reaching the light-sensitive surface as much as possible to that originating at the projector unit.

The masking described has an additional feature of making it difficult for intruders to paralyze photoelectric systems by shining

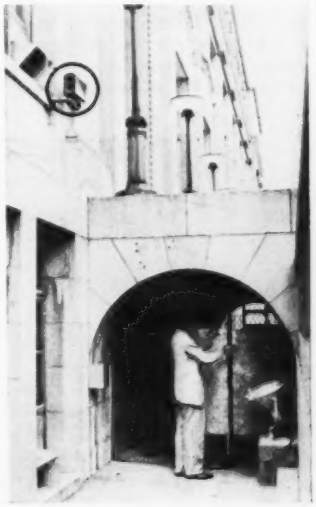

Outdoor photoelectric protection of Atomic Energy Commission Building

flashlight beams and other outside light sources into the phototube to hold the circuit in the standby position. The angle at which light must enter to keep the circuit in its normal operative condition is also quite critical.

The difficulty of maintaining accurate beam alignment is multiplied by mirrors, particularly when beam distances are extended to considerable lengths. To avoid misalignment, the general practice is to mount mirrors in rigid frames, supported by strong brackets fastened to the floor instead of to the walls.

While the light reflection loss introduced by mirrors is normally not more than 15 to 20 percent with a silver-backed mirror, most companies increase that loss factor to as much as 50 percent in establishing maximum beam distances when mirrors are used. In such cases, the mirrors cut down the basic units required to protect a given area but introduce beam length reductions which may be impractical and uneconomical. It is generally not recommended that mirrors be called upon to reflect beams at angles greater than 45 degrees with respect to their surfaces (90-degree angle between incoming and outgoing beams). Even at smaller angles, the loss is sufficient to warrant some reduction in beam throw ratings for each successive reflection.

The 50-percent loss factor mentioned is considered practical because of the major problem of dust forming on mirror surfaces and its consequent reduction in the reflecting characteristics or reflecting ability of the mirror. Cowls and shades are often placed on photoelectric equipment and mirrors to reduce the dust formation. Often it is found more economical to use multiple or duplicate sets of equipment rather than to try to extend a single set of equipment in beam length by the use of a mirror. This is economically practical because of the comparatively low cost of static beam equipment.

Most companies today limit the use of static beam equipment to indoor applications because of the serious paralyzing effects of ambient light from the sun and other sources on the receiving equipment.

Modulated Light

To protect a perimeter adequately against unlawful intrusion outdoors, the modulated-light type of photoelectric equipment is employed. Long-range coverage is possible with modulated devices and is important when considering the protection of fence perimeters for industrial plants engaged in the production of war material. Sometimes where long beams are required indoors, outdoor equipment of the modulated type may be used to gain distances not attainable with the static type.

Most modulated-beam systems use projector units, lamps, optical filters and lenses similar to those found in static-beam systems. One such system is electronically modulated rather than mechanically modulated and uses low-power light output, with consequent limitation on beam distance. To return to the preponderance of modulated systems now on the market, 100 percent modulation is accomplished by the use of a suitable interrupter interposed between the lamp and the lens and rotating at a predetermined rate. The prime mover for the modulator is usually a small synchronous motor and the modulator is designed to interrupt the beam somewhere between 500 and 1,000 times a second.

Energy received by the phototube is amplified and an audio band-pass filter tuned to the modulation frequency is included in the amplifier. The receiver is sensitive only to the frequency of the modulated light and the final rectifier stage of the amplifier converts the received impulses into power with which a d-c signal relay may be operated.

As long as sufficient light intensity is received by the phototube to satisfy its threshold operating requirements, comparatively wide variations in ambient light intensity do not paralyze or trigger the system because amplification occurs only at the critical modulation frequency. Relay current may be held within desirable limits by incorporating some form of avc in the amplifier circuit to render the system still more tolerant to the effects of transient increases or decreases

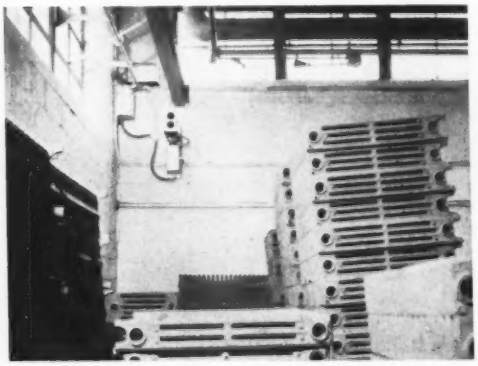

Inside photoelectric protection of warehouse. Two light sources are shown at right angles. Beams protect entire row of windows which run the complete length of both walls

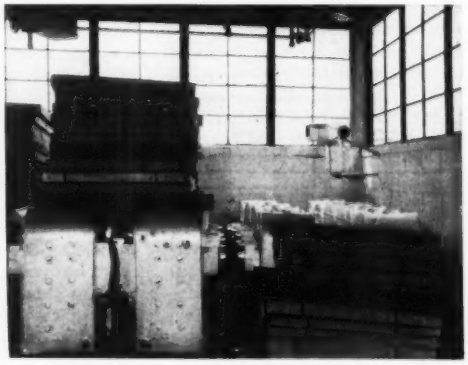

A second location in the same warehouse. Here, two photocell receivers are mounted at right angles. Beams reach the receivers from light sources located at the other ends of both walls

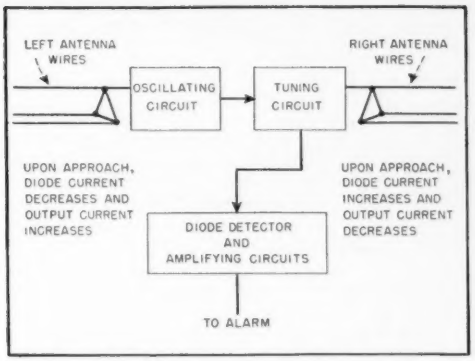
LEFT ANTENNA WIRES
RIGHT ANTENNA WIRES
OSCILLATING CIRCUIT
TUNING CIRCUIT
UPON APPROACH, DIODE CURRENT DECREASES AND OUTPUT CURRENT INCREASES
UPON APPROACH, DIODE CURRENT INCREASES AND OUTPUT CURRENT DECREASES
DIODE DETECTOR AND AMPLIFYING CIRCUITS
TO ALARM

FIG. 1—Block diagram for outdoor capacity-type intrusion detection system of the type shown in Fig. 2

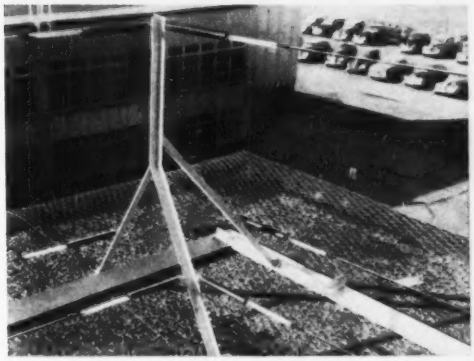

FIG. 2—Detail of capacity-alarm antenna wires on roof, showing counterpoise and wire-tension springs

in light intensity. The system is then insensitive to light from the sun, a flashlight or modulated light at other frequencies.

Continuous trouble-free maintenance of outdoor photoelectric equipment is so important that most operating companies have spent considerable sums over the last few years to improve the basic mechanical and electrical components of such systems. Improvements in motor modulator design and electronic components have not been uncommon and attempts have been made to make the systems more consistent with the application to which they have been placed. The present manufacture of photoconductive cathode surfaces has increased the range of infrared sensitivity of such systems to a point where they can now be used with a greater degree of safety when subject to fogs and other interfering media. While it is recognized that these units are bulky and are difficult to conceal in any perimeter intrusion - detection system, they nevertheless offer a type of protection widely accepted by industrial plant-protection engineers.

Photoelectric intrusion detectors are at a disadvantage where industrial plants are laid out on extremely irregular property plots and on hilly ground requiring coverage of many vertical as well as horizontal angles. Because irregular topography necessitates the use of a plurality of units, such a system is expensive. Capacity-operated relays are often used for such outdoor protection work.

Capacity relay equipment has been used for protection indoors during the last several years. Where cubical content is not excessive as in filing cabinets and safes and where large metal objects do not move from day to day with respect to the safe, this type of protection is applicable. Many circuits were used by protection companies, all operating on the principle that the capacity between antenna and ground is relatively small whereas capacity to ground added by an intruder approaching the system represents a considerable increase in total circuit capacity. As there is always plenty of capacity change on which to base usable circuit output, adjustments can be made to hold over long periods without drifting, because the capacity between safe and ground remains fairly constant.

Outdoor Capacity Systems

To handle the problem of irregular topography, an outdoor version of the capacity relay system was developed. By erecting antenna arrays on suitable posts about the perimeter of a war plant, it was possible to follow land contours with ease and provide a good protection barrier to an intruder. The circuit principle used for outdoor perimeter systems was much the same as that used for indoor safe protection systems. Because the effects of weather had to be taken into account, provision had to be made to balance out the effects produced by rain, snow, ice and slow growth of vegetation.

A system developed during World War II and put into limited use as a capacity relay system for plant boundary protection has been used within the last six years on a larger scale. This system has been extended to the protection of roofs, as shown in Fig. 1, 2 and 3 and other outdoor surfaces of buildings themselves. Limitations with respect to favorable ground conditions thought important in the early stages of development have now been overcome by erecting a ground counterpoise making the system independent of surrounding building or earth ground potentials. Limitations on the amount of capacity which one electronic unit can embrace still confine antenna lengths to a maximum of about 200 feet on each side of a control unit. However, protection of this type must be zoned every few hundred feet of length to permit accurate guard response to alarms originating from a specific location.

Early models of capacity-type equipment used a two-wire antenna array until experiments proved that better protection could be accomplished by a triangular antenna configuration. The latter system uses two antenna wires stretched tightly about 18 inches from the ground on insulator posts spaced about 25 feet apart. The third wire forming the triangle usually is placed about 48 inches above the ground.

Further experiments proved that

with some slight reduction in sensitivity, spur antenna extensions could be connected to the triangular configuration to permit coverage up to distances of six to eight feet above ground at boundary points of particularly critical importance. Thus, a curtain of protection produced by an induction field of electromagnetic energy radiating a foot or so from the antenna array was produced. An approach to the array caused system unbalance and a resulting alarm.

Frequencies used in the oscillator portion of the circuit vary from 150 to 200 kc. The system is designed to maintain a continual slight unbalance between oscillator and tuning sections under normal stable conditions. A block diagram of the circuit shown in Fig. 1 depicts the components used. Entry of a foreign body into the antenna field introduces additional capacitive reactance back into the coupling coil to which the antenna is attached and tunes the coupling circuit in the direction of resonance at the frequency to which the oscillator has been set. A sharp increase in diode-detector current results. A pulse is sent from the diode to the amplifying circuits whose output terminates in a signal relay inserted in the final stage.

Triggering of the circuit by slow ambient variations in antenna to ground capacitance is minimized by using coupling capacitors of several microfarads between the amplifier stages. Changes in capacity which occur at extremely slow rates such as those caused by weather conditions do not build up sufficiently to trigger the relay in the output stage. Circuit values are adjusted so that it is virtually impossible for an intruder to move into the antenna field slowly enough to take advantage of this effect.

Because the capacity system lent itself so well to boundary protection, considerable time and money has been spent in improving upon the principle in an effort to build a more stable system having less sensitivity to unwanted influences such as radiated airborne r-f energy, power-line surges, weather effects and others. Present equipment takes advantage of recent tube refinement, eliminating the use of electrolytic capacitors whose life has been unpredictable and greatly emphasizes the rugged construction needed for important outdoor applications.

Use of the same principle has been extended beyond that previously described for the protection of safes to embrace protection for critical areas indoors. A view of the subscriber's instrument for this type of protection is shown in Fig. 4. A single-ended version of the outdoor capacity-relay equipment is now in use to provide a protection barrier for stockrooms and other inside enclosures. Instead of using conventional forms of screening, inexpensive antenna arrays are erected about an enclosure and provide a complete wall of protection. Antenna arrays may take the form of thin brass strips mounted on either side of a doorway, on showcases, wooden studding or other building structure. Where metallic surfaces are involved, suitable insulation is used.

Unlike the earlier versions of safe and file-cabinet-type capacity relays, as much as 4,000 $\mu\mu$f of loading on the expanded circuit instead of the original 1,000 to 1,500 $\mu\mu$f may be used. This new protection can be extended to factory-type fenestra windows or to office casement windows in place of conventional foil and screens. The results would be the same from a protection standpoint and the improvement in appearance would be obvious.

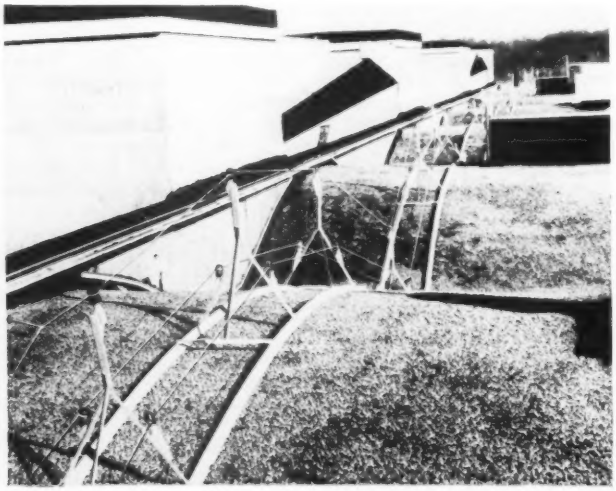

FIG. 3—Capacity alarm system on vaulted roof. Extra supports are used to make antenna wires conform to roof contours

Experimental Systems

Just as in World War II, design engineers are now looking for even better forms of protection. Under study at this time are systems for outdoor application using pulse-modulated sources of high-frequency radio energy designed to beam the energy in much the same manner as photoelectric without the inherent faults with respect to weather. Other forms of antenna arrays using high-frequency radio energy are under study and, while none of these has been used extensively, they show the trend of thinking and the application of electronic principles being considered by engineers.

To improve and simplify the systems necessary to protect indoor enclosures adequately, many companies have for years considered the problem of space protection. It has always appeared logical that a system capable of detecting motion within a confined space and yet not requiring complicated equipment would be the ultimate ideal of the protection engineer. Progress within the last three or four years in the design of space protection systems has resulted in the develop-

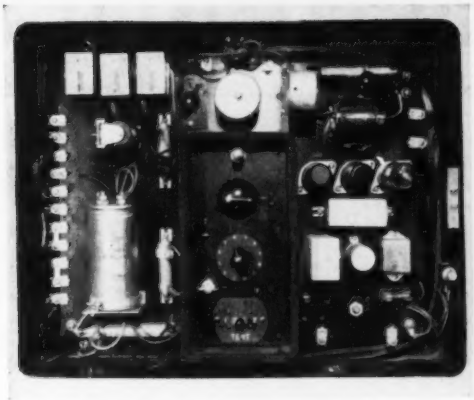

FIG. 4—Chassis of subscriber's instrument for capacity-type protection of safes and file cabinets

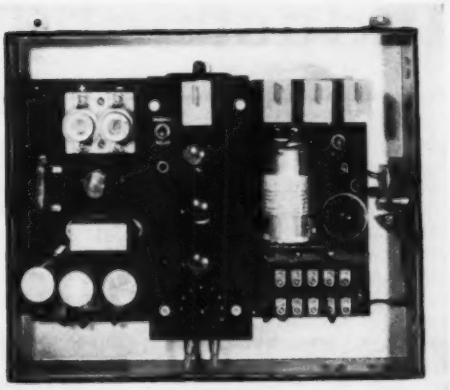

FIG. 5—Chassis of subscriber's instrument for vault sound-detection system

ment and testing of equipment which will do just this with a minimum of components involved. Although extensive industry application of this idea does not yet exist, it should be noted that it may become very useful.

An example of such a system is one operating at a frequency slightly above the audio range in which sound energy is directed from a transducer into an enclosure and reflected back from the multiple surfaces in the enclosure to a receiving transducer. If a stable condition exists in the enclosure filled with such energy, no signal output is obtained. When motion occurs, a frequency change is presented to the receiver. The new frequency may be above or below the initial transmitted carrier frequency. Design of the receiving equipment is such that it can discriminate between the carrier frequency and the difference frequency, using the latter to initiate an alarm.

Space detection systems are not new in principle, but long-term experience of the major operating companies shows that wholesale use of such a system must be approached with caution. There are many interfering factors rendering such systems unstable and until these are properly evaluated, the more tried and tested methods are preferred. For instance, acoustically actuated vault-protection systems are used in hundreds of locations today and will continue to be used for many years. These systems are designed to operate an alarm when physical attack upon the exterior surfaces of the walls or ceilings occur. They do not trigger on relatively low-level sounds which might result from common building vibration. Detecting devices installed within the vaults function through sounds transmitted to them from the outside through walls, ceilings or floors. The subscriber's instrument chassis for a vault sound detection system is shown in Fig. 5. Output voltage from the crystal-microphone detectors is amplified and diode rectified. The resulting d-c actuates a signal relay.

Established values of ambient noise level specified by Underwriters' Laboratories, Inc., are used as guides by the industry in determining amplifier gain requirements. Most systems are used in vaults of masonry construction and the sensitivity of the system depends on whether or not the vaults are reverberant or nonreverberant.

Conclusions

The information presented covering systems suitable for improving industrial plant security and protection has been based, for the most part, on data of long standing and on practices known to be effective. Knowing the importance of plant protection today, all major companies dealing in this type of equipment are continually looking for better and more economical ways to do a protection job. Money expended for research has paid dividends and companies are well aware that the field of protection still has a large reservoir of untapped ideas. The theoretical ideal of a boundary protection system might be said to comprise an intangible barrier of controllable thickness and perhaps unlimited height. The barrier should be capable of handling all types of land topography and should withstand without difficulty the rigors of weather and other similar phenomena. Many of the systems on the market today approach this ideal, but all still have certain limitations.

The ultimate in protection for interior spaces would anticipate the elimination of most common forms of traps and contacts and provide intangible protection for the space enclosed by four walls, a ceiling and a floor. Good practice dictates that such protection completely assured of the absence of false alarms would still require some supervision over normal openings to an enclosure. The next ten years will bring to light many advancements and refinements of the basic principles now incorporated in today's equipment. Meanwhile, the industry has available now many types of equipment from which to choose in improving its security picture.

Reference

(1) Electronic Intrusion-Detection Systems, Electronics, **15**, p 38, Feb. 1942.

Industrial TRISTIMULUS

ONE requirement of an electronic colorimeter for industrial use is that it detect small color differences in the darker colors quickly and reliably with a sensitivity surpassing that of the human eye. A second requirement is that the instrument be sufficiently rugged, stable and simple in operation for use as a production tool.

In the instrument engineered to meet these requirements, operating controls are reduced to a minimum. The instrument measures on a three-color basis known as tristimulus colorimetry. The color that is to be matched or evaluated is viewed by the phototube first through blue glass, then through green glass and then through amber glass. The meter indicates the percent difference between sample and standard for each of these primary colors. The sample can be as small as one-half inch in diameter.

The optical system, based on the flicker photometer principle, is shown in Fig. 1. Sample and standard are viewed alternately 30 times per second just as in a spectrophotometer. Illumination is provided by an incandescent light source within an integrating sphere. Color temperature of the source is preserved by voltage control and lamp calibration. Either reflectance or transmission measurements may be made on any commercial color. The optics includes four lens elements, field stops, stray light stops, source filters, tristimulus filters and a multiplier phototube. Source filters permit comparison under standardized 2,848-deg K incandescent illumination, daylight illumination (Corning 5900 filter) or directly under illumination from external sources.

Transmission measurements of dyes and other liquids are made by placing a sample and standard in the openings of the transmission measurement holder. Clamps are provided for holding colored transparent solid objects at the same locations. Other clamps hold sample and standard against parts in the integrating sphere for reflectance measurements.

A small a-c motor drives a decentered lens in the optical system so that light from sample and standard are alternately focused on the type 1P22 phototube. Actually, the optics never completely eliminates either sample or standard; instead, it alternates from about 20 percent sample and 80 percent standard to 80 percent sample and 20 percent standard.

If reflected or transmitted light from sample and standard are identical, the phototube output will be unchanged by the flicker. If the two differ, an alternating current will be generated in the phototube circuit.

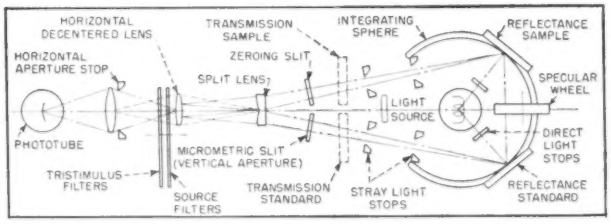

FIG. 1—Optical system, shown in line for clarity. Actual system is folded for compactness. Rotating decentered lens allows phototube to view sample and standard alternately 30 times per second

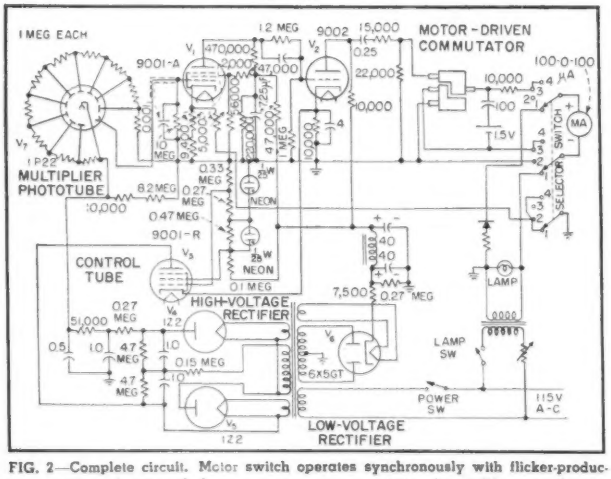

FIG. 2—Complete circuit. Motor switch operates synchronously with flicker-producing rotating decentered lens to convert a-c output of amplifier to d-c for microammeter. Selector switch positions are: 1—check lamp voltage; 2—stand-by position; 3—high-sensitivity range (90—110 percent); 4—low-sensitivity range (65—150 percent)

Electronic System

The electronic circuit of the colorimeter employs a total of seven tubes, connected as in Fig. 2. The high-impedance resistor network for the phototube is soldered directly to the tube pins. A high-permeability magnetic shield is then slipped over the tube and assembled to a flanged metal base with suitable gasketing. Three leads are brought out, from the anode, cathode and dynode 9. The entire net-

COLOR MATCHER

Flicker-photometer type instrument using multiplier phototube in constant-current circuit surpasses sensitivity of human eye in matching even darkest plastic, textile and dye colors. Meter indicates brightness ratio of sample to standard for each ICI tristimulus color

By GEORGE P. BENTLEY
President
Instrument Development Laboratories, Inc.
Needham Heights, Mass.

work is potted with a special polymerizing resin that remains plastic but fully protects the high-impedance networks against moisture. When installed in the instrument, an electrostatic shield is fitted over the terminal pins for final shielding. The phototube tube is thus built in to last for the life of the instrument.

When light from the optical system reaches the phototube, the light consists of two components: (1) A steady component representing the mean brightness of sample and standard as viewed through the particular source and tristimulus filters selected by the operator; (2) an alternating or flicker component of magnitude representing the difference in brightness between sample and standard as viewed through the same filters.

The circuit measures the steady component and the flicker component, and performs the computation necessary to express the percentage difference between sample and standard.

The d-c output of the phototube is amplified by V_1 and V_2, which are connected as a d-c amplifier. The resulting voltage drop across the cathode resistor of V_2, proportional to the steady brightness component, is applied to the cathode of V_3. Variations in brightness change the plate-cathode voltage of V_3 and thereby change the loading that this tube places on high-voltage rectifiers V_4 and V_5. As a result, this tight d-c feedback loop controls the voltage supply to the phototube in such a manner that the mean current output of the tube is substantially constant for steady-light brightness variations of 5,000 to 1. A given percentage difference in any one color will then produce a proportional a-c output voltage at V_3. This is rectified by a commutator on the optical flicker motor, and the resulting d-c voltage is applied to a zero-center d-c microammeter which is calibrated to read percentage difference directly. Flicker and rectifier action are synchronous, hence polarity of the d-c output indicates whether the sample is brighter or less bright than the standard for a particular primary color.

In effect, the sensitivity of the phototube is varied inversely with brightness of light reaching it, just as the iris of the human eye acts to decrease the eye sensitivity when a brighter object is viewed. The range of automatic accommodation is comparable to that of the eye, but is faster, has no fatigue factor with time, and gives a sensitivity exceeding that of the human eye for variations of as much as 10,000 to 1 in brightness. This permits comparison of samples reflecting only 1 percent to an accuracy of ½ percent of reflected light.

To assure measurements truly based on color, regardless of illumination intensity, the instrument computes the ratio of sample brightness to standard brightness. This ratio is indicated on a wide-scale direct-reading meter with full-scale range of 91 percent to 110 percent (corresponding to differences of +10 percent or −9 percent in relative brightness). A less sensitive scale range covers 70-percent to 145-percent ratios.

A direct-reading micrometric slit permits evaluation of colors relative to white or colored reference standards beyond the range of the meter. Comparison is on a tristimulus basis. With properly calibrated standards, colors can be defined to high accuracy in tristimulus terms; reflectances or transmissions as low as 0.1 percent can be measured.

The 9001 regulator tube is operating satisfactorily despite an unusually high plate voltage. About 60 instruments are in service at present, some of which have been operating two years. Many of the units work 24 hours a day, yet tube replacement is practically zero. The only tubes that gave trouble were the 1654's originally used in the high-voltage supply. These have been replaced with 1Z2's which give much better service.

Tolerance in Matching

Color matching involves getting the meter readings for the three primary tristimulus colors up to 100 percent or, from a practical standpoint, sufficiently close to 100 percent to be acceptable to the observer. The absolute tolerance to be set for a measurement varies with each industry. If all these numbers go up and down together, corresponding to a change in the brightness of the color, experience to date in the textile and paint industries indicates that 2-percent tolerance is acceptable. This means that if all three numbers go up and down together from 98 percent to 102 percent, regardless of how light or dark the color is, the match will be within eye color tolerance.

If one number wanders differently from the other two, there is a difference in color rather than a difference in brightness. Only about 1.5 percent can be tolerated for precision matches.

New Cathode Design

By D. R. HILL
Philips Laboratories, Inc.
Irvington-on-Hudson
New York

Assembled planar type L-cathode

ADVANCES in the electron tube art in recent years have placed severe demands on the heart of the electron tube—the cathode. The requirements for higher powers, high-frequency operation, rugged construction, and low-noise operation have taxed the capabilities of the conventional cathode types to their limit.

The great majority of electron tubes employ cathodes of one of three types: tungsten, thoriated tungsten, or oxide coated. Some of the more general characteristics of these cathodes are given in Table I.

With a specific application in mind which required a cathode capable of high emission density and good mechanical strength, a new cathode was developed in the Philips Research Laboratories[1] in Holland which not only provided these characteristics but also gave exceptionally long life and good resistance to poisoning. This cathode, which has been designated the L-cathode, should find wide application in tubes of all types where reliable performance is desired, especially where the cathode loading is severe.

Figures 1A and 1B show two examples of this cathode: the cylindrical type, especially applicable to magnetrons; and the planar type which is applicable to high-frequency disk-seal triodes, klystrons, cathode-ray tubes and other conventional electron tubes. The materials used in the construction of these two types of cathodes and their emission characteristics are identical.

The body of the planar type cathode consists essentially of two sections formed from one piece of molybdenum. The lower section is open at one end and contains a filament for indirectly heating the cathode. The upper section contains a small quantity of barium-strontium-carbonate and is sealed by a cap of porous tungsten so that the means of escape of the active materials is via the pores of the tungsten material. The porous tungsten cap is formed by compressing tungsten powder under high pressure and sintering at high temperatures. The photograph shows an assembled L-cathode of the planar type.

Emission Characteristics

The first characteristic to be considered in comparing the emission of different types of cathodes is the variation of emission density with temperature. This characteristic is given in Fig. 2 for the L-cathode and the three cathodes whose properties are shown in Table I. This cathode curve falls between that of the oxide-coated cathode and the thoriated-tungsten cathode. It should be noted that for continuous operation only about one hundredth part of the saturation emission may be drawn from the oxide-coated cathode. Higher emission densities would result in damage to the surface layer. Therefore, it is apparent that under d-c conditions the oxide-cathode cannot practically operate over the range indicated. The three other types of cathodes can be operated continuously close to saturation emission, and of these the L-cathode has the most favorable temperature-emission characteristic.

Another important cathode property to be considered is its efficiency; that is, the thermionic current emitted in amperes per watt of heater power. The theoretical efficiencies of the four types of cathodes under consideration are shown in Fig. 3. These curves are based on the emission-temperature characteristics and the radiation properties of the cathode surfaces. It should be realized that the cathode shown in Fig. 1B is much less efficient than that shown in Fig. 1A and that the over-all efficiency of a cathode depends largely upon the geometry.

It will be noted that the theoretical efficiency of the new cathode is greater than that of the tungsten and thoriated-tungsten cathodes but less than that of the normal oxide-coated cathode. From the curves we can conclude that in applications where relatively small current densities are required and where the heater power requirements must be kept to a minimum,

Improves Tube Reliability

High emission density and good mechanical strength are combined with good temperature-emission characteristic and excellent resistance to high voltage and high-speed gas ions. Structure contains reservoir of barium-strontium-carbonate emitting material

the oxide-coated cathode may have preference. However, other factors, which will be discussed further, enter into the selection of a cathode.

Emission Mechanism

Since both the L-cathode and the oxide-coated cathode derive their emission from a supply of barium-strontium-carbonate, it might be supposed that the L-cathode could be regarded as a variation of the oxide-coated cathode. However, if we investigate the emission mechanisms more closely it is seen that this is not the case.

The L-cathode is quite different. The thermionic emission from any surface is largely determined by the work function (the energy, usually measured in electron volts, required to transfer an electron from the interior of the material across the boundary into the adjacent medium). In general, the smaller the work function of the material, the higher the emission from the material at a given temperature. Thus, by comparing values of the work functions, an indication can be obtained regarding the behavior of the various materials as thermionic emitters.

The work functions of the four cathode types under consideration are given in Table II. It is apparent that the L-cathode has characteristics different from a pure metallic tungsten emitter and also from a conventional BaSrO coated cathode. It will be noted that of those substances listed in the table, the pure metal tungsten emitter has the highest work function and the oxide-coated cathode, a semiconductor, the lowest work function. The thoriated tungsten cathode has a monatomic layer of thorium on the surface of the tungsten which greatly reduces the high work function of the tungsten. The work function of the L-cathode lies even lower than that of the thoriated-tungsten emitter because of a barium-on-oxygen layer on the tungsten surface which is more effective than thorium in lowering the work

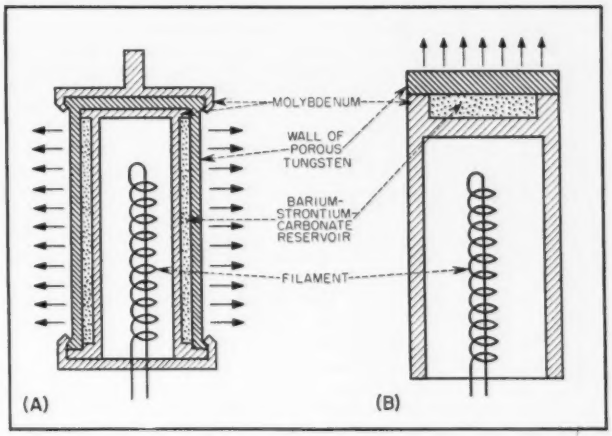

FIG. 1—Cross section of two basic forms of L-cathode: (A) with cylindrical emitting surface and (B) with planar type flat emitting surface

Table I—Summary of Characteristics for L-Cathode and Three Other Types

Type of Cathode	Max. Useful Thermionic Emission in amp per cm²	Max. Useful Thermionic Yield in amp per watt	Poisonability	Resistance to High Voltage	Resistance to High-Speed Gas Ions
Tungsten	1	0.006	Small	Good	Good
Thoriated Tungsten	2	0.070	Large	Good	Poor
Oxide Cathode D-C	0.5	0.25	Large	Poor	Good for a short time
Oxide Cathode Pulsed	50	20.00	Large	Fairly good	Excellent
L-Cathode	300	10.0	Small	Excellent	

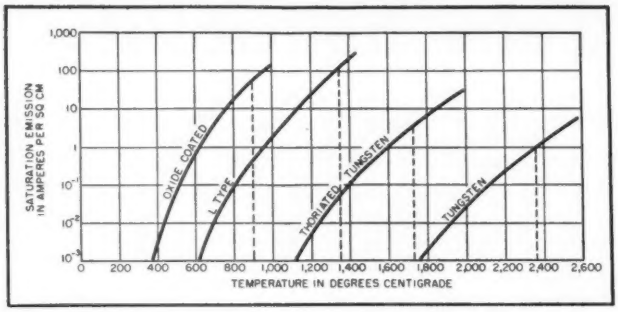

FIG. 2—Saturation emission as a function of true temperature for L-cathode and three other types. Vertical dotted line indicates maximum operating temperature for each cathode. This situation can be realized under both pulse and d-c conditions for all cathodes except oxide coated, the d-c emission of which is limited



FIG. 3—Theoretical thermal efficiency as function of saturation emission in amperes per square centimeter of cathode emitting surface

function of the emitting surface.

The inactivated cathode has an adsorbed layer of oxygen on the tungsten and the surface layer of barium on oxygen is formed during the activation process in the following steps:[2]

(a) The BaO is chemically reduced by the tungsten, forming Ba vapor of low partial pressure at the bottom of the porous tungsten plug.

(b) Barium is carried through the plug by both a gas flow through the pores and surface diffusion over the pore walls.

(c) Barium diffuses over the external emitting surface.

The barium which is slowly lost by evaporation from the cathode surface is continually replenished from the reservoir. Termination of life appears to be associated with the exhaustion of the barium supply. This supply can be made relatively large and accounts for the long life characteristic of the L-cathode.

Other Properties

The rugged construction of the cathode and its smooth mat emitting surface provide several advantages. It is not subject to damage while being mounted. The emitting surface can be made flat to within very close tolerances. In high-voltage operations no permanent damage results from arcing. The coating of the metallic surface is not subject to stripping under the influence of high electrostatic forces as is the case with the emitting layer of the oxide-coated cathode.

The troublesome interface effects found in oxide-coated cathodes are eliminated.[3] The cathode, while subject to poisoning by oxygen or oxygen compounds, recovers quickly. In fact, these cathodes may be used in demountable tubes where all that is necessary for proper operation after exposure to the atmosphere is a second activation process.

Applications

Life has been found to be a function only of the temperature at which the cathode is operated and the quantity of barium in the pellet. Life tests have shown that the cathode when operating at 1,050 C and at an emission density of 2 amp per sq cm has a life of thousands of hours. As the operating temperature is increased, the life is decreased so that when operating in the higher temperature regions where the emission is 250 to 300 amp per sq cm, the life would be expected to be reduced to some hundreds of hours.

The L-cathode has been used successfully in magnetrons, klystrons, disk-seal triodes, iconoscopes, special cathode-ray tubes and other types of tubes where a high degree of reliability is required.

The smooth emitting surface makes it possible to hold the cathode-to-grid spacing to close tolerances. In magnetron applications, while the secondary-emission ratio has been found to be appreciably greater than one, it is not as large as the ratio found with conventional oxide-coated cathodes. In both reflex tubes and magnetrons the cathodes have proved capable of withstanding the heavy electron bombardment which takes place. In two similar reflex klystrons working in the 10-cm region with a continuous cathode load of approximately 2 amp per sq cm, the L-cathode had an average life ten times greater than that of the conventional oxide-coated cathode.

Other applications of the new cathode are being explored. Some of its remarkable characteristics seem best suited for high-quality tubes where long life, good mechanical strength, and rigidity are required. The cathodes have been made available in experimental quantities to Government laboratories and the electron tube industry in this country, and production facilities are being established to meet large scale requirements.

Table II—Work Functions

Type of Cathode	Work Function (volts)
Tungsten	4.41 to 4.63
Thoriated Tungsten	2.6 to 2.9
Oxide-Coated Cathode	1.0 to 1.5
L-Cathode	1.6 to 2.0

REFERENCES

(1) Lemmens, Jansen and Loosjes, *Philips Technical Review*, **11**, p 341, June 1950.

(2) F. K. du Pré and E. S. Rittner, Concerning the Mechanism of Operation of the L-Cathode, paper presented before American Physical Society, New York, Jan. 1951.

(3) Eisenstein, "Advances in Electronics," p 24, Academic Press Inc., New York, 1948.

Sidefire Helix UHF-TV Transmitting Antenna

Radiation-attenuated traveling-wave helical antenna provides power gain of 20 with a beaming bandwidth of 20 megacycles at one-db points. Design offers advantages of structural rigidity and ease of installation and adjustment

By LLOYD O. KRAUSE

Broadcast Engineering Section
Commercial Equipment Division
Electronics Department
General Electric Company, Syracuse, New York

TWO PRIME requirements of tv transmitting antennas are high gain and a uniform azimuth pattern. Also desirable are a minimum of feed complexities and a structure capable of withstanding all types of weather.

Antennas used thus far consist of a multiplicity of bays, the power gain being approximately equal to the number of bays. Each bay requires a feed point, with resulting complications. To reduce the number of bays and feed points, each feed point must provide illumination of an appreciable portion of the total aperture. This may be done by means of a traveling wave.

High-Mode Helical Radiator

The antenna described in this article uses the traveling-wave principle to excite a large portion of the aperture from a single feed. Further, this traveling-wave is made to suffer rather high attenuation due to radiation loss. The far end of the conductor may be left open or shorted, rather than terminated, with negligible effects from the reflections occurring at the unterminated ends because of the small amount of energy remaining in the wave at this point. Thus, each portion of the wire serves as a radiator and as a feed for successive portions simultaneously.

Since horizontal polarization is desired, it is necessary that the traveling wave of current have its greater component horizontal, yet some vertical travel must be achieved in order that required vertical aperture may be secured. A helix can meet the requirements if its pitch and diameter are properly controlled.

The helix must meet certain dimensional requirements as necessitated by the frequency. The currents at like points in each turn of the helix must be in phase. Thus the current, in progressing from turn to turn, must be delayed for each turn a time equal to that consumed by an integral number of cycles. In other words, each turn must be an integral number of wavelengths in helical circumference as measured at the velocity of propagation along the helix.

It is necessary, of course, to be able to support this helical radiator, preferably with a strong metal mast. The spacing of the helix from the mast must be such that an appreciable amount of radiation loss will occur along the helix per turn. The total length of the helix must be adjusted, commensurate with the loss per turn, so that the order of resonance occurring due to end reflections is low enough to

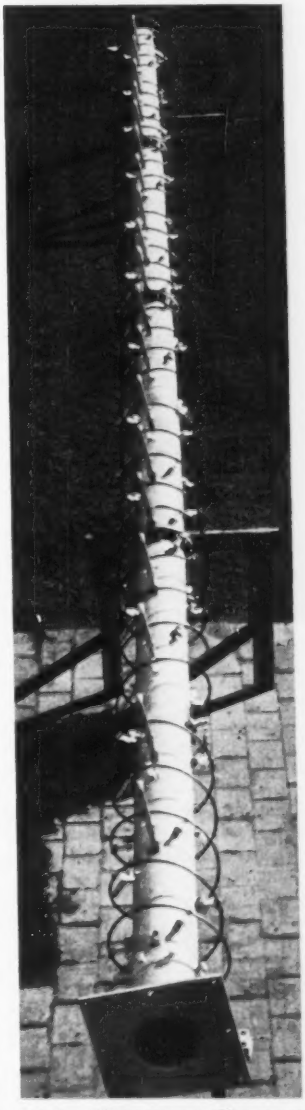

Four-bay 500-mc antenna offers power gain of twenty

This article is based on a paper presented at the fifth annual NARTB Broadcast Engineering Conference, April 1951, in Chicago.

avoid partial cloverleafing of the horizontal pattern because of the resonant current component. The active length of the helix must not be so great that the beaming bandwidth is too narrow because of progressive phase shift, yet long enough that a fair portion of the aperture is illuminated by one feed.

The operation of the helix can be analyzed by studying the radiation from one turn, and then applying well-known array factors to sum up the effect of all the turns.

Figure 1 shows the calculated results for the vertical pattern up to modes including the fifth (mode numbers correspond to numbers of wavelengths per helix turn). Note that the one-wavelength mode radiates rather uniformly in most directions, better along the axis than in its plane. This is the mode commonly used in the well-known end-fire helices.

The one-wavelength mode does not lend itself to practical mast support. The strong loop field passes directly through the center of the loop, and a large metallic member causes serious disruption of normal operation. By using a higher-order mode, where the field at the center is zero, and where the diameter per turn is large enough to permit a sufficiently strong support without seriously disturbing operation, the desired radiation characteristics can be obtained.

Figures 2A and 2B show a sketch of the instantaneous fields existing in one turn of a first and second mode helix. Figure 2C shows the second mode helix field after a mast of required supporting size (for a power gain of 20) has been inserted along the axis. The fields of the one-wavelength helix would induce large counter currents in a mast the size of that in Fig. 2C. The net radiation loss per turn, because of the close mast spacing, would be too small to permit construction of a practical attenuated-traveling-wave antenna. The fields in the second mode helix have not been seriously disturbed and the mast counter currents are proportionately reduced. The radiation loss per turn is now large enough to result in a useful attenuated traveling-wave. The mast size may now be adjusted to provide the desired loss per turn.

The mathematical analysis of one turn for the unattenuated case shows that the azimuth pattern is independent of azimuth angle or helix pitch in the plane at right angles to the helix axis, or the horizon. However, the pattern gradually becomes scalloped as the vertical, or parallelism with the helix axis, is approached. The depth of scalloping is a function of the helix pitch angle. No scalloping occurs with zero pitch angle. The scalloping is insignificant in the region of the horizontal beam produced by a practical helix.

Naturally, there is some component of vertically polarized radiation from the helix because of the helix pitch. The percentage of this component is appreciable when based on the analysis of a single turn. However, by making use of a right and a left hand helix, placed end to end and fed in the center, the vertical components can largely be made to cancel, while the horizontal components are reinforced.

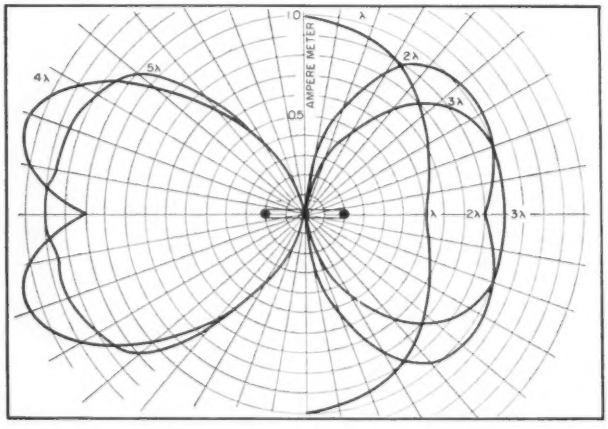

FIG. 1—Vertical patterns from one turn of integral-mode helix with zero pitch and attenuation. Patterns are shown up to fifth mode

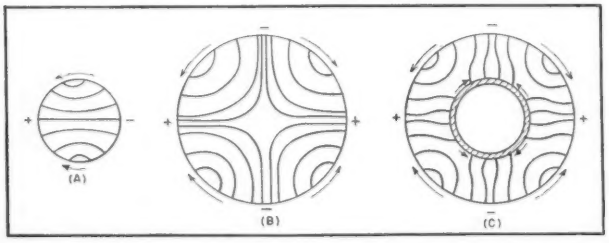

FIG. 2—Partial instantaneous fields in first-mode helix without mast (A), in second mode without mast (B), and in second mode with mast (C)

Four-Bay Antenna

The high-gain antenna is made of four vertically-stacked bays each having a power gain of five. Most of the initial development work was done on models in the 2,000 and 1,000-mc region to facilitate construction and handling. Since all four bays of the high-gain antenna are electrically identical, only one bay will be described in some detail. Operation in the second mode was found to satisfy all electrical and mechanical requirements. That is, each turn of the helix is two wavelengths in circumference at the velocity of propagation along the helix. The antenna has thus come to be called a second-mode side-fire helical antenna.

The length of one bay is five wavelengths. This length also corresponds to the distance between feed points of the four bays. A series feed is used and the distance

between feeds must be an integral number of wavelengths to yield in-phase feeding of the four bays. The five-wavelength bay spacing results in near optimum array factor for the particular pattern produced by one bay.

Figure 3A shows the vertical pattern produced by one bay of a 500-mc model. Note the lack of side lobes, in spite of the fact that each bay in itself is in reality a multibay array. This results from the exponential energy distribution over the aperture of one bay. Figure 3B shows the horizontal pattern attained for a one-day model having certain constructional features.

Feed System

A right and a left hand helix are used in each bay. Each helix has five turns. The two helices are placed end to end, and fed at their junction, which is in the center of the bay.

The use of center feed on each bay prevents beam tilt in the beam of the basic bays. The upper and lower portions advance and retard in phase, keeping the maximum field on the horizon. However, the beamwidth will increase, resulting in a net reduction of gain. The beaming bandwidth is defined as the total frequency separation between the two points where the half-power beamwidth has increased 1 db.

For television purposes, it was decided to make this bandwidth on the order of twenty megacycles, to insure that over the channel the gain variation would be negligible. The beaming curve has a rather flat bottom; the channel under consideration may be placed on this flat portion. Feeding the two helices in parallel has the advantage of reducing the feed resistance per bay to a more convenient value.

By estimating the attenuation and calculating the surge impedance, it was found that the net distributed radiation resistance per turn is on the order of 200 ohms. In the uhf range, even such a high value of distributed resistance results in insignificant phase angle in the surge impedance of the helix.

The helices are supported by Kel-F insulators. This material has excellent mechanical and weathering properties, combined with a very low dielectric constant. A low dielectric constant is desirable to prevent reflections at the support points. The loss factor is high compared to polystyrene or Teflon, but not high enough to result in sufficient loss to cause damage to the insulators, even with ten kilowatts into one bay. There are, of course, no resonant high-voltage points to cause trouble. The ends of the helix may be grounded to the mast to provide lightning protection.

The intrabay feed system is coaxial, with the mast itself serving as the outer conductor. The inner conductor is shorted to the mast a quarter-wave above the top bay feed for mechanical support and r-f isolation of the rest of the mast. The main-line input at the bottom of the antenna is designed for 3⅛-inch line. This input enters the mast from the side through a special matched T. The inner conductor is again shorted to the mast a quarter-wave below this input.

The individual bays are probe-coupled to the inner conductor not making direct connection. The probes are adjusted so that each bay receives one-quarter of the input power. Impedance match is maintained throughout the mast coax for maximum bandwidth.

The hollow inner conductor is of adequate size to permit the beacon lighting cable to pass directly up inside it. Thus a means is provided for running this cable without danger of disturbing the antenna operation as might occur if the cable had to be run outside the mast.

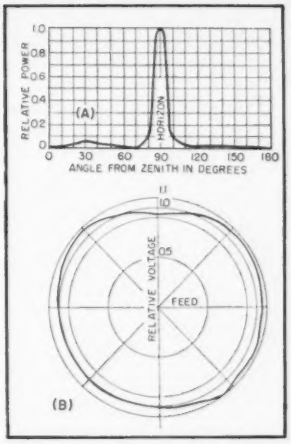

FIG. 3—Measured vertical pattern (A) and horizontal voltage pattern (B) of single-bay 500-mc model

The series type feed system used will cause overall beam tilt to result when the frequency is shifted far enough from center. Over one television channel the amount of tilt occurring is inconsequential.

For very high installations it might be desirable to tilt the beam downward so as to graze the horizon, because of the narrow beam. This antenna lends itself admirably to simply accomplishing this beam tilt to the small amounts desired without disturbing the impedance and power distribution. Because the currents on the antenna are of the traveling-wave type, the instantaneous phase is a function of azimuth. Hence, by mechanically rotating one portion of the antenna relative to the other portion, beam tilt can be produced because the relative phase between bays has now been effectively changed.

Sleet-melting is accomplished by running sufficiently high 60-cycle current through the helix Copperweld conductors.

To Professor Howard G. Smith of Cornell University, who spent the summer of 1950 with G-E, goes much of the credit for development of successful operating models of this antenna. Credit is also due R. E. Fisk, who contributed many ideas and gave patient assistance.

Closeup view of one bay of 500-mc sidefire helical antenna. Each turn of the helix is two wavelengths long at the velocity of propagation along the helix

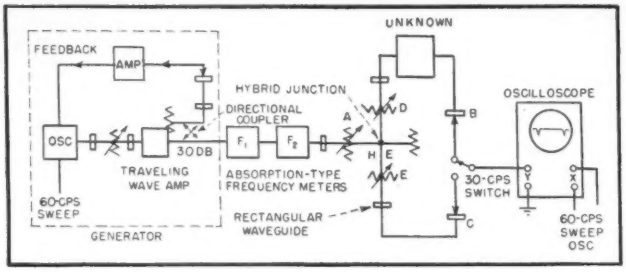

FIG. 1—Basic circuit using 500-mc sweep at 60-cps rate in 4 kmc region



FIG. 2—Control voltage waveshapes

Traveling-Wave Amplifier Measurements

Rapid sweep-frequency technique used at 4,000 mc can be applied to all broad-band amplifier measurements. Oscilloscope display shows transmission accurate to 0.1 db and return-loss values up to 40 db

By FREDERICK E. RADCLIFFE

Bell Telephone Laboratories, Inc.
Murray Hill, New Jersey

EXTENSION of microwave common-carrier circuits for transcontinental television programming has necessitated the development of quick and accurate test procedures. Techniques described in this article have direct application at 4,000 mc, but the same methods are also in general use in the regions of both 60 and 400 mc.

For general studies of broad-band networks, amplifiers and particularly traveling-wave tubes, it is advantageous to use sweep-frequency measuring techniques. By these methods it is possible at a glance to observe either the transmission or impedance characteristics. When adjustments are made, the effect on the overall characteristic is seen. This is particularly important in double-coupled or staggered-circuit work.

By careful design and construction of the measuring equipment it is possible to make transmission measurements to an accuracy of better than 2 percent over ranges of 500 megacycles in the 4,000 megacycle common-carrier band.

A block diagram of the basic circuit is shown in Fig. 1. At the left is the r-f power source consisting of a low-power microwave oscillator of the close-spaced triode type driving a traveling-wave amplifier having an output of about one watt, which is sufficient for the type of measurement to be described. By mechanical means, the oscillator is swept at a 60-cycle rate from 3,700 to 4,200 megacycles.

A small amount of power from the traveling-wave tube is rectified by a crystal, is amplified and fed back to the grid-bias circuit of the oscillator to provide envelope feedback around both the oscillator and amplifier. In this manner the output of the traveling-wave amplifier is made flat to about ±0.2 db over the band.

The power passes two absorption-type frequency meters that provide two markers on the oscilloscope trace to indicate the band limits. The power divides equally in the hybrid junction, passes through two attenuators, and is rectified in two identical crystals.

The outputs of the crystals are switched at a 30-cycle rate by a polarized mercury-type relay and are alternately connected to the Y-axis amplifier of a standard oscilloscope. Attenuators *D* and *E* are adjusted until the traces coincide and the gain of the Y-axis amplifier is adjusted for a sensitivity of one db per inch deflection between the two traces as measured by either attenuator *D* or *E*.

A circuit to be measured may now be placed in the unknown position. Attenuator *D* is adjusted until the traces again coincide. The gain or loss of the circuit is indicated by the change in attenuator setting and the flatness is indicated to an accuracy of about 0.1 db on the oscilloscope scale by direct comparison of the oscilloscope traces.

Figure 2 shows the waveshapes of the control voltages referred to the 60-cycle power-line wave. Waveshapes of oscilloscope blanking, 30-cycle switch voltage, oscillator frequency and oscilloscope sweep

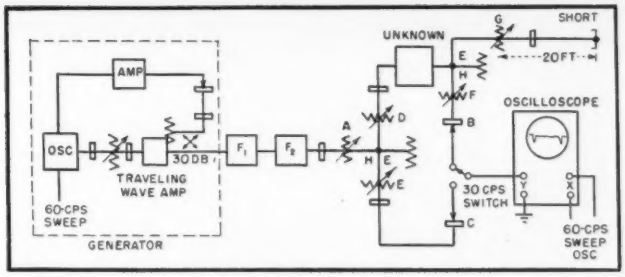

FIG. 3—Circuits for measuring transmission and output-impedance characteristics of broad-band networks or t-w amplifiers



FIG. 4—Relationships used in the long-line impedance measuring

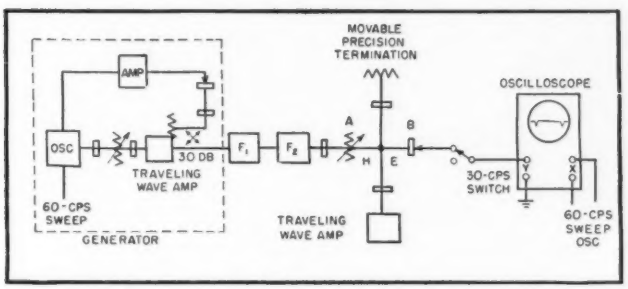

FIG. 5—Modification to measure input impedance of the t-w amplifier

versus time are shown. The oscilloscope sweep voltage is made to match approximately the oscillator frequency-sweep characteristic so that the frequency display is linear to within 10 percent. Each time the oscillator frequency is increasing the 30-cycle switch operates connecting one of the two crystals *B* or *C* to the oscilloscope. Hysteresis effects of the mechanical sweep mechanism are eliminated.

Figure 3 shows the circuit to measure simultaneously both the transmission and output impedance characteristics of traveling-wave amplifiers or broad-band networks. Measurements at both high and low power can be made. The circuit is similar to the basic circuit shown in Fig.1 except for the addition of a second hybrid junction, two calibrated attenuators, and a 20-foot section of shorted waveguide.

The set is calibrated by omitting the traveling-wave amplifier to be tested and adjusting attenuators *D* and *E* until the traces coincide as before with attenuator *G* at maximum attenuation. The amplifier to be measured is inserted and attenuator *D* is adjusted until the traces again coincide. The change in attenuator *D* setting is the gain. By substituting a power meter for crystal *B* and taking into account the 3-db loss in the hybrid junction and the loss of attenuator *F* the power output may be measured.

The output impedance of the traveling-wave amplifier with the tube delivering its normal power output may also be measured by adjusting attenuator *G* for a convenient amplitude of ripples on the transmission characteristic such as 0.1 db. With this amplitude of ripples the sum of the return loss of the sending and load impedances is 45 db. For this ripple amplitude, the return loss is the difference between 45 db and twice the sum of the loss of the 20-foot waveguide, the loss of the hybrid junction and the attenuation of attenuator *G*.

The equations on Fig. 4 show some simple relationships as used in the long-line method of measuring output impedance. Equation 1 is the frequency in megacycles between ripples related to the line length. In this relation, V_g is the group velocity; L is the length of the line in feet; and C is the velocity of light. The line length is chosen to provide the desired resolution of impedance characteristic.

Equation 2 is the relation of the standing wave as seen on the oscilloscope to the reflection coefficients of the source and load impedances. Equation 3 is the relation of return loss to reflection coefficient.

Equations 2 and 3 are plotted in Fig. 4. For convenience the point corresponding to a total *W* of 45 db is chosen in making measurements.

The arrangement of apparatus shown in Fig. 5 is used to measure the input impedance of the traveling-wave amplifier. To calibrate, a short circuit is substituted for the traveling-wave amplifier under test, attenuator *A* is set to 40 db and the gain of the oscilloscope is adjusted until the signal trace is separated from the base line by 0.1 inch. A return loss of 40 db can now be measured.

The base line is obtained by disconnecting one crystal from the 30-cycle switch. The accuracy of measurement is checked by connecting a termination with a *W* of about 40 db in place of the traveling-wave amplifier under test and setting attenuator *A* to zero db. Movement of the precision termination will cause ripples to move on the signal trace. If the balance of the hybrid is good and the *W* of the precision termination is satisfactory, these ripples will be small compared to a *W* reading of 40 db.

The traveling-wave amplifier input impedance may now be measured by connecting it as shown and adjusting attenuator *A* for 0.1-inch deflection on the oscilloscope. The return loss is read directly as the difference in attenuator *A* setting.

High-Speed

WHERE A MULTIPLICITY of information sources must be observed, some system of scanning or sequential sampling may be employed so that certain pieces of measuring equipment need not be duplicated for each information source to be studied. Where the information sources are of low level, special design problems arise. Several high-speed scanning systems are described below that are applicable to low-level operation.

There are two general types of scanners. First, scanners in which the commutating element also carries the information; and second, the type in which the information-carrying element is controlled by a separate commutating system. The capacitance scanner is one of the first type.

Capacitance Scanner

Basically, the capacitance scanner consists of a large number of input plates to which the individual signal sources are attached. The information applied to the input plate is capacitively coupled to a pickup plate which is moved successively from one plate to another in a predetermined order.

Within the frequency limits of the scanner, the capacitance system is an ideal scanning device. The noise components resulting from the scanning operation are practically eliminated since the variation in average d-c potential from input element to input element is negligible and no direct current flows through the scanner. The noise performance is limited by the output impedance, Johnson noise, and the losses through the scanner.

As is true with most mechanical devices, the life of the capacitance scanner is limited. Another basic limitation of this type of scanner is the top operating speed.

MERB Tube Scanner

For very high scanning rates it is necessary to go to the use of electron beams or electronic circuits. Figure 1 shows a cutaway view of a typical multiple element radial beam tube scanner. For the sake of simplicity the abbreviation MERB tube[1] will be used in connection with this tube. Figure 2 is a photograph of such a tube in a complete 50-element scanner. The arrangement of the elements is shown in Fig. 3.

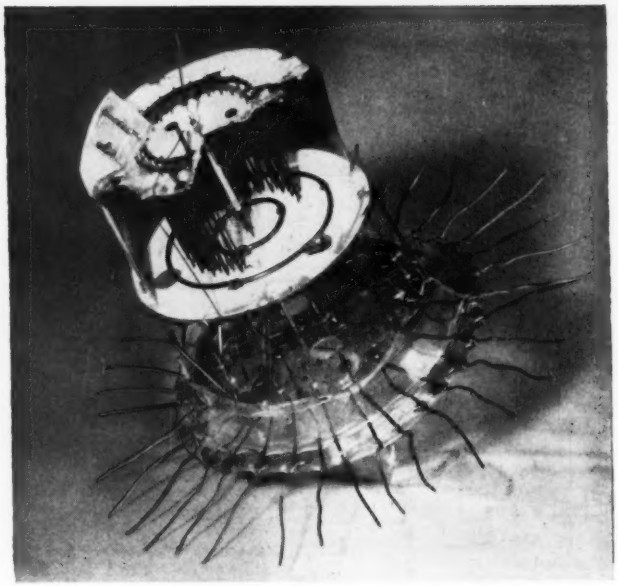

FIG. 1—Cutaway view of multiple element radial beam tube scanner

The physical construction[1] and relative location of the elements is similar to a standard pentode. A common heater and cathode are located at the center as an electron source. The next element out is the inner grid or accelerating grid common to all elements; next, the screen posts, then the signal grids, in the suppressor grid position, and finally the plate. Each signal grid is separated from the adjacent signal grid by a post. The MERB tube shown in Fig. 1 has twenty-five separate signal grids.

In operation, the tube is placed in a strong uniform magnetic field perpendicular to the cathode so that the electron stream from the cathode is focused into a radial beam which flows through one of the signal grid elements to the plate. The focusing of the electron beam is controlled both by the strength of the field and by the voltages on the tube elements. By varying the voltage on this signal grid the current to the plate can be varied. By rotating the field about the axis of the cathode the electron stream can be focused successively on each signal grid. The focusing action of the field produces a double-ended electron beam; with the result that all elements are scanned twice with each revolution. The scanning rate is twice the number of elements times the excitation frequency.

In the scanning system shown in Fig. 2 the MERB tube is used to scan 50 input elements. Each input element has a preamplifier and each element of the MERB tube is connected to two preamplifier outputs. By switching the input preamplifiers *on* alternately in groups as each end of the scanner beam comes around, all 50 elements are scanned by one revolution of the field about the MERB tube. This

This article is based on a paper presented at the 1950 National Electronics Conference. The Conference paper appears in the *NEC Proceedings*.

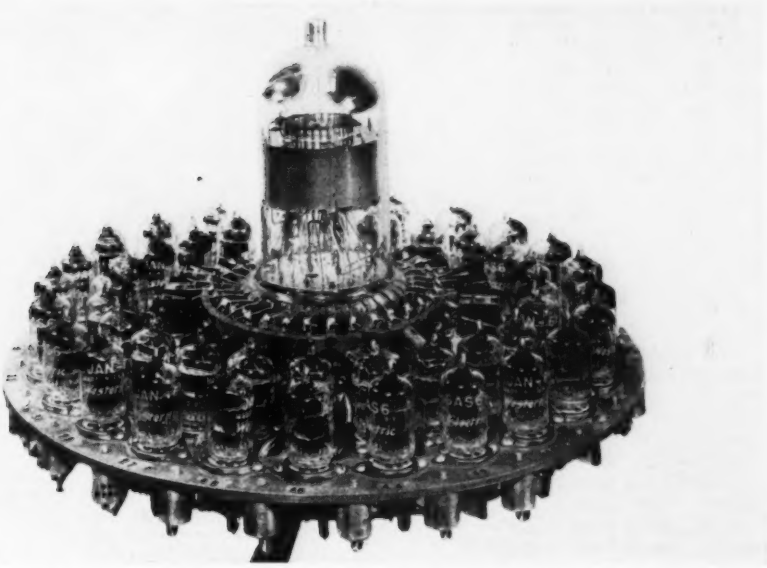

FIG. 2—Complete scanner using multiple-element radial beam tube to sample 50 different signal sources

Sampling Techniques

Space, materials and money can be saved by scanning low-level information sources and using common amplifying, indicating and recording equipment. Survey of sampling systems helps designers choose best system for application to future developments

By B. R. SHEPARD

General Engineering and Consulting Laboratory
General Electric Company
Schenectady, New York

same system could be extended to enable a 25-element MERB tube to scan any multiple of 25 inputs.

The major precaution necessary to keep the scanning noise of the MERB tube at a low level is to operate with very low plate current. Low plate current and reasonable transmission is obtained by the use of low voltages on the tube elements. This method of operation necessitates accepting relatively high loss through the tubes, about 6 to 1. The actual gain or loss through the scanner is not in itself too important except for its affect on overall signal-to-noise ratio of the system. The scanner noise should always be greater than the thermal noise level in the scanner output circuit. For most applications it has been necessary to use a one-tube preamplifier ahead of each element to get optimum signal-to-noise ratio.

F-M Scanner

Figure 4 shows a circuit diagram of an f-m scanner. This scanner is the type in which a vacuum-tube amplifier is provided for each input element. The vacuum-tube amplifier is normally biased *off* so that no information can be transmitted from the input to the common output. When it is desired to read information from that particular input element the vacuum-tube amplifier is biased *on* and allowed to transmit the information to the



FIG. 3—Physical construction and element arrangement of MERB tube is similar to standard pentode

output circuit. Several methods are available for performing this switching operation. The particular commutation control element described here is called an f-m scanner control unit. It has the advantage that the equipment required at the scanner itself is small and light and does not necessarily contain vacuum tubes. Only one line is needed between the scanner and the control element, and the control element can be remotely located if necessary. The number of elements is not restricted and can be easily changed.

Each scanner element is provided with a tuned circuit T_1 and diode rectifier D. Power is coupled into each tuned circuit from a common bus coming from the control unit. When the common bus is excited at the frequency of the tuned circuit, an a-c voltage is transmitted to the diode rectifier element and a d-c output proportional to the excitation on the common bus is applied to the grid of the scanner tube. If the tube is normally biased *off* and the polarity of the rectified signal is such as to bias the tube *on*, then that particular tube can be turned on by exciting the common bus at the frequency of the resonant circuit. If each resonant circuit of the different scanner elements is tuned to a slightly different frequency from the one next to it, the circuits can be switched *on* in sequence by sweeping the common bus excitation frequency through the range of the tuned resonant circuits.

Smooth commutation from element to element is obtained by using the tuned circuit resonance curve as the switching pulse. A smooth or linear sweep frequency rate is used in this case. If desired, an effective square-wave pulse can be applied to each grid by stepping the frequency from that of one tuned circuit to that of the next and so on. It is also possible to stop and turn on only one element at a time and look at that element for as long as necessary by merely exciting the common bus at that particular frequency.



FIG. 4—Typical f-m scanner circuit

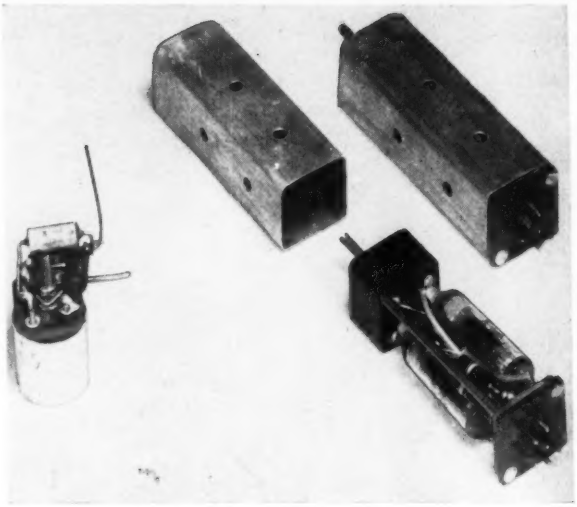

FIG. 5—Subminiature f-m scanner elements

Figure 5 shows two different types of resonant frequency circuits and diode rectifier elements. The unit on the right and center uses subminiature tubes and contains both controlled preamplifier and the switching circuit. The unit on the left uses a germanium diode mounted directly on the tuned circuit. The preamplifier is not included.

Scanning Noise

A scanner as it operates, scanning the input circuits, will generate in its output circuit a complex voltage or current fluctuation which is caused by the scanning action. This noise voltage or current fluctuation is a complex wave which repeats each scanning cycle. In general, this scanning noise is larger than the Johnson noise of the system and is the noise level which limits the application of the scanner to low-noise circuits.

The scanning noise of a scanner is actually made up of a broad spectrum of finite frequency components each of which is a multiple of the scanning rate. The amplitude of each of these components decreases as the frequency of the component increases. In practice, the scanner output is fed into a band-pass filter which allows only the frequencies around the signal frequency to pass.

If the proper restrictions are placed upon the band pass of the filter following the scanner it is possible to plot a universal noise characteristic curve for the scanner. This noise characteristic will be the same regardless of the actual scanning rate of the scanner. The restriction which must be placed upon the band pass of the system following the scanner is that the band pass be just wide enough to pass the important modulation components introduced by the scanning action. Under these conditions the band pass becomes a fixed multiple of the scanning frequency, the multiplying factor depending upon the shape of the scanner output wave.

The actual noise characteristic for a scanner can be obtained at any practical operating scanning speed. It is possible to evaluate a

scanning apparatus with normally available laboratory equipment and using low or readily available scanning speeds. If the information obtained is plotted as shown in Fig. 6 with a horizontal scale which is a multiple of the scanning rate, the resultant curve is the noise characteristic of the scanner and can be applied to all operating scanning rates for the scanner to determine the circuits required ahead of the scanner.

The two curves on Fig. 6 show the noise characteristic of the MERB tube scanner and the f-m scanner. Both characteristics have essentially the same shape. The level of the noise curve depends upon how well balanced are the different tubes or elements of the scanner. If all of the elements are exactly the same and are switched simultaneously there will be very little scanning noise generated. Practically speaking, this is never true; hence, the amount of noise generated in a scanner depends upon the patience and ability of the designer to select tubes or design a circuit to eliminate tube variations.

The actual rate of cutoff of the noise characteristic curve can be improved by the use of properly shaped pulses for switching. Smooth commutation such as that available in the f-m unit will tend to reduce the high-frequency components of the noise. This is shown by the faster decay in the characteristic curve for the f-m scanner. In this particular case the element amplifiers were operated at normal plate current levels. In general, the level of the noise characteristic can be reduced by operating the tubes at very low current levels.

Reducing Noise

Once the noise characteristic of a scanner is obtained it is fairly easy to outline methods which can be used to make a scanner operate at lower signal levels. Two general approaches can be applied. One is to modify the external circuit to make the best use of the scanner noise characteristic; the other is to work directly with the scanner to try to reduce the level of the noise characteristic.

A study of the noise characteristic curve will show that there are two ways of reducing noise by external circuit modifications. One is to increase the frequency of the signal carrier and the other is to reduce the band pass to the absolute minimum required to pass the information. If the application permits, raising the carrier frequency is an easy way to reduce scanner noise. If the signal frequency cannot be changed, the operating frequency of the scanner can often be raised by mixing in the scanner. The normal loss in gain due to mixing must be taken into account so that a larger increase in frequency is required than would be needed if mixing were not used.

In working with the scanner directly there are four methods or approaches for improving the noise characteristic or reducing the amount of noise generated by the scanning action. All four methods are based on reducing the amplitude of the variation between elements or reducing the switching rate between elements:



FIG. 6—Noise characteristics of two scanner types

(1) Reduction of the quiescent or average d-c level of the scanner to the absolute minimum necessary to give useable results. The scanning noise components are proportional to the average current. If the average current can be reduced without a proportional reduction in signal gain, a net improvement in signal-to-noise ratio results.

(2) Balancing of all the scanner elements so that differences between d-c element values are reduced to a minimum.

(3) Increasing the cross-over time between elements. This can be done by proper shaping of the transfer conditions so that a minimum amount of high-frequency components is generated. In general, the noise is generated during the switching period between elements and is caused by dissimilarity between elements of the scanner or gaps in transmission between elements. Any procedure which tends to reduce the dissimilarity and eliminate the gap or reduce the rapidity with which the dissimilarity or gap occurs will aid in reducing the amplitude of the high frequency component generated by the scanning action. An improvement of this kind makes the noise characteristic decay faster with increase in signal frequency.

(4) Reduction of scanning rate. If a slower scanning rate can be tolerated, this will have the same effect as increasing the signal carrier frequency. In addition, a narrower band pass can also be used.

The foregoing methods for improving signal to noise performance of a scanner can be applied to any such commutating device. In general, to utilize a scanner at very low signal levels it is necessary that the information in the signal be available to the scanner at a frequency higher than the scanning rate. Just how much higher will depend upon how low a signal level must be observed and upon the noise characteristic of the particular scanner.

The scanners described here have utilized a switching characteristic or wave form approaching a cosine function in order to obtain smooth commutation. Other switching characteristics will produce a different scanner noise characteristic curve, but the basic problems are the same. Optimum scanner design for any application requires a suitable compromise between circuit complexity, switching characteristics, scanning rate, and scanning noise performance.

Reference

(1) A. M. Skellett, Magnetically Focused Radial Beam Vacuum Tube, Jour. App. Phy., p 704, Oct. 1944.

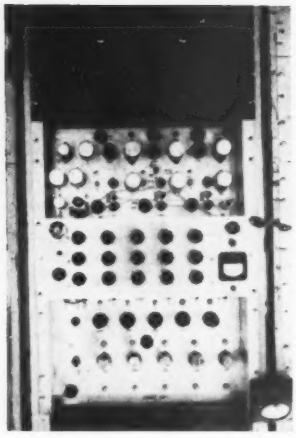

Color generator, exclusive of power supplies, occupies 24½ panel inches

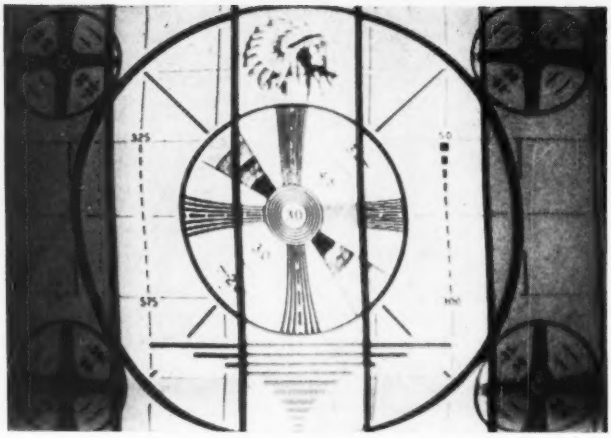

In color, bars from left to right would appear as red, green, white, yellow and blue for this particular setting of color potentiometers

Picture Generator

Simple equipment is added to conventional black-and-white picture-generating setup to provide color-striped pictures for testing either simultaneous and dot-sequential systems or field-sequential system. Complete adjustability of colors is possible

By R. P. BURR, W. R. STONE and R. O. NOYER

Hazeltine Corporation
Little Neck, New York

THE CURRENT INTEREST in color television systems is, among other things, likely to produce the need for a simple means of generating color television signals.

In the early stages of the present monochrome television system, complete camera chains were soon discarded in favor of the simpler and more reliable monoscope pattern generator as a general laboratory and test line video signal source. In the design, development, and manufacture of color television apparatus, a simple and reliable signal generator is also highly desirable. Current techniques for the production of color television signals rely heavily upon flying-spot scanners or direct-pickup cameras. Although these devices may be made reliable, they are not particularly simple, nor are they inexpensive. In addition, the versatility of subject material provided by such apparatus is a feature of questionable merit for routine testing.

The purpose of this article is to describe a simple all-electronic source of color television images which may be added to an existing black-and-white television installation. The unit will provide signals for either simultaneous and dot-sequential systems employing current monochrome standards or for the recently standardized field-sequential system.

Output from the apparatus consists of a monoscope or other television test pattern upon which is superimposed a series of five vertical bars. The hue and saturation of each bar is independently variable and under the operator's control. Any color combination whatever, including black or white, may be obtained. The color signal generator derives its input signals, including the monoscope pattern, from existing television equipment.

Color Mixers

A block diagram of the signal generator is shown in Fig. 1. The black-and-white video pattern to be "colored" is inserted at the lower left of the sketch. Following amplification in the two-stage video amplifier, the signal is applied simultaneously to the three mixer, or modulator, stages marked green, red and blue. When no modulating

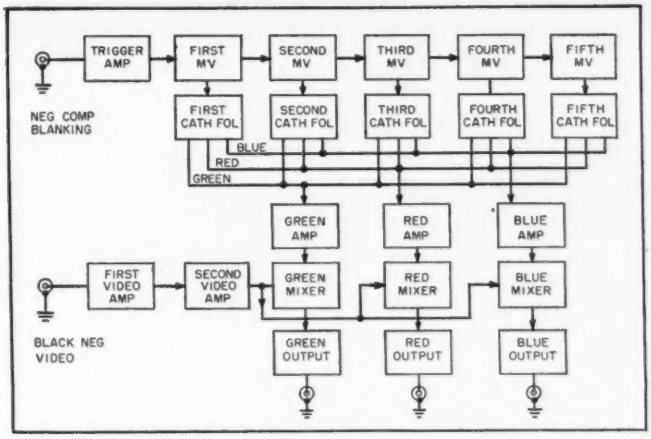

FIG. 1—Chain of five multivibrators, triggered by blanking signal, turns on five different colors during horizontal trace

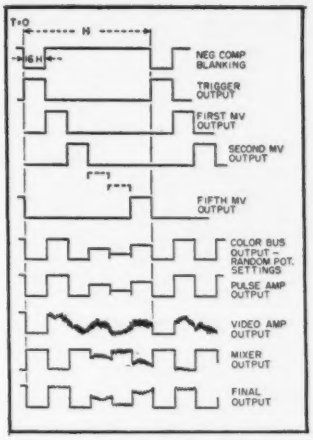

FIG. 2—Waveform chart shows functions of various stages during trace

For Color Television

signal is applied to the three mixers, we may assume that the gains of each mixer-output tube combination may be so adjusted that the green, red, and blue output signals are indentical, or nearly so; that is, the apparatus becomes essentially a triple output distribution amplifier. For a properly balanced three-color display, this condition will correspond, by convention, to a black-and-white picture. To obtain a color picture, the gains of the mixer tubes must be individually modulated in some desirable manner. One form of modulating signal which produces a useful geometrical color pattern may be obtained from the components shown in the upper portion of the diagram.

A negative composite blanking signal, that is, a white picture, is used as the triggering voltage for the input stage of a chain of five one-shot multivibrators. The trigger amplifier and first multivibrator are arranged to fire on the trailing edge of the blanking waveform, so that operation of the circuit begins synchronously with the start of the television system trace time. Upon completion of its turnover cycle the first multivibrator triggers the second of the chain; the second fires the third, and so on, until the action terminates with the operation of the fifth and last stage.

Each multivibrator is adjusted to have a pulse width of approximately one-fifth the system trace time, so that the entire action requires one line of the television picture. Consequently, the voltages applied to the cathode follower stages consist of five successive pulses occurring in time sequence across the picture from left to right.

The cathode followers (which also operate as limiters) are provided with a network of three potentiometers and three resistors in each of their cathode circuits. The object of this arrangement is to permit any amplitude of any one or more of the five pulses to be delivered to the three bus bars marked green, red and blue. The bus bars, in turn, are connected via suitable amplifiers to the suppressor grids of the green, red and blue mixer-modulator tubes, so that modulation of the input video signal in accordance with the various pulse amplitudes is the end result.

Figure 2 illustrates the functions of the various components of the block diagram. The blanking signal which triggers the five multivibrators is at the top., The second line shows the output of the trigger amplifier, an inversion of the input voltage. The first pulse generator output is shown on the third line of the chart. The second, third, fourth, and fifth pulses are generated in sequence—each one generated by relaxation of the previous stage.

A random mixture of the five pulses is shown at the center of the figure, while modulation of a video signal by this waveform is shown on the remaining lines. It should be noted that the bottom line, marked final output, represents the signal for one color only. When the apparatus is adjusted to produce a color picture, the three signal outputs will differ from one another as the green, red, and blue content of the picture varies across the image.

Since the timing of the pattern generator is determined entirely by

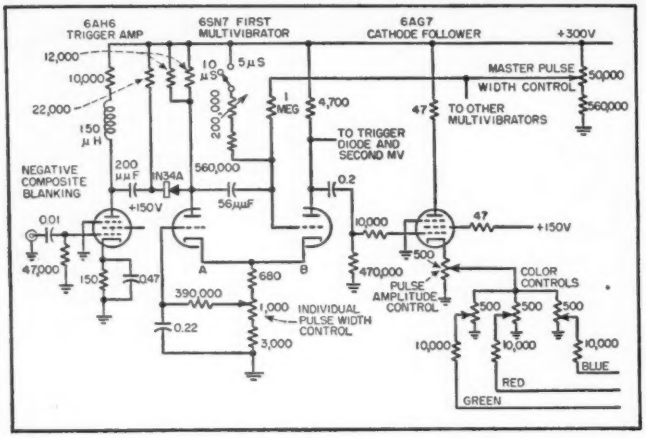

FIG. 3—Circuit of keying pulse generator. The switch adjusting the multivibrator time constant allows quick changeover from present standards to field-sequential standards

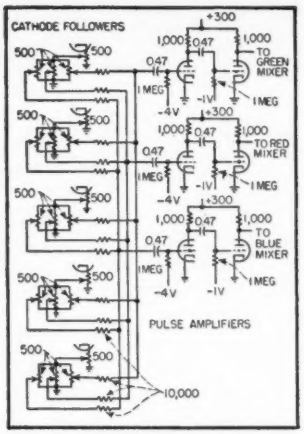

FIG. 4—Fifteen potentiometers in pulse mixer circuit shown permit adjustment of color in each band

the repetition rate of the input blanking signal, operation at line rates other than that standardized for black and white television may be obtained by changing the five pulse durations appropriately. To accommodate operation with the field-sequential color television system, we have included a ganged switch in the active grid time constant of each multivibrator, which may be used to halve the pulse width. The waveform chart would be the same for the higher speed operation.

Trigger Circuit

A simplified schematic diagram of the trigger amplifier and one of the pulse generators is shown in Fig. 3. The multivibrator is of the cathode-coupled one-shot type and is straightforward in design. The negative composite blanking signal applied to the grid of the 6AH6 trigger amplifier causes an abrupt drop in the amplifier plate voltage synchronous with the trailing edge of the blanking signal. The 6SN7 multivibrator and the 1N34A diode are arranged in such a way that the pulse generator is sensitive only to negative-going voltages. Accordingly, operation of the multivibrator is initiated by the trailing edge of the blanking signal.

The relaxation time of the multivibrator is controlled in the usual manner through the application of a variable bias voltage to the active control grid. In addition, as previously noted, a switch is provided to vary the time constant in this grid by a factor of two-to-one so that operation on either field sequential color standards or current black and white standards may be obtained. The second multivibrator of the chain is triggered by recovery of the first inasmuch as a large negative voltage drop appears at the first multivibrator output plate at this point in the cycle.

Mixing of the pulses generated by the multivibrators of Fig. 3 occurs in the cathode circuits of the five cathode followers which are shown at the center of the block diagram. In Fig. 4 may be seen the manner in which the five cathode-follower outputs are combined into three independently variable modulating waveforms. The word "independent" is based on the assumption that one percent cross-coupling between the various pulse amplitude controls is tolerable. Practical laboratory experience with the equipment indicates this to be the case.

Mixer Circuit

The circuit arrangement is such that any amplitude of any pulse may be applied to any one of the three bus bars by appropriate manipulation of the fifteen potentiometers. With reference to the generated color pattern, it might be said that the potentiometers of cathode-follower number one correspond to the red, green, and blue values of bar number one in the color picture, and so on.

Initial amplitude adjustment of each keying pulse is provided by a screw-driver adjustment, so that the pulse voltages from the cathode followers may be equalized. The 10,000-ohm resistors between the potentiometers and the bus bars provide isolation from crosscoupling. A simple two-stage amplifier is provided to raise the output from each color bus bar to a level suitable for operation of the video modulator tubes.

One of the modulator stages is shown in Fig. 5. The video signal is applied to the control grid of a 6AS6, while the pulse modulation voltage is applied to the suppressor. The d-c component is reinserted for both input signals so that operation of the modulator will be unaffected by variations in duty cycle of the video or pulse information. A meter is provided which may be switched into the cathode circuit of each modulator tube for the purpose of setting black current to within a few hundred microamperes of cutoff. Each modulator is followed by a conventional high-impedance current driver for low-impedance lines. The signal delivered to a 75-ohm cable from each output may be ad-

justed to a maximum of two volts peak-to-peak. The output signal does not contain synchronizing information since sync is seldom, if ever, present on a video signal at this point in a color television system.

Color-Monochrome Switch

Finally, the pattern generator contains one very useful device which will be appreciated by those who have been working with color television systems. This is a switch, called a COLOR-MONOCHROME switch, which may be operated to produce an unmodulated black-and-white output from the apparatus. When set to the COLOR position, the generator produces the color pattern set-up on the control panel. When the switch is set to MONOCHROME, the generator becomes essentially a distribution amplifier; that is, the video signals on all three outputs are identical, and are unmodulated. This arrangement is useful for checking the color balance of subsequent apparatus.

Some typical laboratory applications of the pattern generator's color signals might be of interest. For this purpose we will choose a monoscope test chart modulated so that the colors produced are red, green, white, yellow and blue as shown in the test pattern photo.

Oscillograms

First, this color signal may be applied to a dot-sequential color transmitter and the resulting video output observed on an oscilloscope operating at line rate. The oscillogram of Fig. 6A shows the sync signal, the color sync burst, and the video information together with the superimposed color carrier. The transmitter we are observing samples the color information at symmetrical angles, and is adjusted in accordance with the operating practice implied in the early proposals for a color television system of this type. It can be seen that the red, green, and blue areas, being saturated single colors, cause the color carrier to swing below black. For the yellow area, which is a saturated two-color area, overmodulation beyond reference white occurs, while for the white central area, the color carrier disappears altogether.

If the color carrier is removed, as in Fig. 6B, it may be seen that this transmitter is correctly adjusted to weigh red, green, and blue equally in the monochrome component of the transmitted signal. It is worthy of note that for any one color the contribution to the monochrome is one-third; for yellow it is two-thirds; and for white, of course, three-thirds.

Having checked the transmitter adjustments, the performance of the color receiver may be examined. It is desirable that the receiver reproduce the colors of the original scene with reasonable accuracy. That is, the phase of the local color subcarrier oscillator at the receiver must be correctly located.

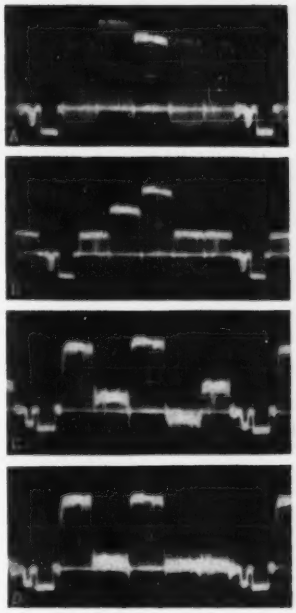

FIG. 6—Oscillograms show waveforms with different combinations of information, as explained individually in text

Let us connect the oscilloscope to the blue video signal channel of the receiver and observe the result. The original colors were red, green, white, yellow and blue, in that order. Therefore, an oscilloscope connected to the blue channel should show no signal during the red and green bars, full signal for the white area, no signal for the yellow bar, and full signal for the blue area. The oscillogram of Fig. 6C shows that this is not the case. Due to misphasing at the receiver, both the red and green areas of the signal show some output in the blue channel. In particular, the blue tube is slightly illuminated during the red area while it is driven below cutoff during the green area. In addition, the blue tube is not at full brightness during the blue area. Obviously, a readjustment of the receiver phase control is required. This operation is readily performed by adjusting for minimum signal in the red and green areas.

Figure 6D shows conditions prevailing in the blue channel for correct phasing.

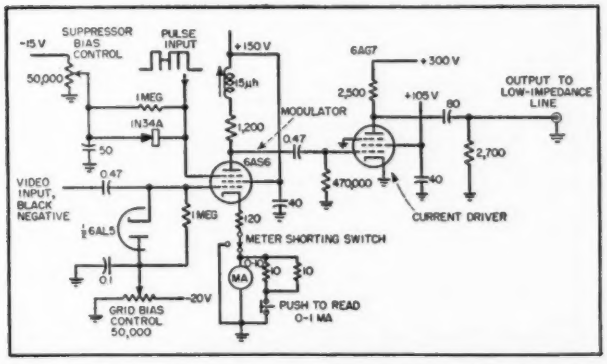

FIG. 5—Video information is fed to control grid of modulator, while pulse modulation voltage is applied to the suppressor

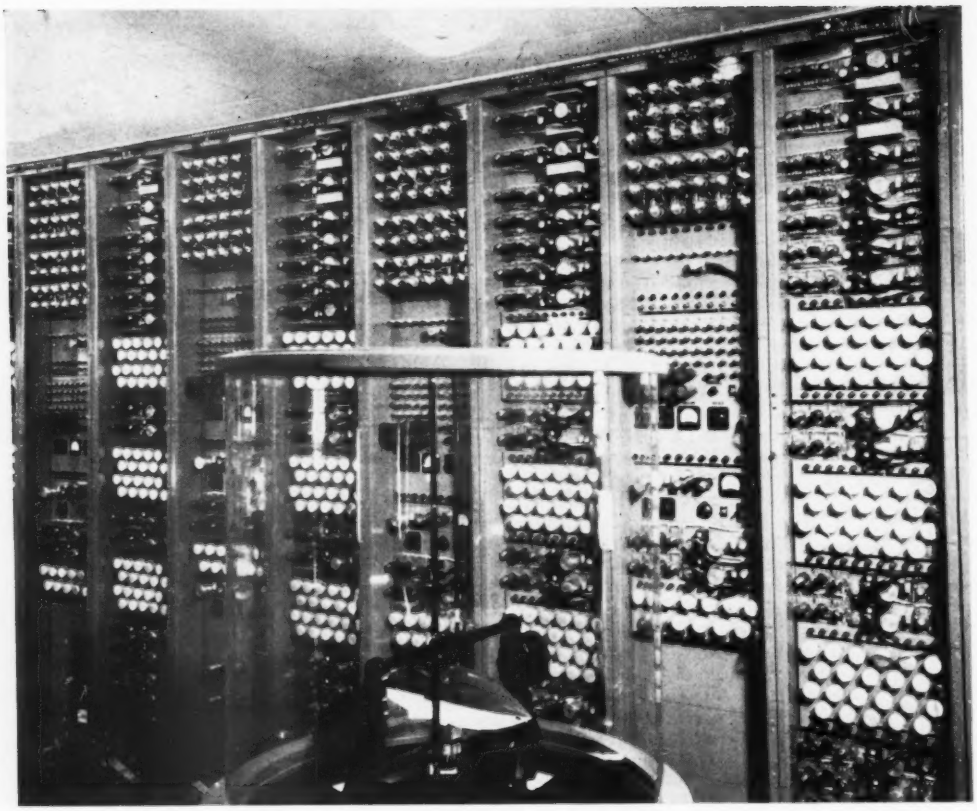

STEP MULTIPLIER RACKS (first, third, fifth and seventh racks from left) in missile simulator section of Project Typhoon computer. In foreground is servo-controlled missile model to show attitude of missile constantly during solution of target-interception problem

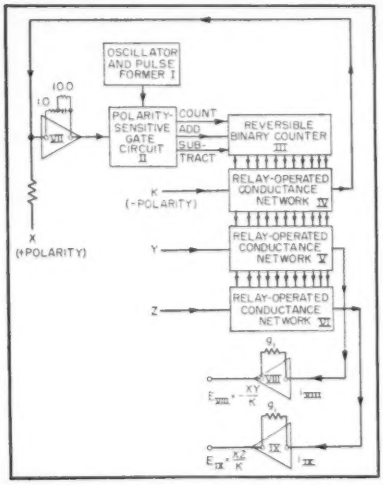

FIG. 1—Basic block diagram of step multiplier

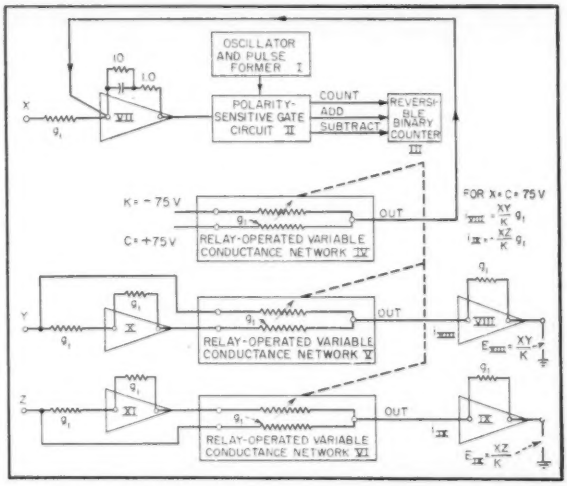

FIG. 2—Method of handling input voltages of both signs in multiplier

Step Multiplier in Guided Missile Computer

Need for test firings of new missile designs is minimized by simulating missile and target characteristics with new 4,000-tube analog computer. Required precision is obtained with reversible binary counter and relay-operated conductance networks in step multiplier

By EDWIN A. GOLDBERG
RCA Laboratories Division
Princeton, N. J.

PROJECT TYPHOON is a large-scale analog-type computer built specifically for the investigation of problems relative to the design of complete guided missile systems, under contract with the Office of Naval Research, Special Devices Center. The computer is divided into several sections, each of which handles some particular phase of a complete guided missile system problem. The major sections are (a) the missile simulator, (b) aerodynamic computer, (c) guidance computer, (d) target simulator computer, (e) recording and display devices and (f) power supply to operate complete simulator.

The input to the missile simulator computer consists of voltages representing aerodynamic forces along the three missile axes (roll, pitch and yaw), aerodynamic torques about the three missile axes, initial position of missile in earth axes, initial spin velocities about the three missile axes, initial linear velocities along the three missile axes, and initial attitude of missile axes relatives to earth axes expressed as direction cosines.

The output consists of missile position in earth coordinates, missile velocities in earth axes, missile linear velocities in missile axes, missile angular velocities (spins) about missile axes, and missile attitude in terms of direction cosines of missile axes relative to earth axes. Among the components required for this section are several high-speed multipliers of high precision. High-precision multipliers were required particularly for maintaining orthogonality of the earth and missile axes systems as the computation proceeds. The step multiplier as described in this article was developed for this application. Thirty-six multiplications and eighteen integrations are made in this section.

The guidance computer is a flexible arrangement of components interconnected by means of patch cords in a manner dependent on the nature of the guidance system. It receives information from the target simulator and missile simulator and delivers its output to the aerodynamic computer.

The aerodynamic computer receives missile velocity, altitude and attitude information from the missile simulator, and missile fin deflection information from the guidance computer. It computes the aerodynamic forces and torques, and routes this information to the missile simulator section. Thus, a closed-loop computing system is formed.

Target trajectory is generated as target position in earth coordinates by the target simulator. Target maneuvers are made by operation of target speed, climb and turn controls.

The recording and display devices consist of two Electronic Associates Variplotters which are normally used for missile and target trajectory plotting in both the horizontal and vertical planes, eighteen GE photoelectric recorders which may be used to record any eighteen variables desired, a missile model which assumes the attitude and fin deflections of the missile being simulated, and a three-dimensional trajectory model which moves objects representing the missile and target in three dimensions.

An idea of the size of the computer may be gained from the following tabulation of certain components:

Section	Stabilized D-C Amplifiers	Computing Servo Units
Aerodynamics	135	6
Guidance	148	11
Missile Simulator	135	
Target Simulator	9	2
Recording	18	
TOTAL	445	19

There are a large number of various other types of components which have not been tabulated. For example, a large bank of polystyrene capacitors in the guidance computer makes possible 80 simultaneous integrations in this section. The computing equipment is mounted in 43 special racks, each rack being 9 feet high. Forty of the racks are standard width, and three are double standard width. About 4,000 vacuum tubes are employed, and the total power consumption is 46 kilowatts.

Step Multiplier Design

Project Typhoon requires a multiplier of very high precision and moderate speed of response, for application in certain critical parts. Servo-type multipliers to meet both requirements seemed to be beyond the realm of practicability, and no all-electronic multiplier investigated had sufficiently high accu-

racy. As a consequence, the step multiplier was developed.

In principle, the step multiplier and servo multiplier are similar. Figure 1 is a basic block diagram of the step multiplier. The count stored in the reversible binary counter is made proportional to the input variable X. The conductances of the relay-operated conductance networks are each made proportional to the count stored in the reversible binary counter, and hence are proportional also to the variable X. Thus, if a voltage Y is applied to the input of one of the conductance networks (V), the output current will be XY and will appear as a voltage proportional to XY at the output terminals of amplifier VIII.

The reversible binary counter either counts at a rate determined by the frequency of the oscillator, or the number in the register remains stationary, depending upon the value of the input voltage to the polarity-sensitive gate circuits. If this input voltage exceeds a certain positive value, the counter will subtract one unit for every pulse from the pulse former. If this input voltage exceeds a certain negative value, the counter will add one unit for every pulse from the pulse former. Should this voltage be zero, or any value between the minimum add or subtract voltages, the count will remain stationary.

If the current fed back to the summing point of amplifier VII from conductance network IV is of the same magnitude but of opposite polarity relative to the current fed to the same point by the variable X, the output of VII will be zero and the count will remain stationary. Should this not be the case, the counter will count in the proper direction and change the conductance of IV until the aforementioned condition prevails. Thus, if G is the conductance of each conductance network, K is the input voltage to conductance network IV and X is the input voltage to summing conductance g_1,

$$G = X_{g1}/K \tag{1}$$

The input currents to amplifiers VIII and IX will then be

$$i_{VIII} = XY_{g1}/K$$
$$i_{IX} = XZ_{g1}/K$$

The output voltages of amplifiers VIII and IX will be

$$E_{VIII} = -XY/K \tag{2}$$
$$E_{IX} = -XZ/K \tag{3}$$

since the feedback conductance of each amplifier is g_1.

Negative values for G are not obtainable since the conductance networks are composed of passive elements only. Hence, some scheme must be provided so that negative and positive values for X may be handled. This may be accomplished by effectively adding a fixed voltage C to X of greater magnitude than X will ever be, and subtracting a voltage CY/K from the output of the multiplier. This is illustrated in block diagram form in Fig. 2 for two different output arrangements. One output, E_{VIII}, will be $-XY/K$, while the other output, E_{IX}, will be $+XZ/K$. It is convenient to choose $C = +75$ volts, $K = -75$ volts, and a value of G for the conductance networks equal to g_1 when the count in the counter is half of the full-scale value. The multiplier thus arranged is capable of accepting values for X which vary between $+75$ volts and -75 volts.

Reversible Binary Counter

Figure 3 is a block diagram of the reversible binary counter. Positive pulses are continuously fed into pulse input terminal B. The count of the counter will remain stationary when the value of the error input voltage at terminal A is zero. If the error input voltage increases in a positive direction, the voltage on the subtract bus will rise to zero and will be prevented from going positive by the diode limiter. This places the subtract gates in the active state so that they can transmit pulses. The add gates will be in the inactive state because the potential of the add bus will be negative. Further increasing the error input voltage will energize the pulse gate so that pulses present at terminal B will be transmitted to the counter, and one unit will be subtracted from the count of the counter for each pulse appearing at B.

For negative error input signals, the potential of the add bus will become zero, and the add gates will be made active. The subtract bus will be negative and the subtract gates will be inactive. Further excursion of the error input signal in the negative direction will activate the pulse gate, and will cause one unit to be added to the count for each pulse appearing at input B.

Thus, the counter will either add

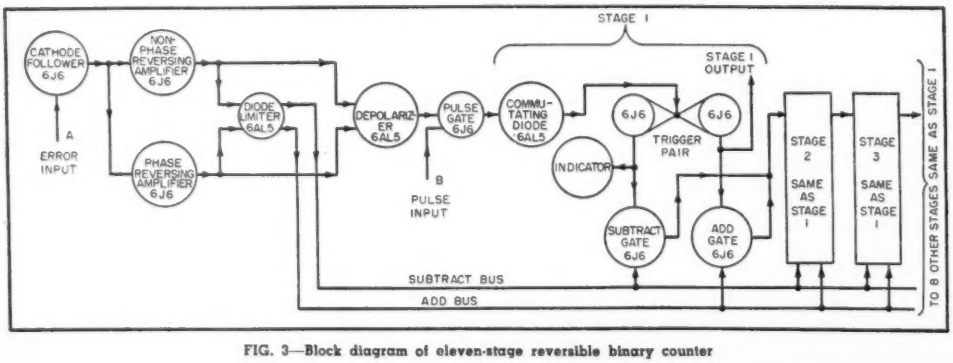

FIG. 3—Block diagram of eleven-stage reversible binary counter

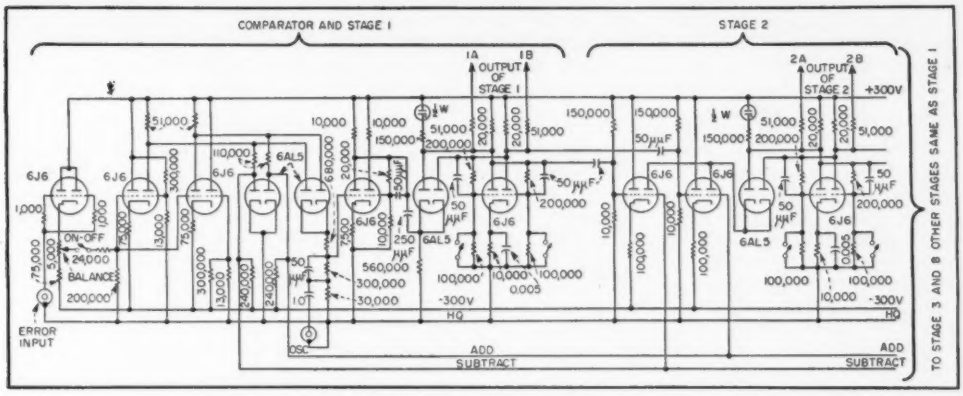

FIG. 4—Circuit used in first two stages of reversible binary counter



FIG. 5—Blocking oscillator used to generate pulses

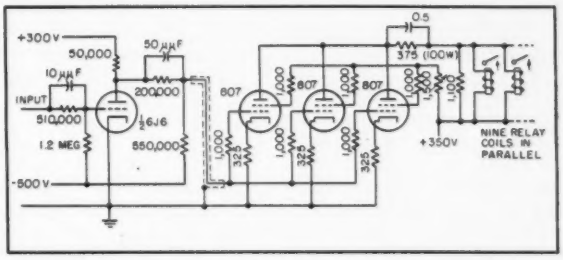

FIG. 6—Relay drive amplifier used to actuate relays of variable-conductance network

or subtract one unit from the count for each pulse at input B, dependent on the polarity of the error signal at input A. The particular mode of operation is obtained by proper choice of the carry-over connections by means of the add or subtract gates.

Figure 4 is the schematic diagram of the first two stages of the counter. The other 9 stages are similar. Diode commutating tubes are used as coupling elements to insure positive counting. The output of each trigger pair is differentiated at the input grid of each gate tube so that the gate tubes transmit pulses. Only negative input pulses will change the state of a trigger pair; positive pulses have no effect.

Each trigger pair has associated with it a neon light to indicate its state. Two pushbuttons per trigger pair are available for setting the state of each stage of the counter, or in other words, the count when the error input voltage is either zero or is disconnected. The output of each stage drives an amplifier which in turn controls the relays of the conductance networks associated with that stage. Pulses for operating the counter are obtained from the blocking oscillator circuit of Fig. 5.

High-Speed Relays

The rate at which the multiplier (X) may be varied and still have the values of the conductances in the variable-conductance networks accurately follow is a function of the speed at which the associated relays can operate. Since high-speed operation was desired, the use of high-speed relays was necessary. It was not possible to find a suitable commercially available relay so one was specifically designed for the job. It is characterized by an extremely light armature which is carefully damped by proper use of tungsten-loaded rubber dampers. The relay exhibits no chatter, and will either close or open within 100 microseconds after application of control voltage to the coil.

Relay Drive Amplifiers

The time required for a relay to close or open is a function of the rate of rise or fall of the coil current, among other things. Consequently, a relay drive amplifier circuit was designed to cause the coil current to rise or fall as rapidly as practicable without damaging the coil insulation. The rate of rise of current through a coil, with resistance and capacitance disregarded, is given by

$$dI/dt = E/L \qquad (4)$$

where dI/dt is the rate of change of current in the coil, E is the voltage across the coil and L is the inductance of the coil in henrys.

To obtain rapid rise of current, E must be large. However, the maximum current must be limited to a safe value, otherwise the coil would burn up. The high-speed relays used were designed for a

steady-state coil current of 50 ma.

A constant-current type of drive amplifier is used. Since the tube drop would normally be high for tubes driving closed relays, the tube dissipation would be high, necessitating the use of fairly large tubes. To reduce tube dissipation, a resistor bypassed with a capacitor is inserted in series with the plates of each parallel group of tubes. Approximately full plate supply voltage is impressed across the relay at the instant the drive tubes are made conducting. As the current builds up in the relay coils, the voltage drop across the relay coils decreases and the voltage drop across the tubes increases. The capacitor across the series resistor will charge up rather slowly, and thus this network will have negligible effect upon the rate of buildup of relay current. In the steady-state conducting condition, there will be very little voltage drop across the relay coils, little across the tubes, and considerable voltage across the resistor-capacitor network.

When cutting off the tubes, the voltage developed across the relay coils will be a function of the coil current, the capacitance across the coils, the inductance, and the resistance across the coils. Neglecting the capacitance, the peak voltage will be $E_c = I_c R_s$, where E_c is peak voltage developed across the coils, I_c is coil current at the instant that current is cut off, and R_s is resistance shunted across the coils. To prevent E_c from exceeding a safe value, R_s must be chosen accordingly. If R_s is made too small, the time for opening will be excessive.

Typhoon incorporates multipliers with either four, six, nine or eleven relay coils per drive amplifier. The relay drive amplifier in Fig. 6 is designed to drive nine relay coils in parallel.

Variable-Conductance Networks

Each variable-conductance network consists of eleven T networks whose inputs and outputs are paralleled, and one non-switched conductance. The transfer conductance of each T network may be made zero (relay closed) or a predetermined value (relay open). Transfer conductance values for the various different networks in a set are chosen on a scale of two basis.

The signal amplifiers used in conjunction with the step multiplier are all similar, and are of the wide-band chopper-stabilized type[1] shown in Fig. 7. Their use eliminates the necessity for manual adjustment of d-c zero offset, and they do not drift.

Interpolation Effect

Should the value of the variable X be such that the conductance networks cannot accurately match this condition because their conductance values vary by discrete steps corresponding to 1 part in 1,024, the conductance value will oscillate between the two adjacent values which straddle the value called for by X.

A partial integrating circuit is used in the feedback network of the error-sensing amplifier (amplifier VII in Fig. 2). The gain of this amplifier for d-c is 11 times the gain for frequencies above a few cycles. The incorporation of some integration in this network is necessary for stable operation of the feedback loop when the loop gain is high.

Performance

The step multiplier is very similar in principle to the servo type of multiplier which incorporates a gang of similar linear potentiometers. Multipliers which tracked very well were needed in the missile simulator section. The step multiplier meets this requirement very well since each conductance network may be adjusted to the calculated value within ±0.001 percent of full-scale conductance. It was not possible to obtain potentiometers which would track as well.

The speed at which X may be varied yet have the counter track is a function of the oscillator frequency which drives the counter, and also a function of the relay speed.

Since the relays require about 100 microseconds to close or open, they are the limiting factor in speed of operation. An oscillator frequency of about 1,000-cps is used, and consequently about one second is required to change the value of the multiplier (X) from zero to full scale. The rate at which the multiplicands (Y and Z) may be changed is a function of the band width of the conductance networks and associated amplifiers.

The author wishes to acknowledge the contributions to the project of A. W. Vance, who conceived the basic principle of the step multiplier, and R. F. Brady and F. F. Shoup, who jointly contributed to the development of high-speed relays employed.

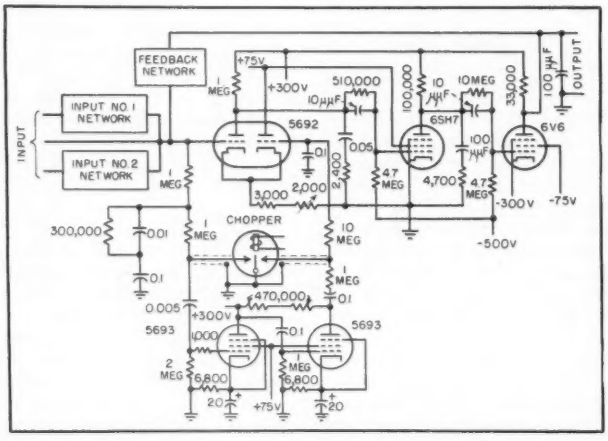

FIG. 7—Circuit of stabilized d-c amplifier used with step multiplier

Reference

(1) Edwin A. Goldberg, Stabilization of Wide-Band Direct-Current Amplifiers for Zero and Gain, *RCA Review*, p 296, June 1950.

Use of cadmium-sulfide crystal in a detector for inspecting cans of baby food. Partially filled can has paper band around it as does nozzle holding crystal. Light above nozzle is illuminated briefly as low-content can passes between x-ray source at left and nozzle.

Beam Stabilizer for Industrial X-Rays

Transmitted beam intensity is held within close limits by use of cadmium-sulfide crystals in stabilizer bridge circuit. Industrial inspecting equipment may then be used to detect small changes in beam intensity caused by minute flaws in opaque objects

By JOHN E. JACOBS

General Electric X-Ray Corp.
Milwaukee, Wis.

APPLICATION of x-radiation to high-speed automatic inspection of opaque objects for minute flaws has increased the requirements for x-ray beam stability over those previously encountered.

For an automatic system of x-ray inspection to compete successfully with radiography or fluoroscopy, it must offer the resolution obtained by these methods. It is necessary to detect, on the basis of transmitted radiation, variations in x-ray intensity of a few percent. This is most easily accomplished by designing the associated detecting equipment to be extremely sensitive to slight variations in intensity. Two units embodying this precise control are now undergoing tests, each installation requiring special adaptation and engineering.

In a single-channel system, a comparison method using two detectors may be used to reduce the effects of x-ray beam instability. For the scanning of large, irregular shapes, a multiplicity of inspecting stations is needed. To attempt to compensate each individual station against beam changes is a major project and usually results in a system that is difficult to keep in balance. The apparent answer to this problem is to stabilize the x-ray source itself in such manner that the transmitted beam intensity is held within close limits.

Regulation of the x-ray beam for

this application is complicated by two factors. The first is that the x-ray output is proportional to the first power of the tube current and the square of the applied peak tube voltage.[1] Commercially available regulators are not satisfactory because they work on the rms value of the wave. Furthermore, waveform distortion is prevalent in x-ray transformers.

The second factor that contributes to the problem is the relation of x-radiation transmitted through material and the voltage applied to the x-ray tube. Referring to Fig. 1, the addition of any material between the beam and the detector has the effect of making only the higher values of impressed x-ray tube voltage effective in determining the intensity received. This means that a change in applied x-ray tube voltage of a few percent will result in a change of the order of ten times percentagewise in the intensity of the beam transmitted through the material.

The previous discussion leads to one conclusion regarding the stabilization of x-ray beams; the detecting element of such a stabilizing loop should be x-ray sensitive with the same amount of filtration between it and the x-ray tube as is shown by an object to be inspected.

Stabilization Methods

The x-ray tube current may be stabilized to within ±0.1 percent by an electronically controlled series impedance in the primary of the filament transformer.[2] This method has been used to control x-ray output by adapting a photomultiplier and fluorescent screen in a comparison circuit.[3] Regulators of the saturated-inductance type do not function satisfactorily to regulate x-ray tube voltage because of their waveform distortion.[4] Another approach has been to adapt a series tube regulator,[5] such as is used in laboratory power supplies. This has the disadvantage of requiring the regulating loop to be insulated to withstand the x-ray voltage, which often exceeds 100,000 volts.

For simplicity and economy it is desired that the regulation of the x-ray tube voltage take place in the primary of the high-tension transformer. The regulating device used should be one with less than 6 cycles response time and should introduce a minimum amount of waveform distortion.



FIG. 1—Quality of x-radiation transmitted as aluminum is added between x-ray tube and detector

Recently, numerous references have been made to the use of cadmium sulphide as a detector of x-radiation.[6,7,8] This material has several advantages. The first is its natural amplification and the second is its high absorption of x-rays as compared to other detectors. The radiation transmitted by an object is only the hard radiation and an efficient detector of this type of radiation is needed.

Because of the density of cadmium and sulphur as compared to the gases used in ionization chambers, it is possible to use a thickness of CdS that will absorb practically all of the radiation. The intensity-wavelength ratios of Fig. 1 are preserved in such a detector. Crystals of CdS have the further advantage of retaining their natural amplification which, in some cases, is in the order of 10^6 even when the crystals are reduced to small cross sections. This makes for a compact, extremely efficient detector.

A sketch of the setup used for checking fuse trains by means of a cadmium-sulfide detector is shown in Fig. 2. In this application, a ¼-in. void in the powder train inside a ¼-in. diameter cord can be detected with the fuse moving at the rate of 60 feet per minute. The indicator may consist of any one of many possible relay-actuated devices. The relay may operate a meter, chart a graph, work a rejection lever to remove the product from the line, ring a bell and so forth.

A fundamental electronic property of semiconductors of the cadmium-sulphide type lends itself very well to regulator service. Over the intensity range encountered, the number of electrons present in the conduction band at any time is a linear function of the incident intensity. However, any decrease in intensity results in the electrons starting to recombine in accordance with the familiar relation $dn/dt = -bn^2$ where b is the recombination coefficient and n is the number of electrons present in the band. Any change in the beam intensity will show up as the square of the change, as the current measured is proportional to dn/dt. This is a

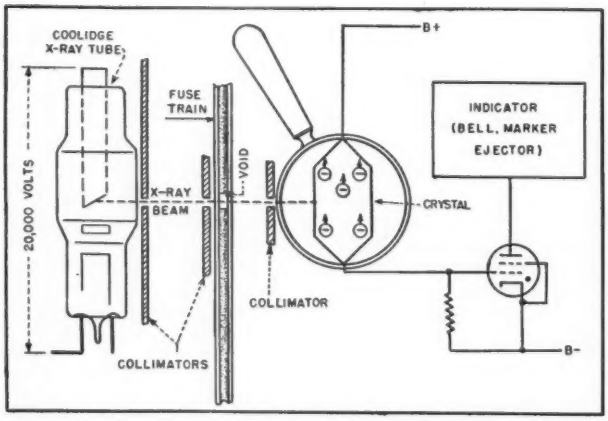

FIG. 2—Application of cadmium-sulfide crystal for checking blast fuses. Amplified output from the crystal is used to actuate any convenient mechanism for indicating a fault in the fuse train

distinct advantage from the standpoint of regulator performance.

The variable-ratio autotransformer-type regulator was chosen for its simplicity and low waveform distortion. Referring to Fig. 3, the CdS crystal is used in a bridge circuit similar to the way a resistor would be used. The CdS crystals behave as a resistor, the resistance of which is a function of the incident intensity. Unless the power-carrying capabilities are exceeded, the crystals obey Ohm's law. If the voltage is doubled, the current for a given incident intensity is doubled.

Regulator Performance

Output from the crystal-resistance bridge circuit is passed through a bridged-T network that serves to stabilize the regulator loop. The network output voltage is compared with the reference voltage of a VR105; any difference is amplified and used to control the regulator tubes. In this case, two triode-connected 6L6's were used. These tubes control the saturable inductor serving as part of the common leg of an autotransformer. Characteristics of the saturable inductor used are shown in Fig. 4.

To check regulator performance, three runs covering three-hour periods were made on typical workdays. An aluminum filter was placed in the beam to establish the condition shown in Fig. 1. To record the output, a special fluorescent-screen photomultiplier pickup was used; arranged to eliminate falling off of response with time. The output of the amplifier was recorded by a high-speed photoelectric recorder. Figure 5A shows the output of the x-ray generator without the regulator. In this case, the output varies over ±15 percent. The large increase at 4:30 is attributed to the factory shutting down at that time.

Using an identical setup, a commercially available electronic regulator of the saturable-inductor type was placed between the line and the x-ray generator. Figure 5B shows that this regulator affords considerable improvement but still leaves much to be desired. The controlling element of the regulator loop in this case was a temperature-limited diode. An attempt was made to schedule the tests over the same period, as experience has shown that Figure 5A is typical for afternoon line conditions at the factory.

The commercial regulator used for Figure 5B is better than it appears in this application. It is because of the relations existing in an x-ray generator as previously described that commercially available regulators perform as they do when used to stabilize x-ray beams.

Figure 5C shows the effect of placing the CdS regulator on the line. Essentially the only difference between the results as shown by Fig. 5B and 5C is that the error voltage fed to the regulator loop in the case of Fig. 5B is proportional to the rms value of the stabilizer output and in the case of Fig. 5C is proportional to the intensity of the x-rays transmitted through the filtering material.

Since the regulator was developed specifically for automatic inspection applications, no provision was made to handle wide kilovoltage variations. In every application of this type the x-ray generator is set to the optimum kilovoltage by means of an autotransformer. The regulator loop then serves to vary the applied kilovoltage by ±30 percent about the mean value in response to the output of the CdS crystal. The variable resistor in the bridge circuit serves to balance the bridge in the middle of the range once it is established. It is not anticipated that voltage variations outside this range will be encountered in practice.

On the basis of laboratory investigations still in progress, changing of the crystal characteristics with use appears to be insignificant. Once installed and calibrated, the stabilizer should maintain constant x-ray output and penetration regardless of x-ray tube aging.

The author wishes to acknowledge the assistance of A. L. Pace, Industrial Section, General Electric X-Ray Corporation, in taking various measurements.



FIG. 3—Schematic diagram of regulator circuit



FIG. 4—Volt-ampere characteristics of saturable inductor



FIG. 5—Output of x-ray generator: (A) unregulated, (B) regulated with ordinary electronic stabilizer and (C) regulated with CdS controlled stabilizer

References

(1) W. T. Sproull, "X-Rays in Practice", McGraw-Hill Book Co., Inc., New York, p 34.
(2) A. F. LeMieux and W. W. Beeman, The Stabilization of X-Ray Tube Current and Voltage, *Rev. Scien. Inst.*, 17, p 130, April 1946.
(3) C. W. Clapp and R. V. Pohl, X-Ray Thickness Gauge for Hot Strip Rolling Mills, *Electrical Engineering*, 67, p 441, May 1948.
(4) J. A. Uttal, Voltage Stabilizers, *Electronic Industries*, p 90, August 1945.
(5) R. Pepinsky and Paul Jarmotz, An Inductively Coupled Series Tube D-C High Voltage Regulator, *Rev. Scien. Inst.*, 19, p 247, April 1948.
(6) R. Frerichs and R. Warminsky, Die Messung von Beta und Gamma Strahlen durch inneren Photoeffekt in Kristallphosphoren, *Naturwiss.*, 33, p 251, 1946.
(7) R. Frerichs, The Cadmium Sulphide X-Ray Detector, *Jour. App. Physics*, 21, p 312, April 1950.
(8) J. E. Jacobs, The Electrical Conductivity of Cadmium Sulphide when Exposed to Pulsating X-Radiation, *Electrical Engineering*, 70, August 1951.

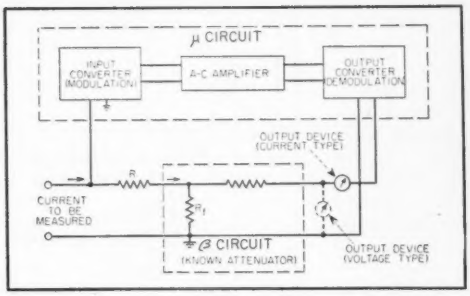

FIG. 1—Basic arrangement of d-c amplifier in which input converter sets limit of zero-offset reduction

Front panel of amplifier, showing zero-center meter having 25-micromicroampere and 25-microvolt basic ranges

D-C Amplifier with

Input required to bring output to zero is less than 1.6 times peak-to-peak thermal fluctuations in new contact-modulated d-c amplifier, corresponding to zero-offset of 10^{-12} ampere on current ranges and 1 microvolt on 20,000-megohm-per-volt voltage ranges

By WILL McADAM, R. E. TARPLEY and A. J. WILLIAMS, Jr.

Research Department, Leeds and Northrup Co., Philadelphia, Pa.

AN ANNOYING characteristic of practical amplifiers is that when their signal inputs are zero, their outputs are not exactly zero.

The zero-signal output, or noise output, from an amplifier may contain components of all frequencies within the transmission band of the amplifier. For example, amplifiers for d-c, to which this discussion is confined, can have in their zero-signal outputs very-low-frequency components and a d-c component. These output components can be brought to zero by the application of an input having proper magnitude and polarity. Zero-offset is herein considered as the amount of amplifier input required to bring the low-frequency and d-c components of the output to zero.

In measurements made with d-c amplifiers, zero-offset can be a component of error, since at any time the amplifier output represents the amplified sum of its signal input and its zero-offset. The error arising from zero-offset is variable in nature because its origin lies in sources affected by uncontrolled conditions such as ambient temperature, line voltage and stray fields. Without special measuring techniques, the limit of uncertainty in measurements made with an amplifier cannot be less than the maximum zero-offset of the amplifier. While zero-offset error can be eliminated by making measurements of the differential type, in general this requires removal of the signal from the amplifier, an inconvenience at best and often a practical impossibility.

The Noise Problem

A contact modulator has previously been described[1] which produces zero-offsetting voltages not exceeding 0.5 microvolt and zero-offsetting currents not exceeding 1×10^{-12} ampere. Using this contact modulator, d-c amplifiers have been constructed[1] having zero-offsets less than 0.5 microvolt with input circuits of about 10^4 ohms. Zero-offsets not greater than 1×10^{-13} ampere have been observed when these amplifiers were adapted to 10^9 ohm input circuits. No amplifier, however, has been available in which the zero-offset is at the same time limited to both 0.5 microvolt and 1×10^{-12} ampere. The problem was to build an amplifier in which the zero-offset would be limited to these two values simultaneously and so approach the limits of performance imposed by its contact modulator much more closely than either of the two amplifiers mentioned (5×10^{-19} watts as compared to 2.5×10^{-17} watts for the 10^4 ohm circuit and 1×10^{-15} watts for the 10^9 ohm circuit).

It is suggested in the previous paper[1] that since the thermal-agitation noise in an amplifier represents the final limit of certainty in measuring with the amplifier, a figure of merit for the zero-offset might be its value relative to the theoretical thermal-agitation noise.[2,3,4,5,6] The amplifier described

This article is based on a paper presented at the 1950 National Electronics Conference. The Conference paper appears in the *NEC Proceedings*.

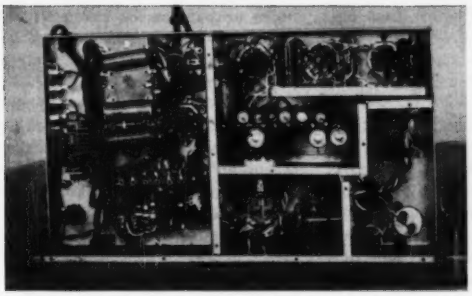

Bottom of amplifier. Chassis cover completes shielding needed to reduce zero-offset

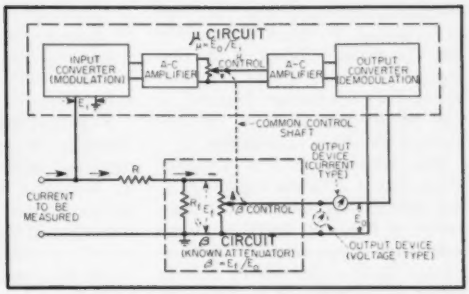

FIG. 2—Preferred range-changing method, in which effective current gain is set by a known attenuator

Reduced Zero-Offset

with the 10^4 ohm circuit exhibited zero-offset which exceeded the peak-to-peak thermal-agitation noise by a factor consistently less than 7.

The amplifier to be described uses the contact modulator mentioned above, and has characteristics approaching closely the limits imposed by the contact modulator. The amplifier zero-offset is at the same time less than 1 microvolt and less than 1×10^{-15} ampere.

Amplifier Design

The amplifier is arranged primarily for current measurement, as shown in Fig. 1 and in more detail in Fig. 2 and 3. It employs the parallel-type feedback useful for current measurement.[1] The action of the circuit is to reduce the current into the input converter to a small fraction of that flowing in R, thus causing the steady-state impedance between the input terminals to be very low (a small fraction of R, so that measurements are of the null-current type).

All amplification in the system is done at a carrier frequency of 60 cps in R-C coupled amplifier stages having poor low-frequency transmission characteristics. Synchronous rectification of the a-c amplifier output and overall d-c feedback are used to stabilize the effective gain to a high degree.[1] The d-c feedback current, or the d-c voltage developed across a part of the feedback circuit, is used as the amplifier output and hence as a measure of the input quantity.

With sufficient gain built into the forward or μ path of the amplifier, the effective current gain is determined solely by the ratio of resistances R and R_f. This ratio must, therefore, be accurately known. In a single-range model of the amplifier, following the arrangement of Fig. 1, the ratio R/R_f was made 2×10^6 so that a 100-microampere output instrument was deflected fully by an input of 50×10^{-15} ampere. The zero-offset of 1×10^{-15} ampere caused by the input converter thus amounted to only 2 percent of the range.

A zero-offset representing at once a current of 1×10^{-15} ampere and 0.5 microvolt dictates an input circuit impedence of 0.5 megohm. However, because the amplifier was meant to be primarily current-sensitive, a value of 1 megohm was chosen for R to favor the performance for current measurements. The amplifier input circuit impedance is thus about 1 megohm, since it is largely determined by the value of R, and the maximum zero-offset represents both 1×10^{-15} ampere and 1 microvolt. Powerwise, this is 1×10^{-15} watt.

The good current sensitivity of the arrangement just described suggests its use for voltage measurements. The adaptation is simple, the only requirement being the inclusion of an accurately known resistance in series with the current-measuring terminals. A second 1-megohm resistor has been included for this purpose, as shown in Fig. 3, giving the instrument a basic voltage range of 50 microvolts with a current drain of 5×10^{-11} amperes at this input voltage (20,000,000,000 ohms per volt).

Range Changing

The usefulness of an amplifier as a measuring instrument is greatly enhanced by the provision of multiple-range features. Range-changing can be accomplished in this type of amplifier by varying the ohmic value of R or R_f (Fig. 1), by varying the portion of R traversed by the unknown current, or by changing the ratio of the current flowing in R_f to the total output current. An early method of range-changing for a current-measuring amplifier[1] consists of connecting one input terminal to a movable tap on the known resistance R. The current gain then depends upon the position of the tap. This method has the advantage of keeping essentially constant the $\mu\beta$ product of the amplifier, hence its stability against oscillation for various ranges. Further, it has the advantage of minimizing the potential drop between input terminals for all ranges; the input impedance,

therefore, is decreased as the range is increased. However, the method has the distinct disadvantage that the noise output of the amplifier appears as a constant fraction of full output, regardless of the current range of the instrument.

The behavior of the amplifier noise output with the range-changing method just mentioned is illustrated in Fig. 4A. Increase in the measuring range with a constant-valued input signal can be seen to result in decrease in the average (desired) output without any corresponding decrease in the noise output. The noise, therefore, represents greater input equivalents on greater ranges.

A preferred range-changing method is one which yields a noise output which diminishes as the measuring range of the amplifier is increased, and also incorporates the advantages of a constant $\mu\beta$ product.

Range-changing by varying the ratio of the current flowing in R_f to the total output current produces the desired reduction of the noise output with increasing range. However, any change in this ratio is a change in the feedback transmission β (the attenuation from the output terminals to R_f is changed). Range-changing by this method, therefore, can fulfill the constant $\mu\beta$ product requirement necessary to preferred range-changing only if changes in the value of β for range control are accompanied by simultaneous inverse changes in the value of μ.

This preferred method of range changing is accomplished in the amplifier, as shown in Fig. 2 and 3, by including variable divider networks in both the μ and β paths. Operation of these variable dividers is from a common shaft, and they are so arranged that an increase of attenuation in one divider is accompanied by a simultaneous decrease of attenuation in the other, maintaining the product of the attenuations of the two dividers constant (except for the three lower ranges as explained below). The values of R, R_f, and β are chosen so that on its narrowest range, the amplifier has the same current sensitivity as the single-range version mentioned previously in connection with Fig. 1, 100 microamperes output for 50×10^{-12} ampere input. As in the single-range circuit, provision for voltage measurements is made by inclusion of a fixed multiplier resistor, hence the range-changing mechanism provides a voltage range corresponding to each current range.

The changes in output signal and in output noise caused by changing the amplifier range in the preferred way are illustrated in Fig. 4B. The noise output can be taken to represent a constant noise current (or voltage) at the input terminals of the amplifier.

With a 100-microampere output instrument, the performance of the amplifier shows a slight progressive falling-off on its 250, 100 and 50 micromicroampere ranges. This occurs because the limited forward gain available requires that the $\mu\beta$ product for these three lower ranges be reduced below its value for the other ranges. The falling-off in performance is most obviously an increase in response time, the time for 99-percent response on the 50×10^{-12} ampere range being about 6 seconds as compared with about 2.5 seconds for the higher ranges.

When it is essential to have both a 2.5-second response time and a 50×10^{-12} ampere range, the 100-microampere output instrument should be replaced with a 10-microampere instrument, and the scale multiplier set to 10 (the normal setting for a 500×10^{-12} ampere range). Since 10-microampere instruments are somewhat special, it has been found convenient to use a fast, narrow-range electronic recorder for the output device. To simplify shielding, a voltage recorder with a 0.1-volt range has been used by connecting it to terminals in the amplifier normally

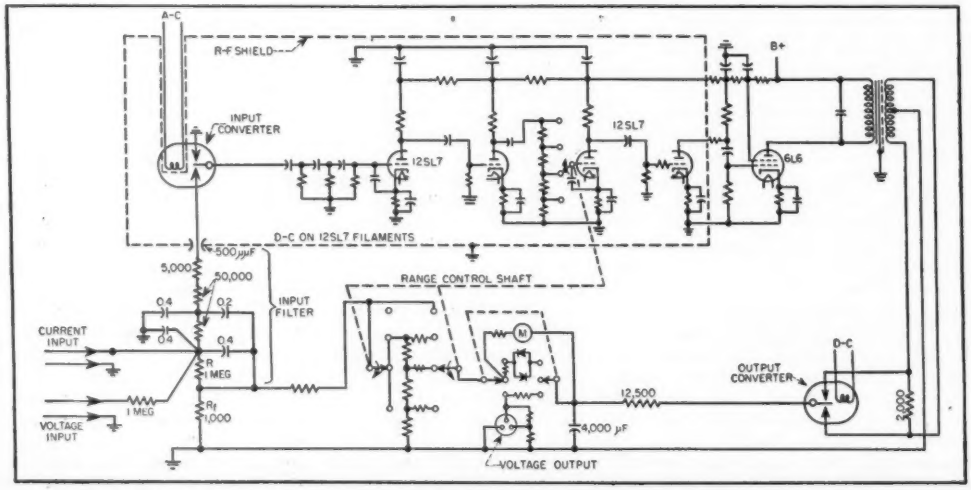

FIG. 3—Simplified circuit diagram of multi-purpose contact-modulated d-c amplifier. Calibrated woven-wire 1-megohm resistor in voltage input lead sets impedance level at 1 megohm

supplying 1.0 volt of output.

The impedance appearing between the input terminals of the amplifier is low for d-c and low-frequency inputs, for which rebalancing can be completed, but it is higher for higher-frequency inputs, for which rebalancing cannot be completed because of delay. The delay in rebalancing depends on the time-constant of the low-pass filter in the β circuit (Fig. 3) and the gain around the feedback loop. The delay has been found experimentally to result in a rebalancing time of about 2.5 seconds (for 99 percent response to an abrupt change of input) on all but the lower three ranges. An approximate equivalent circuit can be found by a calculation involving the experimentally-determined rebalancing time, the experimentally-determined gain around the feedback loop and the circuit values shown in Fig. 3. An equivalent circuit that approximates the amplifier input closely on all but the three lower ranges consists of a 1-megohm resistance shunted by the series combination of a 543,000-henry inductance and a 1,700-ohm resistance.

Reducing Zero-Offset

The use of a contact-modulated amplifier avoids most of the zero-offsets connected with amplification which are encountered in direct-coupled amplifiers that follow conventional design practices.

Even with contact modulation, however, zero-offsets can arise from disturbances of electric, magnetic, mechanical and thermal nature.[2] Preventive measures against zero-offset are chosen on the basis of the frequencies of the disturbing signals and their point of entry into the circuit. Zero-offsetting disturbances in the amplifier have been broken down into three classes—those of power frequency, those of radio frequencies and those of lower frequencies in or near the pass-band of the amplifier. The zero-offset resulting from each of these types of disturbance can be attacked nearly independently, using techniques appropriate to the frequency range of the disturbance, as described with considerable detail in a previous paper.[3]

In building the present amplifier all of the precautions so described were used, but at first the zero-offset was discouragingly large. Its source was traced to the resistors and the capacitors used in the input filter, as shown in Fig. 3.

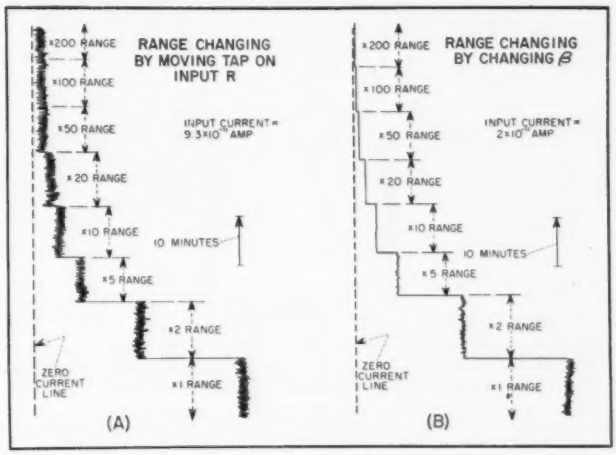

FIG. 4—Comparison of noise behavior with different range-changing methods. A change in deflection between the two highest ranges can be seen with preferred method (B), but not with other method

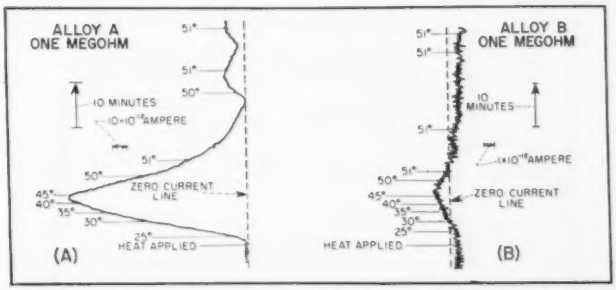

FIG. 5—Thermally-induced current outputs from resistors using different alloys. Temperature of air surrounding resistors is given in degees C. Alloy B was used for the input resistors of the amplifier

The one-megohm resistor used for current measurement and the companion one-megohm multiplier resistor added for voltage measurement must be made of wire in order to have a satisfactorily low temperature coefficient of resistance. In order to minimize loops in these resistors and so minimize the voltage developed in them by changing magnetic fields, woven wire resistors are used. Early resistors of this type were suspected of causing zero-offset. Fig. 5A shows the result of a test to determine if this zero-offset resulted from thermal disturbances. A temperature gradient was set up in a resistor of this type by increasing the ambient temperature 20 degrees in 10 minutes. The resulting gradient produced a current of about 2×10^{-10} ampere. While this temperature change is more severe than would be encountered under ordinary service conditions, the test showed that production of current by resistors could result in considerable zero-offset. Figure 5B shows the result of a similar test on a resistor of similar construction made from a different resistance alloy. The generated current is small, in spite of the severe temperature change, showing that this resistor qualifies for use in the amplifier.

The four capacitors used in the input filter (Fig. 3) were suspected

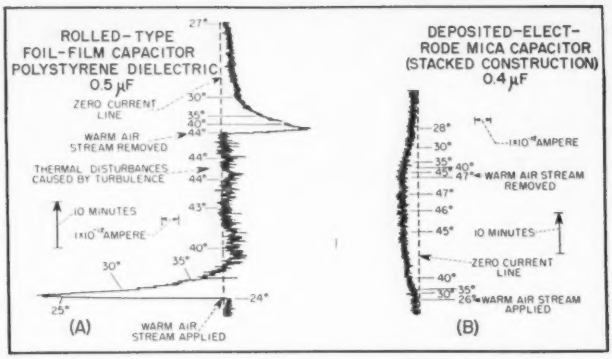

FIG. 6—Thermally-induced current outputs from two different capacitor constructions. Temperatures of capacitor cases in degrees C are indicated

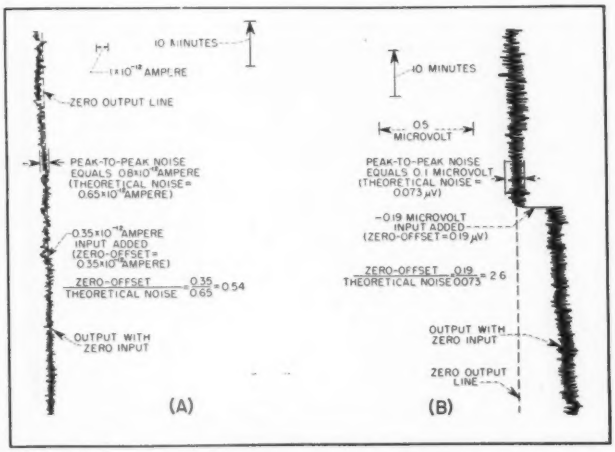
10 MINUTES
1X10⁻¹³ AMPERE
ZERO OUTPUT LINE
PEAK-TO-PEAK NOISE EQUALS 0.8X10⁻¹³AMPERE (THEORETICAL NOISE = 0.65X10⁻¹³AMPERE)
0.35X10⁻¹³AMPERE INPUT ADDED (ZERO-OFFSET = 0.35X10⁻¹³AMPERE)
ZERO-OFFSET / THEORETICAL NOISE = 0.35/0.65 = 0.54
OUTPUT WITH ZERO INPUT
(A)
10 MINUTES
0.5 MICROVOLT
PEAK-TO-PEAK NOISE EQUALS 0.1 MICROVOLT (THEORETICAL NOISE = 0.073 μV)
-0.19 MICROVOLT INPUT ADDED (ZERO-OFFSET = 0.19 μV)
ZERO-OFFSET / THEORETICAL NOISE .019/.0073 = 2.6
OUTPUT WITH ZERO INPUT
ZERO OUTPUT LINE
(B)

FIG. 7—Relation of zero-offset to noise in present amplifier (A) and early version (B) when both were operating well within their ratings

of causing zero-offset, so they also were given the temperature gradient test. Fig. 6A shows the results of a test on one of the four capacitors using an early type of construction. While the temperature change is more severe than would be encountered under ordinary service conditions, it is evident that use of such a capacitor could result in considerable zero-offset. Figure 6B shows the effect of a similar temperature change on a mica capacitor[7] of about the same capacitance value. The generated current was small, in spite of the severe temperature change, showing that this capacitor is qualified for use in the amplifier.

Figure 7A shows a typical record of the output of the amplifier equipped with good resistors and capacitors. At one time when the zero-offset appeared to be about 0.35×10^{-13} ampere a signal of -0.35×10^{-13} ampere was applied to the input, bringing the average output back to the zero-output line. From more extensive tests it appears that the zero-offset will not exceed 1×10^{-13} ampere. Using this figure, the ratio of maximum zero-offset current to theoretical peak-to-peak noise current is $1 \times 10^{-13}/0.65 \times 10^{-13} = 1.6$.

Figure 7B shows for comparison a typical record of the amplifier described in a previous paper[1] for which the ratio of maximum zero-offset voltage to theoretical peak-to-peak noise voltage is $0.5 \times 10^{-6}/0.073 \times 10^{-6} = 7$. The present amplifier therefore shows a factor of improvement of more than 4 based on the figures of merit represented by these ratios.

Applications

The amplifier which has been described in this paper is not commercially available; to date only a few experimental units have been built. The units which have been completed, however, have found a number of uses in our own investigations and elsewhere.

As might be suspected from its characteristics, the amplifier is particularly well suited to the measurement of insulation resistance; its current sensitivity permits the measurement of high resistances with only small applied potentials. For example, with only 1 volt applied, a micro-micromho of leakage can be detected.

Its capabilities in making high-resistance measurements make the amplifier useful in studies of capacitor dielectrics. In addition to the simple insulation resistance characteristics of dielectrics, the phenomena of absorbed charge in capacitors, residual and thermal outputs from capacitors and current outputs from resistors are effects which have been studied with the amplifier.

The authors are grateful to J. W. Harsch, W. D. Voelker and C. A. Alberts for the mica capacitors used, and to W. H. Packer for his continuing assistance in the development of the contact modulator.

References

(1) A. J. Williams, Jr., R. E. Tarpley and W. R. Clark, D-C Amplifier Stabilized for Zero and Gain, *AIEE Transactions*, 67, p 47, 1948.
(2) J. B. Johnson, Thermal Agitation of Electricity in Conductors, *Physical Review*, 32, p 97, July 1928.
(3) H. Nyquist, Thermal Agitation of Electric Charge in Conductors, *Physical Review*, 32, p 110, July 1928.
(4) K. G. Jansky, An Experimental Investigation of the Characteristics of Certain Types of Noise, *Proc. IRE*, 27, p 763, Dec. 1939.
(5) V. D. Landon, A Study of the Characteristics of Noise, *Proc. IRE*, 24, p 1,514, Nov. 1936.
(6) V. D. Landon, The Distribution of Amplitude with Time in Fluctuation Noise, *Proc. IRE*, 29, p 50, Feb. 1941.
(7) C. H. Applegate, Capacitor Requirements of a Manufacturer of Electrical Measuring Instruments, *Proc. Symposium Improved-Quality Electronic Components*, p 97, May 1950.

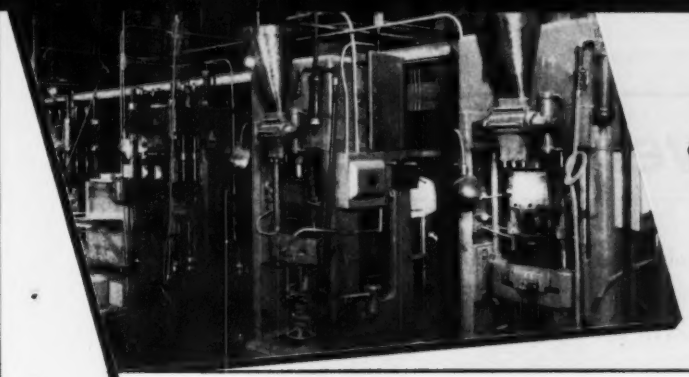

QUANTITY PRODUCTION OF LOW LOSS MICA COMPONENTS . . .
exclusively a CINCH feature . . . . and another contributing factor to the choice of CINCH electronic components as **STANDARD**

FOR MORE THAN A QUARTER OF A CENTURY— CINCH HAS CONTRIBUTED **STANDARD** ELECTRONIC COMPONENTS TO INDUSTRY AND THE ARMED FORCES

CINCH electronic components are available at leading jobbers—everywhere.

. . . PRODUCING "FIRSTS" FOR SPECIFIC COMPONENT USES HAS CONTRIBUTED TO CINCH'S POSITION IN ELECTRONIC COMPONENT PRODUCTION.

And the performance of these and all CINCH components has proven them to be of the utmost in quality, of insulation and other materials, tooling, fabrication, plating and printing, vacuum waxing and workmanship.

CINCH facilities and engineering experience and ability assure the satisfactory fulfillment of any assignment for an electronic component.

Consult CINCH

CINCH MANUFACTURING CORPORATION
1026 South Homan Ave., Chicago 24, Illinois
Subsidiary of United-Carr Fastener Corporation, Cambridge, Mass.

Cinch
ELECTRONIC COMPONENTS

Field-Power Conversion

Direct-reading conversion chart enables quick transfer of propagation data from field-strength to power-density values. Gain in db above 1 microvolt per meter and gain or loss in db above 1 microwatt per square meter shows at a glance

By ROBERT E. PERRY

Electrical Engineer
Boeing Aircraft Co.
Seattle, Washington

In calculations involving propagation curves it is often convenient to do the computation in terms of power density rather than in terms of field strength, which is given in most propagation curves. Changing field intensity into power density can be greatly simplified by the conversion chart.

The chart is based upon the equation

$$P = \frac{E^2}{120\,\pi}$$

where E is the field intensity, P is the power density and 120π is the resistance of free space.

The conversion chart is direct reading. A value on the left scale can be found in terms of the scale on the right side by reading directly across, or it can be read in terms of the upper or lower scale by reading over to the diagonal line and then up or down to the desired scale.

For example, a field of 500 μv per meter corresponds to a power density of approximately 7×10^{-10} watts per square meter. It is 54 db above 1 μv per meter, or about 32 db below 1 μw per square meter.

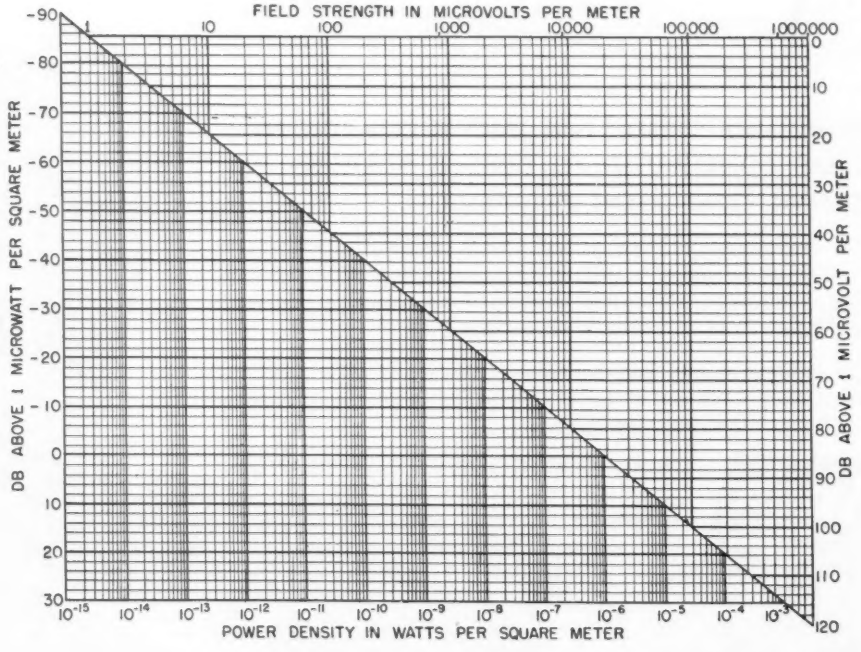

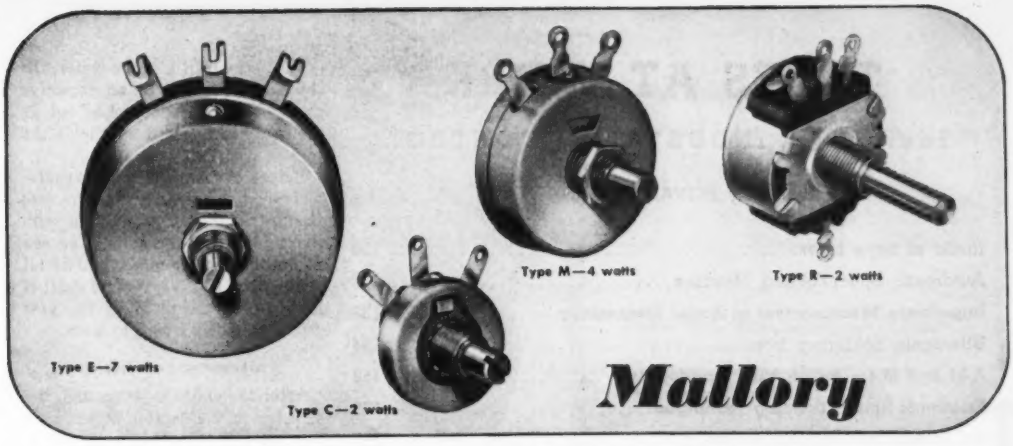

Wire Wound Controls

offer designers wide range of types and ratings

From television, through a host of industrial uses, to precision instrumentation . . . Mallory wire wound controls find a host of applications. And all of the necessary type and rating variations are found in the group of four shown above.

Precision windings, durable contacts and rugged construction make Mallory wire wound controls more than a match for the exacting demands of critical services . . . and contribute to the dependable performance for which all Mallory components are known.

Further information is available on request.

Electrical Characteristics

Resistance Values

Various ranges from ½ ohm up to 150,000 ohms.

Standard Tolerance

±10%; special tolerances available.

Available Tapers

Linear taper is standard. Special combinations can be supplied.

Ratings

for loads of 2, 4 and 7 watts.

Television Tuners, Special Switches, Controls and Resistors

SERVING INDUSTRY WITH

Electromechanical Products
Resistors *Switches*
TV Tuners *Vibrators*

Electrochemical Products
Capacitors *Rectifiers*
Mercury Dry Batteries

Metallurgical Products
Contacts *Special Metals*
Welding Materials

P. R. MALLORY & CO. Inc.
MALLORY
P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

TUBES AT WORK

Including INDUSTRIAL CONTROL

Edited by RONALD K. JURGEN

Radio to Save Lives 136
Automatic Sheet-Folding Machine 138
Impedance Measurement at Audio Frequencies 138
Ultrasonic Soldering Iron 154
A-M or F-M for British VHF Broadcasting 158
Electronic Shuttle-Bonding Technique 166
An Automatic Time Announcer 170
Circuit Printers for Flat and Cylindrical Surfaces 178
Automatic Audio Level Riding 190
Wide-Range Voltage Regulators 202
Aircraft Communication System 210

Radio to Save Lives

THE AIR FORCE'S big A-3 lifeboat, dropped by parachute in air-sea rescue operations, will soon have radio control that will bring it up to survivors, allow them to board and then set the boat on course by an operator in the plane which dropped the boat. By simply maneuvering a stick on a small control box he can take over when the A-3 hits the water and keep control until the survivors can take control.

The A-3 itself is of all-metal construction, measures 30 feet long and is designed to carry 15 men. It is powered by a four-cylinder water-cooled engine, housed in a water-tight compartment. Carried "bombed up" under the SB-29 (research and rescue version of the B-29 bomber), the A-3 is dropped by a 100-foot parachute.

The new radio-controlled lifeboat is shown just after being released from beneath a Boeing SB-29 Superfort

When the boat hits the water, the chute is jettisoned by an explosive charge. A sea anchor goes out as the chute is released and holds the boat in position.

Before development of the radio-controlled system, the A-3 was dropped in the vicinity of the survivors, allowing for drift. The sea anchor held it in place, and if all went well the survivors drifted down to the boat. With the new system, the boat comes to them.

Transmitter and Receiver

After the chute is jettisoned, the operator in the carrier plane takes over on a five-frequency transmitter which is matched up by a five-frequency receiver in the boat. He sends his first signal from the control box. This, in order, releases the stabilizing fins which held the boat steady in descent, frees the rudder board, opens the engine's air vents and cranks the motor intermittently. When the motor catches and is running at a fast idle, the sea anchor is released.

At the operator's next signal, the engine speeds up, the reduction gear goes into forward, and the boat moves ahead. The operator can control its direction right and left and a flux-gate gyro compass connected to the servo electric system on the boat will keep it on whatever course he sets.

The operator stops the boat when it comes up to the survivors' raft and idles the motor while they board. The boat is equipped with a walkie-talkie radio set for communication between the rescued men and the operator in the plane, who will then set the A-3 on its correct course. The gyro compass will keep it on that course with only slight variations that can be checked by a magnetic compass.

The boat itself is equipped with duplicate controls and a manual over-ride which would enable the survivors to break off the radio control at any time.

The A-3 is equipped with rations, survival equipment and gasoline enough to cruise 800 miles. If the distance is longer than that, the boat can be resupplied from the air, since its preset course will be known.

The system, developed by the

The finest solder made for all television and radio work . . . Everything Electrical

Kester Solder

Uniform

Efficient

Kester Plastic Rosin-Core and Kester "Resin-Five" Core Solders are recognized by the trade as outstanding for the finest type of radio, television and electrical work.

These two Solders, which are available in the usual single-core type, can now also be had in a 3-core form.

Only highly skilled craftsmen are employed by the Kester Solder Company. Flux formulas and specifications are rigidly adhered to for perfect uniformity.

Making Kester Solder is an exact science from the raw material to the finished product. Everyone knows and prefers Kester because it can be relied upon to do the job right every time, even under the most difficult soldering conditions.

WRITE FOR FREE COPY "SOLDER AND SOLDERING TECHNIQUE"

Be sure to get your free copy of Kester's Technical Manual filled with valuable information regarding the most advanced and efficient industrial solders and fluxes.

EASIER TO USE

FASTER

DEPENDABLE

SAVES TIME

MADE FROM VIRGIN METALS

ELIMINATES REJECTS

KESTER SOLDER

Kester...Standard for the TV and Radio Fields

KESTER SOLDER COMPANY

4204 Wrightwood Avenue, Chicago 39, Illinois

Newark, N. J. • Brantford, Canada

Equipment Laboratory of the Air Materiel Command and built by the Westinghouse Electric Corporation, is expected to be completely installed in all the Air Force's A-3 boats by early 1952. Transmitters have already been installed in all SB-29's.

Automatic Sheet-Folding Machine

By Ronald C. Walker

Reading, England

Photoelectric relay equipment was recently installed in a British laundry for the purpose of folding sheets. The apparatus performs the operations which previously required the attention of two girls and ensures that the laundered sheets are neatly folded twice in the same direction.

Before reaching the detecting point in the various stages of processing, the sheets pass through an ironer and thence are fed on to a conveyor comprising a number of parallel webbing belts. When each sheet reaches a certain point in its forward travel on this conveyor, the leading edge intercepts a light beam which actuates the relay in an associated amplifier.

The photocell relay admits air pressure to a series of pneumatically operated claws arranged in line at right angles to the direction of motion. The leading edge of the sheet is then gripped and held and at the same time slightly raised above the moving belts which continue to carry the end portion of the sheet forward and underneath the stationary front edge, so that a fold is formed.

When the two halves just overlap one another, the fold is complete and the trailing edge uncovers the light beam again. The claws then release and the sheet travels forward in the folded condition.

After the first fold, the sheet moves on to another detecting point where the process is repeated with the aid of a second and similar photoelectric equipment, thus giving a second fold.

Though the photoelectric apparatus in this particular case is employed for folding sheets, it is equally applicable to industries where textiles, leather, paper and so forth have to be handled in the same way.

A further application of light-sensitive cells in the laundry has resulted in considerable saving of fuel. After the clothes are washed, they are dried by passing on a moving conveyor around a room heated by a steam radiator. The drying process is accelerated by means of a fan which circulates the hot air. The fan, which is controlled by a simple photoelectric relay, is in the circuit as long as the light beam spanning the room is intercepted by the clothes being carried around on the conveyor.

If, for any reason, there is a temporary hold up in the material being loaded on the conveyor, the light beam is no longer obscured and the fan is shut down. As soon as more clothes come along, it starts up again. This ensures a considerable saving of fuel by preventing the operation of a large fan when no clothes are in the room for drying purposes.

Automatic sheet-folding machine operated by photocell relay circuits

Impedance Measurement at Audio Frequencies

By Paul W. Klipsch

Klipsch and Associates
Hope, Arkansas

During the course of loudspeaker development, the necessity for making voice-coil impedance measurements was continuous. The inductometer impedance bridge was capable of yielding the desired information but was slow due to the necessity of balancing simultaneously the resistive and reactive components. Several methods involving a single resistance balance to obtain equal voltages across a calibrated resistor and the unknown were tried.

The most desirable indicator was found to be a cathode-ray oscilloscope in which the vertical and horizontal deflections serve respectively for the voltage measuring devices across the unknown impedance and across a calibrated variable resistor.

In Fig. 1, R is a calibrated slide-wire resistor or decade box and Z is the unknown impedance. The cathode-ray oscilloscope is illustrated in simplified form.

Operation

The operation is as follows: a known resistor is substituted for Z, preferably of a value within the known range of variation of Z.

(continued on page 154)

Ceroc 200

CERAMIC-COATED MAGNET WIRE

...FOR HIGHER RATINGS IN SMALLER WINDINGS



Same v-a rating! At the left is a filament transformer for a radio transmitter wound with double vinyl-acetyl insulated wire and impregnated with synthetic varnish. It is rated at 1,000 hours life under 85°C. ambient temperature operation. At the right is the same transformer, redesigned, and wound with CEROC 200 and impregnated with silicone resin. It has a rated life of 10,000 hours at 160°C. ambient temperature operation!

Shrink the size of small transformers, chokes, relay coils, and other wire-wound electrical components by winding them with Sprague's CEROC 200 Magnet Wire.

This wire has an exclusive ceramic-silicone insulation which permits continuous operation at 200°C. Size for size, it safely carries far larger currents than ordinary magnet wires using conventional insulating materials. Consequently, CEROC 200 can save both copper and magnetic materials for you.

Write for Engineering Bulletins 401 and 403B

• • •

Ceroc T Wherever higher temperatures and severe mechanical stresses are present, investigate CEROC T, the most heat-resistant of all magnet wires! For specifications on this 250°C. ceramic-Teflon insulated wire, write for Engineering Bulletin 402F.

SPRAGUE®

PIONEERS IN ELECTRIC AND ELECTRONIC DEVELOPMENT

SPRAGUE ELECTRIC COMPANY

CEROC is a registered trademark of the Sprague Electric Company.

THE ELECTRON ART

Edited by JAMES D. FAHNESTOCK

Converter Circuit for Phase-Shift Telemetering 140

A New Analog Computer 216

Measuring Power Factor of Low-Loss Dielectrics 224

Self-Erecting Weather Station 232

Zero-Impedance Power Supply Termination 240

Stress-Strain Recorder 244

Converter Circuit for Phase-Shift Telemetering

BY F. G. WILLEY

Servo Corporation of America
New Hyde Park, New York

TELEMETERING is the name commonly applied to the transmission of data from one location to another. A quantity which is to be telemetered may be of one of two types: (1) A scalar quantity has a value which lies between two specified numerical limits. (2) A cyclic quantity, such as the angular position of a shaft, has no minimum or maximum limits and is capable of continuous rotation.

A cyclic quantity may be expressed as a periodic pseudo-scalar quantity, as in angular measurement where we count up to 360° and then arbitrarily start counting again from zero. In many servo and telemetering applications, the arbitrary jump to zero is inconvenient to mechanize.

A cyclic quantity may also be expressed, or recoded, into two or more continuous periodically-varying scalar values. This produces a system having no discontinuities but requiring two or more channels for transmission. A common example of this is the standard synchro which codes the position of a shaft as relative amplitudes of three carrier voltages:

$E \sin \omega t \sin \theta$

$E \sin \omega t \sin (\theta + 120°)$



Commercial plug-in assembly containing two synchro-data telemetering circuits

$E \sin \omega t \sin (\theta + 240°)$

where Θ is the angle of the synchro shaft.

Coding Systems

Since the data to be transmitted actually represents only one quantity (angle) it should be possible to find a means of coding which would produce a single transmittible signal which is cyclic in nature rather than scalar. A quantity which has the required characteristic is the phase shift of a single frequency carrier from a reference wave of the same frequency. Thus in order to transmit N different cyclic quantities, it is necessary to transmit $(N + 1)$ sine waves of the same frequency, the extra one being

(continued on p 212)

MEASURING POWER FACTOR OF LOW-LOSS DIELECTRIC MATERIALS

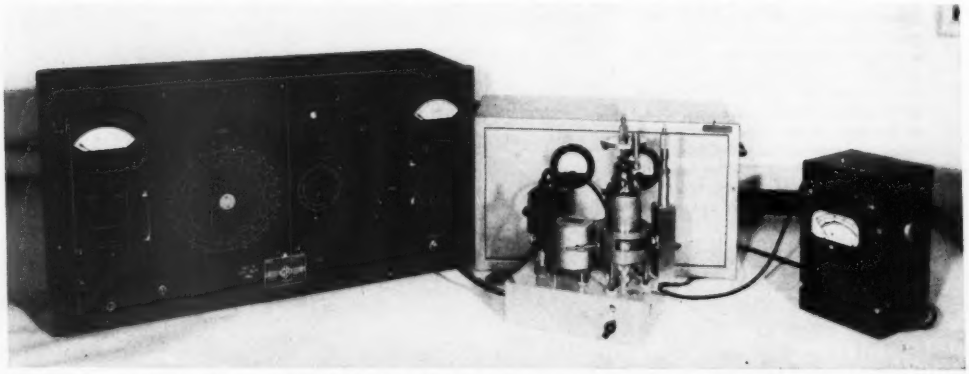

Equipment used at National Bureau of Standards for making power factor measurements on low-loss dielectrics. Measurements as low as 10^{-4} may be made to three significant figures from 1 kc to 300 mc. In the center is the micrometer electrode and coil mounted on negative resistance circuit. Power supplies and measuring instruments are shown in background. (For complete details and circuitry, see p 224)

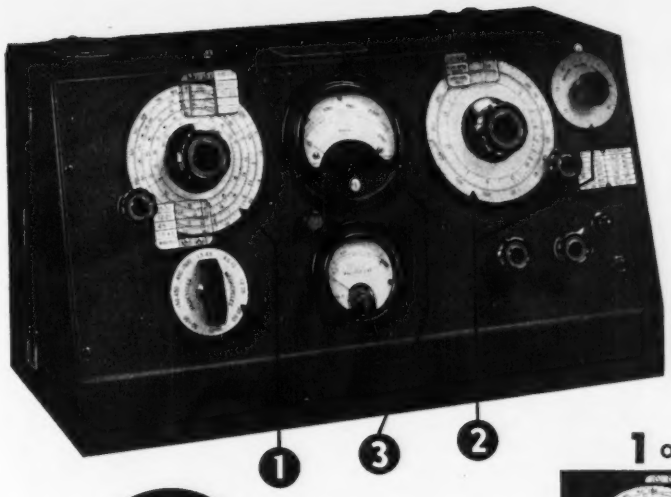

EXAMINE THESE

Direct Reading Features

WHICH SIMPLIFY ACCURATE MEASUREMENTS

The Q METER TYPE 160-A

50 kc. to 75 mc.

Radio frequency circuit design often requires the accurate measurement of Q, inductance and capacitance values. For this application the Type 160-A Q-Meter has become the uncompromising choice of radio and electronics engineers in this country and abroad.

Each component part and assembly used in the manufacture of this instrument is designed with the utmost care and exactness. Circuit tolerances are held to values attainable only in custom built instruments.

With the 160-A Q-Meter, as with other Boonton Radio Corporation instruments, the keynote in design is to embody accurate *direct reading* features which save time and simplify operation.

SPECIFICATIONS

Oscillator Frequency Range: 50 kc. to 75 mc. in 8 ranges.

Oscillator Frequency Accuracy: ±1%, 50 kc.—50 mc.
±3%, 50 mc.—75 mc.

Q Measurement Range: Directly calibrated in Q, 20-250. "Multiply—Q—By" Meter calibrated at intervals from x1 to x2, and also at x2.5, extending Q range to 625.

Q Measurement Accuracy: Approximately 5% for direct reading measurement, for frequencies up to 30 mc. Accuracy less at higher frequencies.

Capacitance Calibration Range: Main capacitor section 30-450 mmf, accuracy 1% or 1 mmf whichever is greater. Vernier capacitor section +3 mmf, zero, −3 mmf, calibrated in 0.1 mmf steps. Accuracy ±0.1 mmf.

Catalog "H" containing further information available upon request.

1 OSCILLATOR FREQUENCY DIAL.

This large 4½" open faced dial has eight overlapping frequency ranges, each calibrated *directly* in kilocycles or megacycles, with scales conveniently divided for maximum readability. A vernier dial drive enables fine settings to be made with ease. All frequency ranges are accurate to within ±1% except the 50-75 megacycle range which is accurate to ±3%. The clearly marked range change switch located directly beneath the frequency dial facilitates rapid and positive selection of the desired frequency band.

2 Q-TUNING CAPACITANCE DIALS.



L-C dial serves twofold purpose of (1) conveniently and accurately indicating tuning capacitance *directly* in MMF, and (2) providing an effective inductance scale which also becomes *direct* reading at certain defined frequencies shown on frequency reference plate. Incremental capacitance dial at right calibrated from +3 MMF through zero to −3 MMF, accurate to ±0.1 MMF.

3 Q-VOLTMETER AND MULTIPLIER METER.



For the indication of Q values the 160-A Q-Meter employs a Weston Model 643 Meter calibrated *directly* in terms of Q over the range from 20-250. The damping of the meter movement is ideal for the rapid determination of exact resonance without sluggishness or overshoot. The lance type pointer enables Q readings to be obtained to the nearest unit. Located directly beneath the Q voltmeter is the "Multiply-Q-By" meter which provides Q multiplier factors of X1 to X1.5 in 0.1 steps, X2, and X2.5 thereby extending the useful range of Q indication to 625. This meter is carefully matched to a particular thermocouple element for maximum accuracy.

DESIGNERS AND MANUFACTURERS OF THE Q METER · QX CHECKER FREQUENCY MODULATED SIGNAL GENERATOR · BEAT FREQUENCY GENERATOR AND OTHER DIRECT READING INSTRUMENTS

BOONTON RADIO Corporation
BOONTON · N.J. · U.S.A.

NEW PRODUCTS

Edited by WILLIAM P. O'BRIEN

Interesting Laboratory Devices Are Featured . . . Technical Data Are Given for New Miniature Equipment . . . Thirty Bulletins Are Described

Lighthouse Tube

GENERAL ELECTRIC CO., Schenectady, N. Y., has put into production another in the series of lighthouse tubes used in radar during World War II. The GL-2C39A high-mu triode can also be used in radio communications and other military equipments. Its nonmilitary applications include aircraft traffic and location controls, broadcast relay equipment, microwave test apparatus, and utility telemetering and communications systems. The tube can operate at full rating up to frequencies as high as 2,500 mc. Maximum d-c plate voltage is 1,000 volts and dissipation is 100 watts.



Square-Wave Generator

ELECTRO - MECHANICAL RESEARCH, INC., Ridgefield, Conn. Model 43A square-wave generator is a versatile laboratory instrument for use in testing audio, video and r-f amplifiers and networks. It includes a wide-range variable-frequency multivibrator that drives a two-stage clipper circuit to produce negative-going square waves. Frequency range is from 6 cycles to 1,000,000 cycles with self-contained generator. Output voltage is approximately 24 volts peak-to-peak when the generator is operated on a 115-volt line. The voltage is delivered at the end of a 300-ohm transmission line that is 24 in. long from driving point to termination. Power consumption is approximately 125 watts at 115 volts, 60 cycles.

Laboratory Monitor

TRACERLAB, INC., 130 High St., Boston 10, Mass. Developed specifically for use as a routine contamination monitor in radioactivity laboratories, the SU-3B laboratory monitor is especially useful for several important applications. They are: checking laboratory bench tops for contamination; checking laboratory glassware in tracer experiments for adequate decontamination; steady monitoring of laboratory background counting rate to detect large scale fluctuations; and monitoring fingertips and laboratory coats for contamination. The instrument is compact, direct reading and a-c operated, and it has three full-scale meter ranges of 200, 2,000 and 20,000 counts per minute. It comes completely equipped including a mica end-window Geiger tube enclosed in a detachable probe assembly connected to the instrument by a convenient length of flexible cable.



Stroboscope

THE SYNCHROSCOPE CO., 57 William St., New York 5, N. Y., has introduced a portable flashlight-type stroboscope capable of indicating synchronous speeds. It is ideal for production and laboratory testing as well as field servicing of synchronous motors, time switches, timing devices, aircraft motors, generators, business machines and other devices using synchronous speeds. The instrument uses an electronic cold-cathode triode tube that rectifies the line source and gives off a pulse of light only during the positive portion of the a-c cycle.



High-Power Amplifier

NEWCOMB AUDIO PRODUCTS CO., 6824 Lexington Ave., Hollywood 38,

RAYTHEON FILAMENTARY SUBMINIATURE TUBES

for supreme reliability and long life
for supreme reliability and long life
for supreme reliability and long life
for supreme reliability and long life
for supreme reliability and long life
for supreme reliability and long life
for supreme reliability and long life

TRANSCRIBE THIS STATEMENT 25,000 TIMES

DICTAPHONE CORPORATION

did it — checked the average life of over 25,000 RAYTHEON CK510AX Subminiature Tubes used in their Time-Master Transcriber and found these tubes were good for *five years* of operation (more than 9000 hours on the job) before replacement could be expected.

Performance like this is taken for granted by thousands of users of Raytheon Subminiature Tubes. That's why they are standard throughout the world — *more of them in use than all other makes combined.*



This chart gives you at a glance the characteristics of representative Raytheon Subminiature Tubes

Type No.	Remarks	Maximum Diameter Inches	Maximum Length Inches	Filament Or Heater Volts	Filament Or Heater Ma.	Mutual Conductance umhos	Power Output MW	Plate Volts	Plate Ma.	Screen Volts	Screen Ma.	Grid Volts
HEATER CATHODE TYPES												
CK5702/CK605CX	Characteristics of 6AK5	0.400	1.5	6.3	200	5000		120	7.5	120	2.5	Rk = 200
CK5703/CK608CX	Triode, UHF Oscillator, ¾ watts at 500 Mc	0.400	1.5	6.3	200	5000		120	9.0			Rk = 220
CK5704/CK606BX	Diode, equivalent to one-half 6AL5	0.315	1.5	6.3	150			150ac	9.0			
CK5744/CK619CX	Triode, High mu.	0.400	1.5	6.3	200	4000		250	4.0			Rk = 500
CK5784	Characteristics of 6AS6	0.400	1.5	6.3	200	3200		120	5.2	120	3.5	−2.0
CK5829	Similar to 6AL5	0.300x0.400	1.5	6.3	150			117ac	5.0 per section			
CK5975	Triode, Amplifier Oscillator	0.400	1.5	6.3	175	4000		200	12.5			Rk = 680
CK5995	Half Wave Rectifier	0.400	1.75	6.3	300				45	Inverse peak 850 volts		
FILAMENT TYPES												
1AD4	Shielded RF Pentode	0.300x0.400	1.5	1.25	100	2000		45.0	2.8	45.0	0.8	Rg = 2meg
1AG5	Diode-Pentode Det. Amplifier	0.285x0.385	1.5	1.25	30	350		45	0.8	45	0.25	Rg = 5meg
1AH4	Pentode, RF Amplifier	0.285x0.385	1.5	1.25	40	750		45	0.75	45	0.2	Rg = 5meg
2E31-32	Shielded RF Pentode for pocket radio	0.300x0.400	1.56	1.25	50	500		22.5	0.4	22.5	0.3	Rg = 5meg
2E35-36	Output Pentode for pocket radio	0.290x0.390	1.56	1.25	30		6	45.0	0.45	45.0	0.11	−1.25
2G21-22	Triode Heptode for pocket radio	0.300x0.400	1.56	1.25	50	60 conv. cond.		22.5	0.20	22.5	0.30	
RK61	Gas Triode, Exp. Radio Control	0.550	1.81	1.4	50			45.0	1.5	Special Circuit		
CK510AX	Double Space Charge Tetrode Amplifier	0.285x0.385	1.25	0.625	50	150† both units		45.0	0.06			0
CK512AX	Low microphonic voltage amplifier	0.285x0.385	1.25	0.625	20	37†		22.5	0.125	22.5	0.04	−0.625
CK526AX	Output Pentode	0.285x0.385	1.5	1.25	20	400	3.75	22.5	0.45	22.5	0.12	−1.5
CK527AX	Output Pentode 15 ma. filament	0.285x0.385	1.5	1.25	15	225	0.75	22.5	0.10	22.5	0.025	0
CK529AX	Shielded Output Pentode	0.285x0.385	1.5	1.25	20	350	1.6	15.0	0.32	15.0	0.075	−1.25
CK534AX	Voltage Amplifier	0.285x0.385	1.25	0.625	15	30†		15.0	0.0047	15.0	0.0014	−0.625
CK535AX	Output Pentode	0.285x0.385	1.5	1.25	20	350	1.6	15.0	0.32	15.0	0.075	−1.25
CK574AX	Shielded Pentode RF Amplifier	0.285x0.385	1.25	0.625	20	160		22.5	0.125	22.5	0.04	−0.625
CK5672	Output Pentode	0.285x0.385	1.5	1.25	50	650	65.0	67.5	3.25	67.5	1.1	−6.5
CK5676/CK556AX	Triode, UHF Oscillator	0.285x0.385	1.5	1.25	120	1600		135.0	4.0			−5.0
CK5677/CK568AX	Triode, UHF Oscillator	0.285x0.385	1.5	1.25	60	650		135.0	1.9			−6.0
CK5678/CK569AX	Shielded RF Pentode	0.285x0.385	1.5	1.25	50	1100		67.5	1.8	67.5	0.48	0
CK5697/CK570AX	Electrometer Triode Max. grid current 5x10⁻¹² amps.	0.285x0.400	1.25	0.625	20	1.5†		12.0	0.22			−3.0
CK5785	High voltage rectifier	0.300x0.400	1.5	1.25	15				0.1	Inverse peak 3500 volts		
CK5851	Class C. RF Beam Tetrode	0.400	1.6	1.25/2.5	120/60	1600		125	5.5	125	0.9	−7.5
CK5886/CK571AX	Electrometer Pentode Max. grid current 2x10⁻¹³ amps.	0.285x0.400	1.5	1.25	10	1.6†		10.5	0.20	Triode Conn.		−3.0
CK5889	7.5 ma. filament electrometer pentode Ig = 3x10⁻¹³ amps. max.	0.400	1.75	1.25	7.5	10		12.0	0.004	4.0	0.004	−2.0
CK6029/CK573AX	Triode, High Freq. Oscillator	0.300x0.400	1.5	1.25	200	2000		90.0	11.0			−4.0
CK6050	Triode, UHF Oscillator	0.285x0.385	1.5	1.25	120	1600		135	4.0			−5.0
CK6088/CK522AX	Output Pentode	0.285x0.385	1.5	1.25	20	450	1 2	22.5	0.30	22.5	0.08	0
VOLTAGE REGULATORS												
CK5783	Voltage reference tube — like 5651	0.400	1.625	Operating voltage 87. Operating current range 1.5 to 3.5 ma.								
CK5787	Voltage regulator	0.400	2.06	Operating voltage 100. Operating current range 5 to 25 ma.								

CK ® RK ®

†Voltage Gain Ratio.

RAYTHEON

RAYTHEON MANUFACTURING COMPANY

SUBMINIATURE TUBES • GERMANIUM DIODES and TRIODES • RADIATION COUNTER TUBES • RUGGED, LONG LIFE TUBES

Calif. Model E-50D amplifier provides two individual 25-watt output channels on separate controls for a total of 50 watts of undistorted audio power. Flexibility makes it ideal for installations in which individual control is desirable simultaneously for two auditoriums of different power requirements. It has inputs for three microphones and one phonograph. Distortion is less than 5 percent for each 25-watt channel. Ample inverse feedback insures good output regulation. An amplifier jack on the chassis permits connecting another E-50D thus providing a total of 100 watts from four separately controlled channels.



Small Oscilloscope

THE HICKOK ELECTRICAL INSTRUMENT CO., 10527 Dupont Ave., Cleveland 8, Ohio. Model 380 Miniscope has a frequency coverage to 2.5 mc and features a sensitivity of 0.1 rms volt per inch, direct connection to c-r tube elements, provision for z-axis modulation and a telescopic light shield. It is designed for industrial and laboratory engineering use. The instrument measures 6 in. wide × 9 in. high × 13¼ in. deep, and weighs only 14 lb. Price is approximately $290.

Isotope Ratemeter

THE VICTOREEN INSTRUMENT CO., 5806 Hough Ave., Cleveland 3, Ohio. The model 524 is a laboratory-quality counting ratemeter for detecting and measuring alpha, beta and gamma radiation. Six ranges of sensitivity are provided with full-scale readings from 300 to 100,000 counts per minute. A three-position time-constant selector and an enclosed loudspeaker for aural monitoring are featured. Provision for a scintillation counter as well as adaptability for various specialized counter tubes are incorporated. The instrument requires 110 volts a-c.



Variable Loudness Control

INTERNATIONAL RESISTANCE CO., 401 N. Broad St., Philadelphia 8, Pa. Revolutionary in the continuously variable audio-compensated control, as opposed to former single or double-tapped, or stepped-type controls, the type LCI offers the following advantages: greater smoothness of adjustment; easy installation, requiring only three connections; less space requirements than previous controls now on the market; and it is less expensive than controls with required taps or the step-type control and associated components previously required to get equal performance. Complete information as to installation, performance and specifications is found in a 14-page leaflet, with full charts and graphs.



D-C Capacitors

GENERAL ELECTRIC CO., Schenectady 5, N. Y., has available a new line of capacitors that meet all the requirements of F characteristics of JAN-C-25 for 100-volt d-c units. For applications where an expected life of 1,000 hours is satisfactory, the rating can be increased to 150 volts and temperatures to 40 C. Test results show that there is negligible change in capacitance from −40 C to 105 C and the units give full life expectancy at temperatures as low as −55 C. These thin-paper, thin-foil capacitors are comparable in all ways with previously offered paper dielectric units and, in addition, are smaller in size and lighter in weight.



Germanium Diode

BERKSHIRE LABORATORIES, 506 Lexington Road, Concord, Mass. The GCD-1 high-back-resistance germanium diodes pass JAN-1A crystal specifications for cycle immersion in hot and cold water and for temperature cycling. Continuous reverse working voltage is 80 volts maximum; peak back voltage for zero dynamic resistance is 90 volts minimum; ambient temperature range is −50 to +75 C; average life, more than 10,000 hours; and shunt capacitance, 0.8 $\mu\mu$f. The diodes operate satisfactorily from d-c to above 100 mc. Price is $2.50.

Electronic Counter

GENERAL CONTROL CO., 1200 Soldiers Field Rd., Boston 34, Mass.,
(continued on page 248)

Announcing

GLASSEAL

REG. TRADE MARK

ACTUAL SIZE

HERMETICALLY-SEALED *Miniature* TUBULAR PAPER CAPACITORS by PYRAMID

Pyramid Type PG "GLASSEAL" miniature paper capacitors are assembled in metal tubes with glass-metal terminals. They will fully meet the most exacting demands of high vacuum, high pressure, temperature cycling, immersion cycling and corrosion tests.

TEMPERATURE RANGES: −55° to +125°C.

CAPACITANCE RANGE: .001 mfd. to 1.0 mfd.

VOLTAGE RANGE: 100 to 600 v.d.c. operating

Your inquiries are invited

PYRAMID Electric Company

GENERAL OFFICES and PLANT NO. 1
1445 HUDSON BLVD. • NORTH BERGEN, N. J.

PLANT NO. 2
155 OXFORD ST. • PATERSON, N. J.

NEWS OF THE INDUSTRY

Edited by WILLIAM P. O'BRIEN

NBS Opens New Lab Center

Aerial view of National Bureau of Standards' Corona, Calif., laboratories

ESTABLISHMENT of a new National Bureau of Standards laboratory center at Corona, Calif., to be devoted to various phases of electronic research, development and engineering was recently announced. To be known as the Corona Laboratories, the new center will be primarily concerned with technical problems of importance to the Department of Defense. About 22 buildings formerly used by the Navy are being renovated to accommodate NBS research and development activities being transferred there from Washington. Limited operations began at the laboratory in June and full-scale operation is planned for September.

In the near future the most important activity at the Corona laboratories will be the development of guided missiles. Every phase of missile development will be covered, from theoretical and applied research to construction of experimental parts and units. An analog computer is being set up in the laboratories to be used in flight simulation problems where trajectories of guided missiles must be computed mathematically. The computer, occupying about 1,000 square feet of floor space, can solve problems in minutes that would take trained mathematicians weeks to solve. Other equipment at the new center will include electronic laboratories, machine shops, wind tunnel, jet engine test cells and altitude chambers.

Technical Writers Needed

AN URGENT need for technical writers exists in the Ordnance Development Division of the National Bureau of Standards. Salaries range from $4,600 to $6,400, depending upon the applicants' experience and education.

This Division is engaged in research and development of electronic ordnance devices for the armed forces. Examples of the type of work reported in the division are:

(1) Experimental work in energy radiation and propagation, static fields, electronic systems and electronic circuitry for military applications.

(2) Development of radio transmission lines and filters, antenna designs and radiation and collection systems, and research and development in electronic circuits for these systems, including gating circuits and servo loops.

(3) Electronic packaging and production techniques on electronic assemblies.

(4) Design and development of electron tubes to meet unusual requirements.

(5) Statistical analysis of field test data, including studies directed toward devising new and better testing plans and techniques.

Further information concerning the work and the benefits of Government employment can be had by writing to the Personnel Officer, Division 13, National Bureau of Standards, Washington 25, D.C. A booklet describing work at the Bureau will be sent on request.

FCC Nonbroadcast Applications

The Federal Communications Commission in announcing revision of its Form 401, "Application for New or Modified Radio Station Construction Permit (Other than Broadcasting)", warns that applicants who use the old, unrevised form after August 1, 1951, may have the application returned. The new form will contain questions involving recently adopted Part 17 of the rules that concern the construction, marking and lighting of antenna towers and supporting structures.

RTMA Election Report

ROBERT C. SPRAGUE, president of the Sprague Electric Co., was reelected chairman of the board of directors of the RTMA at its recent convention in Chicago. The board also reelected Leslie F. Muter as treasurer, and renamed W. R. G. Baker as director of the engineering department, James D. Secrest as secretary and general manager, and John W. Van Allen as general counsel.

Two new directors and 12 former directors were elected. The new directors are Robert S. Alexander, president of Wells-Gardner & Co. and Harlan B. Foulke, vice-president and director of sales of Arvin Industries, Inc. Reelected for three-year terms are: Benjamin Abrams of Emerson Radio & Phonograph Corp.; Max F. Balcom of

BSR *rotocam range*

G.U.4. (3 SPEED) PHONOGRA

M.U.14. (3 SPEED) PHONOMOTO



M.U.15. (78 rpm) PHONOMOTO

The BSR range of Phonographs now leads the field in both design and appearance. The resources of a modern factory coupled with years of experience enable us to make these claims and still sell at competitive prices.

MODELS ILLUSTRATED

GU4. Three speed Phonograph unit with high fidelity pick-up and automatic stop. The pick-up is complete with two permanent sapphire stylii and the turntable is fitted with removable rubber mat. MU14. Three speed Phonomotor. Speed change is effected merely by rotation of the speed change knob. The turntable diameter is 10 inches. MU15. Phonomotor for 78 R.P.M. only, employs an 8 inch diameter turntable and is extremely robust, reliable and inexpensive.

Further details available on application.

U.S. Warehouse and Offices.

SAMCO PRODUCTS COMPANY

36 Oak Avenue, Tuckahoe, N. Y.
Telephone: Tuckahoe 3-9391

Made by Birmingham Sound Reproducers Ltd., Old Hill, Staffs. England Grams: 'Electronic Old Hill, Cradley Heath.'

H. C. Bonfig of Zenith Radio Corp.; Herbert W. Clough of Belden Mfg. Co.; John W. Craig of Crosley Division, Avco Mfg. Corp.; E. G. Fossum of Stewart-Warner Electric Div.; G. Richard Fryling of Erie Resistor Corp.; J. J. Kahn of Standard Transformer Corp.; F. R. Lack of Western Electric Co., Inc.; W. A. MacDonald of Hazeltine Electronics Corp.; and A. D. Plamondon, Jr., of The Indiana Steel Products Co.

Revised Maritime Service Rules

THE Federal Communications Commission has announced an order making overall revisions to Part 7, Coastal and Marine Relay Services and Part 8, Ship Service, of their Rules and Regulations, effective July 23, 1951.

Although the order is so voluminous, some 300 pages, that copies are not generally available, it is planned to publish it in a future single issue of the Federal Register. This edition can be ordered prior to publication at about 20¢ a copy from the Superintendent of Documents, at U. S. Government Printing Office, Washington 25, D. C.

Among other objectives, the revised rules are intended to enhance safety of life at sea by providing type approval or type acceptance for radio equipments, by requiring installation of automatic alarm-signal keyers and inauguration of a radiotelephone distress frequency at 2,182 kilocycles. It is noted, however, that outside of the Great Lakes region, there exists no formal monitoring service for this frequency.

Other provisions include expansion of service for public correspondence and limited service stations, particularly at the very-high frequencies between 152 and 162 mc.

The so-called Marine-Utility class of station has been authorized for low-power, portable vhf radiotelephone operations characterized by the needs of harbor pilots. A Marine Fixed class using the band between 2,100 and 2,210 kc is available for transmission of the communications incident to off-shore oil-well drilling.

MEETINGS

AUG. 15-18: 1951 APCO Conference, Everglades Hotel, Miami, Florida.

AUG. 17-18: 12th Annual Summer Seminar of the Emporium Section of IRE, Emporium, Pa.

AUG. 20-23: AIEE Pacific General Meeting, Multnomah Hotel, Portland, Oregon.

AUG. 22-24: Seventh Annual Pacific Electronic Exhibit and West Coast Annual IRE Convention, San Francisco Civic Auditorium, San Francisco, Calif.

AUG. 28-SEPT. 8: Eighteenth British National Radio Show, Earls Court, London, England.

SEPT. 10-13: Annual Electronic Parts Distributors' Convention and Show, Cleveland Auditorium, Cleveland, Ohio.

SEPT. 10-14: Sixth National Instrument Conference and Exhibit, sponsored by Instrument Society of America, Sam Houston Coliseum, Houston, Texas.

OCT. 2-4: Twenty-Eighth Annual Session of the Communications Section of the Association of American Railroads, Chateau Frontenac, Quebec, Canada.

OCT. 8-10: AIEE Conference on Aircraft Equipment, Hollywood Roosevelt Hotel, Los Angeles, Calif.

OCT. 22-24: 1951 National Electronics Conference, Edgewater Beach Hotel, Chicago, Ill.

OCT. 22-26: AIEE Fall General Meeting, Hotel Cleveland, Cleveland, Ohio.

OCT. 29-31: Radio Fall Meeting, sponsored by IRE, and RTMA, King Edward Hotel, Toronto, Ontario, Canada.

NOV. 1-3: Third Annual Convention and Audio Fair Exhibition of the Audio Engineering Society, Hotel New Yorker, New York City.

NOV. 12-15: NEMA Convention, Haddon Hall, Atlantic City, N. J.

STRANGE SKYLINE

Not a view of storm-tossed television antennas as seen in the United States but the normal rooftop scene of any British city. In England, the receiving dipoles are oriented for vertical polarization of the transmitted signals instead of the horizontal polarization used for tv transmissions here

NTSC Reorganizes

THE National Television System Committee, which recently released an ad hoc committee report on a

(continued on page 275)

WHEN EMERGENCY CALLS FOR *Speed*...

1. In Minneapolis, the police radio network is linked to hospital ambulances by two-way mobile rigs equipped with Sylvania receiving and transmitting tubes. Immediately the Minneapolis Police headquarters hears of an accident, a General Hospital ambulance is alerted by 2-way radio and routed to the scene.

2. Police cars nearby are also instructed to go to the location and lend whatever police help is needed.

Minneapolis calls on Sylvania tubes

3. This quick, efficient coordination between the Minneapolis Hospital and the Police Department has been an important factor in enabling this city to win the *National Safety Council award as the nation's "Safest City" . . . for 2 successive years.*

In Minneapolis, when seconds count, police and hospital authorities know they can count on the sure performance of Sylvania high-quality tubes.

In scores of other critical assignments, including railroads, airlines, steamships, and taxi cabs, you'll find Sylvania tubes get first call.

Now available in types and sizes for every need . . . from subminiature, low-drain battery types to television receiving and picture tubes. For full information and ratings about the types you need, drop a line to: Sylvania Electric Products Inc., Dept. R-1108, Emporium, Pa. *Sylvania Representatives are also located in all foreign countries.*

SYLVANIA ELECTRIC PRODUCTS INC. 1901–1951 50th ANNIVERSARY FIVE DECADES OF PROGRESS

SYLVANIA

RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC PRODUCTS; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

Visit us at booths 401-402—Pacific Electronic Exhibit

Wherever you use fasteners

√ . . . . . under vibration
√ . . . . . under strain
√ . . . . . in limited space
√ . . . . . for fine adjustment
√ . . . . . in inaccessible places
√ needing strength in small sizes
√ . . . . . in compact design
√ . . for maximum holding power
√ . . . . . for fastening thin pieces

. . . use genuine
ALLEN ⬡ HEAD
socket screws and keys

Class 3 fit, quality controlled uniformity and strength, wide range of standard sizes.

WARNING
Allen-Type screws aren't necessarily Allen-Made. Get genuine "Pressur-Formed" Allen ⬡ Head screws in this black and silver box.

Sold only thru leading
INDUSTRIAL DISTRIBUTORS
ALLEN ALLEN HEAD
MANUFACTURING COMPANY
Hartford 2, Connecticut, U. S. A.

NEW BOOKS

Pulse Techniques

By Sidney Moskowitz and Joseph Racker. *Prentice-Hall, Inc., New York*, 1951, 300 *pages*, $6.65.

The authors' purpose in writing the book, in their own words, is to enable individuals with an electrical engineering background to analyze and design circuits for the transmission and utilization of pulses. They have kept mathematics to a minimum with a practical application viewpoint in mind.

After a short introductory chapter where the nomenclature is discussed, the transient response of linear networks is covered in the second chapter. The transform method of solving transient problems and a very short table of Fourier mates are included. Chapter 3 is devoted to the design of pulse networks and delay lines. The fourth chapter, on linear pulse amplifiers, discusses various wide-band amplifiers including the transmission-line amplifier and the cathode follower. Chapter 5, on pulse shapers and clamping circuits, covers limiters, clippers, integrators, differentiators, shapers and d-c restorers. Chapter 6, on pulse generation, is rather short for a very important subject in pulse techniques but all of the basic types are covered.

The applications and practical uses are taken up in chapter 7 on measurements and instruments, 8 on pulse communication systems and 9 on aerial navigation aids. These are each about 20 pages long. Also included are three appendices, one on the complex variable, another on the pulse response of

(continued on page 286)

RELEASED THIS MONTH

An Introduction to Electron Optics: L. Jacob; Methuen's Monograph; Wiley; $2.00.

Electric Transmission Lines: H. H. Skilling; McGraw-Hill; $6.50.

Television Principles: R. B. Dome; McGraw-Hill; $5.50.

Ultrasonics: P. Vigoureux; Wiley; $4.00.

Kenyon
TRANSFORMERS
For All
ARMY
NAVY
SPECIFICATIONS

◆

There's a Kenyon quality transformer to meet almost any standard or special application.

RADAR
BROADCAST
JAN APPLICATIONS
ATOMIC ENERGY EQUIPMENT
SPECIAL MACHINERY
AUTOMATIC CONTROLS
EXPERIMENTAL LABORATORIES

For full details— Contact Kenyon today

Kenyon
Transformer Co., Inc.
840 Barry St. New York 59, N. Y.

Improved COUNTING RATE METER for Continuously Monitoring RADIO-ACTIVE MATERIALS

Type 1500-B
Counting Rate Meter
$540.00

Response Control: *4-position switch gives equilibrium time from 1 second to 3 minutes*

Newly Designed Pre-Amplifier: *in small cylindrical anodized aluminum case; easy decontamination; long cable may be used; case equipped with tripod-type mounting thread (bench-top mount in photo is accessory sold separately)*

Quenching Circuit *operates with self-quenching or non-self-quenching counter tubes*

Greatly Increased Sensitivity: *counting rate meter sensitivity increased four-fold; now responds to ¼-volt pulses*

Panel Jack Terminals *for 5 ma pen recorder providing continuous picture of what happens while radio-active material is being monitored; in absence of operator will indicate spurious activity*

Aural Monitor: *small, built-in loudspeaker, with volume control for aural monitoring*

Stabilized Voltage on Counter Circuit, *continuously variable from 400 to 2,000 volts (also available at terminals at rear of panel), with accurate voltage indication*

Wide Range: *5 to 20,000 counts per minute; full-scale values of 200, 600, 2,000, 6,000 and 20,000; note particularly 2 ranges per decade; meter direct-reading in counts per minute on* all *scales*

Good Accuracy: *±3% of full scale on all ranges*

The probe is provided with a 4-pin socket into which either beta- or gamma tubes may be inserted. Counter tubes are not supplied with the instrument but are available. The G-R Counting Rate Meter has the same rugged mechanical and electrical design and manufacture that has featured *all* G-R precision electronic laboratory equipment since 1915.

GENERAL RADIO Company
275 Massachusetts Avenue, Cambridge 39, Massachusetts
90 West St., NEW YORK 6 · 920 S. Michigan Ave., CHICAGO 5 · 1000 N. Seward St., LOS ANGELES 38

Designed for

Application

SHAFT LOCKS

In addition to the original No. 10060 and No. 10061 "DESIGNED FOR APPLICATION" shaft locks, we can also furnish such variations as the No. 10062 and No. 10063 for easy thumb operation as illustrated above. All types are available in bright nickel finish to meet Signal Corps requirements or black oxide to meet Navy specifications.

JAMES MILLEN MFG. CO., INC.
MAIN OFFICE AND FACTORY
MALDEN
MASSACHUSETTS

Backtalk

This department is operated as an open forum where our readers may discuss problems of the electronics industry or comment upon articles which ELECTRONICS has published.

Another First

DEAR SIRS:

THE AUTHOR of the article "Possible Phototube" which was published in ELECTRONICS (September, 1950, p 132), certainly overlooked that this same photocell was already developed and built in the Laboratories of Zeiss Ikon A. G., Dresden, Germany, by the writer and W. Lang. There was published an article describing the development in the *Zeitschrift für Instrumentenkunde*, 57 (1937, p 249) with the title *"Uber lichtelektrische Zellen für Messungen im sichtbaren Spektralberich"* (About photoelectric cells for measurements in the visible spectrum).

DR. PAUL GÖRLICH
Moskauer Geb.
USSR

To All Tech Reps

DEAR SIRS:

A COMPARATIVELY NEW type of field engineering has come into existence as a result of the growing need of the U. S. Army for technical personnel and the ever-increasing flow of American technical equipment to friendly nations under provisions of various mutual defense treaties.

In the latter case, because of the unfamiliarity of the recipient nations with American types of electronic equipment, methods of operation, preventative maintenance techniques and methods of training, the United States is providing field engineers to assist in the instruction of foreign nations, so that

(Continued on page 300)

record...

reproduce...

erase...

with these

Brush

MAGNETIC HEADS

- **Extremely uniform**
- **Nonmicrophonic and moistureproof**
- **Response smooth and free of discontinuities**
- **Permit perfect mounting of adjacent heads**

RECORDING COMPONENTS

of practically all types for all purposes with reliable characteristics are what have made Brush the leader for more than ten years.

THE BRUSH DEVELOPMENT COMPANY
3405 PERKINS AVENUE
CLEVELAND 14, OHIO

"Our business is the future"

YOU CAN MAKE IT

BETTER WITH

Taylor Laminated Plastics

If Your Problem

is to design your product or part with a material that offers a *combination* of electrical, mechanical and chemical properties such as high tensile, flexural and impact strength... resistance to corrosion, moisture and abrasion... attractive appearance... high insulating qualities... high speed machineability... light weight with great strength and many other desirable characteristics—

A Good Solution

to your problem is Taylor Laminated Plastics. As insulating parts and structural members, Taylor Vulcanized Fibre, Phenol Fibre and Combination Materials, available in a variety of grades, offer you a better, cheaper... faster means of developing a *better* product. If you do your own fabricating, Taylor can supply you with sheets, tubes, rods and rolls. If you seek a source of supply for finished parts, Taylor's completely equipped Fabricating Department is at your service.

More Information

on Taylor Laminated Plastics and their application is available. If you have a design problem as indicated above, write today for the new 1951 Taylor Laminated Plastics Catalog. If possible, state your problem. Your copy will be sent you promptly, and experienced Taylor Sales Engineers will be happy to consult with you without obligation.

The new 1951 Taylor Catalog contains complete specifications and description of Taylor Laminated Plastics. See for yourself how you can make your product or part better *with these versatile Taylor materials. Write today for Catalog E-8.*

Taylor

TAYLOR FIBRE CO.

NORRISTOWN, PENNSYLVANIA

WEST COAST FACTORY: LA VERNE, CALIF.

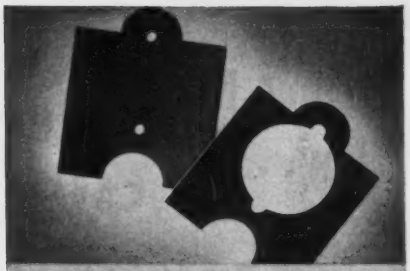

This two-part radio insulator is typical of Taylor's ability to mass-produce accurate parts. Each is stamped in a single operation, one from Taylor Vulcanized Fibre and the other from Grade XXXP-10 Taylor Phenol Fibre, noted for its high dielectric strength. Whatever combination of qualities you may need, it's a good bet that one of the many Taylor grades can fulfill your requirements.

Taylor Post Forming Material is a special grade of Phenol Fibre produced in fully-cured sheet form, for the specific purpose of forming to various shapes by heating and forming operations. This Taylor product makes it possible to transform a flat sheet into one with relatively deep draws and compound curves, with little sacrifice in the strength of material.

More than half a century's experience in the field of laminated plastics gives Taylor the edge whenever there's a problem involving the design and fabrication of laminated plastics. There is practically no limit to the variety of shapes that may be quickly, accurately and economically produced from these versatile materials. Combining light weight and great strength with insulating, electrical or dielectric properties to fit hundreds of applications, Taylor Laminated Plastics can help you produce a *better* product.

AMPHENOL
AN...RF CONNECTORS
...CABLE
Designed FOR
the SUPER-SONIC AGE!

to meet extreme conditions of heat, shock, vibration

to meet the unequivocal specification of absolute dependability at super-sonic speeds

AMPHENOL offers thousands of items!

Amphenol RF connectors provide an efficient connecting link between coaxial cables for never-failing continuity and extremely low RF loss . . . and Amphenol cables made with Teflon dielectric perform with low loss even at temperatures up to 500° F. . . . AN Connectors insure lowest millivolt drop, extra high tensile strength, polarized shells and simple assembly.

Write for Amphenol's complete catalog . . . and ask for Amphenol's Engineering News, to keep ahead of latest developments.

AMPHENOL

AMERICAN PHENOLIC CORPORATION
1830 South 54th Avenue • Chicago 50, Illinois



FIG. 1—Impedance measuring circuit

The resistor R is made equal to the known resistance. The vertical and horizontal gains are adjusted to give the same deflection, for instance 2 inches on a 5-inch crt. The impedance is then substituted for the known resistor, the output of the oscillator set for the desired frequency and a convenient voltage output, the value of R is adjusted until the resulting Lissajous figure has the same horizontal and vertical deflections. Then the absolute value of $Z = R$. Power factor, phase angle, or resistive and reactive components may be determined from the shape of the Lissajous ellipse. The phase angle will be subject to some error if the phase shifts in the vertical and horizontal amplifiers differ. If phase angle is important, care should be taken to make the amplifiers as nearly identical as possible.

The order of magnitude of the power factor can be determined at a glance. Phase angles close to zero will give a narrow ellipse, zero power factor will result in a circle. Nonlinearity of any appreciable magnitude will be indicated by a nonelliptical Lissajous figure. While this procedure is hardly suitable for nonlinearity or distortion measurement, it will serve to indicate when something is wrong to any appreciable degree.

One precaution should be pointed out. The oscillator or its output amplifier will need to be isolated by a suitable transformer. As shown in Fig. 1, the center terminal of the "bridge" is connected to crt ground and this must not be a ground common to the oscillator.

Ultrasonic Soldering Iron

AN ULTRASONIC soldering iron has been developed for the special purpose of tinning aluminum. In the soldering operation, the aluminum is subjected to intense ultrasonic

SPACE was at a premium ...YET EFFICIENCY HAD TO BE HIGH

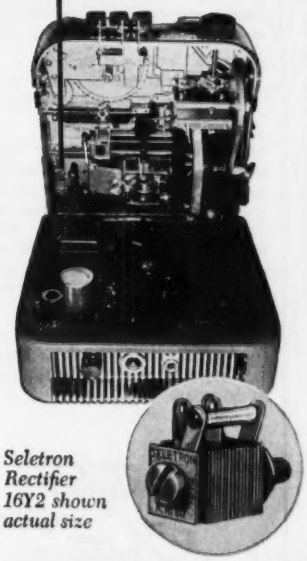

Seletron Rectifier 16Y2 shown actual size

THAT'S WHY GRAY CHOSE SELETRON!

There's no room in The Gray Manufacturing Company desk model Audograph* Electronic Sound Writer for components without a big payload factor.

Gray engineers found SELETRON's tiny new selenium rectifier No. 16Y2 a powerhouse of efficiency for all its half-inch square cell size, and incorporated it into the Audograph's compact design . . . It functions direct at 120 volts to operate the back spacer. No. 16Y2 is rated at 130V input, 100V output, .050 output amps. Weighs less than half an ounce!

Millions of dependable SELETRON Selenium Rectifiers are in service. They are available for every purpose from the miniatures used in radio, TV and other electronic circuits, all the way up to the giant stack assemblies required for heavy industrial purposes.

SELETRON engineers are successful in solving rectification problems. Write us today without obligation . . . And have you our new 16 page rectifier guide for handy reference? Please request Bulletin 104-D-8

*Audograph, T.M. of The Gray Mfg. Co., Hartford, Conn.

Seletron
T.M. REG. U.S. PAT. OFF.

SELETRON DIVISION
RADIO RECEPTOR COMPANY, INC.
Since 1922 in Radio and Electronics

SALES DEPARTMENT: 251 WEST 19TH STREET, NEW YORK 11, N.Y. • FACTORY: 84 NORTH 9TH STREET, BROOKLYN 11, N. Y.

See us at booth 502—Pacific Electronic Exhibit, August 22-24

FOR YOUR PANEL

DIALCO

A NOVEL and UNIQUE CIRCUIT INDICATOR

DESIGNED FOR NE-51 NEON LAMP
For 110 or 220 volt circuits

The required resistor is an integral part of this assembly —"built-in."

RUGGED • DEPENDABLE
LOW IN COST

PATENTED: No. 2,421,321
Cat. No. 521308-997

WILL *YOU* TRY A SAMPLE?

Write on your company letterhead. We will act at once. *No charge, of course.*

SEND FOR THE 192 PAGE HANDBOOK OF PILOT LIGHTS

Among our thousands of Pilot Light Assemblies there is one which will fit your special conditions. Many are especially made and approved for military use. We pride ourselves on prompt deliveries—any quantity.

ASK FOR OUR APPLICATION ENGINEERING SERVICE

Foremost Manufacturer of Pilot Lights

The DIAL LIGHT COMPANY of AMERICA

900 BROADWAY, NEW YORK 3, N. Y. SPRING 7-1300

SPECIALTY OFFERS

LAB-BILT DRY BATTERIES
Standard or Custom-made

INDUSTRY

LABORATORY

RADIO AND IGNITION

***Write for* FREE CATALOG**

This catalog gives complete specifications of 78 Lab-Bilt Batteries of industrial and hard-to-get types.

CUSTOM-MADE BATTERIES

Battery Specification Sheet illustrated in catalog enables you to get any type dry battery designed and made to your individual specifications — even in small quantities!

SUPER SERVICE

Specialty Battery Company is specially equipped to make all Lab-Bilt Batteries FRESH for each order and ship immediately. Give your customers this valuable service. Write for a new catalog today.

SPECIALTY BATTERY COMPANY

A Subsidiary of the RAY-O-VAC Ray-O-Vac Company

MADISON 10, WISCONSIN

---

2 KW VACUUM TUBE BOMBARDER OR INDUCTION HEATING UNIT



For Only $650.

Never before a value like this new 2-KW bench model "Bombarder" or high frequency induction heater . . . for saving time and money in surface hardening, brazing, soldering, annealing and many other heat treating operations.

Simple . . . Easy to Operate . . . Economical Standardization of Unit Makes This New Low Price Possible.

This compact induction heater saves space, yet performs with high efficiency. Operates from 220-volt line. Complete with foot switch and one heating coil made to customer's requirements. Send samples of work wanted. We will advise time cycle required for your particular job. Cost, complete, only $650. Immediate delivery from stock.

Scientific Electric Electronic Heaters are made in the following ranges of Power: 1-2-3½-5-7½-10-12½-15-18-25-40-60-80-100-250KW.

Scientific Electric

Division of

"S" CORRUGATED QUENCHED GAP CO.

107 Monroe St., Garfield, N. J.

practical imagination

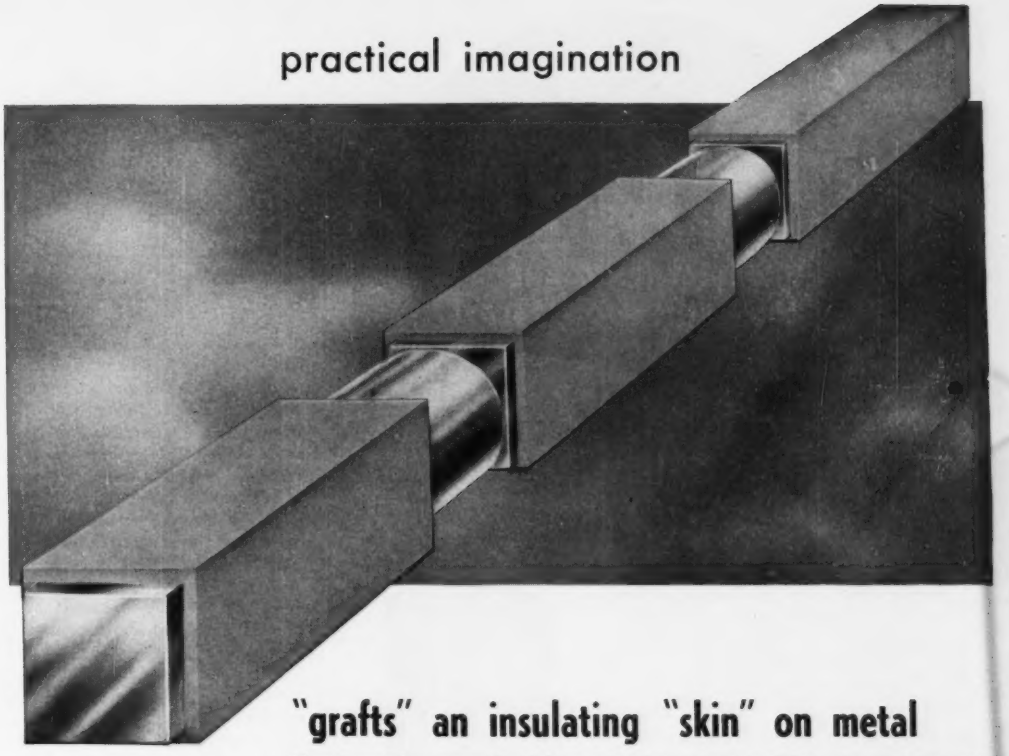

"grafts" an insulating "skin" on metal

Here is another example of the practical imagination C-D engineers can put to work to solve your problems. In this case a heavy electrical connector had to be covered with a safe, efficient insulation. The material best suited to do the job was C-D Dilecto.

The next requirement was to make this insulation an integral part of the whole piece. Here is where practical imagination went to work. The solution was to laminate and mold the Dilecto directly on the metal bar.

When you have a problem involving plastics—whether it is simple or complex—be sure to check with C-D engineers for a practical, unbiased recommendation. They can choose the material best suited to your needs from a wide range of grades of five basic plastics to give you any combination of mechanical, electrical or chemical characteristics. A call to your nearest C-D office will bring you this kind of help any time—all the time.

your partner in producing better products

DILECTO (Laminated Thermosetting Plastic)
CELORON (Molded High-Strength Plastic)
DIAMOND FIBRE (Vulcanized Fibre)
VULCOID (Resin Impregnated Fibre)
MICABOND (Bonded Mica Splittings)

DE-I-51

BRANCH OFFICES: NEW YORK 17 • CLEVELAND 14 • CHICAGO 11 • SPARTANBURG, S. C. • SALES OFFICES IN PRINCIPAL CITIES.
WEST COAST REPRESENTATIVE: MARWOOD LTD., SAN FRANCISCO 3 • IN CANADA: DIAMOND STATE FIBRE CO. OF CANADA, LTD., TORONTO 8

Continental Diamond FIBRE COMPANY

Established 1895. Manufacturers of Laminated Plastics since 1911—NEWARK 16 • DELAWARE

AN approved (3303-1)

R-B-M

ELECTRONIC AND COMMUNICATION RELAYS

Now Hermetically Sealed

HUNDREDS of thousands of R-B-M telephone type relays saw Government service in World War II. Now most of these relays are available in hermetically sealed enclosures designed to meet AN specifications.

R-B-M hermetically sealed telephone type relays are available in contact forms up to and including 4-pole, double throw, 3 ampere, 28 Volts D. C. construction. Also 10 ampere rating up to and including 2-pole double throw at 28 Volts D.C. All relays available with approved AN plug connector, or with solder connections.

Engineers! What is YOUR hermetically sealed relay requirement? R-B-M is developing new and smaller relays to meet Armed Services requirements. Perhaps one of these will solve your problems. Write giving complete relay specifications, application, quantity and AN specifications applying. Address Dept. F-8.

AN approved (3304-1)

R-B-M Production and Engineering facilities in two plants, located in different states, (over a quarter million square feet), can assist you in the development and production of special electro-magnetic devices for Armed Services application.

RBM

R-B-M DIVISION
ESSEX WIRE CORP.
Logansport, Indiana

MANUAL AND MAGNETIC ELECTRIC CONTROLS
—FOR AUTOMOTIVE, INDUSTRIAL, COMMUNICATION AND ELECTRONIC USE



FIG. 1—Sketch of the main components of the ultrasonic soldering iron

vibrations as molten solder is applied to it.

A drawing of the essential components of the soldering iron is shown in Fig. 1. The heating element is located close to the soldering bit at one end of a coupling bar. The laminated magnetostriction element is silver soldered to the other end of the same coupling bar. The coupling bar itself is made of a material having a low thermal conductivity to minimize heat transfer, and it forms a nodally mounted half-wavelength vibrator. The driver coil assembly and the mounting clamps are designed to be heat resistant.

An inexpensive electronic system is used with the soldering iron to keep the applied frequency the same as the resonant frequency of the vibrator. The vibrator itself is included in the oscillatory system. A pickup coil has a voltage induced in it as the magnetostriction element moves. Output from the pickup coil is amplified and fed back to the driver coil to move the vibrator. The circulating signal is then essentially at the resonant frequency of the device.

The information in this article was abstracted from the January 1951 issue of the *Journal of the British Institution of Radio Engineers*, page 17.

A-M or F-M for British VHF Broadcasting

BY EDMUND UPDALE

London, England

TEST TRANSMISSIONS have been under way at the BBC vhf transmitting station at Wrotham, Kent, England, for some time to determine whether a-m or f-m is the better system for vhf broadcasting;

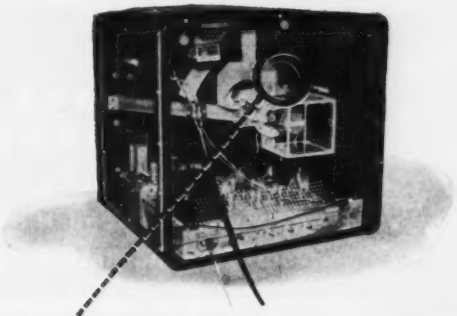

Dielectric strength of Du Pont "Rulan"

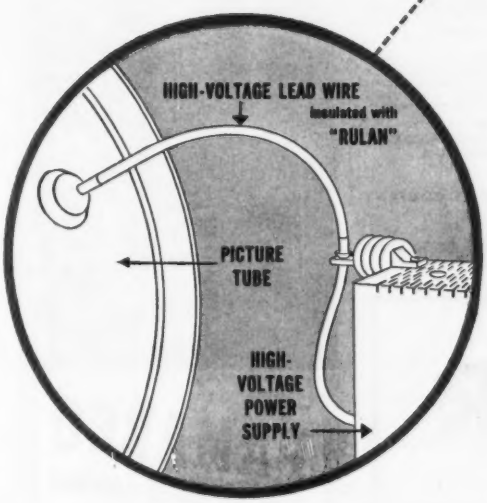

Sketch shows high-voltage wire insulated with "Rulan" connected to kinescope in RCA Victor receiver. Extruded insulation of "Rulan" is only 45 mils thick for 10 kv, 67 mils for 20 kv, and 93 mils for 40 kv.

Wire manufactured by Anaconda Wire & Cable Company, New York, N. Y.

permits smaller cable in RCA Victor TV receiver; flame-resistance increases safety

This high-voltage DC lead wire insulated with DuPont "Rulan"* flame-retardant plastic is a space-saver in RCA Victor television receivers. The high dielectric strength of "Rulan" permits a thinner insulating jacket for the cable. The jacket on a 10,000-volt lead is thin as a soda straw!

The insulation efficiency of "Rulan" is shown by its high resistance to corona in these TV leads. The dielectric constant is 2.7 and the power factor is 0.002—both constant over a wide range of frequencies. "Rulan" is non-tracking. And—important for safety—"Rulan" is flame-resistant and will not support combustion.

You'll be seeing more and more of this tough, flexible insulating plastic. "Rulan" can be used with no sacrifice of efficiency at temperatures as low as -76° F. and has very low water-absorption (only 0.02% by A.S.T.M. test). Excellent for neon sign cable, high-voltage hook-up wire, multi-conductor cable, signal control wire, high-voltage street-lighting cable, and many other applications where a flame-resistant insulation is needed.

Because "Rulan" contains no plasticizer, it is useful in non-migrating jackets. It can be extruded onto wire at high speeds and can be injection-molded.

Demand for Du Pont "Rulan" currently exceeds supply. However, we suggest you investigate the versatile properties of "Rulan" for future application. For more information write:

*TRADE-MARK

E. I. du Pont de Nemours & Co. (Inc.),
Polychemicals Dept., District Offices:
350 Fifth Avenue, New York 1, New York
7 S. Dearborn St., Chicago 3, Illinois
845 E. 60th St., Los Angeles 1, California

DU PONT
REG. U. S. PAT. OFF.
BETTER THINGS FOR BETTER LIVING
. . . THROUGH CHEMISTRY
Polychemicals
DEPARTMENT
PLASTICS • CHEMICALS

MIDGET CONDENSER MICROPHONE

for Precision Sound Measurements and High Quality Sound Recording

- RUGGED CONSTRUCTION
- EXCEPTIONAL CALIBRATION STABILITY
- UNAFFECTED BY VARIATIONS IN HUMIDITY

Built to give years of service without change in calibration. Even without dessicators, Kellogg Midget Condenser Microphones show no detectable drift in laboratory service. Proven in use for optimum performance for more than 15 years.

PRINCIPAL CHARACTERISTICS

	MODEL A	MODEL B
RESPONSE (Referred to 1 volt/dyne/cm²)	-59 db	-55 db
FLAT TO WITHIN	± 3 db from 20 to 11,000 cps, for closed cavity without grille.	± 4 db from 20 to 15,000 cps with or without grille for perpendicular incidence in free field.

Users Include government laboratories, universities, audio development laboratories, sound studios and industrial plants manufacturing sound equipment.

- SEND FOR FULL SPECIFICATIONS TODAY! WRITE DEPT. 26-H.

KELLOGG SWITCHBOARD AND SUPPLY COMPANY
Established 1897
6650 South Cicero Avenue, Chicago 38, Illinois
MIDGET CONDENSER MICROPHONE

WIND more COILS faster

WITH YOUR PRESENT COIL-WINDING MACHINE!



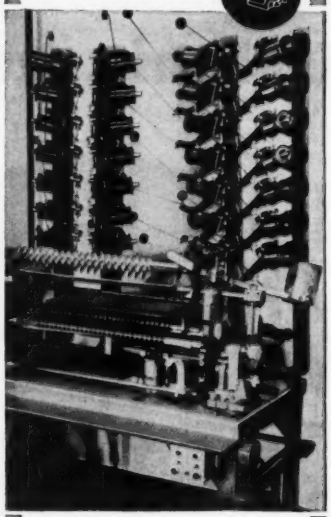

ZOPHAR

WAXES

COMPOUNDS

Anti-Corona high heat-resistant compounds for Fly Back Transformers.

Waxes and compounds from 100° F to 285° F Melting Points for electrical, radio, television, and electronic components of all types.

Pioneers in fungus-resistant waxes.

Our efficient and experienced laboratory staff is at your service.

105 YEARS EXPERIENCE

ZOPHAR MILLS, INC.
112-130 26th Street,
Brooklyn 32, N. Y.

— use PAMARCO Wire DeReeling Tensions for PERFECT COILS

Installation of these inexpensive PAMARCO tensions lowers winding costs because each machine will accommodate more coils at *higher* winding speeds. In addition to increased production, PAMARCO tensions raise production quality. Free-running action practically eliminates wire breakage and shorted turns. Simple thumb screw setting quickly adjusts for any wire gauge. No tools or special skill are needed for operation. For complete data call or write.

PAPER MACHINERY & RESEARCH, INC.
1011 OAK STREET
ROSELLE NEW JERSEY

The Model CVM 3153 is the newest and smallest member of the complete Kinney Vacuum Pump family. Compare it with any other mechanical vacuum pump in its class for:

FREE AIR DISPLACEMENT (2 cu. ft. per min.)
POWER (¼ HP motor)
ULTIMATE LOW ABSOLUTE PRESSURE (0.1 micron or better)
SIZE (14¾" x 10¾" x 13¼" high)
WEIGHT (only 70 lbs. complete)

Compare its quiet operation, its ease of starting, its sound construction . . . and you'll see why Model CVM 3153 is an important step forward in vacuum processing.

Wherever small size and big performance are required, put Kinney Model CVM 3153 to work. Use it in the laboratory. Use it in full scale processing installations, by itself or as a backing pump. Use it in permanent installations or as a portable unit for on-the-spot repair, service, or test work.

There's a Kinney Vacuum Pump for every service, from the big Single Stage 702 cu. ft. per min. Model 181420 to our "New Baby", Model 3153. KINNEY MANUFACTURING CO., 3565 Washington St., Boston 30, Mass. Representatives in New York, Chicago, Cleveland, Houston, New Orleans, Philadelphia, Los Angeles, San Francisco, Seattle.

Foreign Representatives: General Engineering Co. (Radcliffe) Ltd., Station Works, Bury Road, Radcliffe, Lancashire, England . . . Horrocks, Roxburgh Pty., Ltd., Melbourne, C. I. Australia . . . W. S. Thomas & Taylor Pty., Ltd., Johannesburg, Union of South Africa . . . Novelectric, Ltd., Zurich, Switzerland . . . C.I.R.E., Piazza Cavour 25, Rome, Italy.

Kinney
VACUUM PUMPS

Write today for Bulletins V51 and V51-A

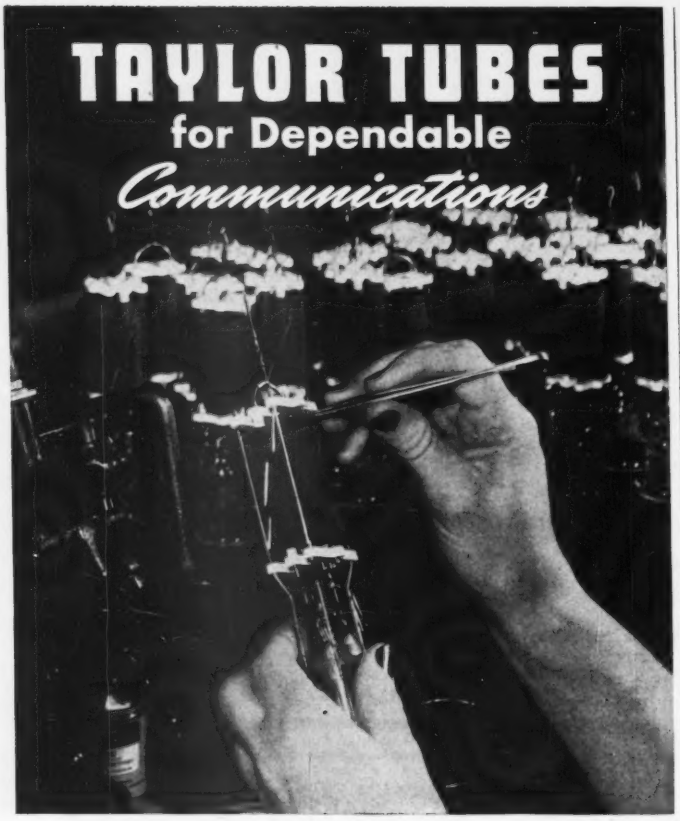

Into the manufacture of every Taylor Custom Built Tube goes an extra measure of careful and detailed consideration. We call this determination of trying to do every job just a little better, the "TQS"—Taylor Quality Standard. It takes a little more effort this way, but after all, knowing they're right for the jobs they have to do is what counts most with us and with you.

★ TRANSMITTING ★ INDUSTRIAL
★ RECTIFIER ★ ELECTRONIC

As always, Taylor is producing tubes of superior quality and outstanding performance. The Taylor Representative nearest you is ready and willing to discuss your particular requirements. Call on him for information any time.

Taylor HEAVY CUSTOM BUILT DUTY Tubes

TAYLOR TUBES INC., 2312-18 WABANSIA AVE., CHICAGO 47, ILL.

the equipment used for the tests is described in the following paragraphs.

The f-m transmitter at the British station has a power of 25 kw and operates on a mean carrier frequency of 91.4 mc with a maximum deviation of ±75 kc. The f-m transmitter incorporates a system in which a quartz crystal oscillator is connected through a quarter-wave network to a balanced modulator. The susceptance of the balanced modulator varies with the modulating signal and, in turn, varies the frequency generated by the crystal oscillator.

Output from the crystal modulator is passed through three frequency-doubling stages and one tripling stage to produce the carrier frequency. Following the tripling stage are six stages of amplification. The first two amplifying stages are conventional push-pull stages and the rest are single-ended grounded-grid stages with coaxial-line tuning elements. The output stage consists of two tubes in parallel.

The a-m transmitter has unmodulated power of 18 kw and operates on a carrier frequency of 93.8 mc. The drive equipment and the r-f amplifiers are like those in the f-m transmitter except that the balanced modulator is made inoperative. The a-f modulator has four stages. The final stage consists of two tubes operating push-pull to



FIG. 1—The vhf antenna and part of the triangular support mast. The antenna is shared by both the f-m and a-m transmitters

In this panel are illustrated standard models of HELIPOT multi-turn and single-turn precision potentiometers—available in a wide range of resistances and accuracies to fulfill the needs of nearly any potentiometer application. The Beckman DUODIAL is furnished in two designs and four turns-ratios, to add to the usefulness of the HELIPOT by permitting easy and rapid reading or adjustment.

A B C

MODELS A, B, & C HELIPOTS
A—10 turns, 46" coil, 1-13/16" dia., 5 watts—resistances from 10 to 300,000 ohms.
B—15 turns, 140" coil, 3-5/16" dia., 10 watts—resistances from 50 to 500,000 ohms.
C—3 turns, 13-1/2" coil, 1-13/16" dia., 3 watts—resistances from 5 to 50,000 ohms.

D E

MODELS D AND E HELIPOTS
Provide extreme accuracy of control and adjustment, with 9,000 and 14,400 degrees of shaft rotation.
D—25 turns, 234" coil, 3-5/16" dia., 15 watts—resistances from 100 to 750,000 ohms.
E—40 turns, 373" coil, 3-5/16" dia., 20 watts—resistances from 200 ohms to one megohm.



F G J

MODELS F, G AND J PRECISION SINGLE-TURN POTENTIOMETERS
Feature both continuous and limited mechanical rotation, with maximum effective electrical rotation. Versatility of designs permit a wide variety of special features.
F—3-5/16" dia., 5 watts, electrical rotation 339°—resistances 10 to 100,000 ohms.
G—1-5/16" dia., 2 watts, electrical rotation 356°—resistances 5 to 20,000 ohms.
J—2" dia., 5 watts, electrical rotation 357°—resistances 50 to 50,000 ohms.

LABORATORY MODEL HELIPOT
The ideal resistance unit for use in laboratory and experimental applications. Also helpful in calibrating and checking test equipment. Combines high accuracy and wide range of 10-turn HELIPOT with precision adjustability of DUODIAL. Available in eight stock resistance values from 100 to 100,000 ohms, and other values on special order.



R W

MODELS R AND W DUODIALS
Each model available in standard turns-ratios of 10, 15, 25 and 40 to 1. Inner scale indicates angular position of HELIPOT sliding contact, and outer scale the helical turn on which it is located. Can be driven from knob or shaft end.
R—2" diameter, exclusive of index.
W—4-3/4" diameter, exclusive of index. Features finger hole in knob to speed rotation.

FOR PRECISION POTENTIOMETERS come to Helipot

...world's largest manufacturer of such equipment!

For many years The HELIPOT Corporation has been a leader in the development of advanced types of potentiometers. It pioneered the *helical* potentiometer—the potentiometer now so widely used in computer circuits, radar equipment, aviation devices and other military and industrial applications. It pioneered the DUODIAL®—the turns-indicating dial that greatly simplifies the control of multiple-turn potentiometers and other similar devices. And it has also pioneered in the development of many other unique potentiometric advancements where highest skill coupled with ability to mass-produce to close tolerances have been imperative.

In order to meet rigid government specifications on these developments—and at the same time produce them economically—HELIPOT® has perfected unique manufacturing facilities, including high speed machines capable of winding extreme lengths of resistance elements employing wire even less than .001" diameter. These winding machines are further supplemented by special testing facilities and potentiometer "know-how" unsurpassed in the industry.

So if you have a problem requiring precision potentiometers your best bet is to bring it to The HELIPOT Corporation, world's largest manufacturer of such equipment. A call or letter outlining your problem will receive immediate attention!

®Trade Marks Registered

The versatility of the potentiometer designs illustrated above permit a wide variety of modifications and features, including double shaft extensions, ganged assemblies, the addition of a multiplicity of taps, variation of both electrical and mechanical rotation, special shafts and mounting bushings, high and low temperature operation, and close tolerances on both resistance and linearity. Examples of potentiometers modified for unusual applications are pictured at right.

A C

3-GANGED MODEL A HELIPOT AND DOUBLE SHAFT MODEL C HELIPOT
All HELIPOTS, and the Model F Potentiometer, can be furnished with shaft extensions and mounting bushings at each end to facilitate coupling to other equipment.
The Model F, and the A, B, and C HELIPOTS are available in multiple assemblies, ganged at the factory on common shafts, for the control of associated circuits.

B F

MULTITAPPED MODEL B HELIPOT AND 6-GANGED TAPPED MODEL F
This Model B Helipot contains 40 taps, placed as required at specified points on coil. The Six-Gang Model F Potentiometer contains 19 additional taps on the middle two sections. Such taps permit use of padding resistors to create desired non-linear potentiometer functions, with advantage of flexibility, in that curves can be altered as required.

THE Helipot CORPORATION, SOUTH PASADENA 2, CALIFORNIA

Field Offices: Boston, New York, Philadelphia, Rochester, Cleveland, Detroit, Chicago, St. Louis, Los Angeles and Fort Myers, Florida. Export Agents: Frotham Co., New York 18, N.Y.

Attention: ELECTRONIC ENGINEERS

Are You Looking For A Material To Completely Impregnate, Mold, and Encapsulate Electrical Components?



Before

After

Acme Star Compound withstands rugged humidity and thermal cycling, as well as salt spray tests.

Millions of ACME-MOLD coils are in service and now Acme offers Star Compound for your use.

Write today for further details

Acme Wire

THE ACME WIRE CO. — NEW HAVEN, CONN.

INSULATING VARNISHES
ACME-MOLD COILS

MAGNET WIRE
VARNISHED INSULATION

Eliminate CRYSTAL TEMPERATURE CONTROL COSTS . . .



Now you can forget temperature control. Just specify Standard's Type 20 Crystal Unit for your products.

In addition to lowering power requirements and weight, it increases compactness, durability and dependability. Type 20 meets all Government specifications, too.

Discover how the Standard Type 20 can cut costs and increase sales for you. A letter will bring Engineering data and complete details by return mail.

Standard Piezo COMPANY
CARLISLE, PENNSYLVANIA

NATIONAL

- Proven
- Dependable
- Quality

POPULAR NATIONAL KNOBS

Can be supplied in quantity for commercial applications in special colors and with special calibrations. Write for drawings and prices.

EXPORT DIV., Dept. E-851

National
NATIONAL COMPANY, Inc.
MALDEN, MASSACHUSETTS

One OF A LINE...

APPROVED BY THE AIR FORCE

FOR *Dependable Control*

The SCREW TERMINAL TYPE CONTAINER

Provided with either back or bottom mounting brackets. Barrier type face plates prevent short circuits between cable and terminal lugs. Easy access to terminal for circuit revisions is possible since, as in the Lug Header Type, removal of the relay from the equipment is not necessary. This unit has particularly wide applications in the aircraft industry.

The Series 335 D.C. (AN-3316-2) Guardian Relay is one of a line of famous controls which distinguish Guardian Electric as a dependable supplier to the U. S. Air Force. *Hermetically sealed* (AN-3312) to (MIL-5757) specifications, or with conventional open and special mountings, Series 335-D.C. offers a wide variety of aircraft applications. Built to rigorous aviation standards, it meets the ANR-20-B and the MIL-R-6106. Generous coil winding area permits single windings up to 15,000 ohms. Parallel and double windings available.

Maximum voltage: 220 v., D.C. Power requirement: Normal, 3½ watts. Max. resistance standard unit: 12,000 ohms. Applicable to time delay attract up to .06 second and release up to .01 second. Contact rating: ¼" dia. silver, 12 amps, at 24 v., D.C. inductive load. Combinations up to 4 P.D.T. with 12 amp. contacts. Bakelite insulated, tested at 1,500 v.—60 C.

GUARDIAN'S NEW HERMETICALLY SEALED RELAY CATALOG IS YOURS FOR THE ASKING


Series 30 A.C.

Series 210 A.C.—215 D.C

Series 220 A.C.

Series 595 D.C.


Series 610 A.C.—615 D.C.

SUBMIT YOUR BLUEPRINTS FOR SPECIFIC RECOMMENDATIONS—WRITE

GUARDIAN ELECTRIC

1625-J W. WALNUT STREET CHICAGO 12, ILLINOIS

A COMPLETE LINE OF RELAYS SERVING AMERICAN INDUSTRY

UG for IMMEDIATE DELIVERY!
CONNECTORS for ALL INDUSTRIAL APPLICATIONS from America's Leading Source of Supply!
COMPLETE ASSORTMENT of All STANDARD TYPES —IN STOCK!
MILO RADIO has Everything for
★ PRODUCTION
★ RESEARCH
★ DEVELOPMENT
★ PROCESSING
★ CONTROL
PURCHASING AGENTS! CHIEF ENGINEERS! Send for this FREE MILO CATALOG!
Here is the answer to your purchasing and material problems! Write today on your company letterhead for our 1053 page massive catalog, illustrating all standard, nationally-known electronic component parts and equipment in the industry. This is centralized purchasing at its best, for MILO stocks everything! Address Dept. E-8.
FREE
For ULTRA FAST SERVICE
★
TELETYPE NY1-1839
CONSOLIDATE YOUR PURCHASES for ELECTRONIC PARTS and TUBES with a Single Dependable Source of Supply
MILO RADIO & ELECTRONICS CORP.
200 GREENWICH STREET, NEW YORK 7, N. Y. • Tel. BEekman 3-2980
Cable Address: MILOLECTRO • The ONE Source for ALL your electronic needs.

modulate the output of the transmitter.

A concentric feeder connects the output of each transmitter to a change-over switch via a filter for minimizing harmonic radiation. From the change-over switches, the transmitter outputs are connected by concentric feeders to a combining filter which prevents power from being fed from one transmitter to the other. The filter consists of sections of concentric line and both the f-m and a-m signals from the filter are carried up the mast to the slot antenna system by a single concentric feeder.

The antenna mast is made up of a lattice steel support mast, 360 feet high, on which is mounted the cylindrical section, 110 feet long and 6½ feet in diameter, as shown in Fig. 1. The cylindrical section with slots in its surface forms the vhf antenna.

The antenna system is common to both transmitters and radiates horizontally polarized waves. The cylindrical section has 32 slots arranged in eight tiers with the four slots in each tier spaced at 90 degrees. Each slot is 8 feet high and 1 foot wide and is screened with a backing of horizontal bars one above the other at one-foot intervals.

Electronic Shuttle-Bonding Technique

ELECTRONIC dielectric heating techniques have been adapted to shuttle bonding to improve the quality of the bond between the dogwood or persimmon wood used for the shuttle itself and the hard fiber sheet surfacing material used to give the shuttle longer life.

An r-f generator is used for heating together with an automatic hydraulic press to give uniform



Weaving shuttle bonded by stray field dielectric heating

Some things won't stay hidden

In one respect at least, Delco Radio is like our fine-feathered friend, the ostrich . . . too conspicuous to be overlooked. You see, Delco radios are in use everywhere today . . . in countless thousands of passenger cars, trucks, buses and other vehicles.

Yes, the same assembly lines that turned out vast quantities of radio and electronic equipment in World War II are now producing for peace at an even greater rate . . . nearly 2,000,000 radio sets in 1950 alone!

Our object in telling you this? It's simply to let you know that Delco Radio is better equipped than ever to produce for America's armed forces. Our special talents, rich experience and broad facilities are now, as always, at Uncle Sam's disposal. Delco Radio Division is reporting for duty!

Delco Radio

DIVISION, GENERAL MOTORS CORPORATION
KOKOMO, INDIANA

bringing YOUR MOTORS

▶ ▶ to market ▶ ▶ ▶

is a full time job for . . . electronics

If the above headline said your meters instead of your motors, it would be accepted without question *and without much interest* because ELECTRONICS is generally recognized as the foremost sales medium for meters.

Not so well known, however, is the scope of ELECTRONICS' influence on motor marketing. Nor is the impact that the science of electronics has had on the manufacture and marketing of motors generally realized, although 35 of the nation's 75 small motor makers are advertisers in ELECTRONICS. Little known also are the many new control applications motors have found in electronics and the new kinds of instrument-type motors that have been developed for use in modern electronic systems . . . particularly those for military, industrial and aviation use. Motors are still usually thought of as simple electric power sources.

In electronics, motors and meters have a good deal more in common than a surface similarity in spelling. Working together, they are bringing into being that new industrial revolution . . . ALL-AUTOMATIC CONTROL. With them, modern industrial instrumentation is going from simple indication of the mechanical meter kind to combined indication-and-control. To bridge the gap between the old, visual indication meters and modern complete machine control, the science of electronics uses motors.

Motors in electronic circuits can both meter and translate meter indications into electrical signals that trigger control mechanisms. It is this constantly developing, revolutionary relationship and interchange between meters and motors that is making ELECTRONICS the most effective medium of all for motor, as well as meter, selling.

ABC

electronics

ABP

12 REGULAR ISSUES
supplying latest technical information, design and product news

A McGraw-Hill Publication • 330 West 42nd St., New York 18, N. Y.

ANNUAL BUYERS' GUIDE
supplying all basic product source and technical specifying data

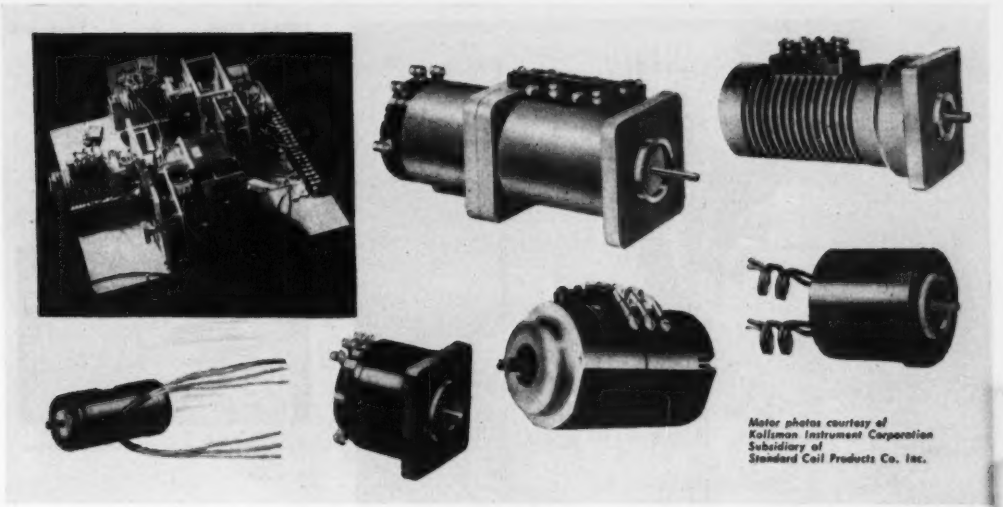

Motor photos courtesy of Kollsman Instrument Corporation Subsidiary of Standard Coil Products Co. Inc.

For what kinds of motors is electronics the best sales medium?

ELECTRONICS is the quickest, surest and most preferred sales medium for motors like those illustrated and for most fractional horsepower motors. A good rule to go by is: The smaller the horsepower, the better the electronic market. Induction and synchronous motors, induction generators, synchros, motor generators, phase shifters, permanent magnet generators, tachometer generators and hysteresis motors are some examples of the types of "motors" for which electronics offers a big market.

How big is this electronic motor market?

For the types of motors illustrated above, one of the outstanding motor manufacturers estimates that "upwards of 230,000 such devices will be used during 1951 and their total value will be in excess of $15,000,000."

ELECTRONICS' Research Department estimates, on the basis of past years' markets, that the entire 1951 electronics motor market will be in excess of one hundred and twenty five million dollars-at-factory.

Where will all these motors be used?

A great many will be used in electronic war gear this year. The rest will be used in electronics throughout industry in the same proportion as ELECTRONICS, the magazine, is read throughout industry. It's a simple little trick called self-leveling circulation . . . in every field of industry the circulation of ELECTRONICS increases in direct ratio to the growth of the use of electronics in that field. ELECTRONICS is everywhere in industry where electronics is used and where there is a market for electronic and allied products.

and the important question: How to get YOUR MOTORS used in electronics?

The answer to that is: Get them designed-in by selling the design engineers on the advantages of your motors. Exactly like all other components, materials and allied products used in electronics, every motor used is designed-in and specified by the electronic design engineers who are, almost without exception, subscribers to, or readers of ELECTRONICS . . . for whom its advertising pages are the chief, often the only source of electronic engineering information on motors.

That's your answer — ELECTRONICS advertising, your key to specialized motor sales throughout industry

---

THE DIRECT ROUTE TO— — — — — — A $2,000,000,000 MARKET PLACE

MOSINEE plants fibres for industry

In Mosinee Industrial Forests, seedlings by the thousands are being planted annually to replace the trees used for products of industry, assuring future supply of *fibres* vital to many products.

Also, on privately-owned acreage, Mosinee supplies the seedlings and know-how to convert otherwise waste land to fibre-producing forests for the future.

This reforestation is the first step in the process of making Mosinee Fibres that work for industry.

MOSINEE PAPER MILLS CO.
MOSINEE, WISCONSIN

MOSINEE
makes fibres work for industry

Test operation of shuttle-bonding press

pressure on both the straight and curved portions of the shuttle face. This method produces a uniform bond along the length of the shuttle.

The new Westinghouse technique uses what is known as stray-field heating with electrodes embedded in rubber on the surface of thick rubber dies to heat the glue line for the purpose of polymerizing the thermosetting plastic glue used.

The r-f generator supplies dielectric heat at a frequency of about 13.6 mc. A standard steel die set used in a hydraulic arbor press makes up the upper and lower platens on which are mounted the electrodes and rubber dies.

The final design uses solid rod-type electrodes running transverse to the shuttle. The rods are flexible enough to conform to the contours of tapered shuttles and heavy enough not to bend over the edge of the shuttle when pressure is applied.

A special rubber mat made of pure gum rubber completely encloses the electrodes. Wedges placed between the rubber dies and press platens allow uniform pressure on tapered ends. One set of electrodes and one press may be used to bond all size shuttles.

An Automatic Time Announcer

SUPPLYING OF time announcements over telephone lines has been a service of telephone companies for many years. The time-announcing equipment to be described is one

Motorola microwave

Multiply your present communication facilities, realize new economies, and make sure of the greatest possibilities for future expansion, by insisting on a MOTOROLA, superior-engineered Microwave System.

With the most *private-owned* microwave mileage now in operation, Motorola offers you the benefit of EXPERIENCE, *plus* many immediate and practical advantages.

Operating in the proven 6000 Mc. frequency band, Motorola Microwave provides maximum effective power gain. The superior frequency-division multiplexing system provides optimum reliability. All your electronic equipment is at ground level for fast, precision maintenance.

Installations

Aeronautical Radio Incorporated
State of California
Pan American Pipeline Co.
Shell Pipeline
Panhandle Eastern Pipeline Co.
Texas Illinois Natural Gas Pipeline Co.
Mid-Valley Pipeline Co.
Brazos River Electric Transmission Cooperative
City of Dayton, Ohio
Michigan State Police

Motorola Microwave is the super communication "pack horse" of complete round-the-clock reliability. Cross-town or cross-country, office to plant—to branch—to mobile crews, it provides multi-channel facilities for voice circuits, supervisory control networks, telemeter, and teletype, 2-way radio tie-in, with innumerable additional combinations for automatically and simultaneously operating your entire system. Motorola Microwave means efficient, economical point-to-point communication.

Motorola COMMUNICATIONS AND ELECTRONICS DIVISION

4545 Augusta Blvd., Chicago 51, Illinois

World leaders in FM 2-way radio communications • 2-way mobile • portable • microwave • carrier and control • supervisory control equipment

5 Big Reasons WHY AIRPAX CHOPPERS ARE AN ESTABLISHED STANDARD FOR THE INDUSTRY!

AIRPAX A580

400 CYCLE CHOPPERS

Modulating minute DC potentials, this chopper combines rugged action with sensitivity and precision for delicate servo applications.

AIRPAX PRODUCTS COMPANY
DESIGNERS ENGINEERS

Middle River Baltimore 20, Md.

FILTER VERSATILITY

Check your filter problems at Lenkurt. Lenkurt combines filter know-how—gained from years of carrier engineering—with the most modern facilities for molding precision magnetic parts, winding toroids in a wide range of sizes and sealing assemblies for maximum life.

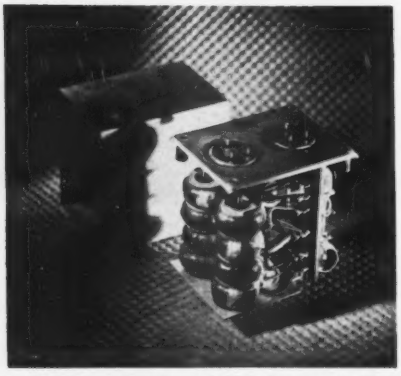

Small-sized hermetically-sealed unit illustrated contains two filters: a low-pass and a band-pass, designed for single sideband carrier application. Other types to your specifications. Write:

LENKURT ELECTRIC CO.
SAN CARLOS • CALIFORNIA

Lenkurt

GET THE FACTS ON

Potter

HIGH SPEED ELECTRONIC
PREDETERMINED COUNTERS

For these applications:

- AUTOMATIC MACHINE CONTROL
- PACKAGING BY PREDETERMINED COUNT
- LINEAL MEASUREMENTS
- FREQUENCY MEASUREMENTS
- TIME INTERVAL CONTROL

The ONLY counter with ALL these features!

- COUNTS AT RATES UP TO 60,000 PER MINUTE
- ABSOLUTE ACCURACY
- INSTANTANEOUS AUTOMATIC RESET
- NO MOVING PARTS, FRICTION OR INERTIA
- SIMPLE DIAL SELECTION OF COUNT

Potter Predetermined Electronic Counters extend the field of automatic counting and control far beyond the scope and capabilities of existing mechanical and electromechanical devices. There are no moving parts, therefore, wear, slippage and inertial effects are eliminated.

Although the standard models count at rates up to 60,000 per minute, counters capable of counting at higher rates are available.

A complete line of photoelectric and electromagnetic detectors, for counting any material or action, can be supplied.

The instruments are easily applied to any problem requiring the precise measurement or control of QUANTITY, LENGTH, TIME, FREQUENCY, REVOLUTION or CAM SEQUENCE. Absolute accuracy of count is guaranteed.

Write today for an accurate appraisal of your problem to Dept. 6-C.

POTTER INSTRUMENT CO.
INCORPORATED

115 CUTTER MILL RD., GREAT NECK, NEW YORK

Visit us at booth 812—Pacific Electronic Exhibit

MITCHELL-RAND

Electrical Insulation Headquarters

features GLASTIC

The fiberglas-polyester laminate that provides greater insulation protection per dollar cost

GLASTIC Laminates are made by combining glass fibers with alkyd base polyester resins . . . the resultant laminate, combining the best electrical and physical features of both, is an insulating material significantly superior in heat, arc and moisture resistance; flexural, impact and tensile strength . . . also it is tough, rigid and dimensionally stable. GLASTIC Laminates are easy to fabricate; they punch and shear without requiring pre-heating.

GLASTIC Laminates are available in six grades to meet all known insulation requirements:	
GLASTIC MM	Distinctly superior to cotton fabric reinforced phenolic laminates and similar materials, yet competitive in price.
GLASTIC GF	Similar to Glastic MM but made with a resin of greater strength and flame resistance; well suited to resist pounding, required in driving slot wedges.
GLASTIC GW	Premium grade, much greater strength than either MM or GF; 45,000 psi at 150°C after 200 hours; requires sharp carbide tools in fabricating.
GLASTIC GU	Similar to GW but uses unidirectional glass cloth for maximum tensile strength in one direction (70,000 psi).
GLASTIC MP	Tough, semi-rigid sheet stock available in .038" nominal thickness only; well suited to cold shearing and punching.
GLASTIC A FLEXIBLE	Tough and thin; will crease without serious loss in dielectric (500-700 V/M); shearing and handling qualities far superior to mica glass materials; will not puff or distort regardless of long storage under heat or humidity; standard thicknesses .015" and .020"

MECHANICAL AND ELECTRICAL PROPERTIES	GRADE MM	GRADE GF	GRADE GW
Flexural Strength (psi)	23,800	34,000	53,200
Rigidity (Young's Mod. x 10")	1.87	2.84	3.38
Impact Strength (Izod)	13.5	19.2	25.0
Tensile Strength (psi)	11,100	17,300	44,500
Compressive Strength (psi)	33,500	53,100	57,500
Hardness (Rockwell M)	90	90	90
Specific Gravity	1.59	1.51	1.75
Water Absorption (% ASTM)	.54	.36	.61
Arc Resistance (ASTM)	150	60	120
Dielectric Strength (V/M)	300	280	210
Dielectric Constant (at 60 cy.)	4.3	4.1	5.4
Power Factor (% at 60 cy.)	3.1	2.4	11.2
AFTER 200 HRS. Exposure at 150°C.			
Flexural Strength (psi)	25,200	32,200	45,000
Impact Strength (Izod)	15.7	25.2	22.0
Dielectric Strength (V/M)	325	315	200
Water Absorption (% ASTM)	1.32	.61	2.15

GRADE B INSULATION FOR THE PRICE OF GRADE A

GREATER { IMPACT STRENGTH, ARC RESISTANCE, HEAT RESISTANCE, DIMENSIONAL STABILITY, MOISTURE RESISTANCE

- MOLDED GLASTIC parts, Grade MG, are available to specification.
- Special GLASTIC for particular requirements will be developed on request.
- Information detailing the superiority of GLASTIC with grade C phenolics and melamine G5 laminates is available . . . Write for GLASTIC bulletin MR; also for free test samples—they'll be sent upon written request.

Write for GLASTIC bulletin MR; also for free test samples

MITCHELL-RAND INSULATION CO., INC.

51 MURRAY STREET · COrtlandt 7-9264 · NEW YORK 7, N. Y.

A PARTIAL LIST OF M-R PRODUCTS: FIBERGLAS VARNISHED TUBING, TAPE AND CLOTH · INSULATING PAPERS AND TWINES · CABLE FILLING AND POTHEAD COMPOUNDS · FRICTION TAPE AND SPLICE · TRANSFORMER COMPOUNDS · FIBERGLAS SATURATED SLEEVING · ASBESTOS SLEEVING AND TAPE · VARNISHED CAMBRIC CLOTH AND TAPE · MICA PLATE, TAPE, PAPER, CLOTH, TUBING · FIBERGLAS BRAIDED SLEEVING · COTTON TAPES, WEBBINGS AND SLEEVINGS · IMPREGNATED VARNISH TUBING · INSULATING VARNISHES OF ALL TYPES · EXTRUDED PLASTIC TUBING

Space Savers for Mobile Uses

Here's a control that saves both space and weight—yet handles plenty of wattage for television receivers as well as for most mobile and aircraft radio uses.

You can get Stackpole LR controls with or without SP-ST or DP-ST line switches and in dual concentric arrangements. The wattage rating is conservative and these sturdy little units have proved their dependability on dozens of jobs formerly handled by materially larger controls.

Data bulletin covering the complete line of Stackpole controls on request.

Electronic Components Division
STACKPOLE CARBON COMPANY
St. Marys, Pa.

STACKPOLE

FIXED AND VARIABLE CARBON RESISTORS • IRON CORES • CERAMAG® NON-METALLIC CORES • MOLDED COIL FORMS • MOLDED CAPACITORS INEXPENSIVE LINE AND SLIDE SWITCHES

device capable of providing this service automatically.

The equipment manufactured by the Automatic Electric Company was designed with three requirements in mind: verbal announcements should be used rather than signals, the recording medium should be continuous with no switching interruptions and the equipment should be simple to operate so that announcements could be recorded easily and inexpensively.

In the equipment shown in Fig. 1, a 2,700-foot length of magnetic tape made of cellulose acetate with an iron-oxide coating passes between two standard 16-mm film reels, 10½ inches in diameter. Three separate sound channels are recorded on the tape, two for time announcements and the third for synchronization.

The entire 2,700 feet of tape are used by one channel for providing time announcements for six hours. At the end of this period, the tape direction is reversed and the pickup circuit is switched to the second channel. The second channel is

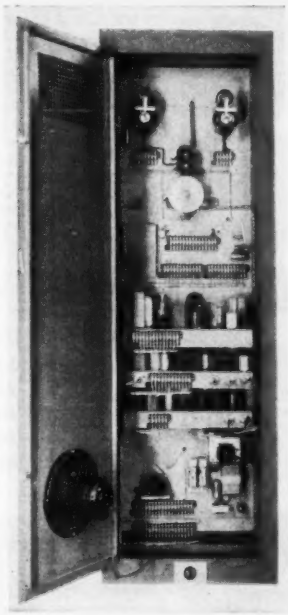

FIG. 1—Rear view of the automatic time announcer. Tape-reel drive motors are visible at top and power supply and amplifier chassis near center

Now... High Speed Movies of Mechanical Action *and* Oscillograph Traces Combined on One Film!

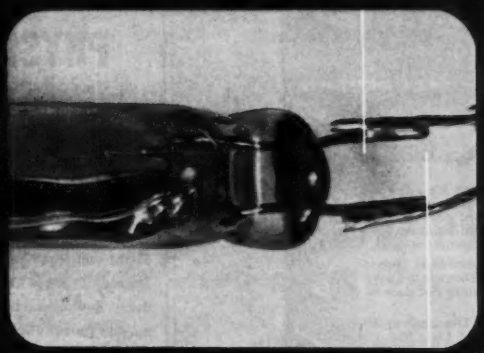

These engineers are seeing for the first time what actually happens at the "break" of a mercury switch.

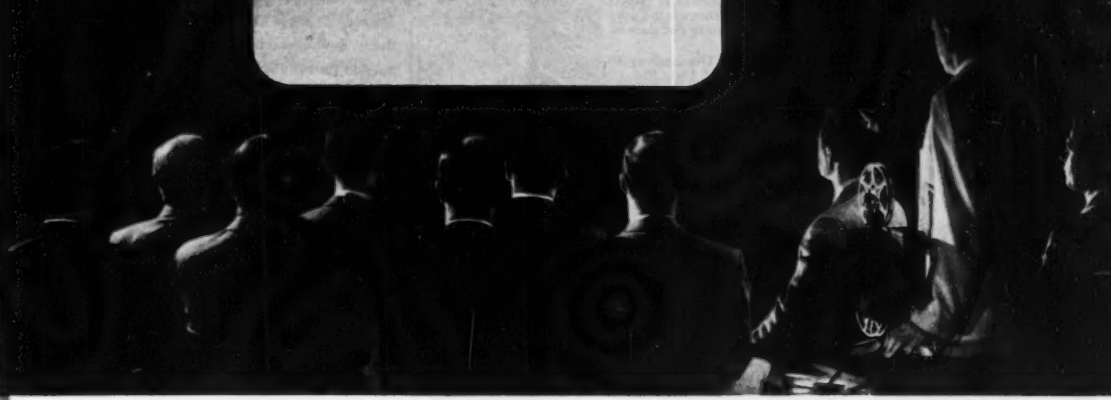



The Kodak High Speed Camera can now be supplied with a special feature which permits the recording of cathode-ray oscillograph traces through the back of the film. This makes possible high speed motion pictures of mechanical action with its electrical aspects simultaneously superimposed *on the same 16mm film.* When projected at normal speed, you get a complete picture of combined mechanical and electrical action slowed down as much as 200 times.

This basic improvement has countless new applications for solving design, production, and product performance problems through high speed movies, particularly those involving electrical equipment. Since an argon lamp times the film travel, extremely accurate analysis is possible. This unique tool may be the answer for which you have been looking. Further information and a copy of the booklet "Magnifying Time" will gladly be sent on request.



The Kodascope Sixteen-10R Projector... To show your high speed movies so that you can study the critical phases of action, this moderately priced projector is equipped with a remote-control push button for reversing film direction over and over again. Its 2-inch *f*/1.6 lens and 750-watt lamp (replaceable by a 1000-watt lamp if needed) assure bright screen illumination, sharp from edge to edge. Important details stand out clearly, even if exposure conditions have not been optimum.

EASTMAN KODAK COMPANY, Industrial Photographic Division, Rochester 4, N. Y.

High Speed Movies

...a function of photography

Kodak

TRADE MARK

"HAVE NEVER WORKED LOOSE
On Over 3000 Pumps!"
—says this manufacturer about
ZIP-GRIP*
Self-Locking
SET SCREWS
Williams Machine & Tool Co., Omaha, Neb., writes..."The ZIP-GRIP* Self-Locking Set Screw eliminates use of nut, and spot facing. Not one has worked loose on 3000 pumps built and in use now about one year."
Send for FREE Demonstrator that Shows You Why... over 125 Manufacturers adopted ZIP-GRIP* Self-Locking Set Screws in one year's time.
With your ZIP-GRIP* Action Demonstrator we'll also send you illustrated Data Sheet and offer of Engineering Test Samples to suit set screw application conditions that have been puzzling you.
*Pat. Pending
Makers of
SETKO
SET SCREWS
Set Screw & Mfg. Co.
470 Main St. Bartlett, Ill. (Chicago suburb)
We specialize in Solving Puzzling Set Screw Problems.

Steatite

for ELECTRONIC Applications

You can specify LOUTHAN low-loss Steatite products with complete confidence in the high quality and dimensional accuracy of the parts. Made to exacting standards, Louthan Steatite insulations have the mechanical and electrical characteristics needed for electronics applications and other electrical service. They are formed to meet your needs and made to close tolerances. Surfaces are smooth, hard, clean and non-absorbent.

Write for Catalog 49-E, describing Louthan Insulations.

THE LOUTHAN MANUFACTURING COMPANY
A Subsidiary of Harbison-Walker Refractories Co.
EAST LIVERPOOL, OHIO
Representatives: H. B. Zeiger, New York 17, N. Y. — Glenn Gaines Company, Chicago 6, Ill.

ENGINEERS DESIGNERS PHYSICISTS

THE Aerophysics & Atomic Energy Research Division of North American Aviation, Inc. offers unparalleled opportunities in Research, Development, Design and Test work in the fields of Long Range Guided Missiles, Automatic Flight and Fire Control Equipment and Atomic Energy. Well-qualified engineers, designers and physicists urgently needed for all phases of work in

Supersonic Aerodynamics,
Preliminary Design & Analysis,
Electronics,
Electro-Mechanical Devices,
Instrumentation,
Flight Test,
Navigation Equipment,
Controls,
Servos,
Rocket Motors,
Propulsion Systems,
Thermodynamics,
Airframe Design,
Stress & Structures.

●

Salaries Commensurate with training & experience.
Excellent working conditions.
Finest facilities and equipment.
Outstanding opportunities for advancement.

Write now — Give complete resume of education, background and experience

●

PERSONNEL DEPT.
AEROPHYSICS & ATOMIC ENERGY RESEARCH DIVISION
NORTH AMERICAN AVIATION
INC.
12214 LAKEWOOD BLVD.
DOWNEY, CALIFORNIA

SO FAR THIS YEAR . . UNILECTRIC WIRING SYSTEMS HAVE SAVED

OVER $250,000 in PRODUCT WIRING COSTS

FOR MANUFACTURERS OF ELECTRICAL AND ELECTRONIC EQUIPMENT

While Maintaining

*Uncompromising Wiring Integrity — Custom Quality — Through Unique Engineering and Mass Production Techniques**

How is Cost Reduction Attained?

1. UNILECTRIC WIRING SYSTEMS are designed especially to simplify product assembly, reduce production time and put your in-plant labor to more effective use.
2. UNILECTRIC'S large-volume use of materials (100,000,000 feet of wire in 1950) affords price savings unavailable to individual manufacturers using smaller quantities.
3. Modern high speed, automatic equipment and UNILECTRIC-designed assembly machines provide substantial production cost savings.
4. Constant improvement in production methods and skills — the result of specialized production engineering — assures steadily decreasing costs.
5. UNILECTRIC has developed new components which simplify wiring assembly and field servicing, and result in cost reduction.

How is Wiring Integrity — Custom Quality — Maintained?

UNILECTRIC Wiring Systems give you *all* these factors necessary for complete *Wiring Integrity*.

1. Specialized wiring engineering experience that assures most efficient circuit design.
2. Selection of components that best meet overall application requirements.
3. Analysis of components to establish individual adequacy without waste.
4. Mass production techniques that assure quality control on hundreds of production sequences simultaneously.
5. Meticulous care in each assembly operation.
6. Supervision by personnel with wiring know-how.
7. Inspection and re-inspection.
8. Guaranteed workmanship and materials.

COST REDUCTION and WIRING INTEGRITY are inherent in UNILECTRIC'S WIRING KNOW-HOW. They result from nine years of constantly serving hundreds of leading manufacturers of electrical and electronic equipment . . . and extensive current and World War II experience producing wiring systems for RADAR, RADIO, TANKS, FIRE CONTROL MECHANISMS, MOTORCYCLES, INSTRUMENTS and other Armed Forces equipment.

*** Savings for individual customers depend on volume. Actual customer reports available on request. If your Defense or Civilian Products require wiring of any kind, your costs can be reduced. Write for details today.**

UNILECTRIC WIRING SYSTEMS

MANUFACTURED BY

UNITED MANUFACTURING & SERVICE CO. • 415 SOUTH 6TH STREET, MILWAUKEE 4, WIS.

with help of Ward Leonard's "Mighty Midget"

The "lamp-lighter" is an automatic photo-electric control for street lights.

The "mighty midget" is a Ward Leonard heavy-duty midget relay.

The control manufacturer had space limitations, but needed high current capacity. The relay has high capacity and is small.

Customer reports "excellent results—no sacrifice in performance due to smaller size".*

That's Ward Leonard "result-engineering"—problems turned into perfect performance by the proper selection or adaption of electric controls. Write for relay catalog. WARD LEONARD ELECTRIC CO., 31 South Street, Mount Vernon, N. Y. Offices in principal cities of U. S. and Canada.

*Tabet Manufacturing Co., Norfolk, Va.

WARD LEONARD
ELECTRIC COMPANY
Result-Engineered Controls Since 1892
RESISTORS • RHEOSTATS • RELAYS • CONTROL DEVICES



FIG. 2—Block diagram of circuit components of equipment

recorded in the reverse direction and provides time announcements for the next six hours.

The time tape supplied for the automatic time announcer is reproduced from a master tape. From the master tape, any number of copies may be made.

Approximately three seconds after the time announcement is made, the tone signal is heard. Announcements are made every fifteen seconds and each one is continuous.

Commercial announcements may be provided by a loop recorder which transmits from a length of magnetic tape mounted on the rim of a drum approximately ten inches in diameter.

A synchronous master clock controls the operation of the time announcer and employs eleven cams to perform all the required functions.

A block diagram of the time announcer is shown in Fig. 2. Audio output is about ten watts which is sufficient to take care of at least 50 trunks simultaneously without an appreciable decrease in volume.

This material was abstracted from an article, "The Automatic Time Announcer", by E. S. Peterson which appeared on page 148 of *The Automatic Electric Technical Journal* for January 1951. .

Circuit Printers for Flat and Cylindrical Surfaces

TWO SEMIAUTOMATIC machines for printing electronic circuits, one for flat surfaces and the other for cylindrical surfaces, have recently been developed at NBS.

In the flat-plate printer, a turntable accepts the unprinted plate at

LAMINATES NEWS

News of General Electric Laminated Plastics that can be of importance to *your* business.

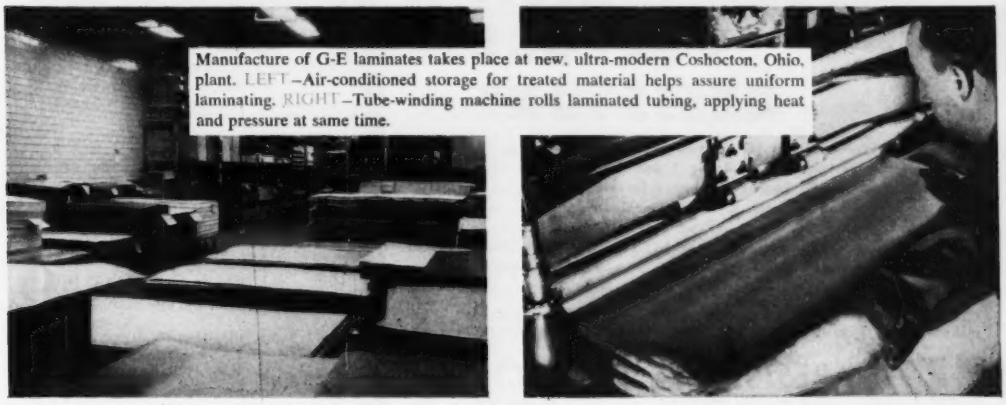

Manufacture of G-E laminates takes place at new, ultra-modern Coshocton, Ohio, plant. LEFT—Air-conditioned storage for treated material helps assure uniform laminating. RIGHT—Tube-winding machine rolls laminated tubing, applying heat and pressure at same time.

EXCEPTIONAL CHEMICAL RESISTANCE IS FEATURE OF NEW G-E LAMINATE

Wherever corrosive chemicals are handled, it's worth considering equipment fabricated from a new phenolic (plastics) laminate recently announced by General Electric.

Designated G-E 2016, the new material is available in sheets and tubes. Important advantages for a wide range of industrial applications are *exceptional chemical resistance, mechanical toughness, resistance to repeated impacts.*

G-E 2016 is produced with canvas base material. Investigate its cost-saving possibilities in pipe lines, for fabricating plating tanks, dye vats, for structural work—where extra strength and chemical resistance are most important. *Write Section Y-4, Chemical Division, General Electric Company, Pittsfield, Massachusetts.*

G-E Laminates for Refrigerators

Laminated plastics for refrigerator inner-doors are preformed by G.E. and supplied to many major manufacturers. Advantages of this use of G-E laminates over metal materials mean better insulation, less condensation, improved finish, rustlessness, reduced weight, elimination of denting. *Look into G-E molded laminates for your products!*

Complete Line of G-E Laminates

General Electric produces a complete line of laminated plastics—either molded or in forms of sheets, tubes and rods, with cloth, paper, glass fabric or special bases—for a wide variety of applications. *(Also, look to General Electric for silicone insulation, insulating varnishes, sealing and filling compounds, mica insulation, varnished cloth and tape.)*

DEFENSE CONTRACTORS!

Investigate the many ways G-E Laminated Plastics do the work of metals—and do it better—as parts, structural materials, electrical insulation. General Electric is ready to work with you in every stage of product development.

You can put your confidence in

GENERAL ELECTRIC

IT'S rpc FOR HIGH VOLTAGE RESISTORS

Stable, dependable resistors made in sizes from one inch to 18½ inches long. Power Rating 1 watt to 90 watts. Resistance values to 100,000 megohms. Designed for easy mounting on a panel or stand-off insulator. Can be assembled to make tapped combinations. Matched pair resistors with 2% accuracy available for high voltage instrumentation. ***rpc High Voltage Resistors*** are used in quantity by leading Manufacturers, Instrument Makers, Universities and Laboratories.

ALSO MANUFACTURERS OF HIGH QUALITY PRECISION WIRE WOUND RESISTORS. HIGH FREQUENCY RESISTORS AND HIGH MEGOHM RESISTORS. WRITE TODAY FOR CATALOG.

rpc RESISTANCE PRODUCTS CO.
714 RACE STREET • HARRISBURG 2, PA.

New BIRTCHER TUBE CLAMP FOR MINIATURE TUBES

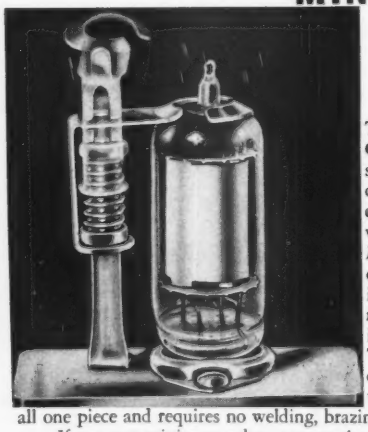

POSITIVE PROTECTION AGAINST LATERAL AND VERTICAL SHOCK!

The *New* Birtcher Type 2 Tube Clamp holds miniature tubes in their sockets under the most demanding conditions of vibration, impact and climate. Made of stainless steel and weighing less than ½ ounce, this *New* clamp for miniature tubes is easy to apply, sure in effect. The base is keyed to the chassis by a single machine screw or rivet...saving time in assembly and preventing rotation. There are no separate parts to drop or lose during assembly or during use. Birtcher Tube Clamp Type 2 is all one piece and requires no welding, brazing or soldering at any point.

If you use miniature tubes, protect them against lateral and vertical shock with the Birtcher Tube Clamp (Type 2). Write for sample and literature.

Builder of millions of stainless steel Locking Type Tube Clamps for hundreds of electronic manufacturers.

The BIRTCHER Corporation

For a Thermosetting Plastic with . . .

EXCEPTIONAL ELECTRICAL PROPERTIES

TOGETHER WITH SUPERIOR CHEMICAL RESISTANCE AND MECHANICAL PROPERTIES

HYSOL 6000

The Hysol 6000 Series is an exceptionally versatile group of materials which derive their properties from the epoxide resins. Supplied in cast rods, tubes and sheets; as a casting resin; and as a coating solution. A variety of formulations can be compounded to assure best service in specific applications.

SPECIFICATIONS OF THE BASIC CAST RESIN

Specific Gravity	1.18 -1.20
Coef. of Thermal Expan.	25-60.4 x 10^{-6}
Heat Resistance	230 - 250°F
Water Absorption 24 hrs.	0.10%
Rockwell Hardness M Scale	85-95
Tensile Strength psi	11,370
Flexural Strength psi	15,540
Modulus of Elasticity psi	426 x 10^{-6}
Izod Impact (Ft. lbs. in notch)	.45
Compressive Strength psi	14,100

ELECTRICAL PROPERTIES

POWER FACTOR			
60 cycles	0.0011	10^3 cycles	0.0042
1 megacycle	0.026	10 megacycles	0.035
DIELECTRIC CONSTANT			
60 cycles	3.88	10^3 cycles	3.70
1 megacycle	3.49	10 megacycles	3.17
LOSS FACTOR			
60 cycles	0.0043	10^3 cycles	0.015
1 megacycle	0.091	10 megacycles	0.110
DIELECTRIC STRENGTH			
step by step (⅛ inch section)			350 Volts/mil
ARC RESISTANCE			135 seconds

Write for Technical Bulletins

houghton laboratories, inc.
OLEAN, NEW YORK

Plants in Olean, N. Y. and Smethport, Pa.

Expanded Facilities Mean –

GREATER AEROCOM PRODUCTION ... SAME HIGH QUALITY!

It seemed that orders for all Aerocom equipment would have to be delayed for about six months – because of a greatly increased volume of orders.

But – Aerocom was able to expand plant facilities and production so that, now, some equipment is available with only small delays.

Despite the pressure for new equipment, corners will not be cut . . . Aerocom quality will be maintained.

CONSULTANTS, DESIGNERS AND MANUFACTURERS OF STANDARD OR SPECIAL METEOROLOGICAL AND COMMUNICATIONS EQUIPMENT

AER -O- COM

Reg. U. S. Pat. Off.

AERONAUTICAL COMMUNICATIONS EQUIPMENT, INC.
3090 Douglas Road, Miami 33, Florida

BALLANTINE

STILL THE FINEST
in
ELECTRONIC VOLTMETERS

Ballantine pioneered circuitry and manufacturing integrity assures the maximum in

SENSITIVITY • ACCURACY • STABILITY

- All models have a single easy-to-read logarithmic voltage scale and a uniform DB scale.
- The logarithmic scale assures the same accuracy at *all* points on the scale.
- Multipliers, decade amplifiers and shunts also available to extend range and usefulness of voltmeters.
- Each model may also be used as a wide-band amplifier.

MODEL 300

MODEL	FREQUENCY RANGE	VOLTAGE RANGE	INPUT IMPEDANCE	ACCURACY	PRICE
300	10 to 150,000 cycles	1 millivolt to 100 volts	1/2 meg. shunted by 30 mmfds.	2% up to 100 KC 3% above 100 KC	$210.
302B Battery Operated	2 to 150,000 cycles	100 microvolts to 100 volts	2 megs. shunted by 8 mmfds. on high ranges and 15 mmfds. on low ranges	3% from 5 to 100,000 cycles; 5% elsewhere	$225.
304	30 cycles to 5.5 megacycles	1 millivolt to 100 volts except below 5 K C where max. range is 1 volt	1 meg. shunted by 9 mmfds. on low ranges. 4 mmfds. on highest range	3% except 5% for frequencies under 100 cycles and over 3 megacycles and for voltages over 1 volt	$235.
305	Measures peak values of pulses as short as 3 microseconds with a repetition rate as low as 20 per sec. Also measures peak values for sine waves from 10 to 150,000 cps.	1 millivolt to 1000 volts Peak to Peak	Same as Model 302B	3% on sine waves 5% on pulses	$280.
310A	10 cycles to 2 megacycles	100 microvolts to 100 volts	Same as Model 302B	3% below 1 MC 5% above 1 MC	$235.

For further information, write for catalog.

BALLANTINE LABORATORIES, INC.

100 FANNY ROAD, BOONTON, NEW JERSEY

Circuit printer for flat surfaces. The ceramic plate being loaded on the turntable (left) will be carried to the rear of the machine where a silver circuit pattern will be impressed on it. The printed plate will then be carried to the unloading position (right) where it will be flipped into the discharge chute

a loading position, carries it to a printing position, then carries the printed plate to an unloading position, where it is automatically flipped into a chute.

In regular operation, three plates are processed simultaneously. While the first plate is unloaded, the second is printed, and the third is loaded. The turntable stops while the operations are performed, then advances the plates one-third of a revolution, stops again, and so forth. The usual production rate, about 1,000 plates per hour, can be increased to 1,500 per hour without loss of printing quality but at the expense of excessive wear and tear on the machine.

As the turntable advances the plates from position to position, they rest on rectangular platens about 3 by 4 inches in size. The flat platens are normally flush with the turntable. When a plate-carrying platen reaches the printing position, the platen rises and presses the plate against the underside of the printing screen, which occupies a fixed horizontal position. While the plate is held against the screen, a rubber squeegee is automatically moved over the top surface of the printing screen, forcing conducting paint through the screen onto the plate in the desired pattern. The platen is then lowered to its original position and is advanced by the turntable another third of a revolution to the unloading position. Here the platen is tilted, and the printed

HEINEMANN
MAGNETIC CIRCUIT BREAKERS

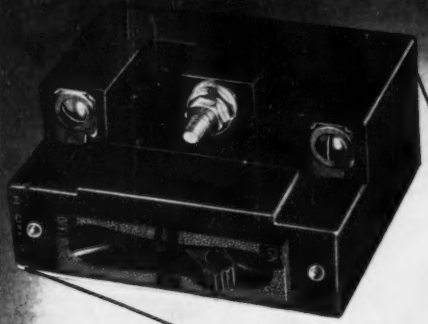

helps Western Electric salvage millions of feet of drop wire per year

Western Electric Company Splice Vulcanizer showing upper mold in raised position
HEINEMANN "SAFELET" containing Auxiliary Circuit Breaker
Upper Mold
TIMER
Lower Mold

The HEINEMANN *Fully Magnetic* CIRCUIT BREAKER shown above is absolutely dependable at all times, regardless of surrounding temperatures. As demanded in this installation, the breaker trips *INSTANTLY* on overload (where needed, a magnetic-hydraulic Time Delay can be furnished to retard tripping for a predetermined time). Rotation of the high speed latch releases contacts which are under heavy spring pressure, while magnetic blowout action gives instant arc interruption.

Write for
Bulletins 3200 and 1010

How it Works

Used for salvaging short lengths of drop wire, this machine makes unique use of the HEINEMANN *Fully Magnetic* CIRCUIT BREAKER. When the mold is closed and the temperature reaches the vulcanizing heat, a thermoswitch located in the lower mold closes and throws into the circuit a resistance, which is in parallel with the heaters. This reduction in resistance increases the current so that it exceeds the rated value of the circuit breaker. The Heinemann breaker then opens, permanently disconnects the current to the elements, and extinguishes a red light which is used to visually indicate the heat period. The magnetic breaker, which is equipped with auxiliary contacts, then acting as a single pole—double throw switch, transfers the current to the timer which through a relay operates a white light that remains illuminated for the entire cure period. At the end of the cure period the relay opens and the light goes out.

EST. HELL 1888

HEINEMANN ELECTRIC COMPANY

97 PLUM STREET TRENTON, NEW JERSEY

STANDARD UNIVERSAL SECTION BOARDS

Precision universal section boards have met with enthusiastic approval. Engineers, Laboratory Technicians, and Designers find it invaluable as a low cost aid in development and prototype work. Available in 4 widths, each board has 5 sections, each with 10 terminals and 4 mounting holes. One or more sections can be easily separated to suit a particular job. PMP offers a choice of 2 terminal types: No. 100 (Double Turret) or No. 400 (Tubular Turret). Also choice of board material: LE or XXX phenolic. XXX phenolic as board material has found wide acceptance and use in high frequency applications.

SECTION SCORING

The illustration clearly shows the ease with which one or more of the five sections of the PMP Universal Board may be used. Scoring is deep enough to make a clean break but not too deep to remain rigid if all five are used.

PRECISION HARDWARE: Many items in the Electronic Hardware field, such as handles, ferrules, thumb screws, stand-offs, etc., are kept in stock. Many years of experience in all types of metal fabrication, enables PMP to offer manufacturers a specialized service in the designing and production of custom components.

PRECISION METAL PRODUCTS CO. of Malden

41 Elm St. • Stoneham 80, Massachusetts

Only with CO-AX

air-spaced articulated R.F. CABLES

THE LOWEST EVER CAPACITANCE OR ATTENUATION

•

We are specially organized to handle direct enquiries from overseas and can give

IMMEDIATE DELIVERIES FOR U.S.A.

Billed in Dollars Settlement by your check.

Transaction as simple as any local bus

LOW ATTEN TYPES	IMPED OHMS	ATTEN db/100ft or 100 Mcs.	LOADING ft in coil	O.D."	
A1	74	1.7	0.11	0.36	
A2	74	1.3	0.24	0.44	HIGH POWER FLEXIBLE
A34	73	0.6	1.5	0.88	
LOW CAPAC TYPES	CAPAC mmf/ft	IMPED OHMS	ATTEN db/100ft 100 Mcs.	O.D."	
C1	7.3	150	2.5	0.36	
PC1	10.2	132	3.1	0.36	PHOTOCELL CABLE
C11	6.3	173	3.2	0.36	
C2	6.3	171	2.15	0.44	
C22	5.5	184	2.8	0.44	
C3	5.4	197	1.9	0.64	
C33	4.8	220	2.4	0.64	V.L.C. ★
C44	4.1	252	2.1	1.03	

★ Very Low Capacitance cable.

TRANSRADIO LTD

CONTRACTORS TO H.M. GOVERNMENT

13 BA CROMWELL ROAD LONDON SW7 ENGLAND

CABLES TRANSRAD LONDON

ONLY SPECIFIC COILS CAN DO THIS JOB-

One of various coils that go into making communications equipment is shown below. This acetate interleave coil is made from fine wire, and the acetate film interleaved with the winding provides a high dielectric between winding layers. Rigid quality control, at Coto, assures perfect operation.

Coto SINCE 1917

Builds Them!

When you need electrical coils, why not take advantage of 34 years of experience, engineering competence, and modern production facilities. Coto coils are built for you, to your specifications.

COTO-COIL CO. INC

COIL SPECIALISTS SINCE 1917

65 PAVILION AVE

PROVIDENCE 5, R.I.

LOOKING HIGH



For high dielectric strength
For high volume and surface resistivity
For high dielectric constant

For low loss factor
For low power factor
For low cost

AND LOW

look to Corning for ALL your electronic glass requirements

Literally hundreds of glasses with widely varying electrical characteristics are available at Corning —glasses that meet almost every electrical requirement. In V.H.F. and U.H.F. applications, where miniaturization and low loss pose difficult problems, one of Corning's glasses often proves the answer. And glasses can be obtained with high physical and thermal shock resistance, and excellent sealing properties, when these characteristics are needed.

While Corning manufactures much standard electronic glassware, such as electronic tube blanks, television tube blanks, sealing beads, and glass tubing, our engineers are ready to work with you on special requirements. In the hands of Corning technicians, glass can be made in a surprising variety of complicated shapes, often to extremely close tolerances. Their technical know-how, years of practical experience, and complete research and engineering facilities are available to help solve your problems. Let us know what you have in mind!

PYREX

CORNING GLASS WORKS, CORNING, N. Y.

Corning means research in Glass

ELECTRONIC SALES DEPARTMENT — ELECTRICAL PRODUCTS DIVISION

1851 • 100 YEARS OF MAKING GLASS BETTER AND MORE USEFUL • 1951

Leach RELAYS

TROUBLE-FREE PERFORMANCE

"as specified"

Because all *Leach* Relays are *quality engineered* for dependable duty... they are specified *first* by leading manufacturers of industrial equipment of all types. If your equipment demands relays that are first and foremost, more dependable and longer lasting, specify *Leach* Relays ... they're more dependable... *performance proves it.* Whatever your relay control problem... it's a challenge to *Leach.* Illustrated are but a few of the wide selection *Leach* provides industry, as standard equipment.

RELAYS SHOWN ABOVE CAN BE SUPPLIED WITH VARIOUS CONTACT ARRANGEMENTS. WRITE FOR DETAILS.

BETTER CONTROLS THROUGH BETTER RELAYS

LEACH RELAY CO.

5915 AVALON BOULEVARD, LOS ANGELES 3, CALIFORNIA

Representatives in Principal Cities of U. S. and Canada

plate slides into the discharge chute.

The flat-surface printer is at present loaded by hand, one plate at a time, as the turntable moves the three platens past the loading position. Otherwise the process, including the flipping of the printed plates into the discharge chute, is entirely automatic.

Cylindrical-Surface Printer

The cylindrical-surface printer was developed for the printing of cylindrical ceramic forms less than 0.5 inch in diameter. Such small ceramic cylinders are usually out of round and present a much more difficult printing problem than larger, more perfect forms.

The cylindrical-surface printer is loaded manually by slipping the cylinder to be printed over a mandrel. A single stroke of a hand-operated control lever then puts the machine through the entire printing cycle and operates a release mechanism which drops off the printed cylinder.

This printer differs from a conventional printer in that the squeegee remains stationary. As the control lever is brought forward, the mandrel, bearing the cylinder to be printed, rises to meet the stenciled screen. Simultaneously the squeegee, which is directly above the mandrel, drops to press against the top surface of the screen. The screen, which remains flat and horizontal at all times, then starts to move (forward on one stroke, backward on the next) over the cylinder and the cylinder rotates in response



Circuit printer for cylindrical surfaces. A single forward-and-back stroke of the control lever (left) puts the machine through an entire printing operation and drops off the printed cylinder

Versatility

OF AMERICAN D. C. AMPLIFIER . . . WITH THE MICROSEN BALANCE . . .

CREATES NEW APPROACHES FOR RESEARCH AND PROCESS DEVELOPMENT

The American D. C. Amplifier — a new, unique electro mechanical feedback amplifier — assures stable, accurate D. C. amplification so vital in engineering and process research.

The heart of this precision instrument is the power-actuated Microsen Balance, a unit extremely sensitive to low power input — insensitive to line voltage variations. It maintains continuous equilibrium between the forces created by the input current and those resulting from the output current. Consequently, the result is precision D.C. amplification.

The American D. C. Amplifier is highly versatile. Some fields of measurement in which it is applied are: electronics, electrical bridges, electrolysis, gas analysis, photometry, and thermometry. It has been used with Pirani gauges, photocells, and ionization gauges. Standard units include Voltage, Current, and Potentiometer Amplifiers, D. C. Converters and D. C. Transformers.

The American D. C. Amplifier is low in cost, easy to operate, compact, portable. Special designs can be engineered, if specific details are supplied. Mail the coupon for complete details. →

MANNING, MAXWELL & MOORE, INC.
250 East Main Street, Stratford, Connecticut

☐ Please send me American D. C. Amplifier bulletin.
☐ Application specifications and/or specific queries attached.

NAME_____
TITLE_____
COMPANY_____
ADDRESS_____
CITY/ZONE_____ STATE_____

AMERICAN ELECTRICAL INSTRUMENTS

A product of **MANNING, MAXWELL & MOORE, INC.** STRATFORD, CONNECTICUT

MAKERS OF 'AMERICAN' ELECTRICAL AND INDUSTRIAL INSTRUMENTS, 'HANCOCK' VALVES, 'ASHCROFT' GAUGES, 'CONSOLIDATED' SAFETY AND RELIEF VALVES. BUILDERS OF "SHAW-BOX" CRANES, 'BUDGIT' AND 'LOAD LIFTER' HOISTS AND OTHER LIFTING SPECIALTIES.

TELEX LISTENING COMFORT

HEARING AT ITS BEST!

Modern, lightweight, durable—Telex Quality Headsets are easy on the ears . . . No uncomfortable ear pressure . . . Easily adjustable and built for hard usage . . . Telex Headsets effectively block out background noises . . . 5 ft. standard cord or special cord with built-in volume control . . .

C.A.A. Approved

TWINSET *

Nothing Touches the Ear

Weighs only 1.6 oz.

MONOSET *

Direct Signal for Both Ears

Weighs only 1.2 oz.

*Trademark

WRITE FOR FREE FOLDER—OR SEE YOUR PARTS JOBBER.

ELECTRO-ACOUSTIC DIVISION
DEPT. H-15, TELEX PARK, ST. PAUL 1, MINN.

In Canada, Atlas Radio Corporation, Toronto

STANDARD OF THE WORLD FOR QUALITY HEADSETS

FOR POSITIVE AND INEXPENSIVE SHIELDING

—use Metex "Electronic Weather Strips"

Because they combine exceptional *resiliency* with good *conductivity*, Metex Electronic Products made of knitted wire mesh offer an unusually effective means of sealing and shielding a wide variety of types of electronic equipment.

As closures for sheet metal cabinets, for instance, the resiliency of "Metex" assures positive conductive contact *at every point* between cover and cabinet — eliminating costly machining for close tolerances. Metex Gaskets also assure resilient metal-to-metal contact between flanges, and can be combined with rubber compounds to function both as a shield and as a seal.

Applications in which "Electronic Weather Strips" have already proved their effectiveness include pulse modulator shields, wave-guide choke-flange gaskets, replacement of beryllium-copper fingers and springs on TR and ATR tubes.

We will be glad to put our experience at your disposal. A letter to Mr. R. L. Hartwell, outlining your problem, will receive immediate study. For preliminary information, write for bulletin "Metex 'Electronic Weather Strips.'"

METEX

METAL TEXTILE CORPORATION

641 EAST FIRST AVENUE, ROSELLE, N. J.

ATR

"A" BATTERY ELIMINATORS

Makes it easy to DEMONSTRATE AND TEST D.C. APPARATUS FROM A.C. LINES

for DEMONSTRATING AND TESTING AUTO RADIOS

New Models . . . Designed for testing D. C. Electrical Apparatus on Regular A. C. Lines. Equipped with Full-Wave Dry Disc Type Rectifier, Assuring Noise-less, Interference-Free Operation and Extreme Long Life and Reliability.

✓NEW MODELS ✓NEW DESIGNS ✓NEW LITERATURE

"A" Battery Eliminator, DC-AC Inverters
Auto Radio Vibrators

ATR *See your jobber or write factory*

AMERICAN TELEVISION & RADIO CO.
Quality Products Since 1931
SAINT PAUL 1 MINNESOTA-U.S.A.

ERIE STYLES 325 and 326 STAND-OFF CERAMICONS®

The Most Efficient Stand-Off Units for VHF and UHF Applications

HERMETICALLY SEALED . . . . RUGGED

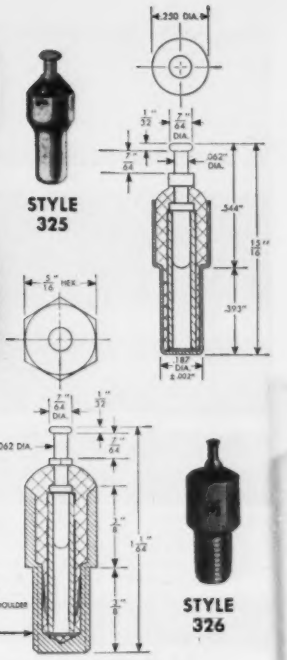

BETTER by-passing is one solution to control of regeneration in high frequency receivers. The Erie Styles 325 and 326 Stand-off Ceramicons offer outstanding features for extremely efficient by-passing. Style 325 is designed for push-on clip mounting to chassis; Style 326 is for threaded mounting installation.

This basic design provides, in a hermetically sealed case, a by-pass-to-ground through the shortest possible path. Full advantage is taken of the concentric electrode configuration in maintaining this short path by making connection to the outer electrode at the plane of the chassis. The result is an extremely low and uniform series inductance. In assembly operations both location and length of leads are accurately fixed, resulting in better mechanical uniformity. This feature has been demonstrated to be of particular importance in good VHF and UHF design.

OUTSTANDING FEATURES

1. Tubular ceramic capacitor is completely sealed.
2. Very low and uniform inductance path to ground.
3. Electrical shielding is provided by means of the grounded metal case.
4. Post terminal provides a sturdy tie point for several connections, and is made essentially to match tube socket terminal height in the interest of maintaining uniform short leads.

SPECIFICATIONS

Standard available capacitance values in MMF: 10, 33, 47, 68, 82, 100, 680, 1,000, 1,500. Voltage Rating, 500 VDC.

Electronics Division

ERIE RESISTOR CORP., ERIE, PA.

LONDON, ENGLAND . . . TORONTO, CANADA

SPEED UP PRODUCTION
LOWER COSTS
IMPROVE PERFORMANCE WITH
REMEMBER THE BRAND NAME
TURBO
VARNISHED TUBING and SATURATED SLEEVING
Here's electrical insulation at its best — for commercial and military applications. Meets Specification MIL-W-3190. Features smooth bore for rapid snaking and fishing; is non-deteriorating and non-absorbent; resists wear, abrasion and impact to provide reliable performance under the most severe operating conditions. Especially suited for use where heat resistance is essential.
Impregnated with specially formulated insulating varnishes, Turbo selected braided cotton, rayon and glass sleeving provides maximum protection for leads and wire connections. Tubing and sleeving available from stock in all NEMA (ASTM) grades. Special high dielectric tubing available on request.
Write today for literature and samples. Catalog features physical and electrical properties, colors, dimensions, packaging, and other technical data.
Write 106 Valley Street, Willimantic, Connecticut
TURBO
THE WILLIAM BRAND AND CO., INC.
INSULATING MATERIAL SPECIALISTS SINCE 1920
WILLIMANTIC, CONNECTICUT, U. S. A., Telephone 3-1661
TURBO Insulated Wires • Wire Markers • Extruded Tubing • Glass Sleeving • Saturated Sleeving • Glass Tubing • Varnished Tubing • Cambric Cloths, Tapes, Papers • Mica
SALES REPRESENTATIVES IN PRINCIPAL CITIES

to the horizontal motion of the screen pressing against it. While the cylinder rolls against the screen, the squeegee forces conducting paint onto the cylinder through the pervious pattern of the screen. When the cylinder has made one complete revolution, both cylinder and squeegee are moved away from the screen. As the control lever is moved back to its starting position, the mandrel carrying the cylinder is rotated from a horizontal to a downward position, a release mechanism on the mandrel is actuated, and the printed cylinder drops off.

With hand loading of the cylindrical surface printer, an operator can easily print 1,500 cylinders in an 8-hour day. An automatic feed mechanism and electric drive should increase the production rate to a probable 500 or 1,000 cylinders per hour.

Automatic Audio Level Riding

By T. K. Abernethy
Chief Engineer
Stations WSIC and WSIC-FM
Statesville, N. C.

ALL BROADCASTING stations have, in common, the prime problem of keeping consistant audio levels in regards to changes from program to program and also from music to speech within a program.

Most stations use a compression or limiting amplifier. The purpose served by the limiter is twofold. First, the peak levels which would cause objectional distortion due to overloading of the transmitter are held below the overload value. Second, by compressing program peaks, the average modulation can be substantially increased. This increase helps considerably because of the large increase in the number of a-m stations on the broadcast band with its attending increase of interference.

With a reasonable amount of compression, a station is able to override background noise and interference from co-channel and adjacent channel stations. An otherwise listenable signal can not be kept so unless a good gain-riding

VISIBILITY

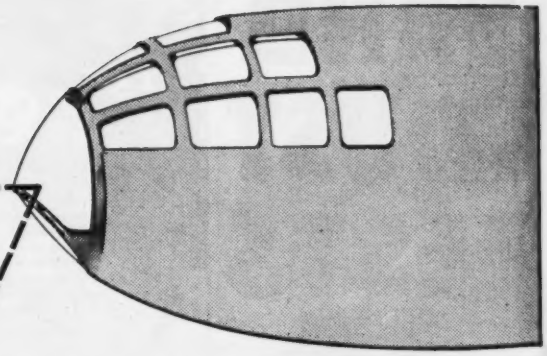

...above and beyond the horizon

when EICOR'S "electronamic team" supplies your AC system with electronically controlled power

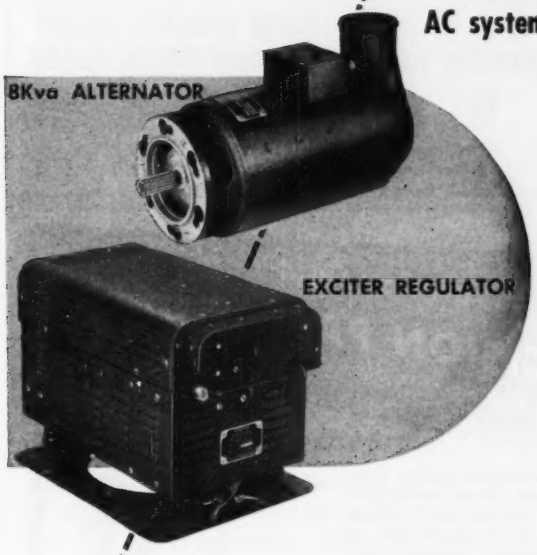

above the horizon — it's Eicor's electronamic team supplying the safe, sure, AC power your nesi-glass deicing system needs for perfect flight-vision under all flying conditions. ***beyond the horizon*** — again this dynamic Eicor team provides the ultimate in closely controlled alternating current, the power necessary to give vision to the far-reaching, far-searching eyes of your aircraft's radar and its associate equipment. You can be assured of the flight-reliability of these units. Designed to rigid and exacting AN Specifications, the Eicor 8Kva Alternator and Exciter Regulator have proven their dependability of performance over thousands of operational flying hours. The Eicor 8Kva Alternator will generate 115/208 volts, three phase, or 115 volts, single phase, at frequencies of 380-1000 cycles and over a speed range of 3800-10,000 rpm. Sensitive voltage regulation and field excitation for the alternator is supplied by its team-mate, the Eicor electronic Exciter Regulator. This Exciter Regulator can also be used in any power circuit, for excitation supply, having a range rating characteristic output of 0.5 to 5.5 amperes DC and 14.0 to 170.0 volts D.C.

AVIONIC PRODUCTS — EICOR

EICOR, INC.
1501 west congress street
chicago 7, illinois

Leading the way in electronic controls for aircraft power conversion equipment

SAND & DUST TESTS



Bowser Sand and Dust Chambers provide facilities for testing aircraft and electronic components in compliance with all MIL, JAN, USAF, AN and other testing specifications. Testing is done in air-suspended sand and dust at high and low air velocities. Temperature control of the air is accurately provided.

Bowser also manufactures engineered environmental equipment for testing, processing and storage in a wide range of sizes and performance ratings. Take advantage now of Bowser's long continuous experience.

CHECK THE SPEC YOU HAVE TO MEET

BOWSER TECH. REFRIG., Terryville, Conn.
Send me more information on the following:

Walk-in Chambers	☐	High Altitude Tests	☐
High Temp. Tests	☐	Mildew Resistance Tests	☐
Low Temp. Tests	☐	Sand & Dust Tests	☐
Fungus & Humidity Tests	☐	Explosion Proof Tests	☐

Name_____ Pos._____
Company_____
Street_____
City_____ Zone____ State_____

BOWSER
TECHNICAL REFRIGERATION
DIVISION BOWSER INC
TERRYVILLE • CONN.

- SMALL
- COMPACT
- WELL DESIGNED
- DEPENDABLE

AGASTAT
TRADE-MARK

TIME DELAY RELAY
PROTECTS BIG INDUSTRY PROCESSES

Address inquiries to Special Products Division
American Gas Accumulator Company
1027 Newark Avenue, Elizabeth 3, New Jersey

Laboratory Control of
PRECISION PAPER TUBES
means finer coil forms for you!

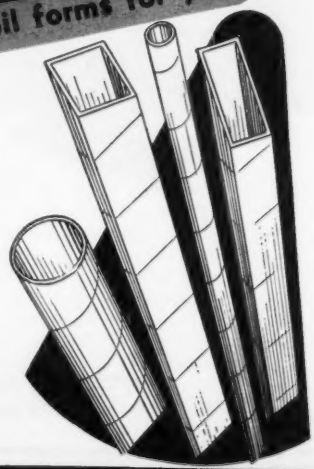

Better heat-dissipation, greater resistance to moisture, better insulation—all are extras you get with Precision Paper Tubes, thanks to carefully supervised Laboratory Control. Also, spiral winding and die-forming under pressure provide 15% to 20% more strength with lighter weight—greater coil winding space.

Available in round, square, oval, rectangular, or any shape, length, ID or OD. Made to your exact specifications of finest dielectric Kraft, Fish Paper, Cellulose Acetate or combinations.

Write today for free sample and New Mandrel List of over 1,000 sizes.

PRECISION PAPER TUBE CO.
2041 W. Charleston St.
Chicago 47, Ill.
Plant No. Two, 79 Chapel St., Hartford, Conn.

Also Mfrs. of Precision Coil Bobbins

SPECIFY...

RMC

TEMPERATURE COMPENSATING

DISCAPS

DESIGNED TO REPLACE CERAMIC AND MICA CONDENSERS AT

LOWER COST!

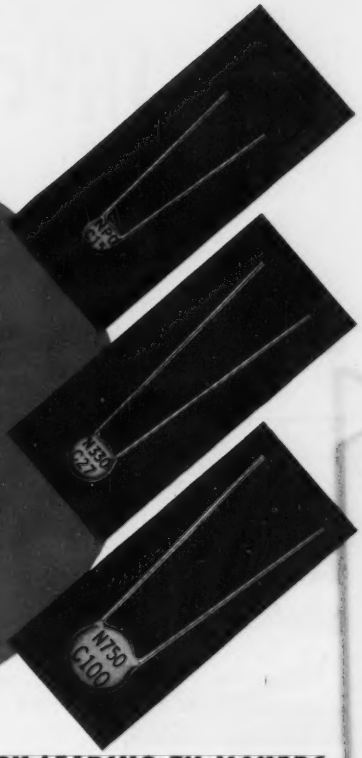

Ten years of research and over two years of volume production have provided the "know-how" behind RMC's leadership in the production of these new low cost disc type temperature compensating and general purpose DISCAPS.

AN RMC DEVELOPMENT

RMC is the only ceramic condenser manufacturer with actual production experience in the manufacture of disc type temperature compensating ceramic condensers. This is your guarantee of dependable performance.

USED BY LEADING TV MAKERS

RMC Type C temperature compensating DISCAPS conform to the electrical specifications of the RTMA standard for Class 1 ceramic capacitors. They are specified by the leading TV and electronic manufacturers because of their high quality, low inherent inductance, small size and low cost.

Available in a wide range of capacities and temperature coefficients between P-100 and N-2200, DISCAPS may prove to be the answer to many of your problems.

"RMC DISCAPS" *The Right Way to Say Ceramic Condensers*

SEND FOR SAMPLES AND TECHNICAL DATA

DISCAP CERAMIC CONDENSERS

RMC

RADIO MATERIALS CORPORATION

GENERAL OFFICE: 3325 N. California Ave., Chicago 18, Ill.

FACTORIES AT CHICAGO, ILL. AND ATTICA, IND.

Two RMC Plants Devoted Exclusively to Ceramic Condensers

8 TRACK
SHOCK PROOF
MOBILE RECORDER!
for
INDUSTRY AND SCIENCE
PLAYBACK ANALYZER
INDUSTRIAL RESEARCH
SHOCK & VIBRATION MEASUREMENTS
TELEMETERING APPLICATIONS
GEOPHYSICAL EXPLORATIONS
Ampex specializes in designing and producing custom-built equipment to meet your requirements. A few of the proven applications are illustrated.
AMPEX RECORDERS are available in 1 to 14 tracks using ¼" to 1" tape
PRECISION PERFORMANCE
AMPEX
Performance Includes . . .
• STANDARD MODELS to 80,000 cps
• CUSTOM-BUILT MODELS to 100,000 cps
• LOW FLUTTER MODELS less than 0.1% PEAK-TO-PEAK!
• LOW FREQUENCY MODELS 0 to 5,000 cps (FM System)
AMPEX
Magnetic Tape RECORDERS
AMPEX ELECTRIC CORPORATION
REDWOOD CITY . . . CALIFORNIA
AX-48
UNRIVALED for AUDIO and INSTRUMENTATION Recording



FIG. 1—Original circuit of Raytheon RL-10 amplifier before modification for automatic level riding

job is done to keep the audio level, and hence limiting, at the optimum value.

The circuits shown for automatic gain riding are adaptable for both a-m and f-m stations and can be applied to any limiting amplifier. Most engineers do not want to use compression on f-m programs, for they wish to retain the dynamic range that f-m affords, due to absence of noise and interference. They do express the need for a limiting amplifier, even if used only for limiting peaks which would otherwise over modulate the f-m transmitter and thereby cause serious distortion in f-m receivers.

With some modification of the limiter input circuit, the limiting amplifier can be made an automatic gain-riding amplifier also.

The amount of limiting can be set and the amplifier will limit this value over a wide range of input level variations from console or line. The amount of limiting is arbitrarily set at approximately 10 db and the reference level is set at 10 db (or more, if desired) above 0 db compression, as shown on the limiter meter. Then, if the level decreases, the reference point of limiting is increased a like amount, and the amount of limiting is corrected to its former value of 10 db.

For f-m, the amplifier is set for no limiting, but in practice it actually amounts to about 2 db and the level is corrected automatically from around — 15 db to 0 db, using 0 db as reference level. This amounts to an input level of 15 db above that which would modulate the transmitter 100 percent, with no limiting taking place.

The level correction and set

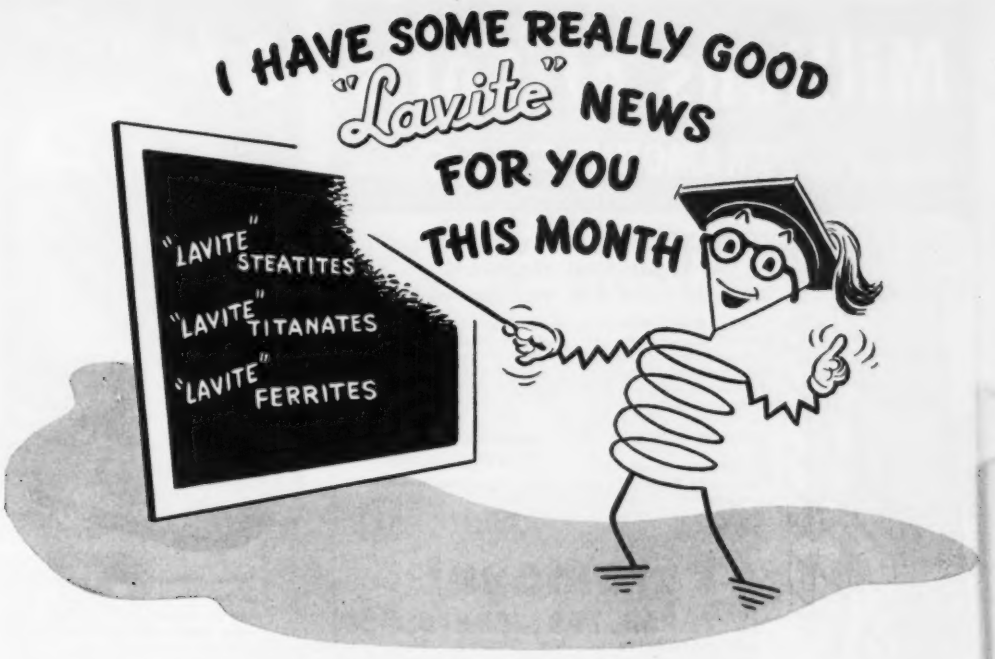

As you know, "Lavite" is a Trade Name of the oldest manufacturer of technical ceramics. "Lavite" Ceramics are backed by 75 years of experience in research and development, and a continuous scientific search for new and better properties to satisfy the stringent requirements of present day communication and power. *This valuable experience is now augmented by added facilities* — research, design and production — with which to even better meet your requirements in quality and quantity — even in periods of general shortages.

I invite you to profit from Steward's research victories and now greater ability to produce. If you have a problem in technical ceramics, I suggest you seek the aid of our engineers for individual study and recommendations, and I am sure you will use one of the many "Lavite" Technical Ceramics.

Write for your copy of our booklet, "Lavite" Technical Ceramics, Table of Properties.

D. M. STEWARD MANUFACTURING CO.

3604 Jerrome Avenue Chattanooga, Tennessee

Sales Offices in Principal Cities

Millions of Coils

wound on PARAMOUNT *Paper Tubes*



Stock Arbors or Special Tubes to Meet Every Need
SQUARE, ROUND, RECTANGULAR
.450" to 25" I.D. ½" to 30" long. Tolerances ± .002"

You find PARAMOUNT Spiral Wound Paper Tubes at the core of coil dependability in nationally known products and equipment. That's proof they're *made right* to *wind right* and *stay right* on the job. Hi-Dielectric. Hi-Strength. Kraft, Fish Paper, Red Rope, or any combination, wound on automatic machines.

NEW! *Shellac-Bound* Kraft paper tubing. Heated shellac forms an adhesive bond between the laminations. Absolutely moisture resistant.

SEND FOR ARBOR LIST OF OVER 1000 SIZES

Write on company letterhead for stock arbor list. Includes many odd sizes.

Paramount
PAPER TUBE CORP.
616 LAFAYETTE ST., FORT WAYNE, IND.
Mfrs. of Paper Tubing for the Electrical Industry

Laminated Silver Material in bar form or blanked to your specifications!

With laminated silver you obtain the high electrical and thermal conductivity characteristic of fine silver . . . yet the precious metal is only where you need it . . . non-precious base metal supplies the added strength and greatly reduces costs.

You will find the fast, dependable service of owner-management and our 53 years of experience a source of complete satisfaction.

Your inquiries will be appreciated and replied to . . . promptly.



The Home of IMPROVED Service

The IMPROVED SEAMLESS WIRE COMPANY
INCORPORATED 1898
775 Eddy Street, Providence 5, Rhode Island

These miniature and sub-miniature corona voltage regulator tubes have been developed for high voltage, low current applications. Specifically designed for such uses as: counter tube power supplies, photomultiplier tubes, stabilizing the second anode potential of cathode ray tubes, reference voltages for regulator systems, nuclear and cosmic ray research. These tubes have been used in such applications as radio frequency and vibrator high-voltage power supplies. They have excellent regulation, exceedingly long life, and their small size gives them a high degree of space efficiency.

In sufficient quantities these corona regulator tubes can be supplied for any voltage between 450 and 16,000 volts.

CHARACTERISTICS

	5841	5950	6119	6120
DC STARTING VOLTAGE (VOLTS MAX)	930	730	2050	16,000
DC REGULATED VOLTAGE (VOLTS)	900±15	700±15	2,000±30	15,600±400
REGULATED CURRENT RANGE (μa)	2-50	2-50	2-50	5-200
VOLTAGE REGULATION (2-50 μa) (%)	1.5	1.5	1.5	2
BULB SIZE	T-3	T-3	T-3	⅝" Dia.
LIFE	Unlimited by use			

RATINGS

MAXIMUM REGULATOR TUBE CURRENT (μa) 200
MAXIMUM RELATIVE HUMIDITY (%) 100
AMBIENT TEMPERATURE RANGE (°C) .....−65 to +100

BETTER COMPONENTS MAKE BETTER INSTRUMENTS

Victoreen Instrument

5806 HOUGH AVE. CLEVELAND 3, OHIO

FREED

"PRODUCTS OF EXTENSIVE RESEARCH

TRANSFORMERS & INSTRUMENTS



1010 COMPARISON BRIDGE
RAPID TV PARTS TEST

NO. 1030 LOW FREQUENCY
"Q" INDICATOR



NO. 1140 NULL DETECTOR
AMPLIFIER MODEL



NO. 1180 A.C. SUPPLY
.1 VOLT TO 100 VOLTS
AT 60 CYCLES



NO. 1170 D.C. POWER SUPPLY
DIRECT CURRENT UP TO
500 MA

NO. 1110A INCREMENTAL INDUCTANCE BRIDGE

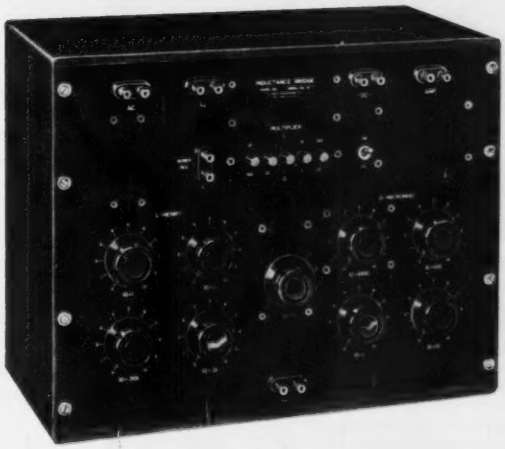

FOR ACCURATE TESTING OF TELEVISION AND COMMUNICATION COMPONENTS UNDER LOAD CONDITIONS.

This bridge has an impedance range of one millihenry to 1000 henries in five ranges. The inductance values are read directly from a four dial decade and multiplier switch. Range of this instrument can be extended to 10,000 henries through the use of an external resistance.

The inductance accuracy is within plus or minus 1% through the frequency range from 60 to 1000 cycles. For the largest multiplier at 1000 cycles, the accuracy of the bridge is decreased to 2%. 60 or 50 cycles line frequency is generally used with this bridge.

On the 1000 henries range, the D.C. is limited to 20 MA. On the 100 henries range the D.C. is limited to 200 MA. On all lower ranges, the current can be one ampere maximum.

HI FIDELITY
½ DB 20-30000 CYCLES

TOROIDAL INDUCTORS
60 CPS. TO 1 MC.



POWER TRANSFORMERS
COMMERCIAL QUALITY

HERMETICALLY SEALED
TO MEET MIL-T-27 SPECS.

SUB MINIATURE
HERMETICALLY SEALED
TRANSFORMERS

SEND FOR LATEST CATALOG!

FREED TRANSFORMER CO., INC.

DEPT. AE 1718-36 WEIRFIELD ST., (RIDGEWOOD) BROOKLYN 27, NEW YORK

when you need a

QUALITY OSCILLATOR

SIE

Model H-2 Oscillator
Is Your Answer

The unique SIE oscillator circuit which has no lower limit to its possible frequency of oscillation is responsible for the excellent low frequency performance of the Model H-2 and other SIE oscillators.

SPECIFICATIONS

Range: 1 cps to 120,000 cps
Calibration: within 1½% plus 1/10 cycle
Output circuits: 20 volts or 20 milliamps and 1 volt at 300 ohms constant impedance
Amplitude stability: Plus or minus ½ db
UNDESIRED VOLTAGES
Power Supply Noise: Less than 1/100% of output signal
Power Line Surge: Less than 1/10% of output signal
Harmonic Distortion: Less than 2/10% from 20 cps to 15,000 cps. Less than 1% at all other frequencies
Microphonic Noise: Less than 1/100% of output signal

SOUTHWESTERN INDUSTRIAL ELECTRONICS CO.

2831 POST OAK ROAD
HOUSTON 19, TEXAS

434 SEVENTH AVE. EAST — CALGARY, ALBERTA, CANADA



FIG. 2—Modification of RL-10 amplifier for level riding with limiting for a-m

amount of limiting is accomplished by using two time constants in the limiter circuit; one fast and one slow. As the rectified voltage is fed to the fast time constant circuit, part of this voltage is stored in the slow time constant circuit, because the two are in series.

In Fig. 1 is shown the limiting circuit of the Raytheon RL-10 before modification by the author. The changes shown in Fig. 2 were made for 10 db of limiting and for level excursions from −10 db to ±5 db, which is extreme but often encountered. Under normal program level the limiter meter indicates a drop in gain of the amplifier of 10 db and the meter will still show 10 db of limiting—varying from 10 db to 20 db on the meter. If the level should drop 8 db there would still be 10 db of limiting and the reference level on the meter would then ride at 2 db.

Although it was not necessary to do so, the 0.1-μf capacitors ahead of the 6H6 rectifier were changed to 0.5 μf to lower the source impedance for the limiter bias. This will make the attack time about twice as fast and much smoother. This change should be made whether used for automatically riding gain or not.

Fig. 3 shows the same amplifier where it is desired to maintain the dynamic range as in f-m program material. Limiting ordinarily is of the order of about 2 db on most programs, but sudden increases in level are not discernable to the listener because the level is corrected so fast. Sudden decreases in level are noticed because of the slow recovery time constant. This feature seems to be quite desirable. The level increase by the amplifier



A lot of
"Military Intelligence"
comes from counters like these...
because every branch of the service...
in fact...

Everyone Can Count on VEEDER-ROOT

Shown here are an aircraft and an artillery counter. What they do, and how they do it, is "nobody's business" but that of the military personnel using them. And now, what might we do for *you?* If you have an important military job on hand, you can count on us to help you just as quickly as our present military commissions will permit.

VEEDER-ROOT INCORPORATED
"The Name That Counts"
HARTFORD 2, CONN. • GREENVILLE, S. C.
Montreal, Canada • Dundee, Scotland
Offices and agents in principal cities

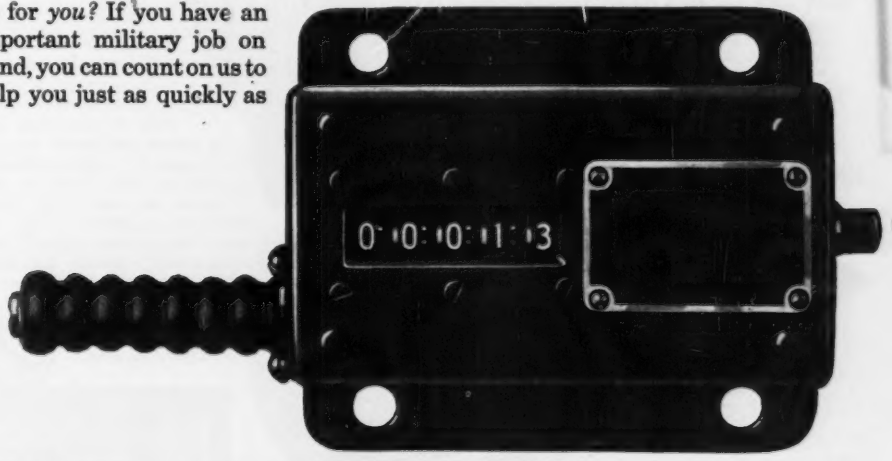

VEEDER-ROOT COUNTERS *"Count Everything on Earth"*

BI-SEAL

SELF-BONDING POLYETHELENE BASE TAPE

LONG LIFE MOISTURE-TIGHT INSULATION

Forms into a solid mass of insulation producing moisture-tight seals by means of a gasketing action on all materials.

FOR HIGH FREQUENCY HIGH TENSION ELECTRICAL INSULATION

FOR Toroids • Coils • Resistors • Deflection Yokes • Antennas

FOR Electroplating • Masking surfaces of external recessed diameters Clean edges eliminate the need of lacquers.

FOR End Sealing of Cables.

FOR An underwater sealing mechanism both for dielectric and hermetic sealing.

CHECK THESE EXCLUSIVE FEATURES:

- √ Fuses into a non-laminar homogeneous mass.
- √ Excellent dielectric characteristics— over 1,000 volts/mil.
- √ A perfect moisture barrier and corona resistant. (Can be applied at—30° F.) Prolonged ageing without deterioration.
- √ Will not corrode metals.
- √ Easy to apply—conforms readily to odd contours.
- √ S. I. C. 2.12, P. F. .0004 @ 10 m.c.

SEND TODAY FOR FREE SAMPLE STRIP

BI-SEAL

BISHOP MANUFACTURING CORPORATION
10 Canfield Road, Cedar Grove, New Jersey
Please send BI-SEAL data.

Mr._____
Title_____
Company_____
Address_____
Tel: VErona 8-2373

MEMO TO DESIGNERS

THE PATH OF MOST RESISTANCE FOR ELECTRICITY ∿∿∿ IS THE PATH OF LEAST RESISTANCE for your PURCHASING AGENT

We're Talking About

JELLIFF ALLOY 1000

This new resistance wire is almost too good to be true. Not only is the Resistivity 1000 ohms/cmf (48% higher than that of the widely-used nickel-chromiums), but it also has such outstanding mechanical and electrical properties that it can easily replace several other alloys now being used in the smaller gages for precision resistors.

★ ★ ★

This means simplified procurement, stock and inventory procedures — more compact precision resistors — lower cost and longer life for the finished product.

For the full story of Alloy 1000, write for Bulletin 17

THE C. O. JELLIFF MANUFACTURING CORPORATION SOUTHPORT, CONN.

the right combination

AiResearch Rate of Change Control

A. W. Haydon Standard D.C. Timing Motor No. 5301

FOR THE RIGHT CABIN PRESSURE

The AiResearch Rate of Change Control regulates the rate at which pressure in the airplane's cabin changes. An A. W. Haydon Motor was chosen to drive the instrument because of its proved performance record in scores of important aircraft applications. Other functions for which similar A. W. Haydon Motors are used include controls for wing and propeller de-icing, propeller feathering, camera intervalometer, hydraulic bypass, fuel tank purging as well as recorder chart drives, trim control, telemetering and destructor control, etc.

Send for complete catalog.

The A. W. HAYDON COMPANY
235 NORTH ELM STREET
WATERBURY 20, CONNECTICUT
Design and Manufacture of Electrical Timing Devices

TOPS

IN DEPENDABILITY
IN QUIETNESS
IN FIDELITY
IN LONG LIFE

. . . in the 3-speed field

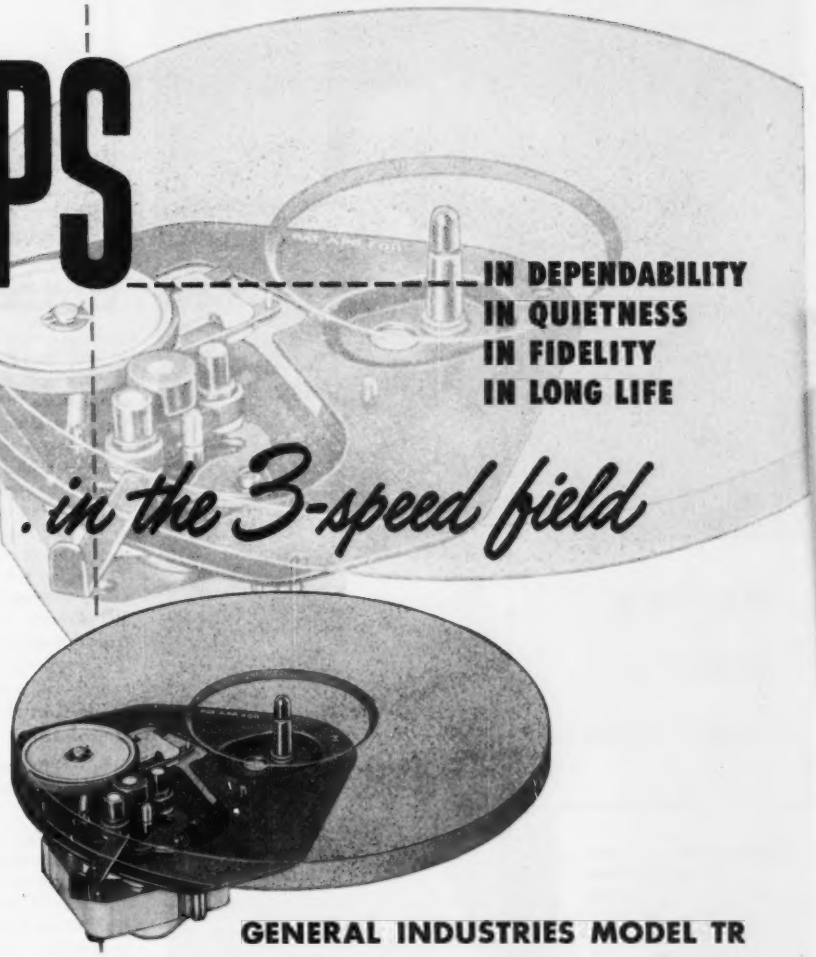

GENERAL INDUSTRIES MODEL TR

Compact . . . foolproof . . . dependable . . . by *every* standard of comparison, the leader among all popularly-priced turntable units. It's General Industries' turret-type 3-speed phonomotor, available in manual type, as illustrated, and also to record-changer manufacturers.

Write *today* for complete information about this and General Industries' *complete* line of three-speed, dual-speed and single speed phonomotors, and the popular new GI Tape-Disc Recorder Assembly. Quantity price quotations furnished promptly upon request.

The GENERAL INDUSTRIES Co.

DEPARTMENT B • ELYRIA, OHIO

MATCHED
QUALITY
COMPONENTS
Reeves-Hoffman manufactures quartz crystal units to all military and commercial specifications from 16 kc to 100 mc.
Reeves-Hoffman Quartz Crystal Units are the sum of many qualities . . . the finest materials . . . skilled craftsmanship . . . and sound engineering based on practical experience in the design and application of crystal units of all types.
When you buy, be sure to specify . . .
REEVES HOFFMAN CORP.
REEVES-HOFFMAN . . . The finest name in crystals
REEVES-HOFFMAN
Corporation
CARLISLE 2, PENNSYLVANIA
LICENSED UNDER PATENTS OF THE BELL SYSTEM



FIG 3—Modified circuit of RL-10 amplifier for automatic level riding for f-m

is slow enough so that the listener is very seldom aware of the level changes, as there is little change in the dynamic range of the f-m programs.

Since peak limiting is not desirable on the f-m programs, the reference level on the f-m limiter amplifier meter can be set at 15 db, or more, below 0 db (no limiting). This is an actual input of ±15 db above reference level of 0 db for 100-percent modulation of the transmitter.

Wide-Range Voltage Regulators

BY JOSEPH HOULE
Washington, D. C.

A REGULATED power supply whose voltage can be adjusted from a few hundred volts down to zero is often needed. Of the many series-tube regulators, no conventional circuit is operable below about 100 volts output because too little plate voltage is then available for the d-c voltage-amplifier tube. While the voltage range of such regulators can be extended downward by means of floating B batteries in the control circuit, this expedient is not usually a complete nor a desirable solution.

To extend the range down to zero without using auxiliary batteries, it is possible to use a circuit having an auxiliary negative supply after a disclosure by White[1]. This general principle has, it is believed, been applied commercially. Figure 1 shows a regulated supply delivering 0 to 300 volts, that was designed by the writer in 1947. A d-c

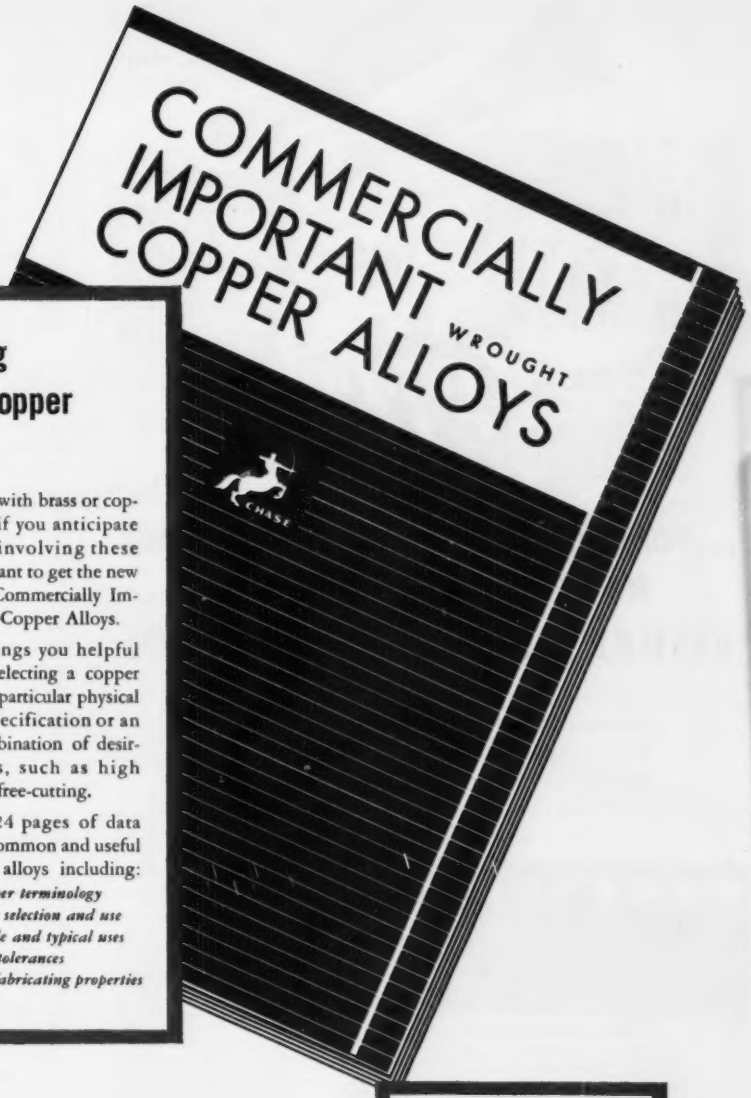

Fabricating brass or copper alloys?

If you're working with brass or copper alloys... or if you anticipate defense orders involving these metals... you'll want to get the new Chase book on Commercially Important Wrought Copper Alloys.

This book brings you helpful suggestions for selecting a copper alloy to meet any particular physical or fabrication specification or an alloy with a combination of desirable properties, such as high conductivity and free-cutting.

It contains 124 pages of data about the more common and useful wrought copper alloys including:

- *brass and copper terminology*
- *suggestions for selection and use*
- *forms available and typical uses*
- *weights* • *tolerances*
- *physical and fabricating properties*

Chase BRASS & COPPER

WATERBURY 20, CONNECTICUT • SUBSIDIARY OF KENNECOTT COPPER CORPORATION

• *The Nation's Headquarters for Brass & Copper*

Albany†	Cleveland	Kansas City, Mo.	New York	San Francisco
Atlanta	Dallas	Los Angeles	Philadelphia	Seattle
Baltimore	Denver†	Milwaukee	Pittsburgh	Waterbury
Boston	Detroit	Minneapolis	Providence	
Chicago	Houston†	Newark	Rochester†	(†sales office only)
Cincinnati	Indianapolis	New Orleans	St. Louis	

CHASE 75th ANNIVERSARY 1876 1951

TO GET THIS BOOK

Because of the expense in making this book, we must limit its distribution to those directly concerned with the fabricating of metals. Please send your request on firm letterhead, giving your position or title.

Type 5JP11A
Single-gun tube
Type 54SWP11
4-gun tube
H-21 Dual-channel Oscilloscope
Oscilloscope for strip-film recording
ETC
...for more accurate and efficient RESEARCH, TEST and VISUAL OPERATING CONTROL
By permitting simultaneous observation or recording of 2, 4, 6 or more different phenomena, ETC multi-gun cathode ray tubes and multi-channel oscilloscopes pave the way to farther-reaching analysis and better operation in many fields.
New catalog on request.
H-42A Strainalyzer for simultaneous analysis of 4 stresses or strains from 0 to 50,000 cycles
H-61 8-Channel Oscilloscope originally developed for recording seismographic phenomena
Type 21JHP7
Single-gun tube
Type 55JG
5-gun tube
electronic tube corporation
1200 E. MERMAID LANE, PHILADELPHIA 18, PA.



FIG. 1—Schematic diagram of a 0 to 300-v regulated supply with straight d-c control amplifier

amplifier tube V_1 controls the series tubes V_2 in the usual way, but the cathode of V_1 is returned to a point 75 volts below ground.

The output voltage is adjusted conventionally by a potentiometer R_2, but the negative end of the divider string R_1 R_2 R_3 is returned to a point 150 volts below ground in order to preserve a favorable control ratio at low output voltages. Unfortunately, while the circuit looks simple, too many separate heater windings are required and the power dissipation in auxiliary circuits is excessive, so that the supply is bulkier than one might infer from the diagram.

Carrier D-C Amplifier

The designer is handicapped by the necessity for a common return connection in the output and d-c amplifier circuits, which makes the plate voltages for the d-c amplifier dependent on the output voltage of the supply. What is needed is a four-terminal d-c amplifier, whose output is divorced completely from the operating potentials of the tubes.

Such a four-terminal amplifier is realizable by using a carrier-voltage principle. Amplification is effected at a carrier frequency, isolation is effected by capacitors or transformers and the d-c is recovered with a diode.

For the present application, d-c modulation is best carried out by means of a germanium crystal rectifier. Carrier voltage is applied to the rectifier at low level, and the resulting carrier voltage across a load resistor is changed by varying the d-c bias on the crystal. Such a circuit and its transfer characteristics are shown in Fig. 2. For this regu-

Snyder Directronic*

MOTORLESS TV AERIAL SYSTEM

360° ELECTRONICALLY SWITCHED BEAM

SUPERSTRUCTURE INSULATOR ASSEMBLY

- 3 combinations of elements for perfect picture clarity on each channel
- Full 360° electronic orientation

DIRECTRONIC BEAM SELECTOR

- Gives remote control of element combinations
- Mounts on or near set

*T.M. APPLIED FOR

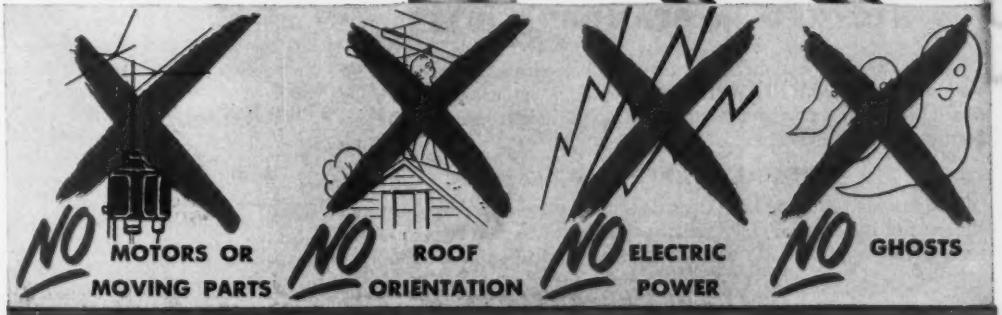

SNYDER MFG. CO.

ANTENN-GINEERS

PHILADELPHIA 40 · U. S. A.

EXPORT: ROBURN AGENCIES, INC., NEW YORK 7, N. Y.

P. S. ONLY ONE LINE TO INSTALL

TRANSFORMER CANS

STOCKED IN STANDARD SIZES

We can save you die costs on all stock size transformer cans, and will make IMMEDIATE DELIVERY. A full range of sizes are available with or without covers. List of stock sizes and prints furnished on request.

SPECIAL SHAPES AND SIZES

We are also equipped to fabricate special sizes and shapes (round, square and rectangular) to your own specifications. Tell us your transformer can requirements and we will be glad to submit estimates.

Craft Transformer Cans are drawn in one piece.

Craft MANUFACTURING CO.
3949 W. Schubert Ave., Chicago 47
Stainless Steel Specialists



FIG. 2—Carrier modulator with crystal diode. Slope is about twice as steep at 0.1-v input carrier level but linearity is poorer

lator application the low input impedance is of no consequence, nor is waveform distortion.

Carrier-Type Regulator

The circuit of a complete regulated d-c power supply using a four-terminal carrier-type d-c control amplifier is shown in Fig. 3. While the circuit looks comparatively complex, its physical realization is relatively compact and efficient. The additional components are all small and cheap and power dissipation in auxiliary circuits is low.

The circuit of Fig. 3 will deliver from 0 to 300 volts with an internal impedance of about 40 ohms. Current output at high output voltages is determined by the current passed by the series tube V_4 at zero bias and is determined at low voltages by the allowable plate dissipation of that tube.

The source of carrier voltage is an ordinary oscillator, V_1. A convenient carrier frequency was chosen as 150 kc. A winding L_2 of a few turns on the oscillator coil form L_1 takes off a signal of about 1 volt for excitation of the carrier modulator system.

The modulator comprises a 1N38 crystal diode and a load resistor R_1. The d-c control voltage, varying the conduction of the 1N38 diode, is the difference between a fixed fraction of the d-c output voltage, taken from point A on a divider and the potential of the slider B on a potentiometer P_3 across a d-c reference source V_5. If point A becomes more positive than point B, the conduction of the 1N38 diode will increase

NF10262
Hermetically sealed vehicular suppresser; conforms with Signal Corps spec's.

NF1A142J
Extra heavy duty, hermetically sealed, corrosion proof filter; 350 amp. capacity.

NF1A084J
Heavy duty, hermetically sealed, corrosion proof filter of feed-through design.

NF1C203
An efficient single pi filter for industrial, marine and aircraft service.



NF1A197
For low-current applications where space is limited.

NF10270
Metallized paper construction for high capacity, low voltage applications.



IN INTERFERENCE FILTERS!

There's a standard C-D QUIETONE filter
for practically every known application,
engineered by the largest filter laboratory in the world.
If your problem is a brand new one, our filter engineers
will be glad to collaborate with you! Write Dept. K-81, for full information.
Cornell-Dubilier Electric Corp., South Plainfield, N. J.

1910-1951

CONSISTENTLY DEPENDABLE
CORNELL-DUBILIER
CAPACITORS

SUBSIDIARY

PLANTS IN SOUTH PLAINFIELD, N. J.; NEW BEDFORD, WORCESTER, AND CAMBRIDGE, MASS.; PROVIDENCE, R. I.; INDIANAPOLIS, IND.; FUQUAY SPRINGS, N. C.; AND SUBSIDIARY, THE RADIART CORP., CLEVELAND, OHIO

Plastic clamp molded by Mack for DuMont, manufacturers of television receivers.
Plastic case for industrial storage battery made by C & D Batteries, Inc.
Molded by MACK for the RCA-Victor 16-inch Television Receivers. Polystyrene solves the high voltage problems.
MACK
custom-molded components
RCA-Victor Model 66X12—Cabinet compression molded by MACK for the RCA Victor Division of Radio Corporation of America.
DESIGN - MOLDING
MOLD MAKING

—FOR

electronic, television, communication and electrical applications

FROM 3 COMPLETE PLANTS

Specify Mack with confidence for all your molded component requirements. One of the original plastic molders, Mack experience dates back over three decades, to the beginning of the industry. From design to final inspection, Mack manufacturing methods — keyed to the electronic industry — give assurance that each part is electrically and mechanically correct. Complete service from blueprint to finish features deliveries to meet your assembly line schedules. Inquiries will receive prompt attention; address Mack Molding Company, Inc., Wayne, N. J.

Mack

MOLDED EXCELLENCE

OVER 30 YEARS OF MOLDING SERVICE TO INDUSTRY



FIG. 3—Schematic of a 0 to 300-v regulated supply with carrier-type four-terminal d-c control amplifier

and more carrier voltage will appear across diode load resistor R_1.

Amplification of the controlled carrier voltage is effected by a conventional tuned amplifier V_2. Recovery of the d-c signal after amplification is carried out by a 6H6 diode V_3, connected as a voltage doubler.

The return side of the voltage doubler is connected directly to the cathode of the series tube V_4. The rectified d-c is negative on the V_4 grid. An increase in the d-c output voltage at the cathode of V_4 will bias the 1N38 so as to increase the carrier voltage; the voltage rectified by the 6H6 will increase and bias the series tube V_4 in a regulatory manner.

The high frequency limit of the regulating action depends on the bandwidth of the carrier amplifier system. To keep the output impedance of the whole power supply low at frequencies above a few thousand cps, a capacitor C_1 is provided across the output.

Design Considerations

No untoward tendencies to instability were observed in trying out the circuit of Fig. 3. Hum averaged around 5 mv.

To permit lowering the d-c output voltage all the way to zero under conditions of light load, the carrier-rectifier system must be capable of producing enough negative bias to cut off the series tube V_4. About 150 volts is required. The high rectified voltage makes a thermionic diode advisable for V_3, rather than germanium diodes.

An attractive feature of this type of regulator is that the control ratio can be made extremely high by merely providing a lot of ampli-

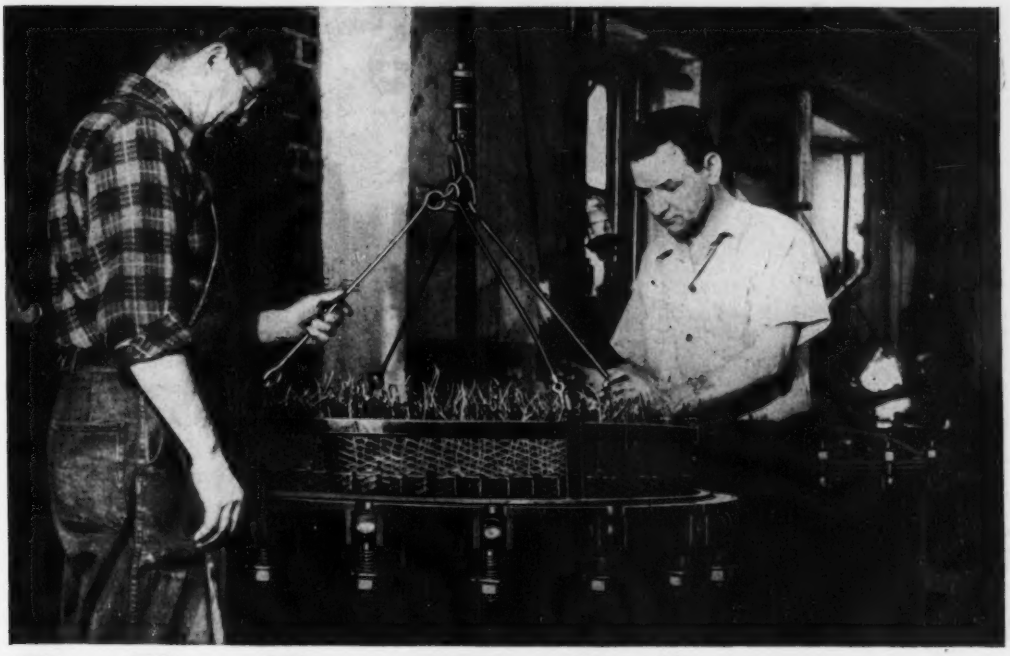

New York Transformer Co. Insulates with IRVINGTON No. 100 Varnish

"FOR EXCEPTIONAL LIFE IN SEVERE SERVICE"

For specialty transformers that meet unusual and exacting requirements, the electronic industry turns to New York Transformer Co., Inc., Alpha, N. J. And for insulation that gives outstanding performance under the toughest conditions, NYT has turned—for more than 10 years—to Irvington No. 100 Clear Baking Varnish, for use on *all* its power transformers and chokes.

Here are two *major* reasons why NYT counts on Irvington No. 100:

MOISTURE RESISTANCE. 24-hour water immersion reduces dry dielectric strength of 2250 vpm *by only 2.2%.*

HEAT RESISTANCE. Irvington No. 100 withstands ASTM heat endurance test at 105° to 110°C *for over 1000 hours.*

You too can give your products service advantages like these—and save time and money, *because . . .*

Irvington No. 100 cures fast and thoroughly, even in deep windings. Its clarity allows quick identification of color coding or numbering—saves time on the assembly line, reduces risk of rejects.

Get the full story today—Technical Data Sheet is yours for the asking.



Send this convenient coupon now

Irvington

VARNISH & INSULATOR COMPANY

Irvington 11, New Jersey

EL-8/51

Irvington Varnish & Insulator Company
6E Argyle Terrace, Irvington 11, N. J.

Gentlemen:

Please send me your Technical Data Sheet on Irvington No. 100 Clear Baking Varnish.

Name.....Title.....

Company.....

Street.....

City.....Zone.....State.....

USE NORTH RELAYS for AUTOMATIC SWITCHING!

This North Relay . . .

mounted with standard micro-switches, provides for instantaneous, dependable, flash-proof opening, closing or transfer of circuits up to 250 volts with 5 amp. load. Micro switches may be poled for normally open, normally closed or break-make contacts. The fast-acting, fast-releasing relay normally operates at one watt. Single-wound coils may be had in any resistance up to 10,000 ohms. Center contacts, independent of micro-switches, automatically control a signal circuit.

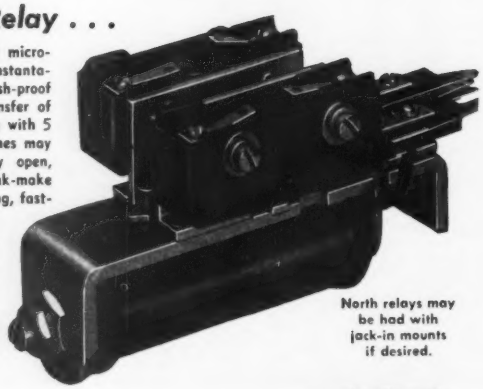

North relays may be had with jack-in mounts if desired.

This North Relay . . .

automatically latches in the operated position, is released by an impulse to the second coil which trips the simple, positive latch. This permits holding of all circuits in the operated position for indefinite periods without continued energizing of either coil. Both coils are fast-acting, fast-releasing, and normally operate at 2 watts. Three pile-up spaces provide for a choice of more than 100 break and/or make contact sets.

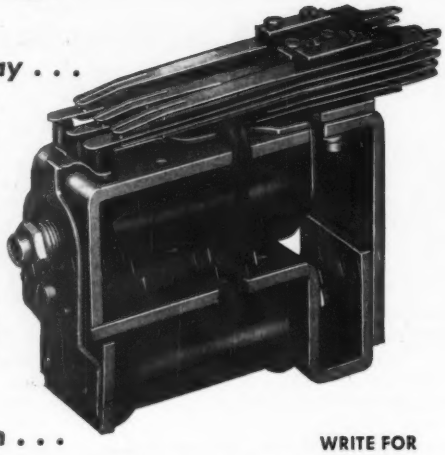

In Combination . . .

the latching relay with the micro-switch mounting, provides an ideal automatic switching control. Typical are its uses in controlling airport runway lights, signalling devices and other on-and-off controls within the rated amperage.

WRITE FOR THE NEW NORTH RELAY CATALOG

NORTH

THE NORTH ELECTRIC MANUFACTURING COMPANY

Originators of ALL RELAY Systems of Automatic Switching

1438-T South Market Street, Galion, Ohio, U.S.A.

fication at the carrier frequency. When this is done, the carrier level at the modulator diode should be lowered proportionately. The low limit for diminishing returns has not been well investigated, but is probably of the order of 50 mv.

Stability of contact rectifiers is considered somewhat better than that of thermionic tubes, so that this type of regulator may well be capable of holding to within a few tens of millivolts with respect to the reference voltage under a wide range of conditions.

REFERENCE

(1) E. L. C. White, U. S. Patent 2,268,790, Jan. 6, 1942.

Aircraft Communication System

ENGINEERS of the Air Materiel Command's Electronics Lab at Wright-Patterson Air Force Base have redesigned all the audio components of an aircraft communication system in one coordinated project which, they say, has achieved better integration of parts than was possible in the projects of the past.

One of the most important changes is the use of small amplifiers at each station instead of the one large central amplifier used in current sets. This serves as a pre-amplifier when the crew member is talking into his mike and as a booster for his earphones when he is listening. It is built into the crew station control panel.

Voice distortion and instability have been cut down by 95 percent by increasing the frequency range and using a moving coil dynamic microphone and earphones instead of the carbon mike and magnetic diaphragm earphones now in use.

Earphones, the source of sore ears after several hours of flight, were redesigned to be more comfortable. They are of plastic with a nylon cap. The uncomfortable leather-covered metal bands that now form the headband will give way to a netting that snaps on easily. The two plugs and cord used for the earphones and mike have been cut to one plug and one cord.

The new system will replace all sets now in use on bombers, fighters and transports.

104 Series
1000 V (RMS)
Flange Diameter .200
Mounting hole 1/8"
Electrode treatments
SW and L

105 Series
1500 V (RMS)
Flange diameter .250
Mounting hole 1/4"
Electrode treatments
SW and L

109 Series
2500 V (RMS)
Flange diameter 13/32"
Mounting hole 7/16"
Electrode treatments
TH, HT, FP, HTL,
and FPSW

110 R Series
3000 V (RMS)
Flange diameter 7/16"
For exterior mounting
Electrode treatments
HTL, HT, FP, FPSW,
and FPNH

112 Series
3000 V (RMS)
Flange diameter 1/2"
Mounting hole 3/8"
Electrode treatments
HTL, HT, FP, FPSW,
and FPNH

112 R Series
3000 V (RMS)
Flange diameter 1/2"
For exterior mounting
Electrode treatments
HTL, HT, FP, FPSW,
FPNH and FP Threaded

105 TB-FP
1500 V (RMS)
Flange 3/8" hex.
Mounting hole 1/4"
28 threaded
Electrode treatment
FP only

106 FP
1500 V (RMS)
Flange diameter 19/64"
Mounting hole 1/16"
Electrode treatment
FP only

107 Series
2000 V (RMS)
Flange diameter 1/2"
Mounting hole 15/64"
Electrode treatments
TH, HT, FP, HTL,
and FPSW

108 Series
2000 V (RMS)
Flange diameter 3/8"
Mounting hole 7/32"
Electrode treatments
TH, HT, FP, HTL,
and FPSW

Meet the FUSITE FAMILY *of* SINGLE TERMINALS

Glass to Steel for a True Fused Hermetic Seal

Protect Sensitive Electrical Components from

- DIRT
- MOISTURE
- FUMES
- CHANGING PRESSURES

GENERAL SPECIFICATIONS

materials -- C.R. steel disc and steel electrodes. Interfused with glass.

finish -- fused electro tin plate.

voltage test -- see individual terminal.

pressure test -- 12 pounds gauge.

insulation test -- 10,000 megohms after salt water immersion.

sudden thermal shock test -- dry ice to boiling water.

Key to Electrode Treatment Available on These Terminals

TH	FP	HT	L	HTL	NH	SW
TURRET HEAD	FLATTENED AND PIERCED	HOLLOW TUBE	LOOPED	HOLLOW TUBE LUG	NAIL HEAD	STRAIGHT WIRE

INSULATE ELECTRICALLY — GLASS TO METAL — FUSITE TERMINALS — PROTECT PRODUCT PERFORMANCE — SEAL HERMETICALLY

Write for Catalog

OF COMPLETE LINE AND ENGINEERING DETAILS -- DEPT. B

THE FUSITE CORPORATION

6028 FERNVIEW AVENUE • CINCINNATI 13, OHIO

dependable timing

INTERVAL TIMERS
TIME DELAY RELAYS

to product performance

PERCENTAGE TIMERS
RUNNING TIME METERS

Cramer

As specialists in TIME as a factor of CONTROL, we have developed a wide range of timing devices, extensively used on electrically operated commercial and industrial equipment where accurate, dependable timing is essential to insure efficient product performance . . . to add convenience of operation . . . to prevent work spoilage and protect equipment itself.

Although the majority of timing problems can be effectively solved by devices considered "standard" in our line, we have had a great deal of experience in the design of special devices to meet specific requirements . . . and will welcome the opportunity to help solve your timing problem. Write us for complete information.

PULSE TIMERS

SYNCHRONOUS MOTORS . . . ALSO CLUTCH, REVERSIBLE AND CHART DRIVE TYPES

THE R. W. CRAMER CO., INC.

BOX 3, CENTERBROOK, CONN.

THE ELECTRON ART

(continued from p 140)



FIG. 1—Basic circuit of synchro data telemetering converter

a common reference signal for all data channels. Various means of multiplexing these channels onto a single radio or wire transmission have been devised by the writer and others.

Converter Circuit

An extremely simple circuit has been devised to convert three-wire synchro data to a single, phase-shifted signal.

The first portion of the circuit consists of a conversion from three-phase to two-phase data. We refer here to space-phase rather than time-phase voltages. Referring to Fig. 1, three resistors R_1, R_2 and R_3 are connected in wye between the synchro output lines A, B and C. The values of the resistors are so chosen that the space-phase vectors of the voltages BD and CD are at right angles. It may be seen from Fig. 2 that the magnitudes of the vector voltages across these resistors must then be related as follows:

$$\left| \frac{e_{AD}}{e_{BD}} \right| = \frac{\sin 15°}{\sin 30°}$$

and

$$| e_{BD} | = | e_{CD} |$$

Because current vectors i_{BD} and i_{CD} are perpendicular in space phase, and the sum of currents



FIG. 2—Space-phase vector diagram of voltages appearing in Fig. 1

When performance exceeds promise!

We **promised** you better resistors than had been available before. Our new crazeless, blue-gray enamel resistors are **out-performing** our highest expectations **in the field.**

Let us summarize the improvements you get in these new Hardwick, Hindle resistors:

1. Crazeless—complete elimination of the crazing which results in failure of the resistive element due to moisture penetration from humidity, salt and severe atmospheric conditions—providing greater dielectric strength.

2. High temperature qualifications—provide greater safety factor under abnormal operating conditions.

3. Stronger core—gives greater resistance to **excess** vibration and shock test.

4. Alloy terminals—greater strength—corrosion and rust resistant—spot-welded to the ceramic body.

5. Resistive element—finest quality wire free from impurities that could cause weakness.

6. Connections—all wire connections to terminals are protected by positive non-corrosive bonding.

The above factors give you absolute assurance of longer life and outstanding performance.

The fixed, the ferrule and the flat types are designed for and manufactured in accordance with JAN-R-26A specifications.

HARDWICK, HINDLE, INC.

Rheostats and Resistors

Subsidiary of

THE NATIONAL LOCK WASHER COMPANY

Established 1886

NEWARK 5, N. J. U.S.A.

the mark *of quality*

for more than a quarter of a century

MAGNECORD *Sound Research* *

* FINDS A FIELD OF BLACK GOLD

Modern engineers know that black gold is where you find it . . . scientifically! That's why they use Magnecord tape recorders in their search for new oil supplies. Magnecord recordings of signals from sensitive electronic instruments help determine the depth and location of oil bearing rock strata.

Whatever your recording problem in science, industry or communications, Magnecorders offer greater fidelity and precision. Available for subsonic, audio and supersonic research, Magnecord can fill your most exacting requirements.

Magnecord, INC.
HIGH FIDELITY TAPE RECORDERS FOR INDUSTRY

Used by more engineers than all other professional tape recorders combined



Write for NEW CATALOG
MAGNECORD, INC., DEPT. EA-8
360 N. Michigan Avenue, Chicago 1, Illinois
Send me further information on Magnecord tape recording for industrial "Sound" Research.

Name.....
Company.....
Address.....
City.....Zone.....State.....

VITAL



FIG. 3—Complete circuit which employs additional components to avoid loading of phase network by output circuit

entering point D must be zero, the relative magnitude of the currents must be

$$| i_{AD} | = | \sqrt{2}\, i_{BD} |$$

and

$$| i_{BD} | = | i_{CD} |$$

Using these expressions, the ratio of the resistances is:

$$\frac{R_1}{R_2} = \frac{e_{AD}}{e_{BD}} \times \frac{i_{BD}}{i_{AD}} = \frac{\sin 15^\circ}{\sin 30^\circ} \times \frac{1}{\sqrt{2}} = 0.366$$

and

$$\frac{R_2}{R_3} = \frac{e_{BD}}{e_{CD}} \times \frac{i_{CD}}{i_{BD}} = 1$$

The above values have been verified experimentally.

The second portion of the circuit of Fig. 1 converts the two-space-phase voltages, BD and CD, into a phase-varying output voltage, ED. The voltages BD and CD are related as follows:

$$e_{BD} = E \sin \omega t \sin (\theta + 45^\circ)$$

and

$$e_{CD} = E \sin \omega t \sin (\theta - 45^\circ)$$

If R_s is chosen equal to $1/\omega C$ at the synchro supply frequency, then the output voltage is:

$$\begin{aligned} e_{ED} &= \sqrt{2}\,(e_{BD} \angle 45^\circ - e_{CD} \angle -45^\circ) \\ e_{ED} &= \sqrt{2}\,E\,[\sin(\omega t + 45^\circ)\sin(\theta + 45^\circ) \\ &\quad - \sin(\omega t - 45^\circ)\sin(\theta - 45^\circ)] \\ &= \sqrt{2}\,E\,[\sin(\omega t + 45^\circ)\sin(\theta + 45^\circ) \\ &\quad + \cos(\omega t + 45^\circ)\cos(\theta + 45^\circ)] \\ &= \sqrt{2}\,E\cos(\omega t - \theta) \end{aligned}$$

The latter is seen to be a constant-amplitude carrier of frequency ω whose phase is proportional to the synchro shaft angle Θ. It is convenient that any load applied across terminal ED be a negligible load on the network. The

It's that Simple...

...Automatic Push-Button Tuning

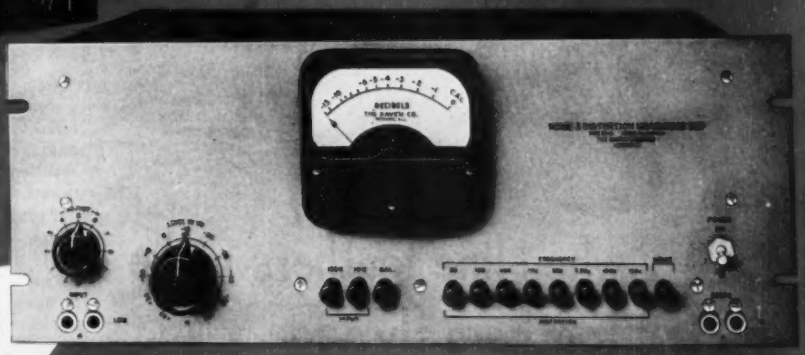

An Exclusive Feature of the New

DAVEN

Distortion and Noise Meter Type 35-A

The DAVEN Type 35-A, Distortion and Noise Meter, is a new, skillfully engineered instrument that provides a rapid, accurate means of measuring distortion, noise and hum level in audio frequency equipment.

Of particular importance is the fact that there is no balancing or laborious time consuming tuning required to make measurements. The user need only push a button and the unit is automatically balanced.

This is accomplished by the use of a series of 8 fixed band rejection filters covering the range 50 cycles to 15 K.c., followed by a stable, high quality, wide range (50 cycles to 45 K.c.), high gain amplifier. There are no tube circuits or other sources of inherent distortions, making it possible to measure low levels of distortion accurately over a wide level range.

SPECIFICATIONS

RESIDUAL DISTORTION: No tube circuits or non-linear devices between input of set and filter input.

DISTORTION MEASUREMENTS: Filters provided for 50, 100, 400, 1000 cycles, 5 Kc, 7.5 Kc, 10 Kc, and 15 Kc with cut off of −70 db. Distortion measurements to 0.1% full scale meter deflection with zero level input.

NOISE MEASUREMENTS: With zero db input, limit is −80 db. At +40 input, limit is −115 db below input.

AMPLIFIER FREQUENCY RANGE: 50 cycles to 45 Kc.

ACCURACY: Filters are down 70 db at fundamental frequencies, and within ±0.5 db of flat response at the second harmonic. Absolute accuracy of measurement can be depended upon to be within ±5%.

RESIDUAL NOISE LEVEL: Below −80 db at gain control full on. Multiple gain control employed so that residual noise drops to −90 db. when gain control is set at −30, −100 db when gain control is set at −20, etc.

Write for detailed information

THE DAVEN CO.
191 CENTRAL AVENUE
NEWARK 4, N. J.

when line "feathers" make the feathers fly...

... Switch to Arkwright Tracing Cloth! You can re-ink clean, sharp lines over any erasure without "feathering" or "blobbing" to spoil your work.

Painstaking Arkwright inspection guards your drawings against pinholes, thick threads or other imperfections—Arkwright quality insures them against brittleness, opaqueness, or paper-fraying due to age. That is why Arkwright Tracing Cloth takes clean, sharp drawings that yield clear, sharp blueprints years after you make them.

Remember: if your work is worth saving, put it on Arkwright Tracing Cloth. Would you like a sample? Write Arkwright Finishing Co., Industrial Trust Bldg., Providence, R. I.

ARKWRIGHT
Tracing Cloths
AMERICA'S STANDARD FOR OVER 25 YEARS

load consisting of R_s and C is directly across two synchro output terminals and must, like R_1, R_2 and R_3, be high enough in impedance to avoid a voltage drop through the synchro. In certain cases, if the output load is not negligible, network constants can be adjusted to compensate therefore.

Accuracy

By careful selection of the five circuit elements mentioned above, angular inaccuracies as small as a fraction of a degree may be attained.

Figure 3 shows a complete circuit which employs additional components to avoid loading of the phase network by the output circuit, and to allow grounding of one side of the output. The photograph shows a manufactured plug-in assembly of two such circuits.

A New Analog Computer

By S. Bosworth

Computer Corp. of America
New York, N. Y.

AN INEXPENSIVE desk-size electronic differential analyzer has recently been developed by the Computer Corporation of America. Although it is housed in a cabinet which is only 36-¾ in. high, IDA (for Integro-Differential Analyzer) contains 20 d-c computing amplifiers, 23 precision ten-turn potentiometers, 8 of which may be used for setting in initial conditions, 8 integrating capacitors, a control panel, a highly stable regulated power supply, and a setup board for wiring in the analog.

The top panel of the main cabinet shown in Fig. 1 contains the 23 coefficient-setting potentiometers. Any of the eight potentiometers in the upper row may be used to set initial conditions into the integrating capacitors mounted behind them. For this purpose, the switch directly below each one is thrown either to left or right for positive or negative initial conditions respectively. With the switch in the center position, the corresponding potentiometer may be used as a coefficient-setter.

The eight 1-μf $\pm$1 percent herme-

DUMONT

VIDEO SWITCHING AND MIXING EQUIPMENT type TA-178-A

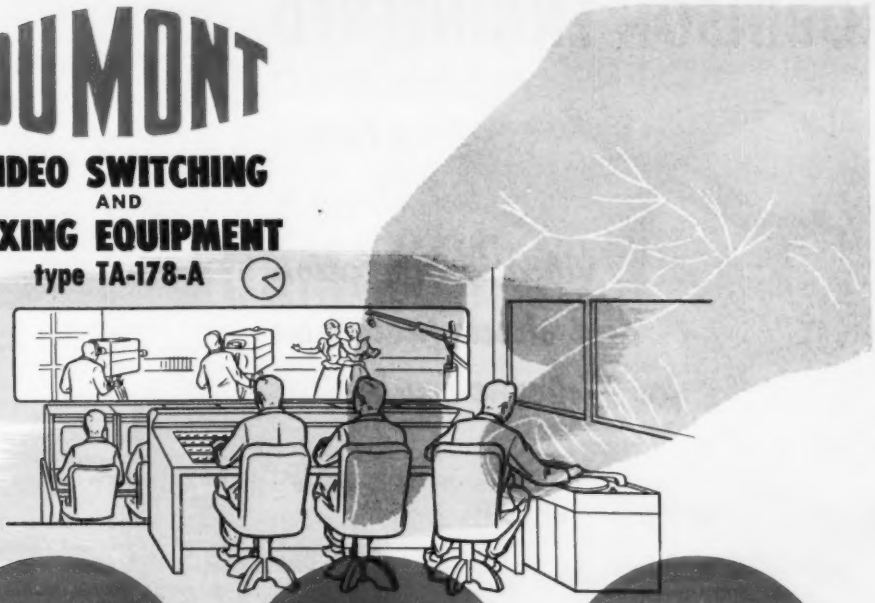



SIMPLIFIED FINGER-TIP CONTROL FOR VIDEO SWITCHING

Comprising the Nine-Channel Switch Unit (5262-A), Mixer Line Amplifier (5263-A) and Low Voltage supply (5019-A).

Variety of special effects, achieved quite simply with the provisions in the Mixer Amplifier, can be previewed before being put on the air. Single Mixer Control at Switching unit permits smooth transition from one channel to another. Again, another control at Switch Unit determines bus cutoff voltage cross-over point, so that any degree of fading, lapping or superimposing of two signals an be accomplished. Provision is made available in the Mixer Amplifier for insertion of special blanking to create special effects such as wipes, montages, etc.

While main line is feeding transmitter, the mixer amplifier output can be used to feed, simultaneously, a different mixed studio show to an audition circuit. The Mixer Amplifier has three identical program outputs which may be fed to transmitter, network cable and master line monitor.

FEATURES

Switch Unit available for mounting in standard 19" relay rack or in console. Mixer Line Amplifier and its power supply are rack-mounted.

All channels take either local or remote signals.

Lap, fade or super are achieved with single control. Facilities for inserting special blanking (horizontal wipes, montages, etc.). Preview for special effects.

Sync insertion on local signals, controlled by pushbuttons. No switching transients on main-line switching. Automatic pedestal setup incorporated in mixer amplifier.

Frequency response of preview monitor No. 1 amplifier, mixer amplifier and main-line amplifier flat within 0.5 db to 8 MC; less than 6 db down at 10 MC. Preview Monitor No. 2 amplifier flat with in 0.5 db to 6 MC: less than 6 db down at 8 MC.

Lucite, pushbuttons lighted internally when button is pressed.

FURTHER DETAILS and QUOTATIONS ON REQUEST

First with the Finest in Television

TELEVISION TRANSMITTER DIVISION

ALLEN B. DU MONT LABORATORIES, INC.

1000 Main Avenue, Clifton, N. J.

ROBINSON ENGINEERED MOUNTING SYSTEMS

Vibration isolation and shock protection for Airborne Equipment



FOR LEAR INC....

Robinson Engineered Mounting Systems, similar to the Met-L-Flex base above, are being used by Lear Inc. for their famous aircraft electronic equipment after extensive in-flight and laboratory tests.

First **Engineered Mounting Systems**
- **with *All-Metal***
- **with MET-L-FLEX**
- **with APPROVAL**

Vital and costly equipment aboard new high performance aircraft must be protected through extreme conditions of vibration, overload and shock. Engineers have found that "off the shelf" mounts seldom deliver the required results and therefore they look to Robinson Aviation for systems *engineered* for the specific application. Current Robinson Met-L-Flex Mounting Systems exceed the requirements of JAN-C-172A and Applicable specifications. Met-L-Flex systems are available in JAN form factors and special designs, to fit your equipment.

ROBINSON AVIATION INC.
TETERBORO, NEW JERSEY
Vibration Control Engineers



FIG. 1—Compact computer which is capable of solving eighth order differential equations

tically sealed capacitors permit the solution of problems describable by an eighth-order differential equation.

The second panel is hinged to permit plug-in and removal of the set-up board shown in Fig. 2. Use of set-up boards makes possible almost continuous operation of the computer, since problems may be changed in the few seconds required to remove one board, and insert another. Since all interconnections are made on the set-up board, the necessity for patch-cords is eliminated, and once the board is in place, it is virtually impossible to disturb the problem set-up accidently.

The boards consist of two panels mounted back to back on an aluminum frame. On the panels are 266 spring-type binding posts. All computer elements are terminated at these posts through three 50-contact connectors at the rear of the frame which mate with receptacles in the cabinet. The remaining uncommited posts may be used as junction points, and to support resistors. By connecting jumpers, which may be ordinary hook-up wire, and fixed resistors of any desired accuracy, between the proper binding posts, all the elements of the computer are interconnected to form the analog of the problem.

Directly below the hinged panel in Fig. 1 are the balance meter and balance controls of ten amplifiers. The balance controls of the other ten appear just above this panel. Each control incorporates a balance switch. Pushing inward on the knob throws this switch and simul-

MILITARY CONTRACTORS:

VOLTAGE REGULATION is PERFORMANCE INSURANCE

Increasingly complex and sensitive electrical and electronic units demand *narrow* supply voltage tolerances. Yet, the very nature of military operations often requires operation in the face of *widely varying* supply voltages. You can assure the constant line voltage your unit requires by building in a SOLA Constant Voltage Transformer.

SOLA regulators are ideal for military use. They are self contained . . . regulate automatically and instantaneously . . . contain no moving or expendable parts . . . require no manual adjustment or maintenance . . . and are self protecting against overload. SOLA Constant Voltage Transformers often replace costly bulky regulating networks, greatly simplifying design and production.

Standard and custom designs can be engineered and produced to meet most voltage regulating requirements.

We welcome your inquiry. Our engineering staff and production facilities are at your disposal.

SOLA *Constant Voltage* TRANSFORMERS

SOLA DISCIPLINES VOLTAGE



Transformers for: Constant Voltage • Fluorescent Lighting • Cold Cathode Lighting • Airport Lighting • Series Lighting • Luminous Tube Signs Oil Burner Ignition • X-Ray • Power • Controls • Signal Systems • etc • **SOLA ELECTRIC CO., 4633 W. 16th Street, Chicago 50, Illinois**

Here's what W. J. SCHNELL, of Sentinel, says about the

Tarzian Tuner

We have used Sarkes Tarzian Tuners in all of the television receivers we have produced and we are very well pleased with the very satisfactory performance and service we have experienced both in production and in the field.
We know that this tuner has in a large manner contributed to the excellent performance and quality reputation enjoyed by Sentinel Television Receivers throughout the trade.

W. J. SCHNELL,
Director of Engineering,
Sentinel Radio Corp., Evanston, Ill.

We can't honestly say this is an unsolicited statement. Sure, we wrote to Bill Schnell. Asked him point blank what he, as director of engineering for one of our oldest customers, actually thought about the TARZIAN TUNER. Naturally, we were pretty sure of what he'd say, for engineers appreciate the many desirable features—such as pin-point oscillator alignment . . . unexcelled stability—which are characteristic of the TARZIAN TUNER. Manufacturers are invited to write for complete engineering data on the TARZIAN TUNER.

SARKES TARZIAN, Inc.

Tuner Division • Bloomington, Indiana

taneously engages a potentiometer. The inherent stability of the amplifiers makes balancing necessary only once or twice a day, while the operation itself requires only a minute.

The twenty computing amplifiers, one of which is shown in Fig. 3, are miniaturized plug-in units. The direct-coupled circuit incorporates a positive feed-back loop which is adjusted to give infinite gain. When used with an external negative feed-back loop, as it is in a computing circuit, the amplifier is stable, and has zero output impedance.

By virtue of the fact that the input and feedback impedances that determine the transfer functions of the amplifiers can be selected and connected on the set-up board, each amplifier may be used as a summer, integrator, sign-changer, or constant multiplier.

Just beneath the lower row of balance knobs and to the left in Fig. 1, are the two controls which select the forcing function and adjust its amplitude. Either a positive or negative internally generated step function may be chosen, at a level of zero to 50 volts monitored on the meter below. Special functions, such as sine or exponential, may be internally generated and applied in the same manner. One position of the selector switch also permits an externally generated forcing function to be introduced through the socket just below this switch.

On the right-hand side of this panel are the two operating controls. A spring-loaded switch allows the application of the forcing function either momentarily or



FIG. 2—The analog of the problem is constructed on this set-up board. Use of several boards makes possible storage of problems and continuous operation of the computer

"dag" CRT Exterior Wall Coating Gives Better Adhesion on Any Glass

"Dag" Exterior Wall Coating is a semi-colloidal dispersion of pure graphite in a lacquer-base vehicle. It is easily applied to CRT surfaces by spraying, and forms a smooth, uniform, conductive black coating that adheres tenaciously to all types of glass.

This ideal CRT coating dries very rapidly, permitting handling of the tubes after two or three minutes. Maximum adhesion is obtained by drying at room temperature for twenty-four hours. For a fast job, infra-red will do the trick in one-half hour at 100° C.

When thoroughly dried, the resulting film resists scratching and cannot be readily loosened by immersion in water.

The versatility of **"dag"** colloidal graphite in the electronic industry is explained thoroughly in a recent bulletin. Write today for your free copy of Bulletin #433-5H.

dag DISPERSIONS

Acheson Colloids Corporation
Port Huron, Mich.

...also Acheson Colloids Limited, London, England

ELECTRONIC INSTRUMENTATION

for LABORATORY *or* PRODUCTION LINE!

DECIMAL COUNTING UNIT, MODEL 700 is a direct reading electronic counter capable of operating at speeds up to 30,000 counts per second. Digits from 0 to 9 are presented on illuminated front panel. Electrical reset to zero. Plug-in octal mounting for easy interchangeability. The counter operates on input pulse of 100 volt neg. with 2 microsec. max. rise time. Output will drive following unit in cascade. Dimensions 1⅜" x 5" x 5¼". Wt. 12 oz. Other models to a million counts per second.

ELECTRONIC COUNTER, MODEL 10 was developed to meet the need for a rugged industrial counter operating at speeds up to 6000 counts per minute. Total count is displayed on the Decimal Counting Unit and the mechanical register to a maximum capacity of 9,999,999. Unit may be operated from closing contacts, photocell, or any means that will supply a positive potential of at least 3 volts. All circuitry moisture and fungus proofed. Unit is available in a variety of vapor-proof and explosion-proof housings to meet individual requirements. Dimensions 6¼" x 7¼" x 6½". Weight approximately 6 lbs.

PRESET COUNTER consists of a series of scale-of-10 electronic counting units each in parallel with a 10-position push-button switch. This instrument accepts counts in the conventional manner at rates up to 10,000 cps. Any number from 0 to maximum capacity may be preset merely by depressing appropriate push-button in each column. Upon reaching the preset count, the unit supplies an output pulse to drive a register, close a gate, divert a production line or perform any other desired function. It then resets to 0 and recycles automatically. Available in any desired capacity.

EVENTS PER UNIT TIME METER, MODEL 554 will automatically count and display the number of events that occur during a precise one second interval at rates up to 100,000 events per second. Accuracy is ± one event. Will operate either manually or automatically to count any mechanical, electrical, or optical occurrences, regularly or randomly spaced, that can be converted into changing voltages. Instrument counts for one second and displays the results on illuminated five-digit panel. Will recycle continuously on automatic operation. Convenient test switch permits 2 second self-check of entire unit. Dimensions 20¾" x 10½" x 15". Weight approximately 68 lbs.

TIME INTERVAL METER, MODEL 510 provides a direct reading of elapsed time between any two events in the range of 0.000010 to 1.00000 seconds. Accuracy is ± 10 microseconds. Any occurrences that can be translated into changing voltages may be so timed. Timing may be started and stopped by independent voltages, the polarity of which may be selected by means of toggle switches. Sensitivity control permits selection of the amplitude of start or stop voltages at optimum level for elimination of interference. Dimensions 20¾" x 10½" x 15". Weight approximately 58 lbs.

SINGLE/DOUBLE PULSE GENERATOR MODEL 903 is a general purpose laboratory instrument that supplies either single or paired pulses individually variable in amplitude, width and polarity. Pulse spacing is continuously variable from 0 to 10 microseconds, pulse width from 0.10 to 1.6 microseconds and pulse amplitude from 200 volts maximum negative and 50 volts maximum positive for 1000 ohm load, and 10 volts maximum negative and 50 volts maximum positive for 50 ohm load. Single or double pulses are available through separate panel connectors. Repetition rate internally controlled 1 to 1000 cps. Push-button control single cycle. External signal control for any rate up to 1000 cps.

These are basic descriptions of representative standard instruments. A variety of modifications, both standard and special, are available to meet specific requirements. For complete details write Dep't. E.

Berkeley Scientific Corporation

2200 WRIGHT AVE. • RICHMOND, CALIF.

A NATIONAL ORGANIZATION



FIG. 3—Twenty computing amplifiers of the type shown are used. These interchangeable units can operate as integrators, summers or sign changers

continuously, before the start of, or during, the computing process. The large knob alongside it is marked OFF-RECORD-COMPUTE. With this switch in the OFF position, the recording oscillograph motor is turned off, and each computing capacitor is maintained in either a discharged condition, or at some preset initial condition voltage. Under these circumstances, the computing process is, in effect, clamped to correspond to conditions in the system at time $t = 0$. When the switch is turned to RECORD, the computing process remains clamped, but the recorder chart drive is turned on. This permits the chart to reach full speed, and allows the pens to be zeroed mechanically. Rotating the switch to COMPUTE removes the capacitor clamps, and allows the computation to proceed.

Below the control panel is the regulated power supply. Positive and negative B voltages are furnished to the amplifiers, as well as to the integrating capacitors for initial condition charging, and to the forcing function circuit. These voltages are regulated to better than 0.1 percent for simultaneous variations in load from zero to full, and line from 105 to 135 volts. Power supply voltages and currents are monitored by the two meters on this panel.

Figure 4 is a close-up view of the recorder and its control unit. Amplifiers for driving the magnetic oscillograph are contained in the control unit, as well as switches to select the input to each channel. This cabinet also contains circuits for controlling and calibrating the gain of the recording channels, and for monitoring any of the amplifier

REASON for CONFIDENCE

. . . in Peace or War

. . . that's what the trademarks and brand names of American producers establish. For never has a country accumulated such wealth of designing and engineering talent, such monumental means for producing both the necessities and luxuries of the day, or such massive potential for meeting the needs of tomorrow—however vast and varied they may be.

Accordingly, we take particular pride in *our* personal emblem. Representing a wide range of alloys for the electrical, electronic and heat-treating industries, it is the very symbol of quality and dependability to a host of manufacturers thruout the nation. We are well aware of our obligation to uphold its reputation—in peace or war.

So if your products demand electrical resistance material of outstanding uniformity, high stability, and long life . . . or if you require radio alloys for electronic uses . . . or high heat-resistant equipment . . . *consult with us.* Our fifty years' experience is at your disposal.

As recipient of the highest Armed Services Award in 1918, and of no less than five Army-Navy "E" Awards in World War II, it is logical that the resources of this firm should be engaged to an unprecedented extent in meeting the demands of the present emergency. However, we stand ready to make recommendations based upon your specific requirements, and shall be glad to serve you to the best of our ability.

One thing is sure: Your use of a D-H product will prove a source of confidence—confidence not only in Driver-Harris products per se, but, in a wider sense, confidence in the capacity of creative America to meet any situation, *come what may.*

Manufacturers of world-famous Nichrome and over 80 other alloys for the electrical, electronic, and heat-treating fields.*

Driver-Harris Company

HARRISON, NEW JERSEY

BRANCHES: Chicago, Detroit, Cleveland, Los Angeles, San Francisco

In Canada: The B. GREENING WIRE COMPANY, LTD., Hamilton, Ontario, Canada

*T.M. REG. U. S. PAT. OFF.

Test, Grade, or Match Resistors

"as fast as you can pick 'em up!"

PRICE $585.00 F.O.B. CINCINNATI

with the new **Clippard** PR-5 RESISTANCE COMPARATOR

Just place the "unknown" resistance across the terminals of this precision, production Clippard tester. Even unskilled operators can process up to 17 resistors (of all types) *per minute.* Working to an accuracy of better than ±1% through the entire range of 100 ohms to 100 megohms, the PR-5 is a companion instrument to the famous PC-4 Automatic Capacitance Comparator. With it, radio, electrical, resistor manufacturers and large part jobbers save time and money and assure unerring accuracy of inspection.

Completely self-contained, the PR-5 requires no outside attachments other than the Standard Resistor against which unknowns are checked. Operates on 110 Volt—60 Cycle AC. Range: 100 ohms to 100 megohms; reads deviation from standard on any of three scales: −5% to +5%, −25% to +30% or −50% to +100%. Size: 18" x 12" x 12". Weight: approx. 32 lbs. For complete details, write for Catalog Sheet 8-E.

Clippard
INSTRUMENT LABORATORY INC.
1125 Bank Street • Cincinnati 14, Ohio

MANUFACTURERS OF R. F. COILS AND ELECTRONIC EQUIPMENT



FIG. 4—Solutions appear graphically on the magnetic oscillograph (left). The control unit (right) selects the computed quantities to be recorded

outputs or the forcing function by means of a meter or cathode-ray oscilloscope. For those applications requiring simultaneous recording of more than two quantities, a six-channel recorder and control unit is available.

To increase the usefulness of the computer, 44 terminals on the set-up board are brought to connectors at the rear of the main cabinet. This makes possible interconnection of two or more computers, and permits the introduction of special function generators, servo multipliers, additional integrating capacitors and other auxiliary equipment.

Measuring Power Factor of Low-Loss Dielectrics

BY J. L. DALKE AND R. C. POWELL

National Bureau of Standards
Washington, D. C.

ACCURATELY MEASURING the power factor of low-loss materials is frequently difficult with equipment that is usually available. The smallest power factors determined by most commercial bridges is hardly better than 10^{-4}, whereas materials such as polystyrene and teflon have power factors only two to three times this value. When resonance methods are used, the smallest detectable power factor is inversely proportional to the Q. For a circuit with a Q of about 200 and the usual voltmeters and generators the sensitivity of power factor measurements is of the order of 10^{-4}. The sensitivity can be increased by introducing negative resistance into

Original paper given at the 1950 Conference on Electrical Insulation, the abstract of which appears in the 1950 Annual Report of Conference on Electrical Insulation, National Research Council.

FIRST!

Federal was FIRST to develop...

FIRST to receive military approval of

RG TYPE CABLES

WITH THE NEW LOW-TEMPERATURE NON-CONTAMINATING THERMOPLASTIC JACKET

THESE ARE THE TYPES APPROVED TO DATE—

RG-5B/U	RG-21A/U
RG-6A/U	RG-22B/U
RG-8A/U	RG-58B/U
RG-9B/U	RG-58C/U
RG-10A/U	RG-59A/U
RG-11A/U	RG-62A/U
RG-12A/U	RG-63B/U
RG-13A/U	RG-65A/U

RG-79B/U

The following types—over ½-inch diameter—are available, subject to military approval:

RG-14A/U	RG-20A/U
RG-17A/U	RG-23A/U
RG-18A/U	RG-34A/U
RG-19A/U	RG-74A/U

Review your requirements now—to insure prompt delivery

Millions of feet of this special approved type have been produced by Federal—

AMERICA'S *pioneer* source of supply for low-temperature RG types—*that's Federal!* It was Federal that *first* successfully developed this type... *first* received approval of the U. S. Signal Corps and the U. S. Air Force... *first* manufactured it in enormous quantities!

That's why it pays to specify Federal when you need RG types. With Federal quality you get an extra measure of experience and know-how... experience that assures complete product satisfaction and dependable cable performance.

In addition to being a primary source of the listed RG types, Federal now is ready to supply complete coaxial cable assemblies... to meet your requirements.

For further details on assemblies and present and subsequent RG approvals, write to Dept. D-613.

Manufacturer of America's most complete line of solid dielectric cables



FEDERAL TELECOMMUNICATION LABORATORIES, Nutley, N. J. ..... a unit of IT&T's world-wide research and engineering organization.

Federal Telephone and Radio Corporation

SELENIUM-INTELIN DIVISION—100 KINGSLAND ROAD, CLIFTON, NEW JERSEY

In Canada: Federal Electric Manufacturing Company, Ltd., Montreal, P. Q.
Export Distributors: International Standard Electric Corp., 67 Broad St., N.Y.

PHALO
"Current's Favorite Conductor"
Provides Versatile Quality for Mobile Communication!
Year after year, hundreds of thousands of feet of shielded connecting cables bearing the famous 'Current's Favorite Conductor' trademark, find their way into the nation's best mobile radio and telephone communication systems.
Phalo builds shielded cables that are as versatile as the systems they connect . . . whatever the purpose, you couldn't find a better quality answer.
Next time specifications call for shielded communication cable, call for PHALO and be certain!
Shielded, jacketed mobile communication cable
Braided Assembly
PHALO
Plastic Insulation
Manufacturers of Thermoplastic Insulated Wire, Cables, Cord Sets and Tubing to Government Specifications

the resonance circuit to compensate for the energy dissipated in the circuit, thereby obtaining a much higher Q. In fact, radio engineers have for many years used regenerative circuits to improve the selectivity of tuning circuits. Apparently Towsley[1] was the first to apply regeneration to dielectric measurements. The approach and the circuit described in this paper are different and the apparatus is simpler making accurate measurements possible up to three hundred megacycles.

Circuit Diagram

Figure 1 shows the circuit which has been in use for over a year. It is composed of a conventional coil, a micrometer electrode system shunted by a voltmeter and a negative resistance in series. The negative resistance is supplied by the real component of the input impedance of a cathode follower circuit with a capacitative load and certain values of grid-to-cathode capacitance. A negative resistance in parallel with the electrode system will also produce satisfactory results, but the value of negative resistance necessary and the dependence of the resonance frequency on the vacuum tube circuit make such and arrangement more unstable than the series circuit. The familiar susceptance variation or Hartshorn technique is used to evaluate the dielectric in terms of micrometer readings, the width of the resonance curve and the voltages with the specimen in and out. The expression for the input impedance to the cathode follower circuit is

$$Z_{in} \leqq \frac{g_m}{\omega^2 C'_K C'_{gK}} - j\left(\frac{1}{\omega C'_K} + \frac{1}{\omega C'_{gK}}\right)$$

provided $r_p >> X_S$, $X_{gS} >>$ R'_K,



FIG. 1—Circuit used for making low-loss measurements at 1 mc

Brush recorder

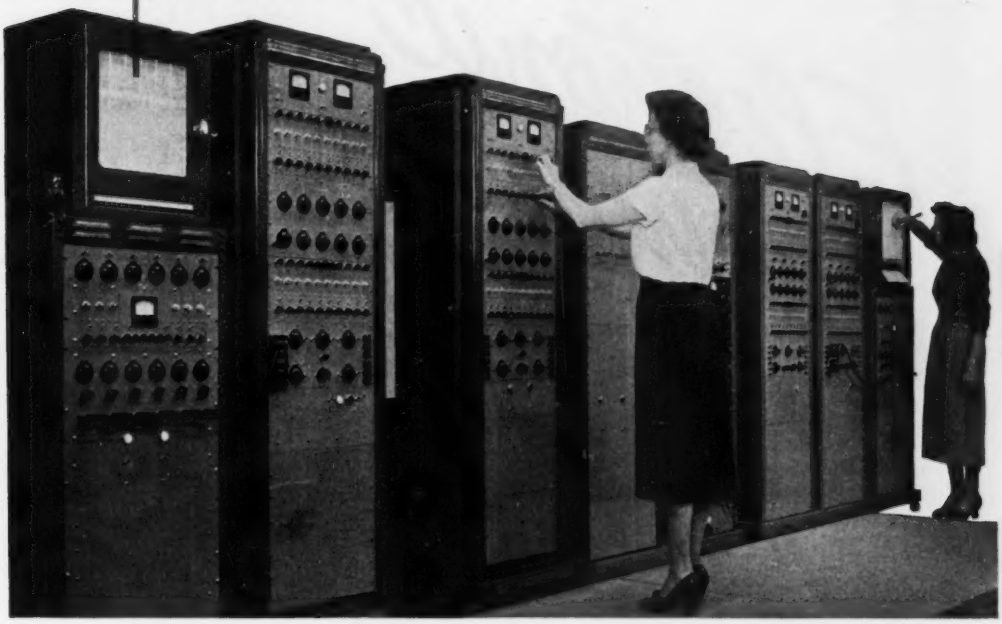

...memory for an electronic brain

● Goodyear Aircraft's Electronic Differential Analyzer provides a method of studying performance of dynamic systems without computations by a corps of mathematicians.

Since there is a direct analogy between the dynamic behavior of electrical and mechanical systems, the performance of one system can be predicted by a study of the other. Thus, by setting up the proper electrical circuits, problems in such varied fields as aircraft design and control, vibration analysis, industrial control, structures, turbines and engines, and other dynamic systems can be solved with the Differential Analyzer.

The memory for this electronic "brain" is provided by a Brush Recording Analyzer. Here, results from as many as six different computations are recorded simultaneously. Permanent visual records are made instantaneously, eliminating laborious plotting.

Investigate Brush instruments for studies of d-c or a-c voltages or currents, strains, displacements, light intensities, temperatures, and other static or dynamic conditions. Write for information. The Brush Development Company, Dept. K-9, 3405 Perkins Avenue, Cleveland 14, Ohio, U. S. A. *Canadian Representatives:* A. C. Wickman (Canada) Limited, P. O. Box 9, Station N, Toronto 14, Ontario.

Heart of each Brush Recorder is the Brush Magnetic Penmotor—a high-speed, direct-writing element for instantaneous, permanent recording. Flat frequency response and linear phase shift with frequency permit accurate reproduction of both transient phenomena and steady state signals.

Put it in writing with a

BRUSH RECORDING ANALYZER

THE Brush DEVELOPMENT COMPANY

PIEZOELECTRIC CRYSTALS AND CERAMICS • MAGNETIC RECORDING • ELECTROACOUSTICS • ULTRASONICS • INDUSTRIAL & RESEARCH INSTRUMENTS

Electronic Engineers

are needed at world-famous

LINK AVIATION

Excellent positions are available for senior electronic engineers on long range military and civilian programs.

Challenging and interesting work—with unique advancement opportunities are offered to men with exceptional electronic abilities.

Excellent wages, liberal health and life insurance program. *Attractive homes and new apartments* within minutes of LINK plant. Bonus and vacation plan, company cafeteria. Currently on 48-hour week.

Experience in airborne radar, analogue computers, pulse systems, servomechanisms, feedback amplifiers desirable.

Write to:
JAMES F. BAYLIS
Personnel Manager

LINK AVIATION, INC.
BINGHAMTON, N. Y.

Manufacturers of LINK TRAINERS • FLIGHT SIMULATORS • GUNNERY AND NAVIGATIONAL TRAINERS • SERVO MECHANISMS • SERVO AMPLIFIERS • GRAPHIC RECORDERS • PRECISION GEAR BOXES • FRACTIONAL H.P. WIDE RANGE VARIABLE SPEED DRIVES • SPUR GEAR DIFFERENTIALS • FRICTION AND OVERDRIVE CLUTCHES • INDEX DIALS *and Special Electronic Devices*

R'_{gK} and $\mu >> 1$; g_m, r_p and μ are the transconductance, plate resistance and amplification factor of the tube and X_K, R'_K, X_{gK} and R'_{gK} are the series equivalents of the corresponding elements in Fig. 1. If Z_{in} is shunted by C_s such that $X_s << R_{in} >> X_{in}$ then

$$Z_{in} \cong -\frac{C'_K C'_{gK}}{g_m C_s^2} - j\frac{1}{\omega C_s}$$

These equations are only approximations but they represent the operating conditions accurately for all practical purposes. Thus, to a very good approximation, the negative resistance is $-C'_K C'_{gK}/g_m C_s^2$. The reactive component of Z_{in} offers no difficulty since it can be made small in comparison to the reactance of the inductance and electrode and remains constant during a measurement. The equation for the resonance curve in terms of the voltage V and the total equivalent conductance G_t across the electrode system is

$$2\log(C_r - C) = \log\left(\frac{V_r^2}{V^2} - 1\right) + \log\left(\frac{G_t^2}{\omega^2}\right)$$

where C_r and V_r are the capacitance and voltage at resonance. Thus if $\left(\frac{V_r^2}{V^2} - 1\right)$ is plotted versus $(C_r - C)$ on log log paper a straight line with slope 2 should be obtained. Figure 2 illustrates that this requirement is met by the high-Q circuit under consideration. Figure 3A shows the familiar resonance curves obtained for the corresponding data, using a voltmeter with



FIG. 2—Curves demonstrate closeness of fit of measured curves to conditions for theoretical resonant curves

Your sealed assemblies can be kept TIGHT with

STUPAKOFF Kovar-Glass Seals

Stupakoff Metal-to-Glass Seals are made in a variety of sizes and ratings.



Kovar Metal, the ideal alloy for glass sealing, is furnished in the form of tubes, rods, sheet, foil and fabricated shapes.

Metal-to-glass seal making has been highly perfected by Stupakoff. When you specify Stupakoff Seals, you get well-designed, accurately-made products that are easy to assemble, mechanically strong, have high flashover ratings, provide high resistance to thermal shock and are dependable. They are made in a wide variety of standard types and sizes, or in special designs to meet your specific needs.

Stupakoff seals are all made with Kovar Metal, which is readily bonded with hard glass producing no undesirable structural stresses. It has substantially the same expansitivity as hard glass from -80°C to the annealing point of glass. These characteristics of Kovar make Stupakoff Seals dependable.

Write for samples and prices of typical Stupakoff Kovar-Glass Seals.

STUPAKOFF

CERAMIC & MANUFACTURING COMPANY

Latrobe, Pennsylvania

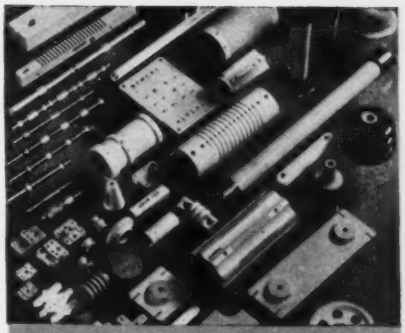

Representative Stupakoff Ceramic products.

STUPAKOFF PRODUCTS

For Electrical and Electronic Applications

ASSEMBLIES—Stupakoff assemblies include metallized ceramic Induction COILS for radio receivers and transmitters; metallized ceramic SHAFTS for air-tuning condensers; METALLIZED PLATES for making fixed rigid assemblies; ceramic trimmer condensers.

CERAMICS—Stupakoff has long been a leading supplier of ceramic products for a wide variety of electrical and electronic applications—precision made for all voltages, frequencies and temperatures.

RESISTOR CERAMICS—Stupakoff Temperature-Sensitive Resistors are used for temperature indicating or measuring equipment such as Radiosonde, for infra-red light source and for heating elements. Supplied complete with terminals, in the form of rods, tubes, discs, bars, rings, etc.

STUPALITH—A group of ceramics having remarkable ability to withstand extreme thermal shock. STUPALITH may be made to have zero, low-positive or low-negative expansitivities. Formed by conventional methods. Safely used at temperatures up to 2200° F.

CERAMIC DIELECTRICS—Stupakoff makes general purpose Ceramic Dielectrics for by-pass, lead through blocking, stand-offs and trimmer applications. Temperature compensating Ceramic Dielectrics have coefficients from P-100 to N-2700, and high K materials up to K-6000.

Made in the form of tubes, discs and special shapes, plain or silvered. See photo below.

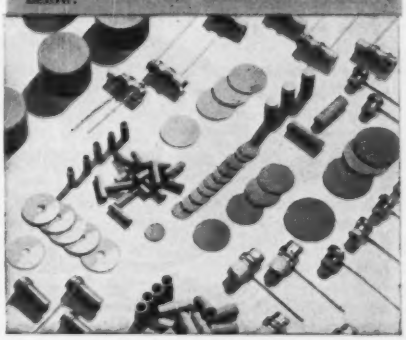

In clock radios, remember, buyer attention focuses on the *clock*.

That's why Sessions custom-styling of hands, dial, and bezel as well as operating features gives you an advantage over designers limited to stereotyped stock models. No matter what your requirements—mechanical or artistic—you can count on Sessions' flawless attention to detail to meet your specific needs. What's more, the price is low—lower than any other dependable switch timer.

Sessions movements are famous for their split-second accuracy and quiet operation. The compact, subsynchronous motor has fewer moving parts—means greater dependability. Substantial savings are passed on to you.

Take advantage of the lessons learned by other leading manufacturers of clock radios. In your new designs, use Sessions Switch Timers. For complete technical details, write The Sessions Clock Company, Timer Division, Dept. 48, Forestville, Connecticut.

linear input impedance.

Stable Q's as high as 170,000 have been obtained. With a commercial generator and power supply, Q's of the order of 100,000 were found to have random fluctuations and drift of the voltage at the resonance peak of about 5 percent over a period of five minutes. The stability obviously improves as the Q is lowered. At 1,000 the voltage peak was stable to better than ±1 percent over a period many times longer than the time required to make a set of measurements. The stability of the circuit was found to

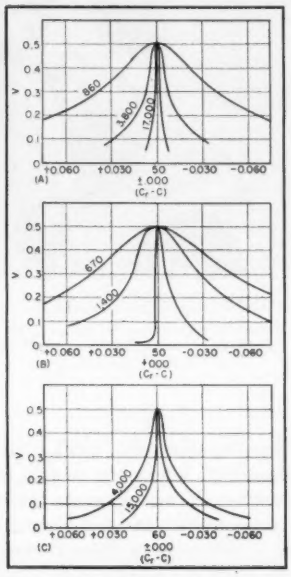

FIG. 3—Curves show voltage across electrodes plotted against vernier capacitance. Numbers on curves represent the approximate $C_r/C = Q/2$

be better than the commercial generator and power supply employed. With such a device the power factor of materials such as polystyrene and teflon can be measured to three significant figures from one kilocycle to 300 megacycles. An extremely low-loss fused-quartz specimen was found to have a power factor an order of magnitude smaller than polystyrene and teflon.

When operating the circuit at Q's

BRIDGEPORT BRASS COMPANY

COPPER ALLOY BULLETIN

"Bridgeport" MILLS IN BRIDGEPORT, CONN. AND INDIANAPOLIS, IND.—IN CANADA: NORANDA COPPER AND BRASS LIMITED, MONTREAL

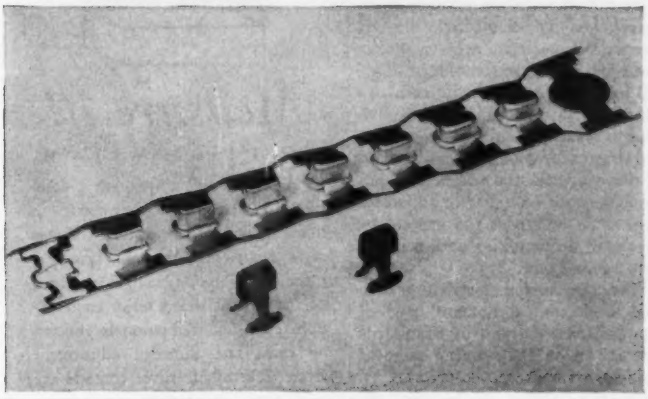

Showing progressive operations in the manufacture of clamp for telephone headset jack. Courtesy, Connecticut Telephone & Electric Corporation, Meriden, Connecticut.

Careful Planning Before Production
Avoids Trouble in Deep Drawing Brass

As in all things, experience in the deep drawing of brass and other copper-base alloys is the best teacher. The reshaping of flat metal into various cup-shaped objects on an efficient production basis is an intricate procedure, and involves skills and know-how. It is, therefore, wise to investigate the problem carefully before attempting to go into production. Help for the determination of the proper alloy for the particular job, and often suitable fabricating techniques as well, can be obtained from our Metallurgical Laboratory and from our literature such as Bridgeport's "Technical Handbook."

The illustration shows the progressive operations used in the production of a clamp for a telephone headset jack. This involves the deep drawing of a rectangular cup, which is not easy. Secondary blanking operations on the bottom of the cup and the formation of the brackets are shown in the small samples in the foreground. Considerable experimental work was done and further developments of the tools were necessary, which involved making two draws to obtain sufficient depth of cup. It was also found advisable to increase the width of the strip metal. The change to a lard oil lubricant was also helpful.

Factors to Consider

The following check-list should be helpful in demonstrating the various points which must be carefully considered before drawing work is actually begun.

1. *Stock*—The flat metal must be wide enough to compensate for contraction of the blank during cupping. Alloy, gauge, tolerance requirements; temper; diameter of arbor are essential.

2. *Punch and Die Radii*—Normal die radius is between 5 and 10 times the thickness of the metal. Too large or too small a die radius may cause trouble.

3. *Die Finish*—Careful polishing of the die is important, since there is a great deal of motion between the metal and the die. Dies should be lapped in the direction of metal flow.

4. *Blank Holder Pressure*—If the blank is not held tightly, the circumferential forces in the perimeter of the blank will produce wrinkling. If blank holder pressure is too great, thickening of the blank will be prevented, and may result in fracturing of the cup.

5. *Diameter Reductions*—In the production of a normal cup for redrawing, the most satisfactory diameter reduction ranges between 40 and 46%. This produces a cup about equal in height and diameter. In making greater reductions, difficulty is encountered in regulating blank holding pressures, and there is danger in the softer alloys of fracturing the cup. In progressive die operations, such as the clamp described above, successive redraws after the cupping operation are held to approximately 15%, since there are no intermediate anneals.

6. *Lubricants*—A lubricant must be used to reduce friction to a minimum and prevent metal-to-metal contact. It must first wet the surface thoroughly, and have sufficient body to stay in place under forming and drawing pressure. The choice of lubricant for a job depends on several factors, including the severity of work, equipment used, production run, means of application and cost. Usually simple soap solutions are satisfactory, but lard oils, vegetable oils and other lubricants are often used.

7. *Metal Surface Finish*—This is important especially in deep drawing operations such as in progressive and eyelet types of work.

This list is intended simply to point out some of the factors influencing success in drawing. Specific problems naturally arise in every individual job. Bridgeport will be glad to help customers with these problems by sharing its vast reservoir of experience acquired in the production and fabrication of copper-base alloys. (6831)

FIRSTS

BY BELL AIRCRAFT

FIRST Supersonic Aircraft (X-1)

FIRST Aircraft to Vary Wing Sweepback in Flight (X-5)

FIRST Jet-Propelled Fighter in U. S. (F-59)

FIRST Commercially Licensed Helicopter

BELL AIRCRAFT CORPORATION

NEEDS

SCIENTISTS! ENGINEERS! DESIGNERS! DRAFTSMEN!

to accept the challenge of development work in...

LONG RANGE PROGRAMS

on

GUIDED MISSILES

AIR-BORNE ELECTRONIC EQUIP'T

ROCKET ENGINES

for

INTERVIEW in SAN FRANCISCO

plan to see our representative R. C. Marks at the Whitcomb Hotel during I. R. E. West Coast Convention, August 22-24

BELL Aircraft CORPORATION

P.O. BOX 1 BUFFALO 5, N. Y.

above a few hundred, effects due to nonlinear elements become noticeable in the distortion of the resonance curve. The negative resistance circuit itself produces no observable nonlinearity, because low amplitudes are used and a large amount of stabilizing negative feedback is provided. However, if a voltmeter with a nonlinear input impedance is connected directly across the electrode system, effects such as those illustrated in Figs. 3B and 3C are easily obtained. To eliminate this difficulty, which obviously makes accurate resonance-curve measurements impossible, it is necessary for the voltmeter input impedance to be linear or to isolate the voltmeter from the system by means of an amplifier with a linear input impedance.

The micrometer electrode system and associated equipment used at the National Bureau of Standards are shown on the opening page of this department.

In the center is located the micrometer electrode and coil mounted on the negative resistance circuit. Power supplies are shown in background.

REFERENCE

(1) 1948 Annual Report of Conference on Electrical Insulation, National Research Council.

Self-Erecting Weather Station

COMPLETE and accurate weather predictions can only be obtained by studying meterological information taken at a large number of widely spaced stations. The accompanying photographs show a weather station that is designed to be dropped from an aircraft by parachute. Upon hitting the ground, the weather station goes into action quickly and automatically, and it transmits weather information by radio to appropriate recording instruments in a main station.

As shown in Fig. 1 the station as it is dropped from the plane resembles a bomb. When the unit is released over a desired location,

This represents the actual size of the housing which totally encloses the Ulanet

MINIATURE THERMOSTAT

MODEL 13

Measure it!

Only 1" L x 5/16" W x 1/4" H

★ And into this tiny space a complete three-element thermostat is housed. Severe temperature changes can't strain the bimetal (principal cause of calibration changes) because of the special strain relief construction. Precision calibration is effected by extra fine threaded adjustment screw. Electrolytic silver contacts are used, too. Temperature ranges up to 400°F. are available.

Here's the mechanically rugged unit you should investigate for positive control. Ulanet engineers will be glad to help you if you state the application you have in mind.

MODEL 13



GEORGE ULANET COMPANY

417 MARKET STREET

NEWARK 5, NEW JERSEY

If your problem is *Heat Control* your solution is *Ulanet*—
Precision Thermostats & Thermal Timers
Exclusively Since 1931

ULANET

ELECTRIC HEAT CONTROL ENGINEERS

For the Best.. Call Cleveland

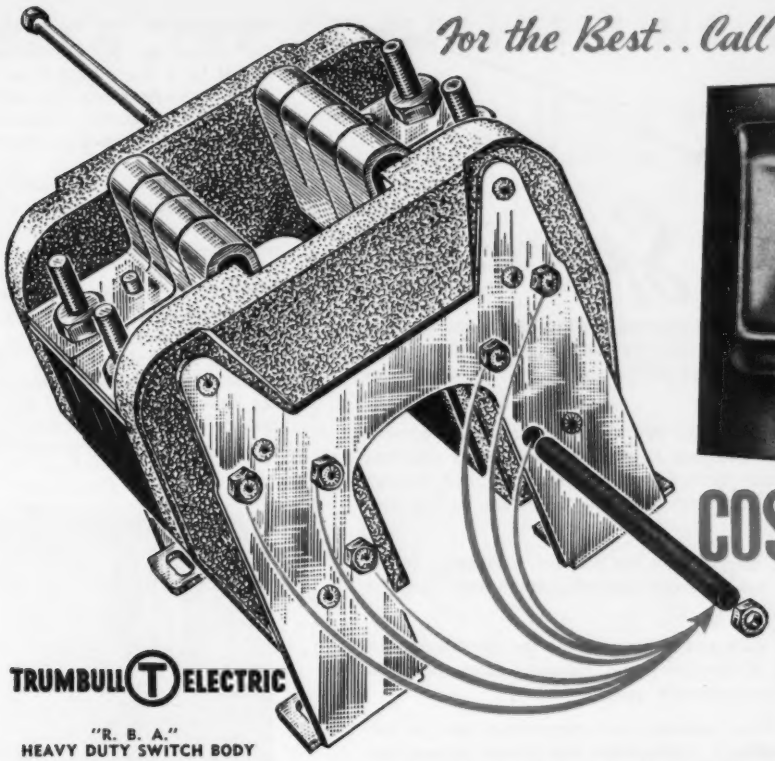

TRUMBULL ELECTRIC

"R. B. A."
HEAVY DUTY SWITCH BODY



COSMALITE

Phenolic Tubing is used in heavy duty switches.

6
COSMALITE TUBES INSULATE BODY BOLTS

In their popular "R.B.A." Heavy Duty Industrial Switch
The Trumbull Electrical Manufacturing Co.
uses Cosmalite Tubing to insulate its body bolts.

The combined electrical and physical properties of CLEVELITE* and COSMALITE* are essential wherever strength, low moisture absorption, high dielectric strength, low loss and good machineability are of prime importance!

DEPENDABLE - ECONOMICAL - LONG LASTING . . . Why Pay More? Made in diameters, wall thicknesses and lengths to meet special or new adaptations . . . in various grades to meet the most exacting needs. Your inquiry will receive immediate attention.

* Trade Marks

The CLEVELAND CONTAINER Co.
6201 BARBERTON AVE. CLEVELAND 2, OHIO
PLANTS AND SALES OFFICES at Plymouth, Wisc., Chicago, Detroit, Ogdensburg, N.Y., Jamesburg, N.J.
ABRASIVE DIVISION at Cleveland, Ohio
CANADIAN PLANT: The Cleveland Container, Canada, Ltd., Prescott, Ontario

REPRESENTATIVES
NEW YORK AREA R. T. MURRAY, 604 CENTRAL AVE., EAST ORANGE, N. J.
NEW ENGLAND R. S. PETTIGREW & CO., 10 N. MAIN ST., WEST HARTFORD, CONN.
CHICAGO AREA PLASTIC TUBING SALES, 5215 N. RAVENSWOOD AVE., CHICAGO

IT'S OUR *Specialty*

You or I can walk into any sporting goods store and buy a good fishing rod for a very few dollars. But when we decide to treat ourselves to "the best there is", the choice narrows 'way down.

That illustrates very well the sales story we have to tell here at Wheeler. Our field is one containing many excellent manufacturers and plenty of tough competition. But through the years we've come to specialize in certain well-defined classifications.

We make magnet wire, for example, principally in the smaller gauges now in great demand, with a wide range of special insulations.

We make coils and transformers to the specifications of a limited group of customers who demand extreme precision and absolutely top controlled quality.

Most of these materials and components now go into key electronic devices . . . computers and control mechanisms, electrical apparatus, and so forth. If that is your field we'd like to talk to you.

MAGNET WIRE
COILS
COMMUNICATIONS EQUIPMENT
TRANSFORMERS

WHEELER MAKES THESE PRODUCTS A *Specialty*

THE WHEELER INSULATED WIRE CO., INC., 1101 EAST AURORA ST., WATERBURY 20, CONN.
Division of The Sperry Corp.

the parachute is automatically opened by a line rigged from the plane. Simultaneously, an electric clock, which controls subsequent operations of the station, is turned on.

The impact of the landing sets off a small explosive charge which disengages the parachute and prevents the station from being pulled along the ground. Either immediately or after a pre-set dormancy period, another explosive charge causes the station to rise to an upright operating position. This is done through an arrangement of six legs to which springs are attached. The explosive charge operates a release, permitting the



FIG. 1—Experimental model of the air-launched automatic weather station developed by the National Bureau of Standards for the Navy Bureau of Ships. The station has landed, but the leg-release device has not yet functioned

springs to pull the legs into position. A third explosive charge extends a telescopic vertical antenna to a height of some 20 feet. The erected station is shown in Fig. 2. The station is then ready for automatic transmission at intervals predetermined by the built-in timing mechanism.

The automatic station could be adapted to transmit various kinds of information, but in the standard design only temperature, pressure, and humidity data are reported. Separate mechanisms responsive to changes in these atmospheric conditions each cause an associated resistor to vary. At predetermined intervals the timing mechanism

CHECK THE COMPLETE LINE OF

✓ G-E Automatic Voltage Stabilizers

- *FOR IMPROVED REGULATION*
- *FOR DECREASED COSTS*

Need Dependable Voltage Control for One of These Applications?

Radio transmitters and radar equipment
Laboratory and factory testing equipment
Motion picture projectors
Precision photographic equipment
Electron microscopes
Calibration of electric instruments
Color comparators
Wheel balancing equipment
Radio testing devices
Telephone apparatus
Motion picture sound equipment
Photometers
X-ray filament circuits
Electronic apparatus
Electrochemical analysis
Full wave rectifiers
Electric furnaces
Heater units
Frequency oscillators
Communication systems
Temperature controls
Television equipment
Signal and alarm systems
Sound recording equipment
Life testing of bulbs
Small motors of instrument recording apparatus
Photographic lighting systems (especially color-photography lighting)
Automatic developing and printing machinery
Photo-engraving equipment
Photocell fire control apparatus
Dielectric heaters
UHF beam relays
Aircraft landing systems
Simulated flight trainers
Electronically operated weight machines
Electrostatic paint spraying outfits
Magnetic measuring gauges
Oscillographs
Electrophoresis equipment
Moisture detection equipment
Gas analyzers and detectors
Instruments used to measure a difference (such as in bridge circuits)

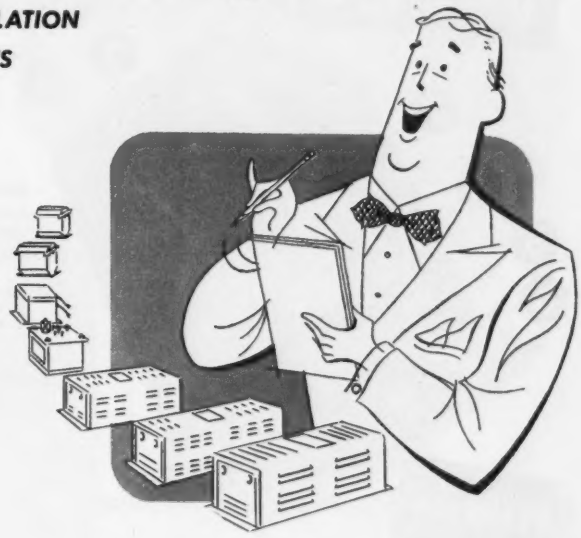

To provide closely controlled voltage for critical equipment, experienced designers select General Electric automatic voltage stabilizers. They get assurance that their equipment will operate better, longer, and more efficiently with the input voltage held close to nominal. You can't make a better investment!

Investigate G-E automatic voltage stabilizers for the answer to your voltage problems. They decrease field calls, increase customer satisfaction, and save money.

For complete details on how this equipment can help you, contact your local G-E representative. For additional information write for bulletin GEA-3634. General Electric Co., Schenectady 5, N. Y.

GENERAL ELECTRIC

411-88

world's toughest transformers

CHICAGO "SEALED-IN-STEEL" New Equipment Line

AVAILABLE IN THREE VERSATILE CONSTRUCTIONS



H-Type. Steel base cover deep-seal soldered into case. Terminals hermetically sealed. Ceramic bushings. Stud-mounted unit. *Meets MIL-T-27 Specifications.*



S-Type. Steel base cover fitted with phenolic terminal board. Convenient numbered solder lug terminals. Flange-mounted unit.

C-Type. With 10" color-coded stripped and tinned leads brought out through fibre board base cover. Flange-mounted unit.

Preferred!

the INSIDE STORY tells why!

The proof of toughness is on the *inside*—the actual proof that demonstrates why CHICAGO Transformers are preferred by engineers, why they fully meet the express requirements of today's tubes and circuits. Here are the "inside facts" of CHICAGO "Sealed-in-Steel" design:

1. Exclusive one-piece drawn-steel case, unsurpassed for strength, moisture-resistance, better electrostatic and magnetic shielding, mounting ease, and streamlined appearance.
2. Uniformly-wound precise coil structures—cooler operation and better electrostatic shielding in power units—minimum leakage, optimum coupling in audio units.
3. Core of high-grade non-aging silicon steel brought to high efficiency by scientific heat-treating in CHICAGO'S own annealing ovens.
4. Core and coil vacuum-impregnated with varnish. Final high-temperature baking achieves a perfectly impregnated coil and core locked against vibration.
5. All internal free space is filled by special, moisture-resistant compound. Prevents corrosion and helps maintain far cooler operation than in conventional air-surrounded mountings.
6. Checked by quality controls at every stage of manufacture, rigidly inspected, "torture-chamber"-tested to insure long, dependable life in actual service.



SEND FOR "NEW EQUIPMENT LINE" CATALOG

You'll want the full details on CHICAGO'S New Equipment Line—the famous Sealed-in-Steel line that offers advanced engineering design to fit today's circuits. Lists units for all purposes: Power, Bias, Filament, Filter Reactor, Audio, MIL-T-27, Modulation, Stepdown and Isolation. Write for your FREE catalog today—or get a copy from your distributor.

CHICAGO TRANSFORMER

DIVISION OF ESSEX WIRE CORPORATION

3501 ADDISON STREET • CHICAGO 18, ILLINOIS

CHICAGO TRANSFORMER — TRADE MARK REG.

turns on the radio transmitter and connects one resistor after another to a critical point in the transmitter circuit. The transmitter is designed so that the emitted radio signal pulses on and off at a rate proportional to the value of the resistor so connected. The station is calibrated before use by subjecting it to known temperatures, pressures, and humidities and measuring the resulting pulse rates. At the receiving station the transmitter pulse rate can then be read as temperature, pressure or humidity, depending on the phase of the predetermined clockwork cycle.

FIG. 2—After the station lands, explosive charges disengage the parachute, raise the station to an upright position, and erect a telescoping antenna

The radio transmitter proper consists of a crystal oscillator followed by a radio-frequency amplifier stage. A relay in the plate circuit of a separate relaxation oscillator turns the crystal oscillator on and off at a rate proportional to the value of whatever resistor is temporarily inserted (by the clock mechanism) into the relaxation oscillator circuit. When the station is to be used as a beacon, the radio transmitter and its control mechanisms may, of course, be simplified.

The clock, in addition to inserting the several weather-responsive resistors into the circuit in a predetermined sequence, connects two other resistors at appropriate intervals. These are a reference

Let **Bendix** Solve Your Problems

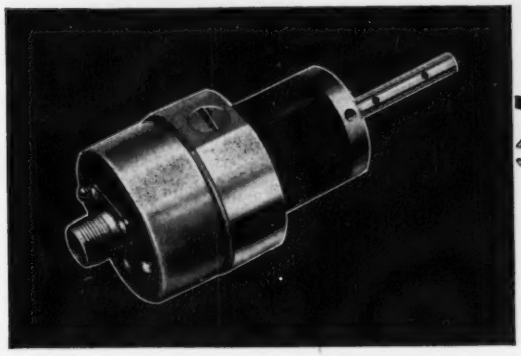

WITH

SPECIALIZED DYNAMOTORS AND DC MOTORS

When you are faced with specifications that place impossible requirements on dynamotors or small DC motors, according to World War II standards, take advantage of recently developed improvements in high temperature and high altitude techniques by simply outlining your requirements to Bendix. Model units *exactly* meeting your performance specifications will be developed and tested for pre-production use—production units will then follow in accordance with your manufacturing schedule.

DYNAMOTORS
Regular • Multiple output • Special purpose

DC MOTORS
1/100 hp—1/2 hp • Continuous and Intermittent Duty
DC Servos and special motors

RED BANK DIVISION OF BENDIX AVIATION CORPORATION
RED BANK, NEW JERSEY
Export Sales: Bendix International Division, 72 Fifth Avenue, New York 11, N.Y.

Write for this colorful and informative book —it's free. You'll find it loaded with facts and figures about all types of dynamotors.

RED BANK DIVISION

Bendix AVIATION CORPORATION

RCA ELECTRONIC COMPONENTS

Typical RCA hermetically sealed and fungus-proofed power transformer for military use.

For military requirements . . . built to military specifications

BECAUSE of its experience, engineering skill, and vast production facilities, RCA is singularly well equipped to manufacture in quantity, special transformers, chokes, filters and coils, rigidly designed to military specifications.

As one of the major suppliers of specialized electronic and television components, RCA is geared to handle your individual requirements without delay.

RCA Application Engineers are at your service—and will be pleased to confer with you on your specific military component designs. For further information, write or phone RCA, Commercial Engineering, Section 42HS, Harrison, N. J., or your nearest RCA field office.

FIELD OFFICES: (EAST) Humboldt 5-3900, 415 S. 5th St., Harrison, N. J. (MIDWEST) Whitehall 4-2900, 589 E. Illinois St., Chicago, Ill. (WEST) Trinity 5641, 420 S. San Pedro St., Los Angeles, California.

RADIO CORPORATION of AMERICA
ELECTRONIC COMPONENTS **HARRISON, N. J.**



FIG. 3—Inner view of experimental model of the air-launched automatic weather station

resistor and an identification resistor, both of constant value. The pulse rate produced by the fixed reference resistor is observed during initial tests of the transmitter. Any subsequent deviation in the reference resistor pulse rate warns the receiving station that a correction factor must be applied to the pulse rates of the weather-responsive resistors. Such deviation could arise from transmitter damage or aging. The identification resistor is of a value selected to produce a pulse rate characteristic of the particular station; this enables the receiving station operator to identify the station.

A special technique is used to insure maximum accuracy of the transmitted data despite possible deformation of the weather-responsive mechanisms due to landing impact: a buzzer vibrates each weather-responsive device for a short time before its associated resistor is inserted in the relaxation oscillator circuit. This forced vibration counteracts friction, which may have been increased by landing-impact deformation, and thus aids in the attainment of a true equilibrium condition.

The developmental model of the weather station had an output of the order of 5 watts. Operating on a frequency in the neighborhood of 5 megacycles, it performed reliably over land at ranges of more than 100 miles. The dry batteries used provided power for transmission of weather reports at 3-hour intervals

FERRAMIC Cores by GENERAL CERAMICS

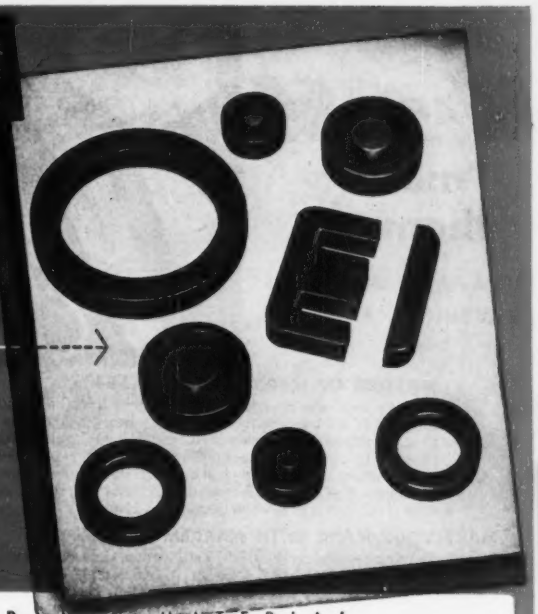

Ferramics are soft magnetic materials featuring:

HIGH PERMEABILITY
HIGH VOLUME RESISTIVITY
HIGH EFFICIENCY
LIGHT WEIGHT
ELIMINATE LAMINATIONS

TYPE OF FERRAMIC MATERIAL

PROPERTY	UNIT	A 34	B 90	C 159	D 216	E 174	G 254	H 419	I 141	J 472
Initial permeability at 1mc/sec	—	15	95	220	410	750	410	850	600	330
Maximum permeability	—	97	183	710	1030	1710	3300	4300	1010	750
Saturation flux density	Gauss	840	1900	3800	3100	3800	3200	3400	1540	2900
Residual magnetism	Gauss	615	830	2700	1320	1950	1050	1470	660	1600
Coercive force	Oersted	3.7	3.0	2.1	1.0	0.65	0.25	0.18	0.40	.80
Temperature coefficient of initial permeability	%/°C.	0.65	0.04	0.4	0.3	0.25	1.3	0.66	0.3	0.22
Curie point	°C.	280	260	330	165	160	160	150	70	180
Volume resistivity	Ohm-cm	$1x10^9$	$2x10^5$	$2x10^3$	$3x10^7$	$4x10^5$	$1.5x10^8$	$1x10^4$	$2x10^5$	—
Loss Factor:										
at 1 mc/sec	—	—	.00016	.00007	.00005	.00008	.00008	.00030	.0003	.000055
at 5 mc/sec	—	.0004	.0011	.0008	.0012	.002	.00075	.00155	.005	—
at 10 mc/sec	—	.0005	—	—	—	—	.0017	.00275	—	—

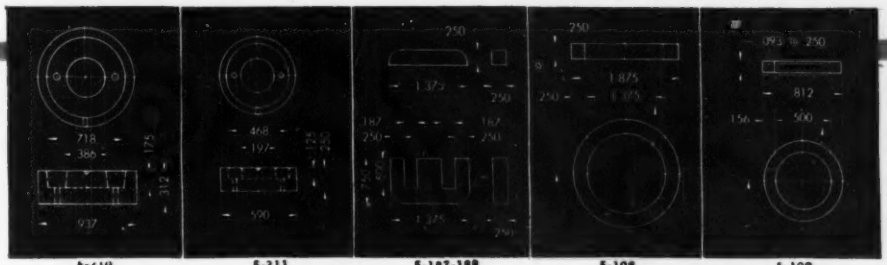

F-210 F-211 F-187-188 F-108 F-109

General CERAMICS AND STEATITE CORP.

GENERAL OFFICES and PLANT: KEASBEY, NEW JERSEY

MAKERS OF STEATITE, TITANATES, ZIRCON PORCELAIN, FERRAMICS, LIGHT DUTY REFRACTORIES, CHEMICAL STONEWARE, IMPERVIOUS GRAPHITE

MARKEM

marks them all

FROM ARTILLERY SHELLS TO MEDICAL AMPULES

MASTERS OF MARKING—Since 1911

Markem methods, machines, type and inks have been marking the products of industry for forty years. Markem machines can mark up to many thousands of pieces per hour. They make clear, durable imprints on flat, curved or irregular surfaces of paint, paper, wood, glass, metal, leather, plastic, rubber, fabric, composition and pressure sensitive tapes. No special skill is needed for their operation. Legend and color of imprint may be quickly and easily changed.

MAKE YOUR MARK WITH MARKEM

When your products need marking for Identification, Control or Market — ask Markem. Submit your problem, together with a sample of the item to be marked. Markem Machine Company, Keene 5, New Hampshire.

MARKEM
BETTER MARKING SINCE 1911

sub-miniature AND moisture-proof

IN-RES-CO S-15 & S-30 WIRE WOUND RESISTORS

THE ECONOMICAL SOLUTION where moisture proof resistive elements of comparatively small size are required for commercial applications. Type S-15 is ⅜" long by ¼" diameter; type S-30 measures ¾" by ¼" diameter. Both types are moisture proof and capable of high performance over long periods of continuous service. IN-RES-CO Resistors for every ordnance or civilian requirement are available at a cost that solves circuit design problems both performance-wise and cost-wise. Check up now, on the complete line of IN-RES-CO quality wire wound resistors.



INSTRUMENT RESISTORS CO.

COMMERCE AVENUE UNION NEW JERSEY

FOR JAN SPECIFICATION RESISTORS — consult the new illustrated literature describing the complete In-res-co line. Write for your copy today!

APPLICATION-DESIGNED RESISTORS FOR ELECTRONICS AND INSTRUMENTATION

for more than 15 days.

The station, called the Grasshopper, was developed at the National Bureau of Standards for the Navy Bureau of Ships.

Zero-Impedance Power Supply Termination

JORDAN J. BARUCH
Acoustics Laboratory
Massachusetts Institute of Technology
Cambridge, Massachusetts

IN THE DESIGN of regulated power supplies, the regulator must perform two functions. One of these is to hold the output voltage constant despite small changes in the input voltage. The second is to hold the output voltage constant despite changes in load current. In general, the series-regulated power supply does both of these jobs with a single regulator section. In many cases, however, it will prove advisable to relegate these two functions to separate sections of the regulator system. The second section, then would provide a low-impedance output for the system.

Much has already been written on the regulation of series-regulated power supplies. In most of these papers, however, a single section is used for both voltage regulation and for the provision of a low output impedance. In the proposed system, a simple regulator section will be described which provides the necessary low output impedance although it is not primarily intended to operate as a regulator for changes in input voltage. Consider the circuit shown in Fig. 1.

We can perform a differential analysis of the output impedance by solely concerning ourselves with the



FIG. 1—Basic circuit of zero impedance power supply termination

Again the time has come 1943 to ask your company, and every company, to

Get in the 1951 SCRAP

FOR every ton of ingot steel produced, at least a half-ton of iron and steel scrap must have *previously* reached the furnaces. Steel is currently being produced at full capacity, more than 100 million ingot tons annually—and there is a developing scrap shortage of serious proportions. Just as in the early years of World War II, the steel industry asks the help of *all* industry to relieve the situation.

TWO IMPORTANT THINGS TO DO

(1) CLEAN OUT YOUR PLANT SCRAP. This is a job that every company can do. Old, worn-out or out-moded and replaced machinery and equipment, rails, structural parts, etc. constitute the "heavy melting scrap" which the steel industry needs most. Clean up *your* plant and yards—move out this heavy scrap into the channels of use.

(2) HURRY BACK YOUR WORKING SCRAP. Don't let the waste of metal-working—turnings, borings, punchings, crop ends, etc.—lie around the plant a day longer than necessary. Keep it moving, back to the furnaces. And doubly important, *be sure to classify and segregate your alloy steel scrap.* Thus handled, it not only commands a higher price, but will help to conserve the nation's supply of critical alloys, practically all of which are highly essential.

Contributed in the National Interest by

ALLEGHENY LUDLUM STEEL CORPORATION

Henry W. Oliver Building • Pittsburgh 22, Penna.

W&O CL 8019

THIS isn't the simplest nor the most complicated transformer STANCOR has designed. It is a good example, however, of the kind of custom transformer design problem that STANCOR'S experienced engineers meet and solve every day as a matter of course. That's why we are confident that, whatever your special transformer problem may be, STANCOR engineers can and will solve them. Write today! Your inquiries will be promptly answered.

STANCOR STANDARD TRANSFORMER CORPORATION

3578 ELSTON AVENUE, CHICAGO 18, ILLINOIS



FIG. 2—Complete schematic of zero impedance circuit used in conjunction with conventional series voltage regulator circuit

voltage regulation. All the quantities we express will be considered differentials. In addition, we will assume that the plate current drawn by tube V_1 is insignificant compared with that drawn by V_2 and hence:

$$i_o = i_1 - i_d$$

If the power supply does have a zero internal impedance however, $i_d = 0$ and $i_1 = i_o$. We will assume this to be the case. A differential analysis of the supply can then be made as follows:

$$Z_o = e_o / i_o \tag{1}$$

$$i_o = i_1 = g_{m2}\, e_{g2} \tag{2}$$

$$e_{g2} = \mu_1 \frac{R_L}{r_{p1} + R_L} e_o \frac{R_2}{R_2 + R_1} - i_o R_1 \frac{r_{p1}}{r_{p1} + R_L} \tag{3}$$

$$\frac{i_o}{g_{m2}} + i_o R_1 \frac{r_{p1}}{r_{p1} + R_L} = -\, e_o\, \mu_1 \frac{R_L}{r_{p1} + R_L} \frac{R_2}{R_2 + R_1} \tag{4}$$

$$Z_o = -\frac{1}{g_{m2}} + R_1 \frac{r_{p1}}{r_{p1} + R_L} \Big/ \left(\mu_1 \frac{R_L}{r_{p1} - R_L} \frac{R_2}{R_2 - R_1} \right) \tag{5}$$

and hence for $Z_o = 0$

$$r_{p1} = -\frac{R_L}{1 + R_1 g_{m2}} \tag{6}$$

Thus, for the zero-impedance condition, the amplifier tube should be operated in the region of negative plate resistance. We see that it is essentially possible, by this means, to obtain a zero-impedance power supply. The analysis holds true, of course, only if the input voltage to the system is constant and may be represented as being in series with a fixed resistance. An additional way in which the behavior of this

When It's A Fuse You Need . . . think first of **BUSS**

A COMPLETE LINE OF FUSES TO CHOOSE FROM
For Television . . . Radio
Radar . . . Instruments
Controls . . . Avionics
It's easy to select a BUSS fuse to do the job right for BUSS makes a complete line of fuses and behind each BUSS fuse is the world's largest fuse research laboratory and fuse production capacity. That's why the BUSS trademark has for 37 years stood for fuses of unquestioned quality that can be depended upon to protect but not to blow needlessly.
Every BUSS Fuse Electronically Tested
Each individual BUSS fuse is tested in a highly sensitive electronic device that records if the fuse is calibrated correctly, if the solder joints are properly made, if the mechanical dimensions of the fuse are right, and if the fuse can be depended upon to operate properly under all service conditions.
BUSS Fuses are made to protect
. . . not to blow.
AND A COMPANION LINE OF FUSE CLIPS, BLOCKS AND HOLDERS

SPECIAL FUSES, FUSE CLIPS, FUSE BLOCKS AND FUSE HOLDERS

Sometimes a special fuse or fuse mounting is required. In such cases we welcome your requests either to quote — or to help in designing or selecting the special type of fuse or fuse mounting best suited to your particular conditions.

Submit description or sketch, showing type of fuse to be used, number of circuits, type of terminal, etc. If your protection problem is still in the engineering state, tell us current, voltage, load characteristics, etc.

At any time our staff of fuse engineers is at your service to help solve your problems in electrical protection.

USE THIS COUPON — *Get All The Facts*

Bussmann Mfg. Co., University at Jefferson
St. Louis 7, Mo. (Division McGraw Electric Co.)

Please send me Bulletin SFB containing complete facts on BUSS Small Dimension Fuses and Fuse Holders.

Name _____

Title _____

Company _____

Address _____

City _____ State _____

ELRC-851

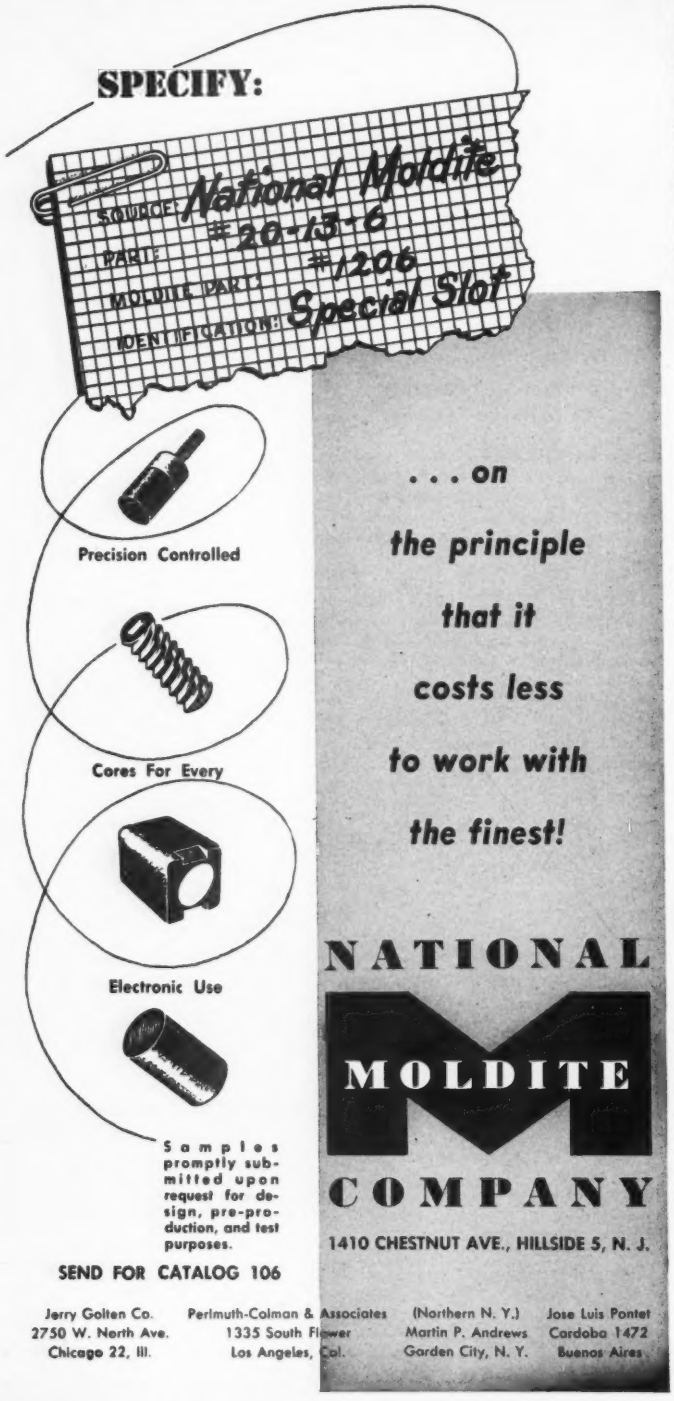
SPECIFY:
SOURCE: National Moldite
PART #: 20-15-6
MOLDITE PART #: 1206
IDENTIFICATION: Special Slot
Precision Controlled
Cores For Every
Electronic Use
. . . on
the principle
that it
costs less
to work with
the finest!
NATIONAL
MOLDITE
COMPANY
1410 CHESTNUT AVE., HILLSIDE 5, N. J.
Samples promptly submitted upon request for design, pre-production, and test purposes.
SEND FOR CATALOG 106
Jerry Golten Co. 2750 W. North Ave. Chicago 22, Ill.
Perlmuth-Colman & Associates 1335 South Flower Los Angeles, Cal.
(Northern N. Y.) Martin P. Andrews Garden City, N. Y.
Jose Luis Pontet Cordoba 1472 Buenos Aires

system can be analyzed is to consider that V_1 operates as a resistor in the voltage divider network comprised of R_L and V_1. A change in load current causes a voltage drop equal to i_1R_1 and this must be compensated for by a change in e_g such that

$$g_{m2}\, e_g = i_1$$

which is the differential current. It is evident that e_g is given by

$$-e_g = \frac{r_{p1}}{R_L + r_{p1}} R_1 i_1 \qquad (7)$$

Since $g_m\, e_g = i_1$, we can write

$$g_{m2} R_1 \frac{r_{p1}}{r_{p1} + R_L} = -1$$

Which is equivalent to Eq. (6).

It is interesting to note that the negative resistance characteristic required of V_1 can often be obtained through the suitable use of a pentode such as a 6SJ7. When using a pentode, it will be possible to obtain and control the value of this negative resistance by tapping the screen voltage off a potentiometer between the plate of V_2 and ground. The output impedance of the power supply regulator section will then in turn be varied. This has proved an extremely useful characteristic in recent laboratory work. A power supply having an impedance which can be varied from approximately plus 500 ohms to minus 500 ohms continuously is now in use in this laboratory for testing the troubles arising from power supply coupling of circuits. The zero impedance termination circuit diagram is shown in Fig. 2.

Its value in this work is enhanced because the ground may be made continuous throughout the power supply, a factor which has been missing in many previous zero-impedance supplies.

Stress-Strain Recorder

AN ELECTRONIC stress-strain recorder to record automatically stress-strain or load deflection characteristics of intricate parts and mechanisms of aircraft armament equipment, has been developed at the Naval Gun Factory in Washington, D. C.

The device consists of a measuring head or transmitter and a re-

For Engineers...

YOUR CAREER OPPORTUNITY of A LIFETIME...at RCA-NOW!

IF YOU ARE FACING a big question: "What is the best move I can make to further my career?"—we believe you will find the answer on this page.

Today, as never before, RCA is engaged in far-reaching electronic developments that have created a need for career men of talent. This means you have the chance of a lifetime to make a permanent connection with RCA in a position offering you the opportunity of a successful career in the field of your choice. Here is what RCA offers.

Wide Choice of Projects

Unusual opportunities await qualified ELECTRONIC, ELECTRICAL and MECHANICAL ENGINEERS . . . PHYSICISTS...METALLURGISTS...CHEMICAL and CERAMIC ENGINEERS — in research, development, design and application, also in technical sales. Positions open provide qualified engineers the opportunity to choose the area of activity they like best.

POSITIONS OPEN IN THE FOLLOWING FIELDS:

TELEVISION DEVELOPMENT— Receivers, Transmitters and Studio Equipment

ELECTRON TUBE DEVELOPMENT— Receiving, Transmitting, Cathode-Ray, Phototubes and Magnetrons

TRANSFORMER and COIL DESIGN

COMMUNICATIONS— Microwave, Mobile, Aviation, Specialized Military Systems

RADAR— Circuitry, Antenna Design, Computer, Servo-Systems, Information Display Systems

INDUSTRIAL ELECTRONICS— Precision Instruments, Digital Circuitry, Magnetic Recording, Industrial Television, Color Measurements

NAVIGATIONAL AIDS

TECHNICAL SALES

ELECTRONIC EQUIPMENT FIELD SERVICE

If you qualify for any of the positions listed above, write us for a personal interview—include a complete resumé of your education and experience. Write to:

Mr. Robert E. McQuiston, Specialized Employment Division, Dept. T-36, Radio Corporation of America, 30 Rockefeller Plaza, New York 20, N. Y.

Professional Status. RCA engineers enjoy the highest professional recognition among their colleagues. You work in close collaboration with scientists and engineers who are distinguished in the industry. You receive recognition for your accomplishments.



Laboratory Facilities. At RCA, unexcelled laboratory resources and advanced technical apparatus are available. You have unlimited opportunities for the complete expression of your talents in the fields of electronics.

Good Living Conditions. You have a choice of residential locations offering suburban-convenience or quiet, countryside living. Good shopping facilities, schools, churches, medical services and modern hospitals are close by. Excellent opportunities for graduate study.

Position Security. These are not temporary positions. Activities are focused not only on the long-range national defense program, but also on a diversified line of products for commercial use. You and your family are protected by Company-paid hospital, surgical, accident, sickness, and life insurance. A modern retirement program helps provide for your future.



Rapid Advancement. Opportunities at RCA are exceptional, for you to move ahead in the career of your choice. You can advance to high-level and supervisory positions which are filled from RCA's engineering staff. Salaries, determined on the experience and ability of individual applicants, are reviewed at regular intervals for increases on a merit basis.

RADIO CORPORATION of AMERICA

MORE GEO. STEVENS COIL WINDING EQUIPMENT IS IN USE THAN ALL OTHER MAKES COMBINED!

• **MORE OUTPUT . . . LOWER COSTS** . . . from *EXCLUSIVE* SPEED FEATURE. Universal motors permit variable speeds without changing belts and pulleys. Coil design permitting, speeds as high as 7500 RPM are not uncommon.

• **PORTABILITY.** Conveniently carried from place to place. Machines come mounted on bases to constitute one complete unit.

• **MUCH LOWER ORIGINAL COST.** The same investment buys more GEO. STEVENS machines than any other coil winding machines.

• **LONG LIFE.** Most of the original GEO. STEVENS machines bought 14 years ago are still operating daily at full capacity.

• **MUCH FASTER CHANGING OF SET-UPS** than any other general purpose coil winding machine. Quickly changed gears and cams save time between jobs.

• **VERY LOW MAINTENANCE.** Replacement parts are inexpensive, can be replaced in minutes, and are stocked for "same day" shipment, thus saving valuable production time.

• **EASIEST TO OPERATE.** In one hour, any girl can learn to operate a GEO. STEVENS machine.

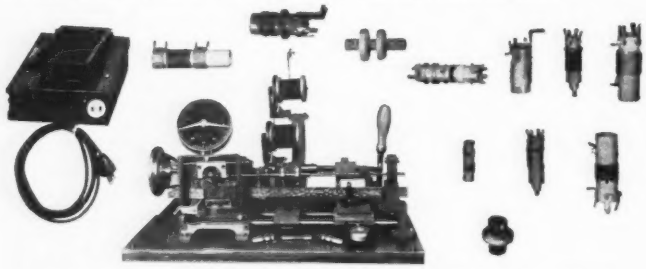

Progressive universal winding machine, Model 125, handles space wound coils and solenoids up to 8" in length, progressive universal coils up to 4" in length and 3" in diameter, universal coils up to ¾" in width, and I.F. coils. Wire sizes are from 20x44 gauge. Cams are stocked from 1/16" to ¾" in decresments of 1/64". Sizes larger than ¾" or less than 1/64" decresments are made upon request. Head to tailstock is over 8"; base 22"

Change gears and idler forming the pattern are enclosed in front. Traverse rack is driven by change gears and idler enclosed in back of the head. The traverse rack has a mandrel return crank and a stop to insure return to identical starting position. Large ball bearings on head stock spindle give long life and easy running. Ball bearing tailstock with spring tension lever permits quick change of coil forms.

Motor equipment:—¼ H.P. Universal motor, V belt driven, double spool carrier tension device with oilite bearings, and adjustable tension friction brake for changing winding tension of the wire.

Dial Counter (Model 50 or 51) with 6" full vision clock dial, accurately registers all turns.

There is a GEO. STEVENS machine for every coil winding need. Machines that wind ANY kind of coil are available for laboratory or production line. . . . Send in a sample of your coil or a print to determine which model best fits your needs. Special designs can be made for special applications. Write for further information today.

World's Largest Manufacturer of Coil Winding Machines

REPRESENTATIVES

Frank Tatro
6022 No. Rogers Ave., Chicago 30, Illinois
Ralph K. Reid
1911 W. 9th St., Los Angeles 6, California
R. A. Staff & Co.
1213 W. 3rd St., Cleveland 13, Ohio

GEO. STEVENS
MFG. CO., INC.
Pulaski Road at Peterson
Chicago 30, Illinois



FIG. 1—Close-up view of measuring head fixed to test specimen

corder. The measuring head (see Fig. 1) consists of a dial indicator (range depends on deflection to be measured) coupled to a 26-volt, 400-cycle aircraft autosyn. A five-conductor cable connects the transmitter to the recorder, which consists of a servo system and recording drum.

Rotation of the drum is proportional to the deflection of the piece being tested and the load component being recorded by a pen which is controlled by the weighing system of the tension-compression machine. The unique feature of this device is the measuring head which can be installed to the test fixture so that linkages that are small and difficult to measure with other devices can be tested for deflection. The electronic stress-strain recorder at present is equipped to record deflections from 0.0001 inch to 10 inches simply by interchanging dial indicators.

Figure 2 shows a test arrangement of a subassembly of a machine gun mount on the tension-compression machine. Strain data of component parts of the machine gun subassembly were also taken during the test.



FIG. 2—Test arrangement for recording deflections and measurements of strain with electronic stress-strain recorder

Ever hear of a bank that gave money away?

Every day, a bank gives away tens of thousands of dollars in exchange for checks drawn on other banks.

These checks are worthless pieces of paper until they're cleared at a central clearing house. Until that time, the bank has literally given its money away!

It's vital for a bank to keep its books balanced by clearing these checks in the shortest possible time.

Yet their central clearing houses are hundreds of miles away from many banks!

What do they do?

They make a wise investment! They ship their checks the fastest possible way – by Air Express!

Whether your business is banking or ball-bearings, here are the unique advantages you can enjoy with regular use of Air Express:

IT'S FASTEST – Air Express gives the fastest, most complete door-to-door pick up and delivery service in all cities and principal towns, *at no extra cost.*

IT'S MORE CONVENIENT – One call to Air Express Division of the Railway Express Agency arranges everything.

IT'S DEPENDABLE – Air Express provides one-carrier responsibility all the way and gets a *receipt upon delivery.*

IT'S PROFITABLE—Air Express expands profit-making opportunities in distribution and merchandising.

For more facts call Air Express Division of Railway Express Agency.

AIR EXPRESS

GETS THERE FIRST

"Black boxes" to your specifications
RESEARCH - DEVELOPMENT - PRODUCTION



Special Test Equipment

Plotting Boards—such as the Variplotter Model 205 Series for accurately presenting X vs Y, curve following, point plotting, etc.



Computer Potentiometers

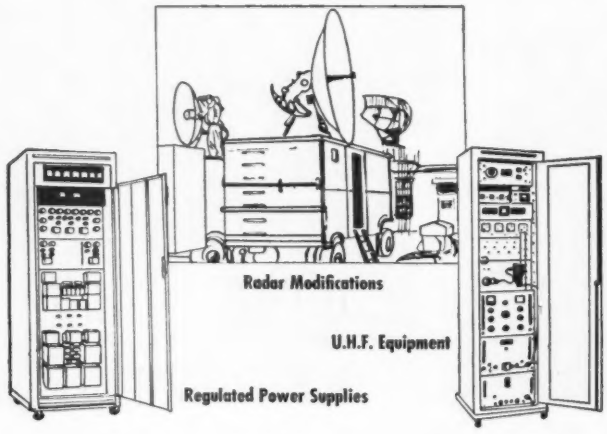

Radar Modifications

U.H.F. Equipment

Regulated Power Supplies

Electronic Associates, Inc., is a coordinated group of electronic engineering consultants fully equipped to perform electronic research, development and production. They include engineering, production, and administrative personnel capable of handling a wide range of problems including design studies, applied research, and the production of highly complex electronic devices.

Plant facilities comprise laboratories; model, welding and machine shops; paint, anodizing, and test departments; assembly and tool rooms; foundry and other contributing functions of production.

A few of the many products the Concern has manufactured are illustrated here.

See us at Booth 10
Pacific Electronic Exhibit—
August—22-23-24

More detailed information will be furnished on request.

ELECTRONIC ASSOCIATES, INC.
Long Branch, New Jersey

NEW PRODUCTS

(continued from page 144)

has available the Post Promatic electronic counters that are capable of counting in excess of 10,000 units per second with either accumulative or predetermined operation. The high-speed count is obtained through the use of photocell and electronic circuits. A visual six-digit totalizer indicates the exact count while a rate meter shows at all times the rate of count per hour. Operation is from 115 volts, 60 cycles.

Tiny Geiger Counter

PRECISION RADIATION INSTRUMENTS, INC., 4113 W. Jefferson Blvd., Los Angeles 16, Calif., has introduced the Snooper, a Geiger counter for use as a civilian defense instrument as well as for prospecting and school use. A miniature amplifier gives a loud audible signal whenever the counter comes near radioactivity whatever the source. The snooper measures 1½ in. × 3 in. × 5 in. and weighs 1¼ lb. Price is $24.95.

Video Distribution Network

THE DAVEN CO., 191 Central Ave., Newark 4, N. J., announces availability of its type V-101 video distribution network. The unit provides a ready means of dividing the output of a single source into from one to five bridging amplifiers for video program distribution. In

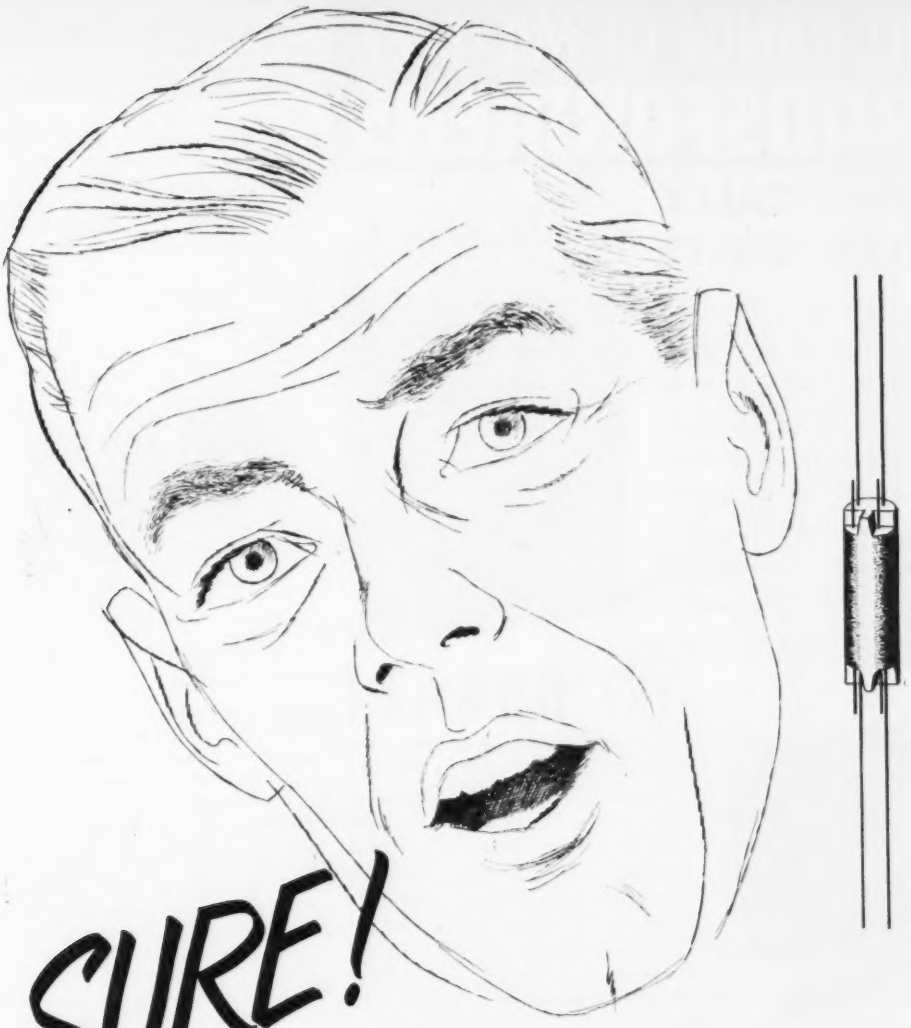

SURE!

Buy SPEER when you buy coil forms

...for the exclusive notch for really anchored leads

SPEER Resistor CORP.

A SPEER CARBON COMPANY SUBSIDIARY

ST. MARYS, PENNSYLVANIA

Complete your circuits with R. F. coils...chokes...tubular and disc capacitors...high voltage condensers...capristors by

JEFFERS ELECTRONICS, INC.
DU BOIS, PA.

Another Speer Carbon Co. Subsidiary

7568

FULL RANGE OF MIL-T-27 TRANSFORMERS

HERMETICALLY SEALED UNITS

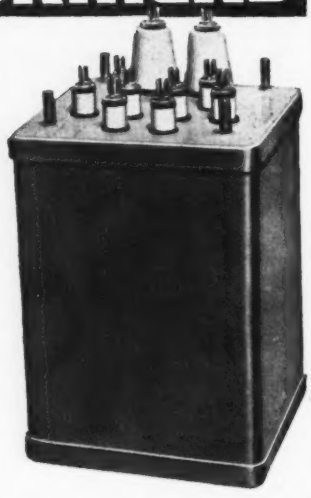

NYT hermetically sealed transformers are available in all standard sizes to meet MIL-T-27 specifications, and especially designed constructions for a wide variety of military as well as civilian applications. Designed and built to meet the most exacting specifications. Production facilities for quantity production of all sizes.



the HORNET

HORNET transformers, pioneered by NYT, are of open type construction, utilizing Class H insulating materials. Approximately one-fourth the size and weight of comparable Class A units. Filament and plate supply transformers and chokes. Units can be designed for ambients up to 190 deg. C., altitudes up to 60,000 feet; power ratings from 2VA to 5KVA.

POWER, AUDIO, FILAMENT and PLATE TRANSFORMERS
REACTORS • FILTERS • CHOKES
TV • RADIO • ELECTRONICS

NYC

Engineering and development facilities

NEW YORK TRANSFORMER CO., INC.
ALPHA, NEW JERSEY

operation the network is inserted in the line between the source and the load. An internal variable capacitor is provided on each output channel for the adjustment of any appreciable change of capacitance introduced by the addition of channels. A switch is provided for terminating the source with an internal adjustable 73-ohm resistive load. This termination can be readily set for zero reflection by means of a screwdriver adjustment.

Line Amplifier

RADIO CORP. OF AMERICA, Camden, N. J. Type MI-12160 plug-in line amplifier with self-contained power supply may be used as a master mixer for up to four preamplifiers, a booster amplifier for supplying zero level to a telephone line, a line amplifier capable of operating from a telephone line, a driver amplifier supplying driving voltage for up to 500 power amplifiers, a monitor amplifier supplying two watts of audio power to a speaker, or a bridging amplifier for bridging a low impedance line. It provides excellent frequency response from 30 to 15,000 cycles with low distortion.



F-M Tuner

COLLINS AUDIO PRODUCTS CO., INC., P. O. Box 368, Westfield, N. J., has

Engineering Data

on ARNOLD TAPE-WOUND CORES

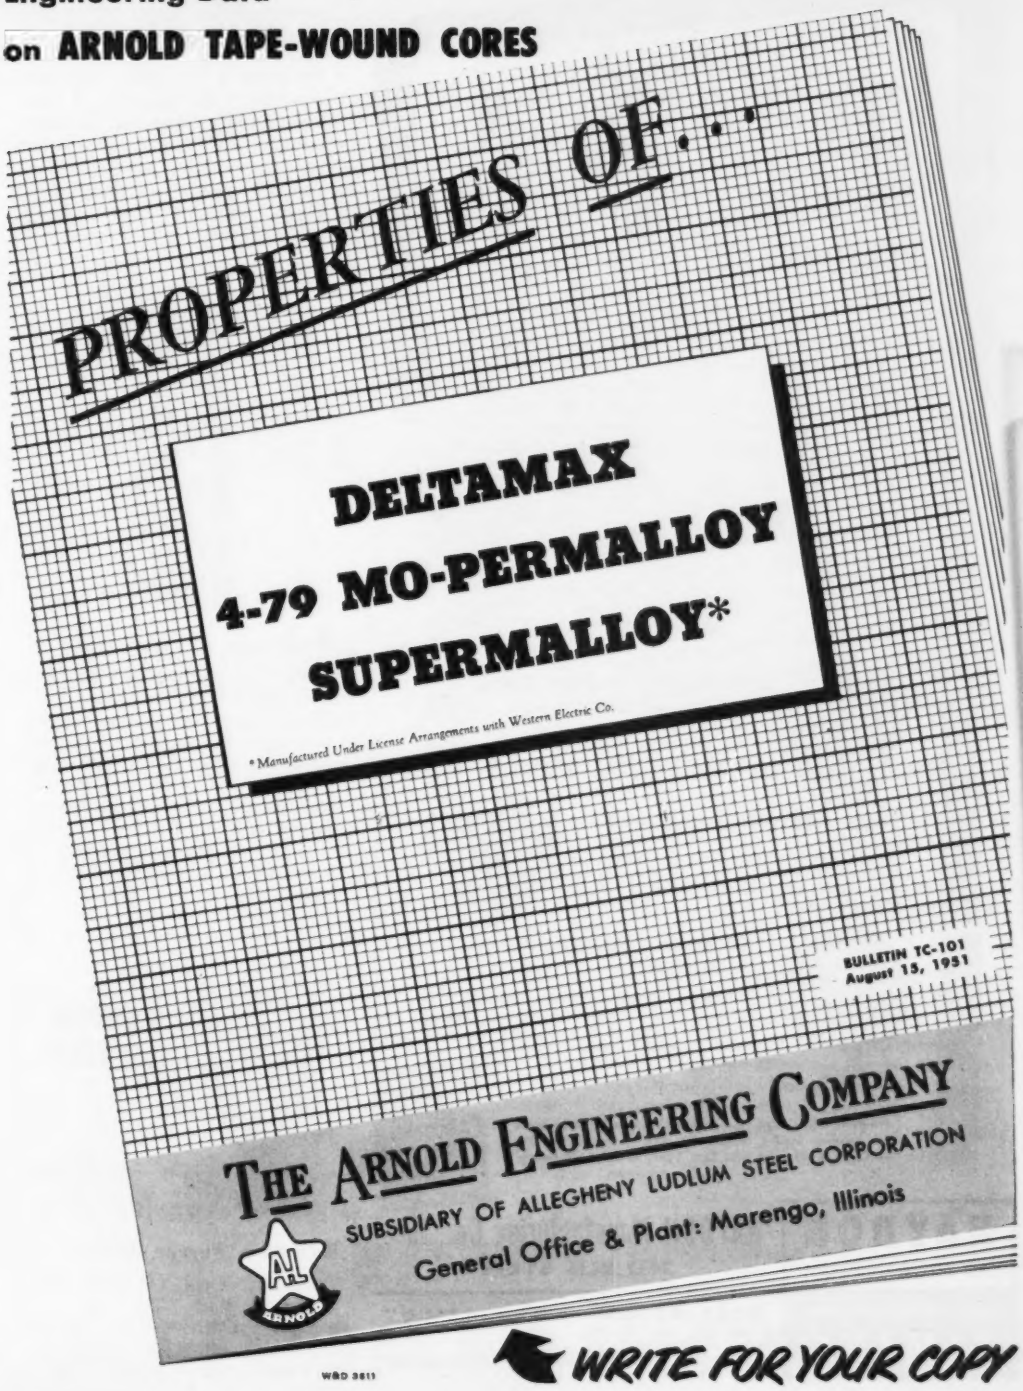

WRITE FOR YOUR COPY

Timing Ideas

PRECISION PERFORMANCE

Manufacturers, recognizing that components of quality insure outstanding product performance, look to Haydon® at Torrington for timers and timing devices. All Haydon timers are made with the same precision as the Haydon motor — your guarantee of satisfactory performance. If you need a special design, you'll find Haydon's extensive engineering and development facilities without equal for service and results.

A few examples of basic Haydon timing units are featured below.

SERIES 8010 INTERVAL TIMER WITH BUZZER

Compact, low cost timer for volume production. Wide range of intervals. Audible (buzzer) signal optional. Quick break. Load contact rated 10A, ½ HP 250 VAC.

SERIES 8006 INTERVAL TIMER

Designed for heavy duty, this unit is available in quantities in standard models. Wide range of intervals. HOLD feature optional. Quick break. Totally enclosed. Switch rated 28A, 1 HP 250 VAC.

SERIES 5900 TIME DELAY RELAY

For use where positive, accurate time delay relay is imperative. Automatic reset. Fixed models for volume production; adjustable models in 4 delay ranges for general use.



SERIES 5700 ELAPSED TIME INDICATOR

Synchronous timing motors with cyclometer type counters for metering elapsed time. Rugged models for wide range of timing, recording operations; in several registers, resettable or non-resettable.

® TRADE MARK REG. U.S. PAT. OFF.

For complete design and engineering specifications, write for catalog: Timing Motors No. 322 — Timers No. 323 — Clock Movements No. 324. Yours without obligation.

HAYDON AT TORRINGTON

HEADQUARTERS FOR **TIMING**

HAYDON Manufacturing Co., Inc.
2432 ELM STREET
TORRINGTON, CONNECTICUT
SUBSIDIARY OF **GENERAL TIME** CORPORATION

announced the model HP-14 f-m tuner. Its output circuit may be operated directly into any load from 500 ohms to ½ megohm. The output level is approximately 3 volts, depending upon what load the tuner operates into. Power source is 110 volts a-c, 60 cycles; power consumption, 100 watts; sensitivity, between 5 and 10 microvolts. Audio response is flat to beyond 15 kc.



Resistance Decade Box

ELECTRONIC INSTRUMENT CO., INC., 276 Newport St., Brooklyn 12, N. Y., has announced the model 1171 resistance decade box in factory wired and kit form. It supplies resistance values from 0 to 99,999 ohms with 0.5-percent precision. Dimensions are 3½ in. × 12 in. × 3 in. In kit form the unit is priced at $19.95; factory wired, it costs $24.95.

Radiation Survey Meter

TRACERLAB, INC., 130 High St., Boston 10, Mass. The Cutie Pie portable radiation survey meter is particularly useful for measuring beta and gamma radiation in labo-

pulse-forming Network Capacitors are dependable

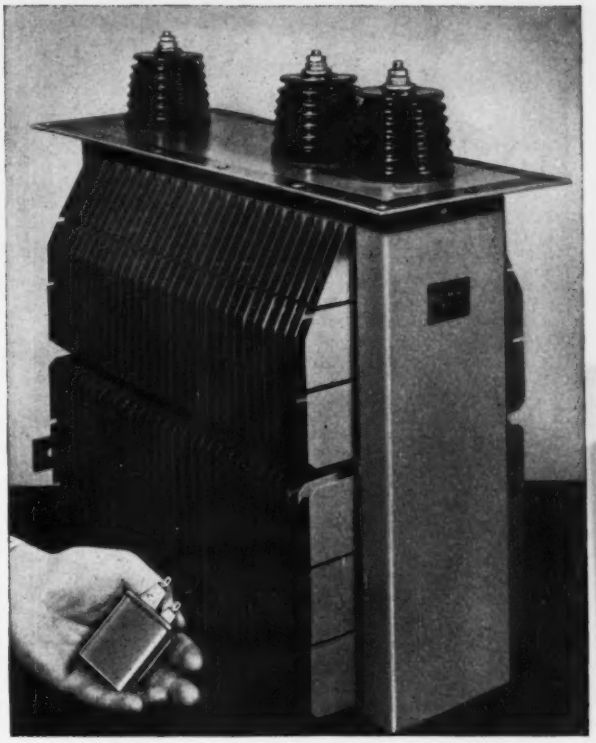

for guided missiles—aircraft—land and sea radar equipments

The keystone to good service on network capacitors is complete information. Your G-E representative has a check-list of twenty-three questions that must be answered to assure you of dependable capacitor performance. And on important propositions, to simplify your design problems, it is highly desirable that a design engineer be called into the discussions as early as possible. Arrangements for such consultations can be made through any Apparatus Sales Office of the General Electric Company.

Whether you expect a service life of 10,000 hours or just 60 seconds, G.E. networks, designed to meet exacting specifications, will give you the reliable performance you require.

Pulse networks are a highly specialized field of capacitor engineering and experience is an important part of proper design work. G.E. has built networks for every type of pulse radar equipment since the inception of radar.

Since 1944, G.E. has been running continuous life tests on many types of networks to obtain more complete research data. These tests are being used to establish life limitations under various conditions of highly critical temperatures and voltages on all types of dielectrics, bushings, materials for coil forms and treating processes. Take advantage of this wealth of information and experience. Your inquiry addressed to Capacitor Sales Division, 42-304, General Electric Company, Pittsfield, Mass. or your nearest Apparatus Sales Office, will receive prompt attention.

General Electric Company, Schenectady 5, N. Y.

You can put your confidence in—

GENERAL ELECTRIC

407-304

FREE! WRITE TODAY FOR YOUR GIANT 1952 RADIO SHACK CATALOG ALL NEW! 192 PAGES!

OVER 15,000 PRODUCTS! LOWEST NET PRICES

IF YOU ARE { a designer, an engineer, a purchasing agent, an experimenter, a manufacturer, a technician, an instructor, a serviceman, a broadcaster, a radio amateur, a custom builder } **you need this CATALOG**

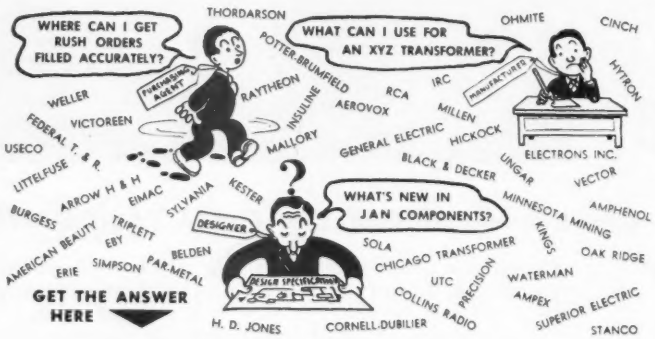

- **COMPLETE**-"**A**cademy to **Z**ephyr"—presenting all the "blue-chip" lines of instruments, components, apparatus, tools, kits, books; for all electronic and electrical development, production, radio, TV, amateurs, and hi-fi sound.
- **DETAILED** — gives pictures and full descriptions of over 15,000 items — with more technical data than ever before offered in a catalog of this kind.
- **UP-TO-THE-MINUTE** — includes latest information on radiation instruments, radar, miniature and subminiature equipment.
- **TIME and MONEY SAVER** — gives you a single, low-cost dependable, rapid, mail-order source for all your requirements.
- BACKED UP — by the largest stocks, strongest capitalization, largest plant, most suppliers, greatest number of "blue chip" lines, lowest prices, and best delivery service anywhere in the East.

FREE! MAIL THIS COUPON TODAY

Radio Shack Corp. Dept EL
167 Washington St., Boston 8, Mass.
Please send me your FREE 192-page catalog
Issue date Sept. 1, 1951
I am a .....
NAME .....
ST. and NO. .....
CITY ..... ZONE..... STATE.....

RADIO SHACK
CORPORATION
167 Washington St., Boston 8, Mass.

ratories handling levels of radioactivity of the order of millicuries. A new circuit, making full use of the principle of inverse feedback, permits extremely stable operation and a large reduction in the time constant which is now only 1.5 seconds on all ranges. Calibration accuracy is ±10 percent of full scale and is maintained throughout the specified battery life of approximately 800 hours. The meter is provided with three full-scale ranges of 15, 150 and 1,500 milliroentgens per hour.



Variable Inductor

C. G. S. LABORATORIES, INC., 391 Ludlow St., Stamford, Conn. The Increductor is a new type of electrically controlled variable inductor with no moving parts. It is variable over a useful inductive range of 100 to 1, 200 to 1, or even more in some applications. It is low in loss, maintains high Q even at megacycles, is controlled with minimal power, and is compact and light in weight. These characteristics are attained by the use of separate control and signal windings, specially arranged on a ceramic core having unusual magnetic properties.



Amplifier System

ALTEC LANSING CORP., 9356 Santa Monica Blvd., Beverly Hills, Calif., announces a new amplifier system

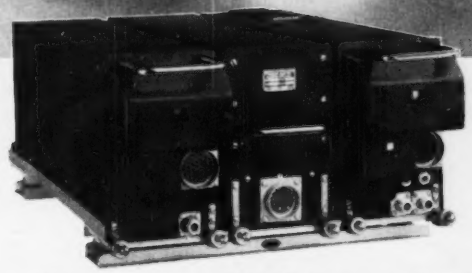

WILCOX ... Choice of EASTERN Air Lines

180 Channel WILCOX Communications System Chosen for Eastern's Entire Fleet of SUPER CONSTELLATIONS and MARTIN 4-0-4's

Eastern Air Lines demanded the finest communications equipment available to match the advanced, efficient operation of their modern new fleet. No greater compliment could be paid to Wilcox radio equipment than to be selected for this challenging assignment.

The Wilcox 440A VHF Communications System covers all channels in the 118-136 Mc. band. It is light in weight, small in size, and easy to maintain.

UNIT CONSTRUCTION FOR EASY HANDLING

The 50-watt transmitter, high sensitivity receiver, and compact power supply are each contained in a separate JAN A1-D case. Any unit may be instantly removed from the common mount.

FINGER-TIP REMOTE CONTROL

All transmitter and receiver functions are available by remote control. A new channel selector system assures positive operation and minimum maintenance.

DEPENDABILITY AND EASY MAINTENANCE

Simple, conventional circuits minimize the number and types of tubes and require no special training, techniques, or test equipment.

Write Today FOR COMPLETE INFORMATION ON THE WILCOX 440A 180 CHANNEL VHF COMMUNICATIONS SYSTEM

WILCOX ELECTRIC COMPANY

FOURTEENTH AND CHESTNUT KANSAS CITY 1, MISSOURI, U.S.A.

ANTENNAS

FOR RADAR NAVIGATION

Official U. S. Navy Photograph

Several types of carrier-borne navy fighters are equipped with a specially-designed antenna developed by WORKSHOP engineers. This is just one of many classified antennas brought to the peak of performance in Workshop laboratories. Others include antennas for rockets, guided missiles, beacons and communications.

If your contract requires a high-frequency antenna, get in touch with the WORKSHOP. As the pioneer and acknowledged leader in this field, we can help you. Be it research, design, test or production, our highly-experienced staff, backed by the finest laboratory equipment in the industry, can handle your problem with a minimum of time and expense. Write, or phone Needham 3-0005. No obligation.

Specialists in High-Frequency Antennas

THE **WORKSHOP ASSOCIATES**
DIVISION OF THE GABRIEL COMPANY
135 Crescent Road, Needham Heights 94, Massachusetts

designed especially for use in home music systems, consisting of the A-433A preamplifier and A-333A power amplifier. All operating controls are located on the preamplifier which connects to the power amplifier by 6-foot flexible cables. Frequency response is flat to plus 0, minus 1 db from 20 to 20,000 cycles and is within 3 db of flat response up to 100,000 cycles. The system will deliver full 27 watts of audio power at less than 5-percent harmonic distortion; 20 watts at less than 2-percent harmonic distortion; and 15 watts at less than 0.5-percent harmonic distortion.



Precision Ceramics

THOR CERAMICS, INC., 225 Belleville Ave., Bloomfield, N. J., has developed a new steatite insulating ceramic which can be milled, drilled, pressed, planed, lathe-turned, ground or worked by any other process applicable to metals. The new ceramics combine the advantages of close-tolerance production with ideal electrical characteristics. Their hardness—crush resistance factor of 100,000 lb psi—facilitates high-speed precision production to meet JAN specifications or manufacturers' requirements at low unit cost.

Power Amplifying Tube

BRITISH INDUSTRIES CORP., 164 Duane St., New York 13, N. Y. The KT66 tetrode was designed especially for use in the output stage of quality audio amplifiers. It is also used as an oscillator or r-f power amplifier for frequencies up to 30 mc. The tube is a high-slope indirectly heated beam

Disc Cathode Speeds Assembly-Improves Performance

Expanded Facilities . . . more space, equipment and trained co-workers help to meet growing demand.



Inspection and Gaging . . . equipment for checking "E" dimensions of Disc Cathodes.



52,600 Seamless Nickel Cathodes, compared under a lens with an ordinary pin.

● Electronics manufacturers find it pays to be a customer of Superior. They receive good service, quality products and the benefits of Superior's methods and metals research that constantly improves upon already good products.

An example is the new, improved Disc Cathode. Investigation proved that a slight flaring of the open end minimized the danger of heater cathode "shorts" caused by scraping of the heater wire coating during insertion, while speeding the operation.

This feature added to an already excellent cathode, resulted in a part that does a better job at a lower cost.

The Disc Cathode is only one of the hundreds of products which Superior supplies . . . but the same program of product improvement is applied to all of them. That's why most manufacturers in the electronics field are already friends and customers. If you are one of the exceptions, it will pay you to find out more about Superior and Superior products. For information, consultation about production problems, design help or research assistance, write today to Superior Tube Company, 2500 Germantown Ave., Norristown, Pennsylvania.

Which Is The Better For Your Application . . .

SEAMLESS . . . ? The finest tubes that can be made. Standard production is .010" to .121" O.D. inclusive, with wall thicknesses of .0015" to .005". Cathodes with larger diameters and heavier walls will be produced to customer specification.

Or LOCKSEAM* . . . ? Produced directly from thin nickel alloy strip stock, .040" to .100" O.D. in standard length range of 11.5 mm to 42 mm. Round, rectangular or oval, cut to specified lengths, beaded or plain.

Superior

THE BIG NAME IN SMALL TUBING

All analyses .010" to ¼" O.D.
Certain analyses (.035" max. wall) Up to 1¼" O.D.

Mfd. under U.S. Pats.—Superior Tube Company • Electronic Products for export through Driver-Harris Company, Harrison, New Jersey • Harrison 6-4800

Here's why
those in the know
demand–

CANNON PLUGS

superior
contact
design

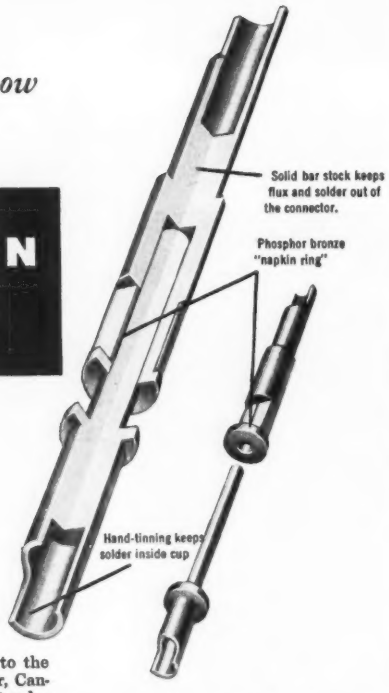
Solid bar stock keeps flux and solder out of the connector.
Phosphor bronze "napkin ring"
Hand-tinning keeps solder inside cup

Because the contact is the key to the success of any electric connector, Cannon has always applied the highest order of skill and care to this all-important detail. Cannon pin and socket contacts are all precision machined from solid bar stock. Silver or gold plating maintains high conductivity after years of constant use. Phosphor bronze "napkin ring" of the socket keeps pressure on large areas of heavy metal, preventing current loss. There are no thin metal tangent contact points in Cannon contacts. (See below). Solder cups are carefully tinned by hand to keep the solder inside the cup. Cannon socket contacts are full floating to assure perfect alignment. You'll find these design features throughout the great variety of precision contacts used in all Cannon connectors. For real value demand Cannon.

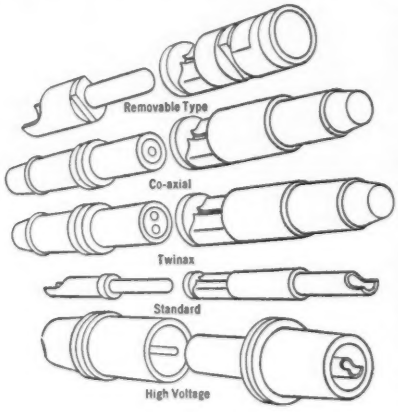



Cannon design (above left) makes contact on large, heavy metal surfaces. Current is not carried through spring section. In Cannon Connectors there are no thin metal tangent contact points, like the design shown at right.

CANNON ELECTRIC

Since 1915

LOS ANGELES 31, CALIFORNIA
REPRESENTATIVES IN PRINCIPAL CITIES

In Canada & British Empire: Cannon Electric Co., Ltd., Toronto 13, Ontario. World Export (Excepting British Empire): Frazar & Hansen, 301 Clay St San Francisco, California.

tetrode suitable for either single or push-pull audio operation and may be employed as a triode with screen connected through a 100-ohm resistance to the anode. It can work interchangeably with the American-type 6L6 tube in any circuit.

Five-Inch Scope

GENERAL ELECTRIC Co., Syracuse, N. Y., has announced the type ST-2C five-inch oscilloscope designed especially for use in microwave installations. The vertical sensitivity a-c input is 0.075 volt rms per inch; the vertical amplifier frequency response is 20 cycles to about 3 mc. The entire vertical amplifier, sweep and low-level horizontal stages are supplied with d-c operating potentials from an electronically-regulated power supply which allows the oscilloscope to be used under unusually severe power-line fluctuations. To aid in amplitude measurements of voltages under test, a voltage calibrator is included which may be varied in seven steps, from 0.3 volt to 300 peak-to-peak volts.



Galvanometer Shunt

AUDIO INSTRUMENT Co., 133 W. 14th St., New York 11, N. Y. Model 170 galvanometer protector increases the speed and convenience of use of a Wheatstone bridge by adjusting itself automatically and continuously during bridge balancing operation. The galvanometer retains enough sensitivity to indicate balancing effect at all settings, yet is completely protected against

Big New MB Shaker!

...rated at
2500 POUNDS
force

Here's heavy duty capacity for your vibration testing to military specification MIL-E-5272 and 41065-B

Vibration testing reveals *in advance* how your products will behave in service. It's a "must" for military equipment. This new MB model C-25 shaker, one of the largest developed, provides large "brute force" for meeting military vibration testing specifications. Rated at 2500 pounds continuous vector force, it has capacity to produce 15g with 100 lb table load or 20g with 58 lb table load.

An electromagnetic exciter, MB model C-25 features accurate, continuous, easy control of force and frequency. Electrically interlocking controls assure proper operation.

Whether your own vibration testing requirements are of large order or small, you can get the answer to your problem at MB. Models start at 10 pounds force output. Resonant beams for special problems also available.

Make MB *your* headquarters for help and advice on vibration problems. You'll save yourself time and work. ***Write for new Bulletin No. 1-VE-5 on vibration exciters.***

MB's C-25 shaker with control panel. Available with built-in meter to read directly acceleration, velocity or displacement.

THE MB MANUFACTURING COMPANY, Inc.

1060 STATE STREET, NEW HAVEN 11, CONN.

PRODUCTS AND EQUIPMENT TO CONTROL VIBRATION...TO MEASURE IT...TO REPRODUCE IT

NEW STEVENS THERMOSTAT

fast response • close temperature control



Specifically engineered for electronic, appliance and apparatus applications, compact Type M Stevens Thermostats assure *fast response and close temperature control*—characteristics of larger Stevens Thermostats.



Action of new Type M thermostat is extremely precise because bi-metal element is electrically independent. Bi-metal disc rests on top of rigid Monel-backed contact disc, which carries current on its silver side because of minimum electrical resistance. Since bi-metal carries no current, artificial cycling and life-shortening "jitters" are eliminated.

Double, heavy-duty silver contacts in series minimize arcing, further increase thermostat life. Heat-resistant stainless steel or Inconel return spring assures positive On or Off position. Silver-plated brass or steel terminals, mounted on non-conducting Alsimag base, are furnished in standard or special shapes.

Get faster response and closer temperature control on small current differentials. Specify Stevens Type M Thermostats on your appliances and industrial apparatus — *for better performance, longer life.*

A-2580

STEVENS *manufacturing company, inc.*
MANSFIELD, OHIO

damage. The protector uses a network of nonlinear and linear resistors.

Ion Trap

THE INDIANA STEEL PRODUCTS CO., Valparaiso, Ind. The E-Zee-On ion trap possesses a uniform field pattern and can be adjusted in a matter of seconds with one hand. It is a slip-on, grip-snug beam bender made of one piece, permanently magnetized Cunife that cannot be put on backward and requires no manual clamping. Because of its uniform weight distribution it will not jar loose, slip or come out of adjustment.

Literature

Flat Ceramic Capacitors. Sprague Electric Co., North Adams, Mass. Ratings and sizes of standard Bulplate flat ceramic capacitors are shown in engineering bulletin 602. The capacitors discussed are made in six different physical sizes in single and multiple capacitance combinations with voltage ratings up to 5,000 volts.

Air-Cooled Transmitter. Allen B. DuMont Laboratories, Inc., 1000 Main Ave., Clifton, N. J., has published a 16-page bulletin on its 5-kw Oak air-cooled transmitter. Bulletin TTD-T102 contains illustrations, block and circuit diagrams, chief features and specifications of the unit.

Potentiometer Controller. Minneapolis-Honeywell Regulator Co., Wayne and Windrim Aves., Philadelphia 44, Pa. Specification sheet

YOU CAN BE **SURE**... IF IT'S

Westinghouse

Transformer Space-saving problem SOLVED

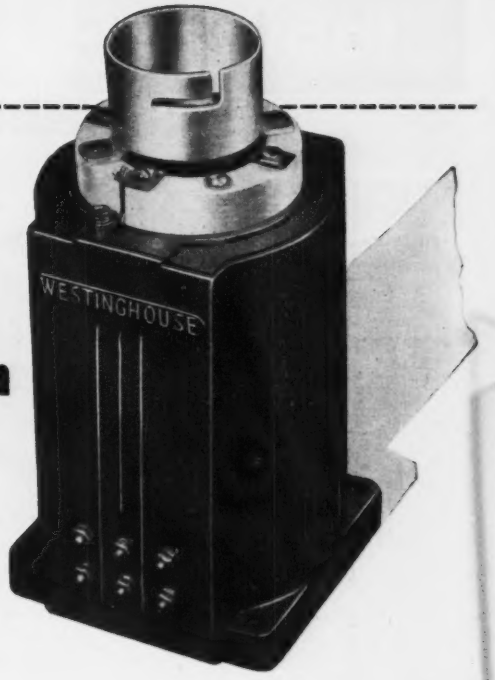

Here's a space-saving problem... and another example of how Westinghouse applies engineering experience to handle all types of transformer problems.

The problem: To build a more compact filament transformer for use with Phanotron rectifier tubes.

First, the transformer case, core and coils had to be made smaller.

Second, the large standoff insulator between the transformer case and tube socket had to be eliminated. Because the previous case was metal, a large standoff insulator had been used to keep the tube socket, mounted on top of the transformer case, 11,000 volts from ground.

The Westinghouse solution: MOLDARTA and Type C HIPERSIL cores, two Westinghouse engineered products.

Westinghouse Type C HIPERSIL cores, ⅓ smaller than ordinary cores, easily fit the smaller MOLDARTA transformer case.

MOLDARTA, a low power factor, low loss material, also served as the perfect insulator. Thus the large standoff insulator was eliminated . . . the desired compactness was attained . . . and a difficult space-saving problem was solved.

If you have a tough transformer problem, take advantage of the facilities of Westinghouse for quick, practical solutions. Transformers specially designed for all types of electrical and electronic circuits, as well as a wide selection of standardized designs . . . produced in quantity . . . with quality. Call your nearby Westinghouse representative, or write Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pennsylvania. J-70569

Westinghouse

SPECIALTY TRANSFORMERS

Stabilized

• HYSTERESIS MOTOR

NON-HUNTING

FULLY-DAMPED MOTION FOR LARGE INERTIA LOADS

MODEL GL 513
1800 rpm 1/20 hp

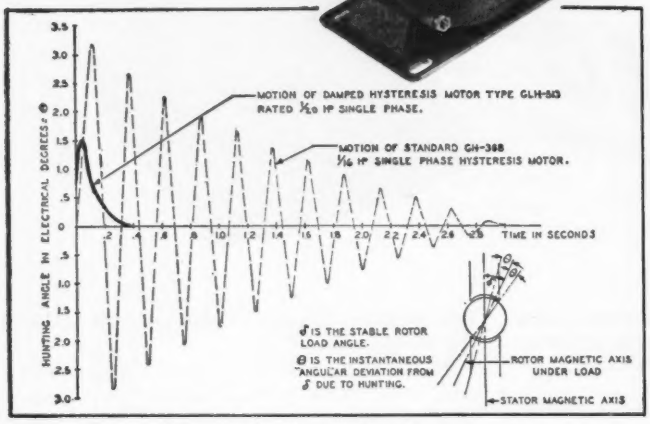
MOTION OF DAMPED HYSTERESIS MOTOR TYPE GLH-513 RATED 1/20 HP SINGLE PHASE.
MOTION OF STANDARD GH-368 1/16 HP SINGLE PHASE HYSTERESIS MOTOR.
HUNTING ANGLE IN ELECTRICAL DEGREES = θ
TIME IN SECONDS
δ IS THE STABLE ROTOR LOAD ANGLE.
θ IS THE INSTANTANEOUS ANGULAR DEVIATION FROM δ DUE TO HUNTING.
ROTOR MAGNETIC AXIS UNDER LOAD
STATOR MAGNETIC AXIS

Approximate motion curves for standard and damped hysteresis motors with load inertia of 180 ounce—(inches)² by weight, rotating 1800 rpm.

THE new Model GL 513 Elinco motor is excellent for all sound and optical work, for goniometer drives, and all other applications where a high degree of motional stability is essential. It permits higher basic motor speeds for a given load inertia without increase in flutter . . . allowing greater power output for fixed motor size.

The curves compare a standard 1/16 hp hysteresis motor with the new GL 513: note that the non-hunting motor not only radically reduces the *duration* of any oscillation, but also cuts the *magnitude* of the initial swing about 50%. Furthermore, whereas the standard motor, after one oscillation, damps out a connected load of only 9 oz.in.² by weight, the GL 513 shows a value of 180 oz.in.²

Model GL 513 is currently available for reasonable future delivery; other stabilized units, with other speed and voltage ratings as well as multiple-speed units, are under development.

ELINCO

ELECTRIC INDICATOR CO.
PARKER AVENUE • STAMFORD, CONN.

MANUFACTURERS OF SPECIALLY-DESIGNED PRECISION MOTORS AND GENERATORS—GOVERNOR-CONTROLLED; SELF-SYNCHRONOUS; DRAG-CUP; DC & AC TACHOMETER; SHUNT; SERIES; COMPOUND; PERMANENT-MAGNET; SPLIT-FIELD; SEPARATELY-EXCITED; UNIVERSAL; INDUCTION; RELUCTANCE; HYSTERESIS; DC & AC SERVO; REELMOTORS; TOTALLY-ENCLOSED; AC DYNAMICALLY-BRAKED; MULTIPLE-SPEED.

No. 175 gives engineering data on the new ElectroniK strip chart pneumatic control potentiometer. Illustration, specifications, dimensional diagrams and ordering information are included.

Engineering Bulletins. Melpar, Inc., 452 Swann Ave., Alexandria, Va., has available for the asking three engineering bulletins, the start toward monthly recordings of the company's developments. Volume I, No. 1 deals with potting resin for subminiature assemblies and subassemblies; No. 2 gives instructions for use of Melpak IV-M and Melcoat I casting resins; No. 3 describes the model MP-1539 miniature radar beacon.

Retaining Rings. Waldes Kohinoor, Inc., 47-16 Austel Place, Long Island City 1, N. Y. A new series of engineering bulletins covering all types of Truarc retaining rings, grouped by specific ring function, was recently issued. All charts give complete engineering specifications including allowable thrust loads, force required to flatten bowed type rings, gap widths, rpm limits and many other helpful data.

Tapes for Television. Minnesota Mining & Mfg. Co., 900 Fauquier Ave., St. Paul 6, Minn. An illustrated 8-page folder is devoted chiefly to the Scotch electrical tape No. 22, designed for tv deflection yokes because of its high dielectric strength and heat resistance with thin caliper. Description of the No. 33 tape that protects against moisture, corrosion and abrasion is also included.

Strip Chart Recorder. Minneapolis-Honeywell Regulator Co., Wayne and Windrim Aves., Philadelphia 44, Pa. Instrumentation data sheet 9.1-7 describes the Brown ElectroniK strip chart recorder which, when coupled with a Kelvin bridge measuring circuit, comprises a modern method of measuring rotor temperatures. Besides describing the instrument and its method of installation, it discusses the Kelvin bridge prin-

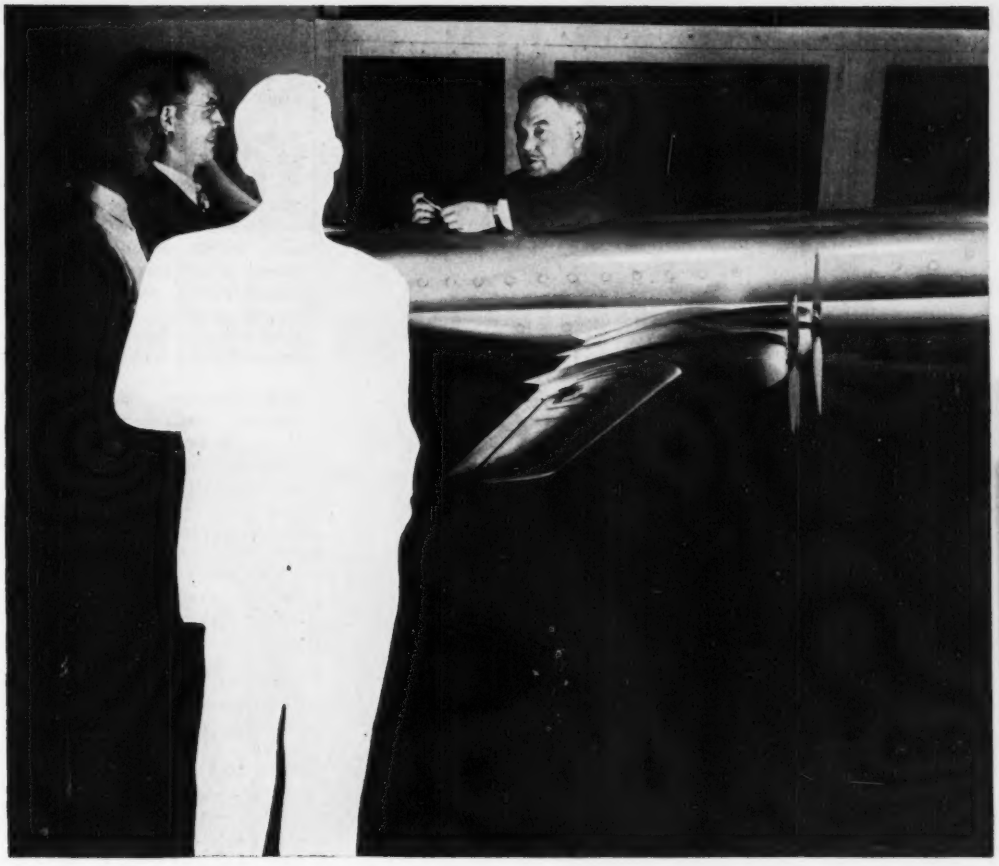

Do you fit in the Boeing picture?

Boeing's world-wide reputation for sound engineering achievement is founded on *men*. Boeing engineers and physicists are graduates of many universities and technical schools. They come from every state in the Union. Under inspiring leadership they have been welded into one of the most potent forces in any field of scientific advance.

If you can measure up to Boeing standards, there is an attractive future for you in this renowned group. In addition to the prestige which attaches to being a member of the Boeing engineering team, there are other definite advantages:

1 The challenge of working on such vital programs as the B-47 and B-52 jet bombers, guided missiles and other revolutionary developments.

2 Stability of career opportunity with an engineering division that is still growing steadily after 35 years.

3 The invigorating atmosphere of the Pacific Northwest—hunting, fishing, sailing, skiing, temperate climate all year around.

4 The availability of housing. Newcomers to Seattle are able to get accommodations—and that's unique in a great aircraft manufacturing center.

5 Good salaries. And they grow with you.

6 Moving and travel expense allowance.

Boeing's immediate needs call for experienced and junior aeronautical, mechanical, electrical, electronics, civil, acoustical and weights engineers for design and research; for servo-mechanism designers and analysts; and for physicists and mathematicians with advanced degrees.

Write today to the address below or use the convenient coupon.

JOHN C. SANDERS, Staff Engineer—Personnel
DEPT. H-8
Boeing Airplane Company, Seattle 14, Wash.

Engineering opportunities at Boeing interest me. Please send me further information.

Name _____

Address _____

City and State _____

BOEING

Now more than ever . . .

Quality Electronic Equipment



. . . deserves Quality Cabinets

THE finest electronic equipment in the world is being provided for our armed services today. If you're helping to produce this quality equipment . . . and need a dependable supply of cabinets to match its high standard of construction, there's a good chance Corry-Jamestown can help you speed your production as well as maintain the quality of your finished equipment.

A high regard for quality has always been second nature with us during our 30 years of fabricating steel, stainless steel and aluminum. What's more, our three large plants, our modern fabricating facilities, our skilled craftsmen and our engineers are teamed to go right to work on your contract . . . and to make deliveries *on time*. We'll gladly give you more information about our facilities, capacity, etc.

CALL, WRITE OR WIRE US TODAY!

CORRY-JAMESTOWN MFG. CORP.

CORRY, PENNSYLVANIA

Makers of famous Steel Age office furniture

ciple and lists the required instrumentation, system benefits and other technical data.

Tube Characteristics. Raytheon Mfg. Co., 55 Chapel St., Newton 58, Mass. An 8-page booklet is filled with tabular material giving complete characteristics for a wide variety of special purpose tubes. It includes information on subminiatures, magnetrons, klystrons, rectifiers, voltage regulators, radiation counters, transmitting tubes and transistors.

Paper Tubulars. Cornell-Dubilier Electric Corp., South Plainfield, N. J. Bulletin NB142 gives the outstanding features, uses and dimensions of the Pup general-purpose metallized paper tubular capacitors that may be used over a temperature range from −40 to +60C without derating. The capacitors described are particularly suitable for portable equipment where space is limited.

Laboratory Instruments. Polarad Electronics Corp., 100 Metropolitan Ave., Brooklyn 11, N. Y., has issued a 10-page catalog describing a line of laboratory instruments including its all-band spectrum analyzer, microwave signal sources, video amplifier and laboratory power supplies. Illustrations, chief features and specifications of each are given.

Civil Defense Communications. General Electrical Co., Syracuse, N. Y. A new brochure pictorially presents typical communications systems now in use which can be co-ordinated into a dependable emergency communications network in any community. The brochure also describes the company's technical advisory service for civil defense radio communications. It lists GE specialists in 22 district offices throughout the country who are available without charge to analyze existing communications systems and recommend methods of forming them into a single network to operate in any peacetime or wartime emergency.

Strain and Stress Studies. Electronic Tube Corp., 1200 E. Mer-

how to get small DEFENSE parts in a HURRY...without prefabricated metal WORRIES

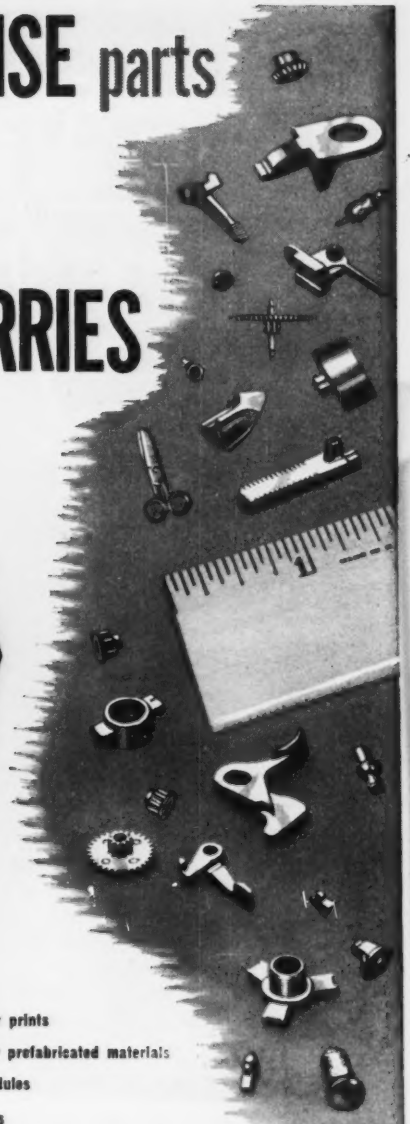

design it as a GRC ZINC DIE CASTING!

COMPARE:

- GRC goes right to work from your prints
- GRC avoids delays—no waiting for prefabricated materials
- GRC helps you meet delivery schedules
- GRC cuts costs—avoids scrap loss

COMPARE! Parts made by old methods:		COMPARE! GRC Improvements:
	SPRING WASHER Formerly stamped: die casting permitted design improvement.	
	Cup Gear Originally a 3-piece assembly stamping, screw machine & wire form.	
	Puncturing Pin. Was aluminum screw machine part.	

When it comes to turning out *really small* parts speedily and economically—Gries has a wealth of experience in meeting both civilian and military requirements. Gries' exclusive production facilities make simple or intricate parts in 1 automatic operation—completely trimmed, ready for use, from 100,000 pieces to many millions.

TODAY—Find out how GRC can help YOU! Write, wire, phone for bulletin, samples. Or send your prints for quotations and delivery dates.

GRC

Max. Wt. ½ oz.
Max. Lgth.—1¾"
SMALLNESS UNLIMITED

GRIES REPRODUCER CORP. 100 Willow Ave., New York 54 • MOtt Haven 9-2476

maid Lane, Philadelphia 18, Pa., has issued a single-sheet bulletin on the H-42A Strainalyzer for dynamic strain and vibration studies from 0 to 50,000 cps. The unit described is designed especially for stress studies of rockets, jet engines, aircraft and the like, and permits simultaneous observation and recording of electronic traces of four phenomena in correct time and phase relationship. General uses, specifications and components are shown.

Temperature-Compensated Strain Gages. Baldwin-Lima-Hamilton Corp., Philadelphia 42, Pa. A new 2-page bulletin, No. 174, describes, shows graphic performance and gives specifications for ten new type SR-4 resistance wire strain gages. The gages covered are only slightly affected by temperature variations within certain ranges when bonded to steel or aluminum.

Picture Tubes. Zetka Television Tubes, Inc., 131-137 Getty Ave., Clifton, N. J., has announced a two-color, 12-page catalog covering thoroughly its 16, 17, 19 and 20-in. round and rectangular picture tubes. Every tube shown is detailed with descriptive copy, diagrammatic drawings and technical descriptions.

Stabilized Crystals. The James Knights Co., Sandwich, Ill. A full line of modern stabilized crystals for every electronic application is illustrated and described in catalog 51. Dimension drawings and general specifications on all the company's crystals and holder types, old replacement types as well as new, are included in the publication, the chief purpose of which is to provide busy engineers with complete data on new crystal advances.

Parts and Components. The Muter Co., 1255 South Michigan Ave., Chicago 5, Ill., has prepared a new catalog of radio, tv and electronic parts and components. The three sections already completed include: Form 100 on Ceramicaps—temperature compensating, general purpose, disc and variable

PERMANENT CAREERS

FOR

ELECTRONIC ENGINEERS AND PHYSICISTS

IN LOS ANGELES

with GILFILLAN

- the company that developed and produced GCA, the world-famous Radar equipment for landing aircraft in bad weather
- the company that pioneered development of GCA radar equipment for the USAF, the CAA, the USN and the USMC

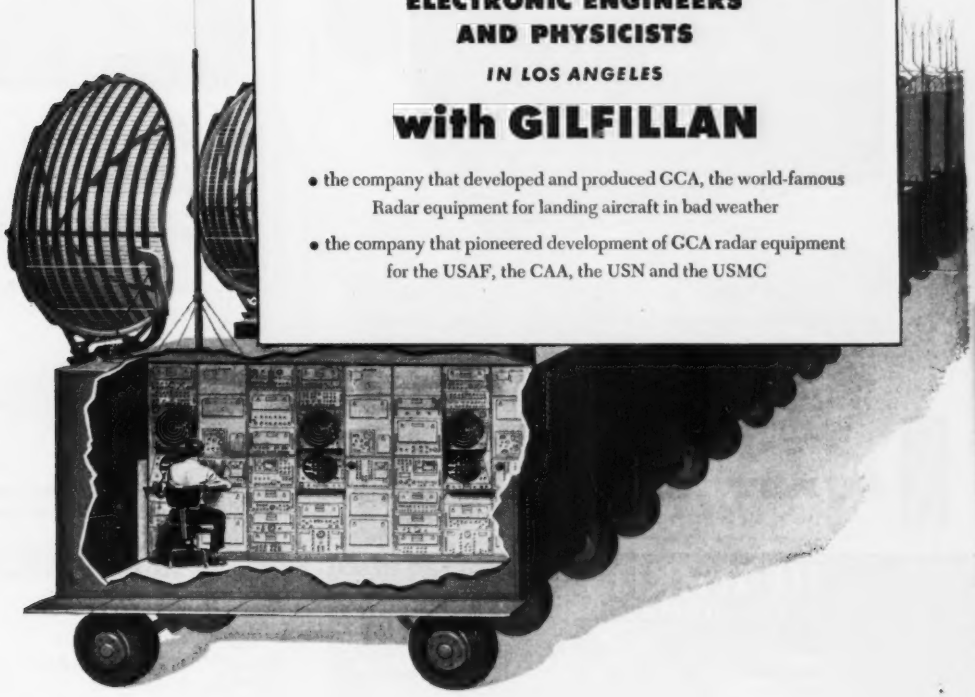

GILFILLAN OFFERS...

- excellent financial opportunity. Because Gilfillan jobs require top specialists, most jobs fall into higher pay categories.
- secure, long-term careers with a progressive 40-year-old company.
- outstanding engineering opportunity, ranging from major systems design to detailed circuit design.
- advancement in both pay and responsibility according to ability.

ELECTRONIC ENGINEERS
Having design experience in one or more of the following:

General radar and computing systems
Servo mechanisms *Indicator systems*
Radar transmitter modulators and high voltage power supply systems
Wide band IF amplifiers and receivers
General pulse circuits

MICRO-WAVE ENGINEERS...Having design experience in transmission line components, micro-wave antennas and feeds.

PHYSICISTS...Having practical experience in analysis of radar and radar control systems.

DEGREE NOT ESSENTIAL but applicants should have minimum of five years' experience and familiarity with design requirements for military specifications.

ADEQUATE MOVING ALLOWANCE...for family and furniture. Your family will enjoy living in Southern California. Wonderful climate the year around. Adequate housing, unexcelled educational facilities.

Interviews can be arranged at convenient cities

WRITE OR CONTACT MR. HOMER TASKER,
Chief Engineer, Gilfillan Brothers
1815 Venice Blvd., Los Angeles 6, Calif.

ALL REPLIES STRICTLY CONFIDENTIAL

GCA Gilfillan LOS ANGELES, CALIFORNIA

TWO *NEW*
TWIN POWER SUPPLIES

MODEL 610-F
- Precise Electronic Regulation.
- 2 Independent Sources of Power.
- 0-325 V.D.C. at 0-100 Milliamperes. Continuously Adjustable.
- 0-325 V.D.C. at 0-200 Mils if the Sources are Combined.
- Both D.C. Outputs Metered for Voltage or Current.
- 6.3 and 12.6 V.A.C. Outputs Provided.
- A.C. Ripple Less than 10 Millivolts.

MODEL 1210
- Precise Electronic Regulation.
- 2 Independent Sources of Power.
- 0-500 V.D.C. at 0-150 Milliamperes. Continuously Adjustable.
- 0-500 V.D.C. at 0-300 Mils if the 2 Sources are Combined.
- Both D.C. Outputs Metered for Voltage or Current.
- 6.3 or 12.6 V.A.C. Outputs Provided.
- A.C. Ripple Less Than 10 Millivolts.

Also available with regulated bias output.

Furst *Twin* Power Supplies double the usefulness of a single unit at considerable saving in space and cost. Write for complete specifications on these and other Furst *Twin* Power Supply Models.

FURST ELECTRONICS
10 S. Jefferson St., Chicago 6, Ill.

HEATHKITS . . . . .
OFFER UNMATCHED ADVANTAGES

Heathkit OSCILLOSCOPE KIT $39.50
Heathkit TUBE CHECKER KIT $29.50
Heathkit V. ALIGNMENT GENERATOR KIT $39.50
Heathkit SIGNAL TRACER KIT $19.50
Heathkit ELECTRONIC SWITCH KIT $19.50
Heathkit CONDENSER CHECKER KIT $19.50
Heathkit AUDIO GENERATOR KIT $34.50
Heathkit IMPEDANCE BRIDGE KIT $69.50
Heathkit RF SIGNAL GENERATOR KIT $19.50
Heathkit BATTERY ELIMINATOR KIT $22.50
Heathkit HANDITESTER KIT $13.50

You'll find unmatched advantages in HEATHKITS—the most complete line of test equipment in kit form. Careful engineering and extensive laboratory testing in the development of each kit, coupled with the use of only highest quality components give you RUGGED, DEPENDABLE, and ACCURATE test equipment.

You SAVE MONEY when you build your own because all expensive factory wiring and construction costs are completely eliminated . . .

All kits are COMPLETE and a real pleasure to build—Every part necessary is furnished—and the clear, detailed instruction manual makes construction easy and educational. (And, the finished kits are truly professional in appearance.)

Order your HEATHKIT today and enjoy these tremendous advantages!

HEATH COMPANY
BENTON HARBOR 14, MICHIGAN

EXPORT AGENT: ROCKE INTERNATIONAL CORP., 13 EAST 40th STREET, NEW YORK CITY 16

Where the Requirements are Extreme . . .

Use SILVER GRAPHALLOY*

For extraordinary electrical performance

GRAPHALLOY
TRADE MARK REG. U. S. PAT. OFF.

THE SUPREME BRUSH AND CONTACT MATERIAL

for BRUSHES
- for high current density
- minimum wear
- low contact drop
- low electrical noise
- self-lubrication

for CONTACTS
- for low resistance
- non-welding character

*Graphalloy is a special silver-impregnated graphite

Accumulated design experience counts — call on us!

GRAPHITE METALLIZING CORPORATION
1055 NEPPERHAN AVENUE, YONKERS 3, NEW YORK

ceramic capacitors; Form 200 on resistors—wire-wound Candohms, Zipohms and sensitivity controls; and Form 300 on Spirashield—the wiring shield for critical r-f and a-f circuits. Copies of these and other sections still to be released may be had without charge by a request on a company letterhead.

Soldering Flux. Mico Instrument Co., 80 Trowbridge St., Cambridge, Mass. A four-page bulletin deals with Solderux fluxes, a group of very effective soft-soldering agents based upon sound chemical principles not used previously in soldering practice. Complete description and a price list of the pastes, creams and liquids are included.

Crystal Probes. United Technical Laboratories, Morristown, N. J., offers a folder describing the many uses of its Klipzon high-frequency germanium crystal probes. Of special interest is the description of use as a means of one-man orientation of tv antennas for best directional characteristic. An additional folder is also available describing Klipzon self-holding test prods, Mini-Prod connectors and Mini-Prod adapters.

Components Booklet. Citation Products Co., 233 E. 146th St., New York 51, N. Y., has issued a booklet containing dimensional diagrams and technical data on a line of products including terminal lugs, terminal boards, cable assemblies, metal stampings, plastic fabrication and screw machine parts.

High-Voltage Capacitors. Sprague Electric Co., North Adams, Mass. Engineering bulletin 212B gives complete sizes and ratings for a line of Hypass three-terminal network feed-through capacitors. The capacitors described are especially suited for suppression of radio interference and harmonic generation in high-voltage circuits in transmitters and industrial electronic equipment.

Vacuum-Sealed Transformers. The Halldorson Co., 4500 Ravenswood Ave., Chicago 40, Ill. Catalog No. 18 lists a complete line of radio

3J/160E (TRIODE)
Filament 10 volts 29 amp.
Ratings Eb 3 kV.
Ib 1 amp. Pp 1kW.
Max. frequency 120 Mc/s.
Overall diameter 2·5 ins.
Max. height 5·2 ins.

3J/260E (TRIODE)
Filament
10 volts 80 amp.
Ratings
Eb 11 kV.
Ib 5 amp.
Pp 20 kW. Max. frequency 30 Mc/s.
Overall diameter 8·031 ins.
Max. height 15·125 ins.

Standard

THORIATED TUNGSTEN VALVES



3J/192E (TRIODE)
Filament
5 volts 66 amp.
Ratings
Eb 7kV.
Ib 2 amp.
Pp 4·5 kW. Max. frequency 22 Mc/s
Overall diameter 5·875 ins.
Max. height 8·750 ins.

5J/180E (PENTODE)
Filament
10 volts 28 amp.
Ratings
Eb 6kV.
Ib 1·5 amp
Pp 3·5 kW. Max. frequency 25 Mc/s.
Overall diameter 5·875 ins.
Max. height 8·750 ins.

Incorporate thoriated tungsten filaments. Efficient air-blast cooling. Require exceptionally low filament power. Facilitate the design of simpler and smaller radio equipment

Standard Telephones and Cables Limited
An I T & T Associate
RADIO DIVISION, OAKLEIGH ROAD, NEW SOUTHGATE, LONDON, N.11 - ENGLAND

SURE SOURCE FOR SPECIAL LAMINATION SHAPES

Special shapes are often the *only* way to meet rigid specifications . . . the *only* way to reduce *weight*, to save *space*.

Whether your problem is a transformer, a rotating device, a choke or a saturable reactor, check with Thomas & Skinner. With their quarter century of experience, they can offer you a solution that will incorporate all the latest advances in technology and design.

For peak performance to rigid specifications, make Thomas & Skinner your *sure source for special laminations.*

THOMAS & SKINNER
Specialists in magnetics—permanent magnets and laminated cores.

THOMAS & SKINNER
STEEL PRODUCTS COMPANY

1122 East 23rd Street • Indianapolis, Indiana

TELEVISION PRINCIPLES

Just Out

1. **A practical treatise on the principles and theory of television transmission** and reception. Emphasizes basic TV transmitter and receiver design, and such subjects as video amplifiers, cathode followers, grounded-grid amplifiers, signal-to-noise ratios in head-ins, intermediate frequency amplifiers, and detection. Contains helpful reference charts, curves, and tables. **By Robert B. Dome, Elec. Consultant, Electronics Dept., Gen. Elec. Co. 281 pages, 85 illus., $5.50**



FUNDAMENTALS OF ATOMIC PHYSICS

Just Out

2. **Gives engineers groundwork in atomic and nuclear fundamentals, in the simplest possible treatment.** Covers the kinetic theory of gases, the charge and mass of electron, electronics, photoelectric effects, X-rays, the Bohr theory of the origin of spectral lines, electron configuration in atoms, etc. Deals with matter waves, isotopes, and other important factors. Supplies an understanding of the quantitative relations involved in atomic and nuclear structures. **By Saul Dushman, Research Consultant, Gen. Elec. Co., Schenectady, N. Y. 294 pages, illus., $5.50**

BASIC ELECTRON TUBES

Just Out

3. **A guide to the principles and fundamentals of electron tubes.** For a variety of tubes, the book covers the physical appearance, the circuit diagram, the physical theory, and finally the mathematics concerned in the tube's operation. Throughout, it progresses from the most basic and easily-understood electron tubes to more complicated tubes. Covers high-vacuum and gas photo-tubes, high-vacuum triodes, beam-power tetrodes, cathode-ray tubes, thermionic gas diodes, etc. **By Donavan V. Geppert, Gen. Elec. Co., Syracuse, N. Y. 334 pages, 273 illus., $5.00**

ELECTRICAL TRANSMISSION LINES

4. **For electrical and electronic engineers,** and those interested in power and communications, here is a concise, authoritative presentation of the theory of circuits with distributed constants, which is valid at all frequencies, followed by chapters on the application of this theory to radio frequency lines, power lines, telephone lines, filters, and wave guides. **By Hugh H. Skilling, Professor of Electrical Engineering and Head of the Department, Stanford U. 437 pp., 158 illus., $6.50**

SEE THESE BOOKS 10 DAYS FREE

McGraw-Hill Book Co., Inc.
330 W. 42nd St., N.Y.C. 18

Send me book(s) checked below for 10 days' examination on approval. In 10 days, I will remit for book(s) I keep, plus a few cents for delivery, and return unwanted book(s) postpaid. (We pay for delivery if you remit with this coupon; same return privilege.)

- ☐ 1. Dome—TV PRINCIPLES, $5.50
- ☐ 2. Dushman—FUND. of ATOMIC PHYSICS, $5.50
- ☐ 3. Geppert — BASIC ELECTRON TUBES, $5.00
- ☐ 4. Skilling — ELEC. TRANS. LINES, $6.50

(Print)
Name .....
Address .....
City .....Zone.....State.....
Company .....
Position L-8-51

This offer applies to U. S. only

FOR RECORDING strains

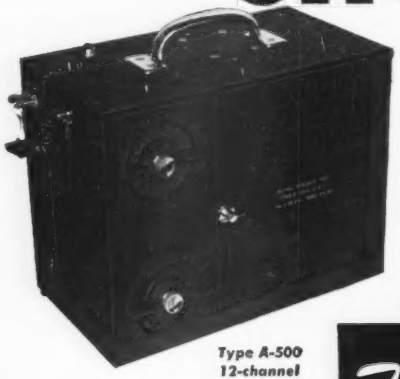

- **Portable**
- **Compact (6 3/4" x 9 13/16" x 12 3/4")**
- **Light weight (33 lbs.)**
- **Easy loading**
- **2 to 12 channels**
- **Many other features found only in much larger recorders**

Type A-500
12-channel

dependable instruments

Heiland
DENVER

Oscillograph Recorder

• The Heiland 500, because of the extremely small size and light weight, is widely used in aircraft and guided missile testing and by industrial and general research laboratories. The use of highly sensitive Heiland galvanometers permits the measurement of strains without the use of amplifiers.

For further information write

HEILAND RESEARCH CORPORATION 130 East Fifth Street Denver, Colorado, USA

and tv transformers. Many items are listed that are of interest to a wide range of industries. Among such items are isolation, stepdown, filament and voltage-regulating transformers.

Electric Control Potentiometers. Minneapolis-Honeywell Regulator Co., Brown Instruments Division, Wayne and Windrim Aves., Philadelphia 44, Pa. Catalog 15-15 is a 36-page booklet covering ElectroniK potentiometers for both contact and proportional control. Engineering and constructional data, types of control, partial list of available ranges, application data and accessories are described.

Broadcasting Brochure. Radio Corp. of America, Camden, N. J. A new brochure provides complete description and specifications for the model BTL-1A studio-transmitter link equipment that may be used in the 890 to 911-mc band for tv aural channels, by a-m stations in the 925 to 940-mc shared service band and by f-m stations in the 940 to 952-mc band. Copies are available to broadcast station engineers requesting it on their letterhead.

Replacement Needle Chart. Electrovox Co., Inc., 60 Franklin St., East Orange, N. J., offers a colorful 11-in. × 17-in. chart showing not only all of the phonograph needles in use by leading record-player manufacturers, but cartridge makers as well. Name of maker, needle model by maker's number, illustration of actual needle, and replacement number and list price are given.

Engineering Bulletin. Schaevitz Engineering, Camden, N. J. A four-page bulletin illustrates and technically describes the company's linear and rotary variable differential transformers, linear and angular accelerometers, pressure transducers, rotary accelerators, slip rings and recorder systems.

Subminiature Capacitors. Sprague Electric Co., North Adams, Mass. Bulletin 213A shows new ways of mounting subminiature metal-en-

STEP RIGHT UP AND GET YOUR PRINTS ON TIME*
*Today's Bruning "93" can make up to 105 square feet of black-and-white prints per minute.
SPEED TO SPARE!
EASY OPERATION!
EMITS NO FUMES!

Outgrown your present black-and-white print equipment? Meet today's Bruning—it makes other machines look slightly horse-and-buggy. It's the talk of the trade!

TALK ABOUT VOLUME...with a Model 93 Bruning you can print up to 105 square feet per minute! And that's *finished* prints—prints that come out flat, dry, neatly stacked, and ready for immediate use.

TALK ABOUT EASY OPERATION... since Bruning BW machines *use no vapors and emit no fumes*, they require no special exhaust installation. You merely connect them to your electrical circuit and you're ready to make prints. And when a Bruning machine is rolling, all you do is set the desired speed and feed in the paper. That's all. No trained operator is needed.

TALK ABOUT EASY MAINTENANCE...all essential bearings are permanently lubricated—also self-aligning. The adjustable speed drive is a patented, stepless transmission that runs for years without attention. Parts that do require occasional attention are accessible in minutes.

TALK ABOUT FLEXIBILITY... Bruning BW machines can handle *any* black-and-white print jobs, and six different models offer a complete range of speeds and capacities. Too, there are 85 varieties of Bruning sensitized papers, films and cloths—far more than any other manufacturer offers.

SEE FOR YOURSELF the speed and ease of operating a Bruning BW machine. It's an eye-opener even if your present equipment is just a few years old. A complimentary demonstration, or our explanatory booklet, is yours for clipping the coupon.

The revolutionary, new BW Copyflex model.

BRUNING

Specialists in copying since 1897

CHARLES BRUNING COMPANY, INC.
Dept. Z-81 100 Reade St. New York 13, N. Y.
☐ Please send me your free booklet A-1053A.
☐ I would like to see a Bruning BW machine demonstrated.
Name _____ Title _____
Company _____
Street _____
City _____ Zone _____ State _____

INSULATION

FORMVAR • FORMEX • ENAMEL

STRIPPED CLEAN IN SECONDS

with X-VAR

X-VAR is non-corrosive, non-creeping — leaves wire ready for soldering. Now in use by leading manufacturers of electrical products. *Write for FREE SAMPLE for testing.*

FIDELITY CHEMICAL PRODUCTS CORP.
472 Frelinghuysen Avenue, Newark 5, New Jersey

Superior's *new* TELEVISION BAR GENERATOR

THROWS AN ACTUAL BAR PATTERN ON ANY TV RECEIVER SCREEN!!

TWO SIMPLE STEPS

1. Connect Bar Generator to Antenna Post of Any TV Receiver.
2. Plug Line Cord into A.C. Outlet and Throw Switch.

RESULTS—A stable never-shifting vertical or horizontal pattern projected on the screen of the TV receiver under test.

AT YOUR RADIO PARTS JOBBER

DEALERS NET PRICE only 39.95

Manufactured and Guaranteed by

SICO **SUPERIOR INSTRUMENTS CO.**
227 Fulton Street • New York 7, N. Y.

PHYSICISTS
And
SENIOR RESEARCH ENGINEERS

• • •

POSITIONS NOW OPEN

• • •

Senior Engineers and Physicists having outstanding academic background and experience in the fields of:

- Microwave Techniques
- Moving Target Indication
- Servomechanisms
- Applied Physics
- Gyroscopic Equipment
- Optical Equipment
- Computers
- Pulse Techniques
- Radar
- Fire Control
- Circuit Analysis
- Autopilot Design
- Applied Mathematics
- Electronic Subminiaturization
- Instrument Design
- Automatic Production Equipment
- Test Equipment
- Electronic Design
- Flight Test Instrumentation

are offered excellent working conditions and opportunities for advancement in our Aerophysics Laboratory. Salaries are commensurate with ability, experience and background. Send information as to age, education, experience and work preference to:

NORTH AMERICAN AVIATION, INC.
Aerophysics Laboratory
Box No. K-4, 12214 S. Lakewood Blvd.
DOWNEY, CALIFORNIA

cased paper capacitors as well as a complete line of subminiature 125-deg C capacitors. The latter type described may be had in voltage ratings from 100 to 1,000 volts d-c in both inserted tab and extended foil constructions. The bulletin giving complete details is available upon letterhead request.

Products Catalog. The Astatic Corp., Conneaut, Ohio. Catalog No. 51 covers all the company's products manufactured for civilian markets. Printed in three colors, it includes illustrations of all items, as well as full descriptive and performance data on all models of tv and f-m boosters, microphones and stands, phonograph pickups and cartridges, needles, recording heads and related equipment. The index is cross-referenced.

Analog Computers. Geo. A. Philbrick Researches, Inc., 230 Congress St., Boston 10, Mass., has published a catalog and manual on a line of high-speed all-electronic analog computers for research and design. Included are illustrated descriptions of a wide variety of components, a table of operators and responses and a selected bibliography.

Selenium Rectifiers. Sarkes Tarzian Inc., Bloomington, Ind., recently issued a 64-page handbook on Centre-Kooled selenium rectifiers for radio, tv and electronic applications. Included are circuits, characteristics curves, illustrations, application notes and stack connection information. Price is 25 cents.

Logarithmic Amplifier System. Kalbfell Laboratories, Inc., 1076 Morena Boulevard, San Diego 10, Calif. A recent mailing piece shows how a line of plug-in amplifiers connected together can constitute a convenient system having good sensitivity, high input impedance and low output impedance for driving a rectifier type meter. Units described are the model 104A preamplifier, model 105A Logaten driver amplifier and model 106A detector amplifier. A price list is included.

* MAGNECORDER

Sound Performance

Official Marine Corps Photo

FOR FIDELITY AND DEPENDABILITY

...on the beach-head

...for the broadcast *

Going in for a landing with the Marines takes rugged dependability. Magnecord tape recorders meet this requirement and provide split-second-precision recording on the beach-head. Serving all over the world in vital communication assignments, Magnecorders undergo the severest conditions and still continue to record with high fidelity right at the moment they are needed.

At KIRO, Seattle, Wash., delayed programs and "on location" remotes are handled with complete confidence since Magnecorders were installed. In the field or at the station, Magnecord professional tape recorders are the first choice of radio engineers everywhere.

FEATURES

PT7 accommodates 10½" reels and offers 3 heads, positive timing and bushbutton control. PT7 shown in complete console model is available for portable or rack mount.

FLEXIBILITY

In rack or console, or in its really portable cases, the Magnecorder will suit every purpose. PT6 is available with 3 speeds (3¾", 7½", 15") if preferred.

FIDELITY

PT63 shown in rack mount offers three heads to erase, record, and play back to monitor from the tape while recording.

WRITE FOR NEW CATALOG

Magnecord, INC. 360 N. Michigan Avenue Chicago 1, Ill., Dept. EB-8

Send me latest catalog of Magnecord Equipment

Name.....

Address.....

City.....Zone.....State.....

VITAL

SERVOTHERM PRODUCTS

BOLOMETER AND PREAMPLIFIER

Thermistor bolometers are FAST, sensitive INFRARED and HEAT detectors. Especially RUGGED for industrial, scientific, and military applications. PREAMPLIFIER provides NOISE-FREE initial amplification and mount.



THERMISTOR POWER SUPPLY

Provides voltages required by BOLOMETER bridge and PREAMPLIFIER. Regulated and filtered permitting THEORETICAL NOISE LIMITS of amplification, while operating from 60 CYCLE line.

SERVO CORPORATION OF AMERICA

DEPT. E-8 NEW HYDE PARK, N.Y.

IN YOUR NEXT DESIGN... TAKE FULL ADVANTAGE OF THE SUPERIOR CHARACTERISTICS OF... DX TOROIDAL COILS

Where a circuit calls for an efficient coil of a high Q factor—when space and weight are limited, *specify DX TOROIDS.*

DX TOROIDS require less space for a given inductance. They have no coupling effects in adjacent circuits as their fields are entirely contained within the perimeter of the coils. Shielding does not affect the Q.

DX TOROIDS have a wide application in a number of electronic equipments—particularly airborne radar and miniature assemblies. Toroidal "off-center" and focus coils; band pass, high and low pass filters; inter-stage and output transformers improve performance with substantial savings in space.

DX Radio Products Company has devoted 10 years to the development of design and methods of winding TOROIDS. Our experience and extensive facilities are at your service. Just tell us your requirements. We will design your coils or build them to your exact specifications and submit samples promptly.

Write or Wire DX Today

DX RADIO PRODUCTS CO.

GENERAL OFFICES: 2300 W. ARMITAGE AVE., CHICAGO 47, ILL.

DC - AC CHOPPER

A model for every use.
10 — 500 cycles AC
Meets AN Specifications
also 60 cycles
Single pole and double pole
Make-before-break contacts
Contacts in air or in liquid

These Choppers convert low level DC into pulsating DC or AC so that servo-mechanism error voltages and the output of thermocouples and strain gauges, may be amplified by means of an AC rather than a DC amplifier.

They are hermetically sealed, precision vibrators having special features which contribute to long life and low noise level.

WRITE FOR THESE CATALOGS...

#280 10-500 cycles
#246A 60 cycles

STEVENS ARNOLD INCORPORATED

22 ELKINS STREET
SOUTH BOSTON 27, MASS.

NEWS OF THE INDUSTRY

(continued from page 148)

new color television system (see p 90), has reorganized and established nine new panels. Chairman W. R. G. Baker also announced the appointment of Elmer Engstrom, vice-president in charge of research at RCA Laboratories, as vice-chairman of the NTSC. Other vice-chairmen are Donald G. Fink of ELECTRONICS and David B. Smith of Philco Corp.

The nine new panels, their chairmen and vice-chairmen are as follows:

Subjective Aspects of Color—A. N. Goldsmith of New York, chairman; D. E. Hyndman of Eastman Kodak Co., vice-chairman.

Color System Analysis—D. G. Fink of ELECTRONICS, chairman; A. G. Jensen of Bell Laboratories, vice-chairman.

Color Video Standards—A. V. Loughren of Hazeltine Electronics Corp., chairman; W. T. Wintringham of Bell Laboratories, vice-chairman.

Color Synchronizing Standards—D. E. Harnett of General Electric Co., chairman; M. R. Briggs of Westinghouse Electric Corp., vice-chairman.

Compatibility—D. E. Noble of Motorola Inc., chairman; R. DeCola of Admiral Corp., vice-chairman.

Field Testing—T. T. Goldsmith of Du Mont Laboratories Inc., chairman; G. E. Gustafson of Zenith Radio Corp., vice-chairman.

Network—F. Marx of American Broadcasting Co., chairman; R. E. Shelby of National Broadcasting Co., vice-chairman.

Coordination—D. B. Smith of Philco Corp., chairman; I. J. Kaar of General Electric Co., vice-chairman.

Definitions—R. M. Bowie of Sylvania Electric Products Inc., chairman; M. W. Baldwin, Jr. of Bell Laboratories, Inc., vice-chairman.

The entire NTSC is composed of twenty organizations. These units with their representatives and alternates (in parentheses) are as follows:

Admiral Corp.—R. DeCola (Joe Marty, Jr.); Bendix Radio Div.—A. C. Omberg (John Miller); Color Television, Inc.—Samuel Smith (A. S. Matthews); Crosley Division

Andrew VHF and UHF "TEFLON" insulated TV TRANSMISSION LINES

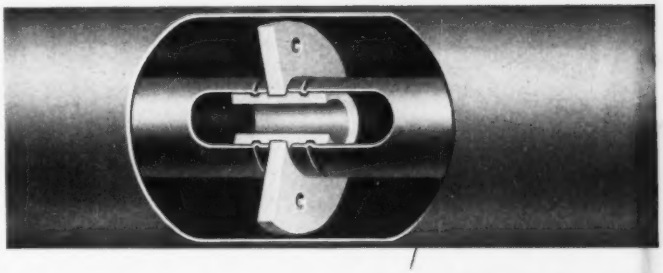

ANDREW offers a complete series of Andrew coaxial transmission lines . . . specifically designed for VHF and UHF TV frequency ranges—54-890 MCs.

Teflon insulators, with a dielectric constant of 2.0, ⅓ that of steatite and a loss factor of 0.0004, 1/10 that of steatite—minimize impedance discontinuity, increase efficiency . . . Andrew further compensates for insulators in 3⅛" and 6⅛" line as illustrated—on smaller diameters, insulators are secured in a rolled groove on the inner conductor. A complete line of hangers, elbows, gas barriers and other accessories are available.

FREE

Andrew Bulletin 73—to help you select correct transmission line for your TV station—a complete table of power ratings and loss data for use over entire UHF and VHF TV bands— No obligation—write for your copy today!

Andrew CORPORATION
363 EAST 75th STREET CHICAGO 19
WORLD'S LARGEST ANTENNA EQUIPMENT SPECIALISTS
TRANSMISSION LINES FOR AM TO 10 - ANTENNAS DIRECTIONAL ANTENNA EQUIPMENT
ANTENNA TUNING UNITS TOWER LIGHTING EQUIPMENT

ANDREW

ANDREW CORPORATION
363 E. 75th Street, Chicago 19
Please send me a copy of Bulletin 73 describing VHF and UHF Television Transmission lines.
Name .....
Title .....
Company .....
Address .....
City ..... Zone .... State .....

Important
SAVINGS
to VOLUME users
of small parts

..like these

SHOWN TWICE SIZE

thanks to
MULTI-SWAGE

If you need small tubular metal parts like these in large VOLUME, Bead Chain's MULTI-SWAGE Process can mean important savings to you.

Much Cheaper Than Solid Pins

Many prominent users of solid pins for electronic and mechanical purposes have cut costs by switching to Multi-Swaged *tubular* pins . . . without sacrificing strength or accuracy.

Typical Applications—

As terminals, contacts, bearing pins, stop pins, male-female connections, etc., in a wide variety of products such as Business Machines, Ventilator Louvres, Toys, Radio and Television Apparatus, Terminal-boards, Electric Shavers, Phonograph Pickups, etc.

Send part (up to ¼" dia. and to 1½" length) and your specs for a quotation or write for DATA BULLETIN.

B®

THE BEAD CHAIN® MFG. CO.
88 Mountain Grove St., Bridgeport 5, Conn.

Manufacturers of BEAD CHAIN — the kinkless chain of a thousand uses, for pull and retaining chains and other industrial uses, plumbing, electrical, jewelry, fishing tackle and novelty products.

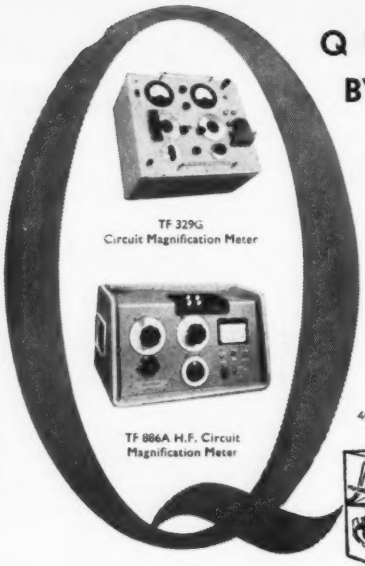

Q MEASUREMENT BY MARCONI

Famous for years in the field of radio measurement, Marconi Instruments offer TF 329G for 50 kc through 50 mc measurement and the TF 886A for the range 15 - 170 mc. Covering the whole gamut of broadcasting, am, fm and tv, they are universal instruments in radio engineering, allowing the measurement of Q, L, C, R, dielectric loss, power factor, permittivity, frequency and a host of others. Write now for fuller details.

TF 329G.	TF 886A.
50 kc — 50 mc ± 2%	15 — 170 mc ± 2%
10 — 500 Q ± 5%	60 — 1200 Q ± 10%
40 — 450 μμf ± 1%	12 — 85 μμf ± 1%

Have you got our 44 page booklet **Measurements by Q Meter**, a complete treatise on the subject with full operating instructions?

MARCONI INSTRUMENTS 23-25 Beaver Street, New York

CANADA: CANADIAN MARCONI CO., MARCONI BUILDING, 2442 TRENTON AVENUE, MONTREAL
ENGLAND: MARCONI INSTRUMENTS LIMITED, ST. ALBANS, HERTS.

Visit us at Booth 518—Pacific Electronic Exhibit

AMPERITE

THERMOSTATIC METAL TYPE
Delay Relays

PROVIDE DELAYS RANGING FROM 1 TO 120 SECONDS

FEATURES: — Compensated for ambient temperature changes from —40° to 110° F . . . Hermetically sealed; not affected by altitude, moisture or other climate changes . . . Explosion-proof . . . Octal radio base . . . Compact, light, rugged, inexpensive . . . Circuits available: SPST Normally Open; SPST Normally Closed.

PROBLEM? Send for *"Special Problem Sheet"*

Regulators



Amperite REGULATORS are the simplest, lightest, cheapest, and most compact method of obtaining current or voltage regulation . . . For currents of .060 to 6 Amps. . . . Hermetically sealed; not affected by altitude, ambient temperature, humidity.

Write for 4-page Illustrated Bulletin.

AMPERITE CO., Inc., 561 Broadway, New York 12, N. Y.
In Canada: Atlas Radio Corp., Ltd., 560 King St., W. Toronto

AVCO Mfg. Corp.—L. M. Clement (P. F. G. Holst); Allen B. Du Mont Lab., Inc.—Allen B. Du Mont (T. T. Goldsmith); ELECTRONICS—D. G. Fink (G. R. Towne); Federal Telecommunications Laboratories, Inc.—Emile Labin (N. H. Young); General Electric Co.—I. J. Kaar (J. E. Keister); Alfred N. Goldsmith—A. N. Goldsmith (D. E. Hyndman); The Hallicrafters Co.—H. J. Adler (L. R. Mead); Hazeltine Electronics Corp.—A. V. Loughren (K. McIlwain); Hogan Laboratories, Inc.—J. V. L. Hogan (F. A. Hester); Motorola, Inc.—D. Noble (E. B. Passow); National Association of Broadcasters—E. K. Jett (Neal McNaughton); Philco Corp.—D. B. Smith (F. J. Bingley); RCA Laboratories—E. Engstrom (G. L. Beers); Sylvania Electric Products Inc.—R. M. Bowie (B. F. Tyson); Tele-Tone Radio Corp.—M. L. Levy (R. S. Mautner); Westinghouse Electric Corp.—M. R. Briggs (R. Harmon); Zenith Radio Corp.—G. E. Gustafson (J. E. Brown).

New Anti-Cancer Weapon Planned

THE powerful, supervoltage rays of radioactive cobalt will soon be studied as a new aid to cancer sufferers. A special apparatus for administering the rare isotope will be delivered to the Oak Ridge Institute of Nuclear Studies and M. D. Anderson Hospital by General Electric X-Ray Corporation of Milwaukee within the next several months.

Located in Oak Ridge, Tenn., adjacent to the Atomic Energy Commission plant, the Institute (O.R.I.N.S) will cooperate with the M. D. Anderson Hospital of Houston, Tex., affiliated with the University of Texas, in extensive tests on radioactive cobalt and its effects on cancers.

The radiation emitted by cobalt 60, as it is known, is equivalent to the x-rays produced by high-voltage tubes operating at about 1,200,000 electron volts. Four cobalt wafers, each less than one inch square and less than an eighth of an inch thick, are being irradiated in the Chalk River, Canada, atomic

Standard
RADIO INTERFERENCE and FIELD INTENSITY Measuring Equipment
Complete Frequency Coverage - 14 kc to 1000 mc!



VLF!
NM - 10A
14kc to 250kc
Commercial Equivalent of AN/URM-6.
Very low frequencies.



HF!
NM - 20A 150kc to 25mc
Commercial Equivalent of AN/PRM-1.
Self-contained batteries. A.C. supply optional. Includes standard broadcast band, radio range, WWV, and communications frequencies.



VHF!
NMA - 5
15mc to 400mc
Commercial Equivalent of TS-587/U.
Frequency range includes FM and TV Bands.

UHF!
375mc to 1000mc NM - 50A
Commercial Equivalent of AN/URM-17.
Frequency range includes Citizens Band and UHF color TV Band.

These instruments comply with test equipment requirements of such radio interference specifications as JAN-I-225, ASA C63.2, 16E4(SHIPS), AN-I-24a, AN-I-42, AN-I-27a, AN-I-40 and others.

STODDART AIRCRAFT RADIO CO.
6644-A SANTA MONICA BLVD., HOLLYWOOD 38, CALIFORNIA
Hillside 9294

FOR LONG LIFE IN LOW AMPERAGE CIRCUITS THE SERIES 4000 S.P.S.T. MOMENTARY CONTACT PUSH-BUTTON SWITCH IS IDEAL. AVAILABLE EITHER NORMALLY OPEN OR NORMALLY CLOSED. CONSERVATIVELY RATED AT ½ AMP., 115V. A.C., NON-INDUCTIVE.



SERIES 4000

THE SERIES 2000 SNAP ACTION SWITCH IS FOR HIGHER AMPERAGE CIRCUITS. OR FOR TEST APPARATUS WHERE AN AUDIBLE "CLICK" IS DESIRED AT THE EXACT MOMENT OF OPERATION. RATED AT 10 AMPS., 115V. A.C., NON-INDUCTIVE. THE CONTACT ARRANGEMENTS ARE THE SAME AS THE SERIES 4000.



SERIES 2000

GET DETAILS— Write for the Grayhill Catalog now.

Grayhill

4522 West Madison Street Chicago 24, Illinois

IS YOUR RECTIFICATION PROBLEM LISTED HERE?

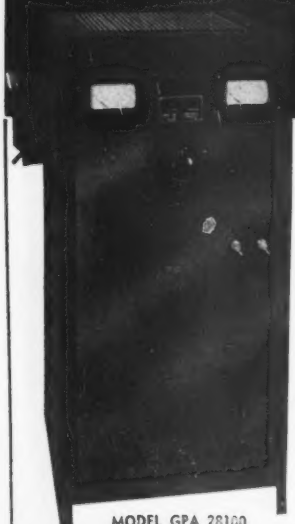

- Battery Charging
- Battery Elimination
- Business Machines
- Carbon Arc Lamps
- Dynamotors
- Electroplating
- Elevators
- Exciter Lamps
- General Laboratory Use
- Generator Fields
- Magnetic Brakes, Chucks and Separators
- Motors
- Relays
- Telephones
- Solenoids

Whatever your particular application of D.C. may be, it need not be a problem. The OPAD-GREEN COMPANY is prepared to offer assistance in designing and constructing Selenium Rectifier power supplies and equipment for your specific needs. There is no obligation for this service. Write today for our Rectifier Questionaire—proposals and recommendations will be forwarded promptly.

OPAD-GREEN COMPANY

71-2 WARREN ST., NEW YORK 7, N. Y. PHONE: BEekman 3-7385-6

Controlled HEAT FOR ALL TYPES OF SOLDERING

With 250-Watt WELLER GUN

No need to change tools for *light or heavy* soldering. The 250-watt Weller Soldering Gun does both with *controlled* dual heat. 5-second heating saves time and current on every job. Your Weller Gun pays for itself in a few months.

Check These Time-and-Money Saving Features

TRIGGER-SWITCH CONTROL—Governs heat for light or heavy work. Saves power because no need to unplug gun between jobs.

SOLDERLITE—Spotlights the work. Lets you see what you're doing at all times.

5-SECOND HEATING—No waiting, no wasted current. Saves hours and dollars each month.

LONGER REACH—Lets you get at any job with ease. Slides between wiring—into the tightest spots.

STREAMLINED—Compact and comfortable to hold. Pistol-balanced for fast precision soldering.

RIGID-TIP—Chisel-shaped. More soldering area for faster heat transfer. "Over-and-under" terminals give bracing action.

DUAL HEAT—Single heat 200 watts; dual heat 200/250 watts; 120 volts, 60 cycles.

See the new 250-watt Weller Soldering Gun today at your distributor—or write for bulletin direct.

SOLDERING GUIDE—Get your new copy of SOLDERING TIPS—revised, up-to-date and fully illustrated 20-page booklet of practical soldering suggestions. Price 10c at your distributor, or order direct.

WELLER ELECTRIC CORP.

806 Packer Street, Easton, Pa.

energy reactor, for use in the new unit. The cost of an equivalent amount of radium ($26,000,000) would be several thousand times greater.

While radioactive cobalt has been tested before on cancer, this has been chiefly in the form of local therapy, usually requiring surgical planting in the tissues, whereas the new apparatus will make it possible to direct the rays at sizeable areas from a distance and to reach deep or otherwise inaccessible cancers.

Manipulating the isotope and adapting it to easy application has posed major problems for GE design engineers. They have now developed a housing and an electrical-mechanical system that makes it possible for doctors and their aides to give treatments by remote control, to limit the radiation to the patient under treatment, and to return the isotope to a safe position automatically in case of power failure.

The cobalt will be encased in a housing made of a special tungsten alloy known as Hevimet, which is considerably more dense and therefore less transparent to radiation than lead. The operator, located in an adjoining room, will be protected by thick concrete walls, but will be able to see the patient through a window consisting of 15 inches of x-ray protective material.

Radio-cobalt takes 5.3 years to lose half of its effectiveness—the rate at which it is said to decay thus making it well adapted to continued use for cancer therapy without frequent correction of calculations by the physicist or radiologist.

The Oak Ridge Institute of Nuclear Studies is a nonprofit educational corporation comprised of 26 southern universities, organized to make AEC facilities available to universities for research and graduate work.

Engineering Positions Available

CIVIL service examinations have been announced for filling electronic engineering positions at the Naval Air Development Center, Johnsville,

Edin instruments



OSCILLOGRAPH GALVANOMETER

No's. 8001, 8002, 8003 and 8004 ink-writing galvanometers have sensitivities from 3.5 to 40 volts per cm., resonant frequencies from 15 to 120 cps., resistances from 1000 to 2000 ohms, frequency response up to 350 cps., and a single-jewel pivot construction. Units are designed for multiple operation up to 10 channels in a total width of 12 inches.

DIRECT-COUPLED AMPLIFIER

No. 8100 direct coupled amplifier has a voltage amplification of 13,000 with a maximum output of 70 volts. Frequency response from d.c. to 10,000 cps. is flat within 10%. Input impedance is 2 megohms; output impedance is 150 ohms. Input may range from 0.1 mv. to 100 volts. Stability is better than 0.1 mv. per thirty minutes, or 0.5 mv. per day. Attenuator is stepped for factors from 1 to 1000.

OSCILLOGRAPHS

Recorders can be supplied with 1, 3 or 9 chart speeds ranging from 0.1 mm./sec. to 250 mm./sec. See specifications of OSCILLOGRAPH GALVANOMETER for frequency range.

OSCILLOGRAPH AMPLIFIER

No. 8121 special amplifier has a time constant of 1 second, an exponential response to a square wave at high gain, input impedance of 1 megohm, and input form 0.1 mv. to 1000 volts. At low gain, No. 8121 becomes a DC amplifier with a voltage gain of 100 and an input of 10 mv./mm.

HIGH-GAIN AMPLIFIER

No. 8130 amplifier has a voltage gain of 1,000,000 and includes a built-in pre-amplifier. Frequency response is from 1 to 200 cps. Input may range from 10 microvolts to 100 millivolts. This amplifier is particularly suited for biological studies.

Many other types of recording and amplifier circuits are available and special equipment can be assembled to meet particular specifications.

EDIN COMPANY, INC.
207 Main Street
Worcester 8, Mass.

Please send complete information on:

☐ RECORDERS
☐ NO. 8121 AMPLIFIER
☐ GALVANOMETERS
☐ No. 8100 AMPLIFIER
☐ No. 8130 AMPLIFIER
☐ _____ SPECIAL (Enclose details)

(NAME)

(NO.) (STREET)

(CITY) (STATE)

COMPANY POSITION

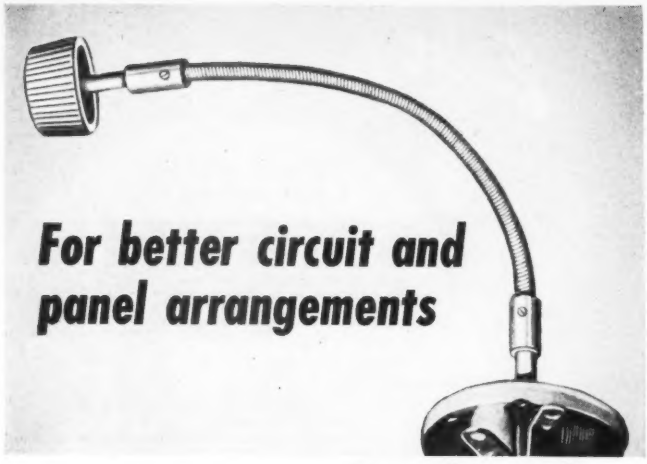

For better circuit and panel arrangements

Couple with S.S.White Flexible Shafts

By connecting variable elements to their control knobs with S.S.White flexible shafts, you can mount the coupled parts where and how desired to satisfy all wiring, assembly, space, servicing and operating conditions. The shafts are especially designed to provide smooth, responsive control whether operating in curves or in a straight line.

What's more, S.S.White flexible shafts are quickly and easily installed, require no alignment, and retain their sensitivity throughout the life of the equipment.

For details,

WRITE FOR BULLETIN 5008

It gives essential facts and data on flexible shafts and tells how to select and apply them.

Attention— West Coast Manufacturers

We're now ready to serve you at our
WESTERN DISTRICT OFFICE
TIMES BUILDING
LONG BEACH, CALIF.
to meet your requirements on S.S.White flexible shafts, aircraft accessories, resistors and plastic products.

THE S.S.White INDUSTRIAL DIVISION
DENTAL MFG. CO.
Dept. E, 10 East 40th St.
NEW YORK 16, N. Y.

Western District Office • Times Building, Long Beach, California

Pa. The salaries range from $4,600 to $7,400 a year.

To qualify, applicants must have completed appropriate undergraduate college study and, in addition, must have had graduate study or professional experience, or both, in one of the following fields: sonar, radar, radio, control, radiation and engineering evaluation.

Further information and application forms may be obtained from most first- or second-class post offices, from civil service regional offices, or from the U. S. Civil Service Commission, Washington 25, D.C. Applications will be accepted until further notice by the Recorder of the Board of Examiners, Naval Air Development Center, Johnsville, Pa.

Broadcast Bureau Appointments

THE Federal Communications Commission has announced the following appointments in its new Broadcast Bureau, which is headed by Curtis B. Plummer:

Joseph M. Kittner, chief of the Aural Facilities Division; Cyril M. Braum, chief of the Television Facilities Division; Dwight D. Doty, chief of the Renewal and Transfer Division; Frederick W. Ford, chief of the Hearing Division; and Paul Dobin, chief of the Rules and Standards Division.

BUSINESS NEWS

THE INDUSTRIAL CONTROL CO. has moved its facilities from Long Island City to a new location on Straight Path and Arlington Ave., Wyandanch, L. I., N. Y.

CAM-STAT INC., manufacturer of regulators, thermostats and other precision equipment, has moved to new and larger quarters at 11833 West Olympic Boulevard, Los Angeles 54, Calif.

AIR ASSOCIATES, INC. has expanded facilities by leasing additional plant capacity at Orange, N. J., for the manufacture of electronic equipment. The new plant provides 65,000 sq ft of floor area which raises the corporation's total factory area,

DOUBLE BARREL Advertising

Advertising men agree—to do a complete advertising job you need the double effect of both Display Advertising and Direct Mail.

Display Advertising keeps your name before the public and builds prestige.

Direct Mail supplements your Display Advertising. It pin-points your message right to the executive you want to reach—the person who buys or influences the purchases.

More and more companies are constantly increasing their use of Direct Mail because it does a job that no other form of advertising will do.

McGraw-Hill has a special Direct Mail Service that permits the use of McGraw-Hill lists for mailings. Our names give complete coverage in all the industries served by McGraw-Hill publications—gives your message the undivided personal attention of the top-notch executives in the industrial firms. They put you in direct touch with the men who make policy decisions.

In view of present day difficulties in maintaining your own mailing lists, our efficient personalized service is particularly important in securing the comprehensive market coverage you need and want.

Ask for more detailed information today. You'll be surprised at the low over-all cost and the tested effectiveness of these hand-picked selections.

McGRAW-HILL PUBLISHING CO., INC.
330 West 42nd Street
NEW YORK 18, N. Y.

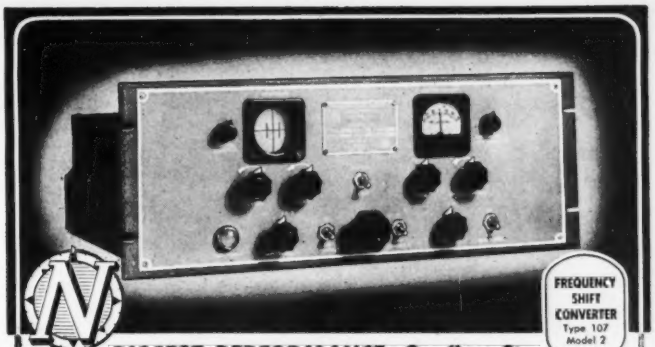

BIGGEST PERFORMANCE—Smallest Size

Four exclusives are yours with the Northern Radio FREQUENCY SHIFT CONVERTER —utmost simplicity of operation, precision tuning, highest quality performance, and smallest size in the industry.

For single and diversity FS receiving systems, this dual channel unit converts mark and space tones into DC pulses, and drives teleprinters and other recorders directly. Its unique 2" oscilloscope provides the industry's most meaningful tuning pattern for precise receiver adjustment—during initial setup and while keying. Its specially designed limiter and discriminator afford an exceptionally high degree of performance. Polar or neutral output is available. Keying speeds up to 600 w.p.m. It's only 19" wide x 7" high x 15" deep.

This unit may also be used as a make and break CW or ICW demodulator.

See the specifications on this outstanding model in the 1951 Electronics Buyers Guide. For complete data on the precision-built Northern Radio line, write today for your free latest Catalog E-8.

NORTHERN RADIO COMPANY, INC. 143-145 West 22nd Street, New York 11, N. Y.

Pace-Setters in Quality Communication Equipment

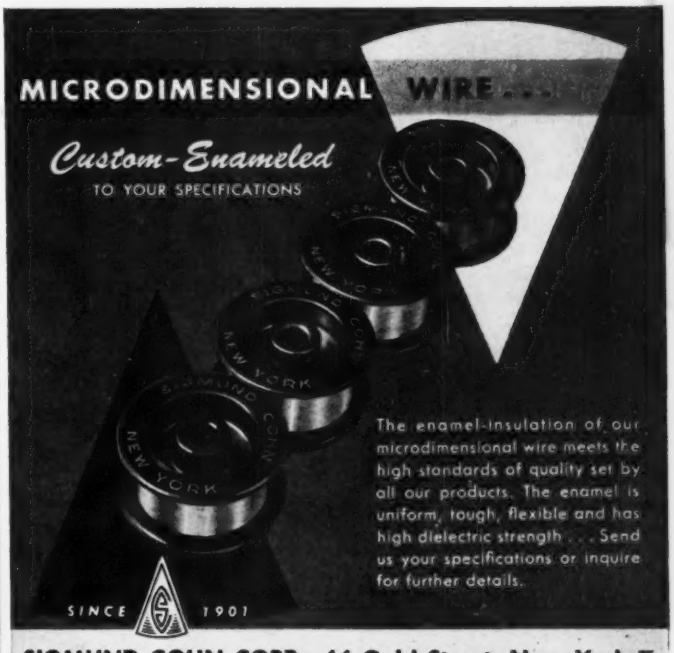
MICRODIMENSIONAL WIRE
Custom-Enameled
TO YOUR SPECIFICATIONS
The enamel-insulation of our microdimensional wire meets the high standards of quality set by all our products. The enamel is uniform, tough, flexible and has high dielectric strength . . . Send us your specifications or inquire for further details.
SINCE 1901

SIGMUND COHN CORP., 44 Gold Street, New York 7

NEW!

First Aid For "Idea-Men"

C.T.C.'s handy new ceramic coil kit helps you design electronic equipment around standard components

Design engineers, laboratory technicians, experimenters! . . Here's a brand new, conveniently packaged ceramic coil form kit, especially developed to spark ideas in the design of your electronic equipment and for the development of prototypes and pilot models.

C.T.C.'s new Coil Kit contains 15 ceramic coil forms — 3 each of 5 different types of C.T.C.'s standard, mass-produced coil form components for quick, handy use.

COIL FORM TYPES INCLUDED IN KIT

The 15 coil forms vary in winding diameters from 3/16" to 1/2", and in overall mounted heights from 19/32" to 1 11/16". Each is made of grade L-5 silicone impregnated ceramic, meeting specifications of JAN-I-10, and provided with a powdered iron slug for high, medium and low frequency operation. As alternates to the iron slugs, extra slugs of silver-plated brass are included.

All necessary hardware is furnished. Metal parts are non-ferrous and electroplated to meet military specifications. Also supplied is a handy chart identifying slug types by color code and part numbers, and giving approximate frequency ranges and permeabilities.

SPECIAL CONSULTING SERVICE

C.T.C.'s experienced component engineers are at your service — without cost — to help you secure exactly the *right* components. When standard parts are unsuitable they will design special units, working closely with you for economical, satisfactory results.

Call on the C.T.C. Consulting Service any time. Just write to Cambridge Thermionic Corporation, 437 Concord Avenue, Cambridge 38, Massachusetts.

custom or standard... the guaranteed components

including the Teterboro plant, to more than 185,000 sq ft.

THE WILCOX-GAY CORP., Charlotte, Michigan, has leased an 85,000-sq ft plant in Burbank, Calif., for the manufacture of tv, radio and recording products.

MELPAR, INC., Alexandria, Va., has opened a branch plant at 10 Potter St., Cambridge, Mass., to be devoted primarily to applied research and advanced development work on electronic equipment for the armed forces.

COLUMBIA BROADCASTING SYSTEM inaugurated its commercial color television service with a special program over CBS-TV stations in New York, Boston, Philadelphia.

Newest model CBS color tv camera weighs only 29 pounds, against the 180 pounds of a standard black-and-white camera. It is less than ½ cu ft as contrasted with the 3 cu ft of the black-and-white camera

Baltimore and Washington, D. C., on June 25, 1951. Approximately 20 hours of color tv weekly was expected to be scheduled by fall.

PERSONNEL

LOUIS T. RADER, formerly division engineer of General Electric's Manual and Accessory Control Engineering Division, has been appointed assistant manager of engineering of the company's Control Divisions at Schenectady, N. Y.

HARVEY J. FINISON has been promoted from assistant chairman of

ENGRAVING
ROUTING
PROFILING
MODELING

GREEN ENGRAVER
Proved Profitable —
Machine Tool, Radio, Electrical and Instrument Mfrs., Sales Promotion and Advertising.

Fast, rugged, convenient—and *inexpensive*. The Green Engraver is tops for low-cost performance —zips out *precision* work on metal, plastics or wood . . . cuts four lines of letters from 3/64" to 1" on curved or flat surfaces . . . operates by tracing . . . makes anyone an expert . . . engraves panels, name plates, scales, dials, molds, lenses and instruments. (Also widely used for routing, profiling and three dimensional modeling.) Electric etching attachment available.

Special attachments and engineering service available for production work.

FREE—Fact-packed folder. Send for yours, today

GREEN INSTRUMENT COMPANY

GREEN
363 PUTNAM AVENUE
CAMBRIDGE, MASS.

Built Right!
Priced Right!

BECO UNIVERSAL IMPEDANCE BRIDGE

Model 250-C **$295.00** **F.O.B. Portland**

Write today for further information

BROWN ELECTRO-MEASUREMENT CORP.

Instrument BECO *Specialists*

4635-37 S. E. HAWTHORNE BLVD. PORTLAND 15, OREGON

MICROSYNS

Position Indicator
Type 1C-001A

The Doelcam Microsyn is an electro-magnetic four pole, reluctance bridge unit providing rugged construction, inherent electrical and mechanical simplicity, and high accuracy performance in the following applications:

Position Indicator — provides an electrical indication of angular displacement with high signal-to-noise ratio.

Stiffness Motor — operates as a torsional spring with adjustable stiffness coefficient.

Torque Generator — supplies a torque proportional to excitation and independent of shaft rotation.

Variable Inductor — offers an inductance that varies linearly with shaft rotation.

The Doelcam Microsyn can be designed for special applications in a wide variety of sizes. Units are available in instrument housings or as rotor and stator combinations to provide for individual mounting.

For more details, write to:

DOELCAM CORPORATION
56 Elmwood Street, Newton 58, Massachusetts.
Gyroscopic Flight Test and Control Instrumentation
SYNCHROS · SERVOMECHANISMS · MICROSYNS · ELECTRONIC INVERTERS

ELECTRO TEC
SLIP RING ASSEMBLIES & COMMUTATORS
for GYROS, COMPUTERS RESOLVERS, MOTORS SELSYNS, INSTRUMENTS

- ABSOLUTE MINIMUM TORQUE FRICTION
- DIAMETERS FROM .05" TO 24.0"
- MINIMUM 1000 V.A.C. HI-POT INTER CIRCUIT
- HARD SILVER RINGS PLATED TO PRECISION MACHINED PLASTIC FORM
- SPECIAL SURFACE DEPOSITS MINIMIZE FRICTION, PREVENT TARNISH

Electro Tec Miniature Slip Rings and Commutators are the product of an exclusive manufacturing technique that results in precision concentricity, higher dielectric strength, longer life.

Uniformly High Performance in thousands of applications has resulted in wide adoption by most leading manufacturers of precision equipment. For complete details or engineering collaboration, call or write **today.**

. . . Precision CRAFTSMANSHIP

(PATENTS PENDING)

ELECTRO TEC CORPORATION
SO. HACKENSACK, NEW JER...

THE MERCURY DELAY LINE

is at present the most practical device available in production quantities useful for delaying pulse signals. Whether the delay is in milliseconds or microseconds, in single or in multiple units, we are prepared to serve you in laboratory or production models with economy based on simplified design procedures and long experience.

Most delay lines are tailored to fit individual circuits, but here are typical design characteristics of different lines we manufacture.

- **OPERATING FREQUENCY**—10 to 30 mc.
- **WEIGHT** —2¼ pounds for a 200-usec line to 30 pounds for a 1500-usec dual line.
- **THIRD-TIME-AROUND ECHOES**—down a controlled number of db from first path signals
- **BANDWIDTH**—depends upon delay and operating frequency, but a typical case is 5 mc. Shown in the graph is the test response curve of a production line.



Our Delay Line Application engineers will be glad to advise you if you write us your need or if you call Boston, HI-2-1810.

•

Also available for the asking is a helpful booklet on the use of the Mercury Delay Line

LABORATORY FOR ELECTRONICS, INC.

43 Leon Street

Boston 15, Mass.

electrical engineering research to chairman of the electrical engineering department at Armour Research Foundation of Illinois Institute of Technology.

HARRY F. OLSON, director of the Acoustical Research Laboratory of RCA Laboratories, Princeton, N. J., has been elected president of the Acoustical Society of America for the year 1952.

LUTHER W. HILL, on leave of absence from the post of president of the Carolina Telephone and Telegraph Co., has been named director of the Communications Equipment Division, National Production Authority, U. S. Department of Commerce.

E. C. QUACKENBUSH, previously associated with manufacturers of connectors and wiring devices, has joined Cannon Electric Co. to head the engineering department of its newly created Eastern Division in East Haven, Conn.

JOHN T. HOLLERAN, with General Electric Co. since 1923, has been appointed manager of the Fort Edward and Hudson Falls operations of the company's Transformer and Allied Product Divisions at Fort Edward, N. Y.

JAMES W. MCRAE, formerly director of transmission development, has been promoted to vice-president in charge of the systems development organization at Bell Telephone Laboratories, New York, N. Y.

J. W. McRae

A. K. Wright

ALFRED K. WRIGHT has been promoted from chief radio engineer to vice-president and director of engineering at Tung-Sol Lamp Works, Inc., Newark, N. J.

DAVIDUX

Canvas & Leather Products

TOOL ROLLS
BAGS & CASES
BG BAGS
CW BAGS
RADIO EQUIPMENT
ELECTRONIC EQUIPMENT
RADAR EQUIPMENT

C. R. DANIELS, INC.
75 West St., New York 6, N. Y.
549 W. Randolph St., Chicago 6, Ill.

WILTON
THE FINEST NAME IN VISES

Send for our 32 page catalog of Vises, Work Positioners and Industrial Clamps.

Sold Thru Distributors

WILTON TOOL MFG. CO.
925T Wrightwood Avenue
CHICAGO 14, ILLINOIS

The New STAVER
MINI-SPRING
TRADE MARK REG. AND PAT. PEND.

Available! Special Improved Types for Military Apparatus

Gives support two ways—Keeps pressure downward and gives sideway support. The spring action is constant and resilient permanently. Send for catalog sheet.

THE Staver COMPANY
INCORPORATED

91 PEARL ST. • BROOKLYN 1, N. Y.
ULSTER 5-6303



It's a special kind of finish which cannot be described or pictured — but it's different from the finish on any other tracing cloth. It inks different, it erases different, it erases different — it's tougher, more uniform and differently better. That's just a claim — but with a little cooperation from you we can prove it. Just write for samples and test them — that's all. Others have and that is why so many are using Micro-Weave Tracing Cloth. Why don't you try it?

THE HOLLISTON MILLS, INC.
NORWOOD, MASS.
NEW YORK PHILADELPHIA CHICAGO

MICRO-WEAVE is backed by Holliston's 50 years of leadership and experience in developing special cloths for industry.

TRANSFORMER CASES

HOT TINNED TO YOUR SPECIFICATIONS

DRAWN CASES WITH INSIDE FIT COVERS IN SMALL SIZES

WRAPAROUND, LOCK SEAM CASES IN MEDIUM AND LARGE SIZES

OUTSIDE FIT DRAWN COVERS IN LARGE SIZES

CAREFULLY SELECTED STEEL FOR THE BEST COMBINATION OF STRENGTH, WEIGHT AND SPACE FACTORS

ROUNDED CORNERS FOR NEAT, STREAMLINED APPEARANCE

SHIPMENTS FROM STOCK ON STANDARD STYLES

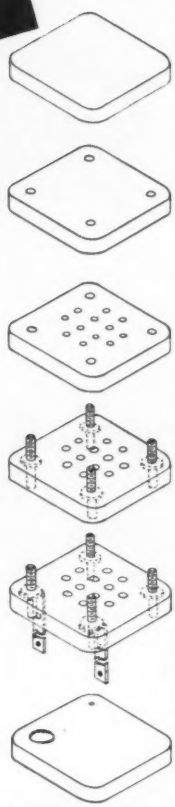

Standard cover modifications are illustrated above. Other modifications to meet your specifications.

OLYMPIC

METAL PRODUCTS COMPANY INC.

P. O. Box 71 Phillipsburg, N. J.

NEW BOOKS

(Continued from page 150)

cascaded filters, and the last on pulse response of transmission lines.

The material is covered very well for an introductory text on pulse techniques. For engineers who have not had a background in transient analysis and are now encountering pulse equipment in the field the book should prove very useful. For the younger men who have had network and transient analysis in school, the first half of the book should prove to be an interesting brief review.

Chapters 6 to 9 are a little too brief for a complete study of the field but they do give a comprehensive survey of pulse applications. The book should prove very valuable to application engineers who need an introduction to practical pulse techniques.—NATHAN MARCHAND, *Marchand Electronic Laboratories, Greenwich, Conn.*

Electronic Fundamentals and Applications

BY JOHN D. RYDER. *Prentice-Hall, Inc., New York,* 1950, 806 *pages,* $9.00.

THIS BOOK, written by the head of the electrical engineering department at the University of Illinois, is a welcome addition to the Prentice-Hall Electrical Engineering Series edited by W. L. Everitt. The book is intended for instruction of senior and graduate students in engineering and physics who intend to make professional use of electronic techniques. Great care has been used in the choice of symbols; bold-face letters are used meticulously throughout the book to indicate phasors (vectors, having direction and magnitude), but the treatment is not unnecessarily mathematical. Simple differential equations and complex algebra suffice. A good variety of problems of moderate difficulty are appended to each chapter. Numerical answers are not given, and few problem solutions are worked out in detail in the text proper. These omissions detract from the value of the book to the student who must study by himself.

The book follows a three-part

VULCAN
ELECTRIC HEATING UNITS

STRIP HEATERS
FOR HEATING

Plastic Extruders
Package Sealers
Flat Surfaces
Shallow Pans
Melting Pots
Hot Plates
Platens
Ovens
Tanks
Pots
Dies
etc.

16 Stock Sizes from 150 watts, 8" overall length to 1250 watts, 41⅜" overall length.

115 and 250 volts.

VULCAN
ELECTRIC COMPANY
DANVERS 10 MASS.
VULCAN

MODEL PFR — POLINEAR RECORDER

FOR AUTOMATICALLY PLOTTING both ANGULAR and STRAIGHT LINE functions on either POLAR or RECTILINEAR coordinates in any COMBINATION . . .

- Records both AC and DC voltage levels
- Designed for STANDARD 8½ x 11 chart sheet
- POLAR and LINEAR turntable movement
- TURNTABLE instantly set to any chart position
- Auxiliary Electrical linkage for synchronizing to turntable motion: Oscillators, Rotational Devices, Test Turntables, Analyzers
- Interchangeable range potentiometers
- Dependable and service free operation

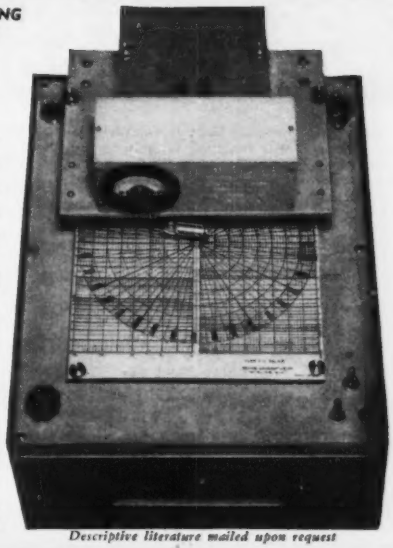

Typical applications:

Beam Pattern Plotting of antennas, microphones, loudspeakers, lighting fixtures, ultrasonic devices;
Frequency Response Records of microphones, loudspeakers, amplifiers, Filters, Radio and television circuits;
Rectilinear Curves on vacuum tubes, potentiometers, amplifiers, counting and computing devices.

Descriptive literature mailed upon request

Designers and Manufacturers of Graphic Records
SOUND APPARATUS COMPANY STIRLING, N. J.
Instruments Engineered for Individual Requirements

Runzel
WIRE, CORD and CABLE

In almost endless variety of sizes, insulation and colors to your specifications, Runzel products are available to assist you in your wiring problems.

Shielded wire and cords . . . popular hook-up and lead-in wire . . . speaker cords and all types of insulated wire products.

Precision made RUNZEL products are the finest. Write for samples

RUNZEL CORD & WIRE CO.
4723 Montrose Avenue
Chicago 41, Illinois

E-I HERMETIC SEALING COMPONENTS

Announcing: AN IMPORTANT ADDITION TO THE E-I FAMILY OF SEALED LEADS—

NEW R and RR SERIES TERMINALS

A completely new line of double barrel terminals that provide added protection against flashover without any appreciable increase in terminal size. The double barrel results in a longer leakage path on both ends of the terminal while the upper barrel increases the mechanical strength of the terminal and facilitates soldering. For information call or write today.

Write for These Descriptive Bulletins:
849 — Hermetically Sealed Terminals
850 — Hermetically Sealed Headers
851 — Gasket Type Bushings

E-I INC. ELECTRICAL INDUSTRIES
INCORPORATED
44 SUMMER AVENUE, NEWARK 4, N. J.

ALDEN COMPONENTS FOR PLUG-IN UNIT CONSTRUCTION

Until recently there has been no one place where components specifically designed for plug-in unit construction were available. It was necessary for engineers to design and have parts custom made or improvise with standard components in makeshift arrangements. To provide the type of design necessary, Alden engineers are working with the industry developing a whole series of components specifically for plug-in construction.

The first problem undertaken by Alden engineers was a base specifically for plug-in unit construction. . . . The conventional tube type bases proved unsatisfactory; they didn't stand up, the boss broke and the pins bent. To overcome these difficulties Alden designed an entirely new base . . . the Non-Interchangeable Series bases have no molded center boss to break, pins are strong and stubby—do not bend or break out and are Non-Interchangeable to prevent danger of mismating and costly burned out units.

Out of this work we feel that Alden's is the one place where you now can take your unitizing problems and obtain the standard bases, sockets, mountings and housings to answer most of your needs. As illustrated below, the Alden Non-Interchangeable and miniature bases have tremendous flexibility and are fast becoming the standard for plug-in construction.

20 Pin Non-Interchangeable Bases & Sockets

The scope of the Alden "20" base as a mounting medium is almost unlimited . . . cards, brackets and balls can be easily and securely attached with standard assembly tools. For holding components and miniature tube sockets the Alden Terminal Card Mounting System on the Alden Base gives ease of layout and wiring assembly. Open units for heat dissipation or shielded units for protection against dust or rough handling both lend themselves to mounting on the Alden Base with the same facility.

11 Pin Non-Interchangeable Bases & Sockets

Smaller than the "20" but with the same features, the Alden "11" base and sockets are rugged for long life and Non Interchangeable to isolate critical voltages or signals and prevent burned out units. The retention force of pins and socket clips can be varied from light to heavy. Locating rings and alignment indicator quickly center base and socket for insertion. These and other features make it practical to incorporate plug-in construction in your design.

7 and 9 Pin Miniature Bases & Sockets

Miniature and sub-miniature circuits, potted circuits, and miniaturized components easily become compact, sturdy plug-in units with the Alden 7 and 9 pin miniature plug-in bases and sockets. A wide selection of housings and mounting components are available for use with these bases.

Of particular importance is the Alden Terminal card Mounting System. Miniature circuits can be assembled on the card and the assembly can be mounted on the base to form a complete miniature unit.

Write Dept. E for information on sample plug in kits or for Catalogue "Components for Plug-in Unit Construction."

NA-ALD ALDEN PRODUCTS COMPANY

117 NORTH MAIN STREET, BROCKTON 64, MASSACHUSETTS

plan: physical electronics, characteristics of electron tubes, and electronic circuits. In the first category are six chapters on fundamental particles, electron ballistics, cathode rays, emission, space charge and gaseous conduction. Electron tubes are described in chapters on diodes, triodes, multielement tubes, gas diodes and control tubes, and photoelectric tubes. Circuits are described in chapters on small-signal amplification, large-signal audio and radio-frequency amplifiers, oscillators, modulators, demodulators, wave-shaping circuits and gas-tube circuits. The final chapter is an up-to-date summary of solid-state electronics.

The treatment of small-signal and large-signal amplification is comprehensive and particularly well-written. Recent developments are included; the phasitron f-m modulator is briefly described, as is stagger tuning of wideband amplifiers. Throughout the book, tables of performance and figures-of-merit are given, referring to particular tube types and circuit arrangements. There are a few deviations from accepted terminology; for example, "photoemissive cell" is used for phototube. But these are few, and detract little from the general excellence of the book. It should prove a most helpful addition to the growing list of standard texts on electronic techniques.—D.G.F.

Theory and Application of Industrial Electronics

BY JOHN M. CAGE. *McGraw-Hill Book Co., New York*, 1951, 290 *pages*, $4.75.

THE AUTHOR states in his preface that this book is written primarily for college graduate and undergraduate courses in industrial electronics. Since the book comprehensively and broadly covers the subject without being superficial, it will also be interesting to others wishing to gain a general knowledge of the subject.

Although little not previously published material is presented, this is the first book of its kind which has offered an integrated treatment of electronic circuits and devices

SUPERIOR TV BAR GENERATOR

Makes Perfect Pattern Adjustments Simple
(See Full Description in Superior 'Factory Ad')

COMPLETE WITH TEST LEADS AND SIMPLE INSTRUCTIONS

$39.95 NET

- Provides linear pattern to adjust VERTICAL linearity, height, centering.
- Provides linear pattern to adjust HORIZONTAL drive, width, peaking, linearity, centering.
- Provides vertical sweep signal for adjusting and synchronizing vertical oscillator discharge and output tubes.
- Provides vertical signal to replace vertical oscillator to check vertical amplifier operation.
- Provides horizontal sweep signal for adjusting and synchronizing horizontal oscillator A.F.C. and output tubes.
- Provides horizontal sweep signal to check H.V. section of fly-back and pulse operating power supplies.
- Provides signal for testing video amplifiers.

FREE—WITH EACH PURCHASE OF A SUPERIOR TELEVISION BAR GENERATOR . . . Our complete package of TV literature comprising: • HINTS FOR BETTER PICTURES ON 630TV • 630TV DIAGRAM • ILLUSTRATED TV CONVERSION MANUAL • AGC CIRCUIT DIAGRAM • RESISTOR & MICA CODE CHARTS and also our latest catalogs and flyers with hundreds of special offers.

BROOKS RADIO & TELEVISION CORP.
84 Vesey St., (Dept. E) New York 7, N. Y.

S·S·White MOLDED RESISTORS

The All-Weather Resistors

Photo Courtesy Photovolt Corp., New York, N. Y.

ARE USED IN THIS ULTRA SENSITIVE ELECTRONIC PHOTOMETER

in this instrument—designed for measurement of very low light values—S.S.White Resistors serve as the grid resistance in the all-important high-gain D.C. amplifier circuit. The manufacturer, Photovolt Corp., New York, N. Y., reports that the resistors "work very satisfactorily"—which checks with the experience of the many other electronic equipment manufacturers who use S.S.White resistors.

S.S.WHITE RESISTORS
are of particular interest to all who need resistors with inherent *low noise level* and *good stability* in all climates.

HIGH VALUE RANGE
18 to 10,000,000 MEGOHMS
STANDARD RANGE
1000 OHMS to 9 MEGOHMS

WRITE FOR BULLETIN 4906

It gives essential data about S.S.White Resistors, including construction characteristics, dimensions, etc. Copy with price list on request.

THE S.S.White INDUSTRIAL DIVISION
DENTAL MFG. CO.
Dept. R, 10 East 40th St.
NEW YORK 16, N. Y.
WESTERN DISTRICT OFFICE: Times Building, Long Beach, Calif.

INSURE *Proven Quality* with JONES PLUGS & SOCKETS

P-306-CCT — Plug, Cable Clamp in cap.

S-306-AB — Socket with Angle Brackets.

Series 300 Small Plugs & Sockets for 1001 Uses

Made in 2 to 33 contacts for 45 volts, 5 amps, for cap or panel mounting. Higher ratings where circuits permit. All plugs and sockets polarized. Knife switch socket contacts phosphor bronze, cadmium plated. Engage both sides of flat plug—double contact area. Bar type plug contacts hard brass cadmium plated. Body molded bakelite.

Get full details in Catalog 18. Complete Jones line of Electrical Connecting Devices, Plugs, Sockets, Terminal Strips. Write today.

Jones HOWARD B. JONES DIVISION
CINCH MANUFACTURING CORPORATION
CHICAGO 24

---

distributors for 30 years
of radio and electronic
components for all your needs

RADIO WIRE TELEVISION
INCORPORATED

NEW YORK 13, N.Y.
100 Sixth Avenue
WAlker 5-8883

NEWARK 2, N. J.
24 Central Avenue
MArket 2-1661

BOSTON 10, MASS.
110 Federal Street
Hubbard 2-7850

Lafayette 100 SIXTH AVE.
DIV. RADIO WIRE TELEVISION, INC.
FOR CUSTOM RADIO AND TV COMPONENTS

Custom assemble your own high fidelity phono - radio - television ensemble. All famous name components at lowest prices. Send for *Free* hi-fi catalog to Dept. E.

OVER 30 YEARS OF PRECISION ELECTRICAL EXPERIENCE
DeJUR
PRECISION Potentiometers
SERIES L-400
To meet the increasing demand for small compact precision potentiometers for military airborne instrumentation and similar applications, DeJUR is now producing the L-400 series potentiometers, built to rigid mechanical and electrical requirements of JAN-R-19 specifications.
DeJUR MODEL L-402
DeJUR MODEL L-400 with switch
FEATURES:
1½" diameter
3 watts fully enclosed
5 to 125,000 ohms
accuracy up to 0.5%
linearity up to 0.1%
300° rotation mechanical and electrical
on-off switch
ganging up to 10 units
double end shafts available
RA-60 DeJUR MODEL 275
RA-50 DeJUR MODEL 260
DeJUR MODEL 201
DeJUR MODEL 292
Built to JAN-R-19 specifications. Other models from 1-3/16" to 5" diameter.
1½" Panel INSTRUMENTS
Also available • 2½" • 3½" • 4" panel meters in all standard ranges. JAN-1-6 and A. S. A.
DeJUR MODEL 112
DeJUR MODEL 120
FEATURES:
Precision built DeJUR 1½" instruments for applications where space must be conserved • DeJUR rugged construction • Both models in all ranges and sensitivities • External shunts and multipliers available for various ranges • Complete magnetic shielding and methods of lighting scale • Approved source for government services meets JAN specifications.
• DC VOLTMETERS
• AMMETERS
• MILLIVOLT METERS
• MILLIAMMETERS
• AC RECTIFIER TYPES (self-contained).
Aluminum Case • One Hole Ring Mounting
Power RHEOSTATS
Built to JAN-R-22 specifications, DeJUR Rheostats are available in 25 or 50 watt sizes, single or dual ganged. Resistances up to 50,000 ohms in the 25 watt size and 75,000 in the 50 watt size.
DeJUR MODEL 241
All Metal Construction
DeJUR MODEL 245
For Further Information Write Dept. E-81
DeJUR MODEL 245-D
REQUEST CATALOG
DeJUR USA
DeJUR AMSCO CORPORATION
45-01 NORTHERN BOULEVARD, L. I. C. 1, N. Y.
MANUFACTURERS OF SCIENTIFIC PRECISION EQUIPMENT FOR OVER A QUARTER OF A CENTURY
• CAMERAS • PROJECTORS • ENLARGERS • EXPOSURE METERS •

outside the field of communications.

A general discussion of rectifiers and thyratron circuitry includes useful generic curves relating output current in terms of load circuit parameters.

Two chapters are devoted to servo theory, which include an unusually thorough presentation of this subject and its applications.

Electronic motor speed controls and generator voltage regulators are outlined, and an adequate survey of thyratron and ignitron applications in welding is followed by an analysis of basic resistance welding control circuitry. The latter is clearly introduced by a presentation of basic electronic timing circuits.

A discussion of induction and dielectric heating offers a satisfactory introduction to these subjects.

The description of industrial vacuum tube amplifiers is particularly good and may be useful as a reference in many industrial circuit designs. The chapters on electronic measurements and on oscillators and pulse techniques are also excellent and comprehensive.

The book is amply supplied with practical applications, and yet includes substantial basic theory and mathematical background.

Adequate references are included in the bibliography of each chapter so that more complete study may be made of any phase of the subjects covered if desired. Also included are problems which combine an exercise in theory and simpler practical application for use of the student.—JAMES H. BURNETT, *Electrons, Inc., Newark, N. J.*

Electromagnetic Problems of Microwave Theory

BY H. MOTZ. *A Methuen monograph, John Wiley & Sons, Inc., New York, 1951, 182 pages, $2.00.*

THIS MONOGRAPH deals with the determination of electromagnetic fields that exist in such microwave components as klystrons, magnetrons and waveguides. This book should be particularly valuable to physicists and engineers doing advanced research and development work on these components. It may not be too useful to the practical

Ungar's
little Angels

DO A HEAVENLY SOLDERING JOB

Pick any job and you'll find a pip of a tip to use with the trim, slim Ungar Pencil. Any of the 8 Ungar Angels interchange in the No. 776 Handle to make a honey of a tool that does work faster and better than larger, heavier irons. Whatever your problem, you'll bless the day you discovered these saintly soldering cherubs!

No. 537-C ⅛" PENCIL TIPS, 20 Watts
For Light Duty Work. Recommended for small meters and instruments, small joints and hard-to-reach points on radio and TV, printed circuits, delicate electronic assemblies, aircraft instrument repair, hearing aid assembly and repair.

Write for Catalog No. 600

Ungar ELECTRIC TOOLS, INC., Los Angeles 54, Calif.

GET YOUR COPY NOW!

—of "Standard's" UNBRAKO *Standards.*
Write on your business letterhead, today.

SOCKET UNBRAKO® SCREWS

"Standard" Recommends *Standards*

SPS STANDARD PRESSED STEEL CO.
JENKINTOWN 10, PENNSYLVANIA

ELECTRONICALLY REGULATED
LABORATORY
POWER SUPPLIES

BENCH
MODEL 25

- STABLE
- DEPENDABLE
- MODERATELY PRICED

- **INPUT:** 105 to 125 VAC. 50-60 cy
- **OUTPUT #1:** 200 to 325 Volts DC at 100 ma regulated
- **OUTPUT #2:** 6.3 Volts AC CT at 3A unregulated
- **RIPPLE OUTPUT:** Less than 10 millivolts rms

WIDTH 14"
DEPTH 6"
HEIGHT 8"
WT: 17 LBS.

For complete information write for Bulletin E

LAMBDA ELECTRONICS CORPORATION
CORONA

MORE THAN A TUBE SOCKET...

JOHNSON 122-101
A Basic Sub-Assembly
FOR VHF

Provision for mounting button mica capacitors directly to socket. Special contacts permit mounting grid coils directly on terminals. Ventilated aluminum base shield recesses socket below chassis for short lead length. Two holes provided for mounting buss bar neutralizing leads.

Here's one of the most popular transmitting tube sockets for VHF in America today — the JOHNSON 122-101.

It's especially designed for VHF and UHF use with Septar based tubes, such as the 826, 829, 832 and 4D32.

The 122-101 is a 7-pin steatite wafer socket incorporating ventilated base shield. Five tube retainer springs grip the tube securely even under severe conditions encountered in mobile operation.

Steatite insulation, silver-plated contacts that are recessed to prevent movement, and the ventilated base shield permit Septar based tubes to be operated at full input with maximum efficiency at their high frequency limits. Mounting holes are .185" on 2-5/16" square.

For further information, consult E. F. JOHNSON COMPANY, the leading producer of power tube sockets in the electronics industry .

And Write for Complete Catalog.

Save production time and costs by using this modern tube socket.

JOHNSON . . . *a famous name in Radio!*
E. F. JOHNSON CO., WASECA, MINNESOTA

FOR MILITARY APPLICATIONS

RAYTHEON

CUSTOM-BUILT TRANSFORMERS

Since 1927, Raytheon has been a leading producer of custom-built magnetic components for military and commercial applications. Typical units include: single or polyphase power transformers, pulse transformers, blocking oscillators, servo transformers, chokes, audio components, filters, saturable magnetic components, etc. Cased or open types to meet the most exacting MIL specifications as well as Underwriters' Laboratories and R.M.A. requirements.



NEW, ULTRA COMPACT, Raytheon miniature audio type transformers with new patented, compression terminals. Designed for minimum space requirement and assembly ease in communications equipment.

FOR POSITIVE VOLTAGE CONTROL



Designs available in ratings from 5 to 10,000 watts. A wide range of catalog types, or custom-engineered to meet special needs.

RAYTHEON

VOLTAGE STABILIZERS

The first choice of manufacturers of electrical equipment for more than two decades. Compact, rugged, light weight and with no moving parts, they can be built into equipment or used as an accessory. Compensates for widely varying input (±15%) within 1/20 second; maintains voltage within ±½% of rated output. Insures peak performance of any AC operated electrical equipment.

WRITE FOR COMPLETE INFORMATION

Address Magnetic Components Division, Dept. 6460-A

RAYTHEON MANUFACTURING COMPANY

Waltham 54, Massachusetts

microwave equipment and system engineer.

The subject material of this book, electromagnetic fields in components, concerns probably the most difficult and complex phase of microwaves. It would be impossible to fully cover all fields in all possible component configurations. However, the aim of the book is to illustrate methods of analysis by thoroughly worked-out examples. This is done quite well, and in the process a number of very useful general relationships are developed. In particular, solutions of some of the more complex mathematical equations are given, in some cases with a graphical presentation, which could not readily be found in the literature. This material is of necessity highly mathematical, and the reader should have a thorough knowledge of electromagnetic wave theory, advanced calculus and differential equations to fully absorb it.

The first chapter in the text provides an excellent review of the theory of the basic components used in microwaves, namely velocity-modulated tubes (klystrons), travelling-wave tubes, resonators, cavity magnetrons, crystal and bolometer detectors, transmission lines and measuring equipment (wavemeters and standing wave lines).

In chapter II the basic theory of velocity modulation is covered, with a detailed analysis of electron flow in space (within the klystron) and absorption of energy by a single finite gap (small signals). In chapter II, this basic theory is expanded to include klystron operation using a double-gap system.

Chapter IV deals with the fields in cavity magnetrons, with particular emphasis on mode selection in these magnetrons. Chapter V deals with the basic Maxwell equations as they are applied to waveguides. Chapter VI provides some useful methods of solving the field equations in waveguides containing slotted gap elements. These methods are then used to analyze fields in resonators and corrugated waveguides.

Chapter V and VI continue the analysis of fields in waveguides, covering the effect of coupling ele-

MICO

Precision Apparatus

TOROID COIL WINDERS



Wide-range, laboratory-type machines available for winding samples and small production runs of toroid coils. Production machines built to meet specific requirements.

MICO INSTRUMENT CO.
76E Trowbridge St., Cambridge, Mass.

PM

PATTON-MacGUYER

PRESSED METAL

SMALL METAL STAMPINGS

In Accordance With Your Prints

Extensive modern plant, complete equipment, engineering and toolmaking skill for producing your stamped metal parts accurately, economically, promptly. Moderate die charges. Facilities for large volume production. We welcome stamping problems.

TERMINALS for ELECTRIC WIRES

Specialists in the terminal field, we have dies to produce over 400 different kinds of separate terminals. Every modern facility to meet your standard or special requirements.

PATTON-MacGUYER COMPANY
Edgewood Station Providence 5, R.I.

EISLER
Television Tube MACHINERY

- ECONOMICAL
- MODERN DESIGN
- PRODUCTION ENHANCING

TV Sealing Machine



Machines for Manufacturing Incandescent Lamps, Radio and Electronic Tubes

From 5" to huge 24" Television Tube

RESISTANCE WELDERS ¼ to 300 KVA



EISLER'S Electronic Equipment is especially Designed and Built to your exact requirements.

EISLER TRANSFORMERS STANDARD • SPECIAL

WE INVITE YOUR INQUIRIES Sizes From ¼ to 500 KVA

EISLER ENGINEERING CO., Inc.
751 So. 13th St. Newark 3, N. J.

THE NEW 'Economy' OSCILLOGRAPH

Long the world's most popular oscillograph, the Type S-14 has been redesigned and improved to meet exacting demands of modern research. The NEW Type S-14C 'Economy' Oscillograph is the simplest to operate and maintain, and the most versatile in application. No research or testing laboratory is complete without it.



- Wide range of galvanometer types and characteristics. Natural frequencies to 10,000 cps; sensitivities to 50,000 mm per ma; single and polyphase watts.
- Precision optical system for very high writing speeds and high-quality records.
- Continuous-drive magazine for records to 100 or 200 feet long.
- Wide range of record speeds. Any of 9 speeds available by shifting single external belt. Standard speeds: 40, 20, 10, 4, 2, 1, 0.4, 0.2 and 0.1 in./sec.
- Internal motor and gear reducer shock mounted and vibrationless.
- Light-socket operation.
- Daylight loading and unloading.
- Automatic transiend recording attachments.
- Complete list of accessories for extreme versatility.

FOR FURTHER INFORMATION WRITE FOR BULLETIN 201-G

Hathaway INSTRUMENT COMPANY
1315 SO. CLARKSON STREET • DENVER 10, COLORADO

EDISON Develops NEW Relay Timing Adjustment

Another triumph of EDISON ingenuity! Like most other modern electrical relays and components, the EDISON Model 501 Thermal Time Delay Relay is hermetically sealed in glass. One phase of the manufacture which concerned EDISON engineers was a minute variance in calibration which sometimes occurred between the final timing setting and the hermetic sealing operation.

The solution to this problem was found in the patented design of the adjusting screw featured in the illustration above which permits final calibration adjustments to be made *after sealing* and guarantees pinpoint accuracy in every production relay. All adjustments are factory preset; not changeable after delivery.

SPECIFICATIONS:

Vibration.....1/16" amplitude at 55 cps.
Impact.....50 g.
Delay Periods.....5 sec. to 5 minutes
(Special models to 25 minutes; without temperature compensation).
Ambient.....—60 to +85° C.
Contact load.....choice of 3 or 6 amperes to 450 V. ac/dc.

Ask for free copy of Bulletin E-3007.

Thomas A Edison
INCORPORATED
West Orange • New Jersey

VISIT US AT BOOTH 607 • PACIFIC ELECTRONICS EXHIBIT
CIVIC AUDITORIUM • SAN FRANCISCO • AUGUST 22-23-24
SEE THE NEW EDISON *MINIATURE* TIME DELAY RELAY

OTHER INSTRUMENT DIVISION PRODUCTS

Sealed Thermostats • Electronic Temperature Controls • Temperature Monitors • Electrical Resistance Bulbs • Sensitive Relays

YOU CAN ALWAYS RELY ON EDISON

ments (or antennas) and discontinuities. This text contains a large number of references, so that the reader can readily study any particular subject in greater detail by going back to the source material.
—JOSEPH RACKER, *New York, N. Y.*

Quartz Vibrators

BY P. VIGOUREUX AND C. F. BOOTH. *His Majesty's Stationery Office, London, England,* 1950, 371 *pages,* $6.75.

THE PIEZOELECTRIC effect was known for approximately 40 years before the crystal unit became a useful item. It then remained a product of craftsmanship with limited use until about 1938, when demands for large quantities for the Services developed considerable activity in this field. As a result, the past few years have seen rapid advancements in the science of piezoelectricity and its applications. With respect to quartz, emphasis has been given to a study of the modes of motion in plates, evaluation of the elastic and piezoelectric constants, standardization, higher precision, the growing of synthetic quartz, the study of aging, and efforts to render manufacturing techniques well-definable processes. Widespread efforts on all of these phases have created a keen interest and the desire for dissemination of views. Consequently, a book on quartz vibrators by men with as wide a background and experience as the authors should be well received at this time.

Vigoureux's previous book was one of the earliest in this field and was used as a guide and reference in this country in the early stages of crystal unit development. Most of the material in the earlier book has been included but has been almost completely rewritten. Particularly, the notation has been modified to be more in accordance with general usage.

Mr. Booth's experience in the radio laboratories of the General Post Office and his past contact with the quartz processing industry of the United Kingdom has given him a broad experience in the manufacture and application of crystal units. He has also been ac-

THE INDUSTRIAL POCKETSCOPE® AND LINEAR TIME BASE

BY WATERMAN

MODEL S-11-A
11" x 5" x 7"
8¾ lbs.

5 lbs.
11" x 5" x 3½"
MODEL S-21-A

Recognition of the unusual versatility and application of the portable Model S-11-A Industrial POCKETSCOPE has rocketed since its introduction to the industry. Now Model S-21-A Linear Time Base, a completely independent and self powered instrument expands the utility of Model S-11-A to a point previously unrealized. Although physically constructed to mount directly beneath Model S-11-A, this linear time base is designed to operate successfully with most of the presently available oscilloscopes.

Model S-11-A POCKETSCOPE
Vertical and horizontal channels: 0.1v rms/inch with response within −2DB from DC to 200KC. Repetitive time base continuously variable from 3cps to 50KC with + sync.

Model S-21-A Linear Time Base
Linearized periodic or trigger sweep from ½cps to 50KC. Output 20v peak with DC coupling. Positive or negative blanking signals of 100v peak. Positive and negative sync.

WATERMAN PRODUCTS CO., INC.
PHILADELPHIA 25, PA.
CABLE ADDRESS: POKETSCOPE

WATERMAN PRODUCTS INCLUDE:

S-10-B GENERAL	POCKETSCOPE
S-14-A HI-GAIN	POCKETSCOPE
S-14-B WIDE-BAND	POCKETSCOPE
S-15-A TWIN TUBE	POCKETSCOPE

Also RAKSCOPES, LINEAR AMPLIFIERS, RAYONIC® TUBES and other equipment

WATERMAN PRODUCTS

New di-acro POWERSHEAR

OFFERS
CONTINUOUS ACTION
plus
VARIABLE SPEED
from 30 to 200 strokes per minute

for high speed DIE-LESS DUPLICATING

The new Di-Acro POWERSHEAR has remarkable speed and accuracy for the production of small parts.

1. CONTINUOUS SHEARING ACTION — no clutch to engage! Feeding speed determines shearing speed.

2. VARIABLE SPEED — cycle quickly set for each shearing operation.

3. EASE OF OPERATION — fatigue is reduced, production soars.

4. "SINGLE STROKE" SHEARING — non-repeating safety clutch for jobs not adaptable to continuous shearing.

Any plant doing high speed precision shearing on smaller parts cannot afford to be without the DI-ACRO POWERSHEAR. Available in 12" and 24" shearing widths, capacity 16 gauge sheet steel. Also standard model.

DOES PRECISION WORK ON ALL SHEARABLE MATERIALS

MICA	LEATHER	ALUMINUM	STAINLESS STEEL
PLASTICS	SILVER	SILICON STEEL	and Many
BIMETALS	MAGNESIUM	CHROME MOLY	Other Materials
FIBRE	COPPER	LEADED BRASS	

SEND FOR 40 PAGE "DIE-LESS DUPLICATING" CATALOG giving full details on Di-Acro Powershears, also Di-Acro Benders, Brakes, Rod Parters, Notchers, Rollers and Punches.

O'NEIL-IRWIN
321 8TH AVE.
LAKE CITY, MINN.

For Greater Counting Efficiency

(½ ACTUAL SIZE)

NEW "Y" ELECTRIC PRODUCTIMETER

for use on light applications

Hi-Speed... Accurate... Long Life... Totally Enclosed

● This small "Y" Electric Counter is designed primarily for use on light applications . . . built to give accurate count at high, low or intermediate speeds — up to 1000 counts per minute. Counter gives maximum readability at all angles. Design fits all mounting conditions . . . panel mounting or base mounting. Hardened steel parts for long life and dependability.

DURANT MANUFACTURING CO.
1912 N. Buffum St. Milwaukee 1, Wis.
112 Orange St. Providence 3, R. I.
Representatives in Principal Cities

Write for New Bulletin No. 55.

PRODUCTIMETERS
SINCE 1879 *Count Everything*

ECLIPSE-PIONEER

Announces the New Line of

PYGMY SYNCHROS



Size of pygmy as compared to AY-200 series outline

Eclipse-Pioneer has added a tiny new member to its great family of famous Autosyn* synchros. It's the new AY-500 series, a precision-built pygmy weighing only 1¾ oz. while scaling only 1.278" long and .937" in diameter (the same diameter, incidentally, as a twenty-five cent piece). Its accuracy and dependability are assured, thanks to Eclipse-Pioneer's 17 years of experience and leadership in the development of high precision synchros for aircraft, marine and industrial applications. For more detailed information on the AY-500 and other E-P Autosyns, such as the remarkably accurate AY-200 series (guaranteed accuracy to within 15 minutes on all production units), please write direct to Eclipse-Pioneer, Teterboro, N. J.

*REG. TRADE MARK BENDIX AVIATION CORPORATION

LOOK FOR THE PIONEER MARK OF QUALITY
REG. U.S. PAT. OFF.

Typical Performance Characteristics

	One AY-201-3 Driving		One AY-500-3 Driving
	One AY-500-3 Control Transformer	Two AY-500-3 Control Transformer	One AY-500-3 Control Transformer†
INPUT			
Voltage	26-volts, single-phase	26-volts, single-phase	26-volts, single-phase
Frequency	400 cycles	400 cycles	400 cycles
Current	88 milliamperes	110 milliamperes	55 milliamperes
Power	0.8 watts	1.2 watts	0.9 watts
Impedance	105+j280 ohms	100+j220 ohms	290+j370 ohms
OUTPUT			
Voltage Max. (rotor output)	17.9 volts	16.2 volts	14.1 volts
Voltage at null	40 millivolts	40 millivolts	40 millivolts
Sensitivity	310 millivolts/degree	280 millivolts/degree	245 millivolts/degree
Voltage phase shift	23 degrees	26 degrees	44 degrees
System accuracy (max. possible spread)	0.6 degrees	0.6 degrees	0.75 degrees

Other E-P precision components for servo mechanism and computing equipment:

Servo motors and systems • rate generators • gyros • stabilization equipment • turbine power supplies • remote indicating-transmitting systems and special purpose electron tubes.

For detailed information, write to Dept. C

ECLIPSE-PIONEER DIVISION of

TETERBORO, NEW JERSEY

Bendix AVIATION CORPORATION

Export Sales: Bendix International Division, 72 Fifth Avenue, New York 11, N. Y.

tive in the exchange of knowledge with this and other countries.

The principle purpose of this book is contained in the authors' statement, as follows: "It is hoped that the reader interested in the subject will gain a usable knowledge both of the theoretical aspects of piezoelectricity and of its practical applications in the production of crystal units, commencing with raw crystal and finishing with the performance of the equipment in which they function as component elements."

As the title implies, the material is limited solely to quartz. In this respect the book does not cover the field of piezoelectricity or crystallography. However, the treatment of quartz is fairly complete with respect to crystal structure, piezoelectric effects and the electrical, mechanical and optical properties. X-ray effects and the effect of heat on physical properties are comprehensively covered. In the chapter on Piezoelectrical Phenomena in Quartz, a comparison is made between the elastic constants and moduli as given by three well-known exponents, Messrs. Cady, Mason and Voigt. An appendix covers the theoretical treatment of the natural frequency and coupling factor as determined by computing the stored energy. A full chapter is devoted to the theory of the quartz resonator as analyzed by use of the circle diagram, which has proved to be a very useful and convenient method.

While the theoretical aspects of quartz crystals are covered sufficiently to give the reader a well-rounded insight, by far the major contents cover their production and application. The treatment of production begins with the occurrence and examination of quartz crystals and covers in detail all processes, including the testing of the completed unit. Some consideration is given to the design of a production plant. This section is greatly enhanced by the generous use of good photographs. The reader is warned by the authors that not all manufacturers use the same processing methods, but the ones shown have been used in mass production and are therefore considered rgliable.

The various applications covered

SPECIALISTS IN
ELECTRONIC GEARS

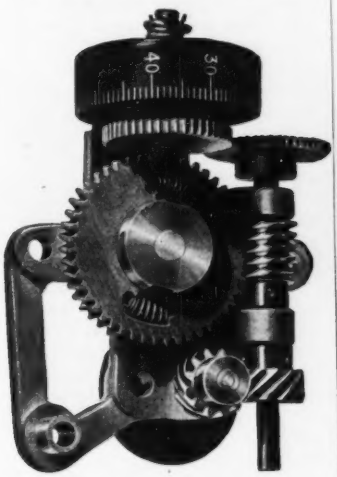

QUAKER CITY
GEAR WORKS
1910 N. FRONT ST.
PHILADELPHIA 22, PA.

Polarad
Portable
TV WAVE FORM
MONITOR

Features
- Sweep expansion of 25 tube diameters.
- Voltage calibration accuracy to 2%.
- Input signal level 0.25 to 5 volts peak to peak.
- Rack mounting and portable.
- Excellent synchronizing capabilities.

Specifically designed for precision waveform analysis and amplitude measurement of video signals in television circuits. Also ideally suited as a general purpose instrument in many applications due to its wide frequency response, high sensitivity, and excellent synchronizing capabilities.

Polarad Electronics Corporation
100 Metropolitan Ave.
Brooklyn 11, N. Y.

Write Dept. E-8 for details.

Engineers and Consultants to the Nation's Great TV Stations

IMMEDIATE CAPACITY
FOR DEFENSE
SUB-CONTRACTS

STRAIGHTENING & CUTTING
Perfect straight lengths to 12 ft.
.0015 to .125 diameter

WIRE FORMS
.0015 to .080 diameter

SMALL METAL STAMPINGS
.0025 to .035 thickness
.062 to 3 inches wide

★

Specializing in Production of Parts for Electronic and Cathode Ray Tubes

Write for Illustrated Folder
Send Blueprints or Samples for Estimate

ART WIRE & STAMPING CO.
227 High Street Newark 2, N. J.

Variable Frequency
CENTRIFUGAL
BLOWER
with
PERFORMANCE
that far
EXCEEDS
its
SIZE & WEIGHT



MODEL
B302H-1C

For aircraft or other confined area installations where weight and size are critical. Large cooling capacity — precision balanced for smooth operation at the higher frequencies.

SPECIFICATIONS

115 volts AC variable frequency • 320—1000 cycles • 1.4 amps. • 1.5 mfd. • 40 CFM minimum at 0" static pressure • overall dim. 4⅜" x 4-13/64" • weight 25 oz. • Fungus proof • Silicon impregnated.

Other models available for greater air delivery. 60 cycle, 400 cycle variable frequency.

EASTERN AIR DEVICES, INC.
585 DEAN STREET • BROOKLYN 17, N. Y.

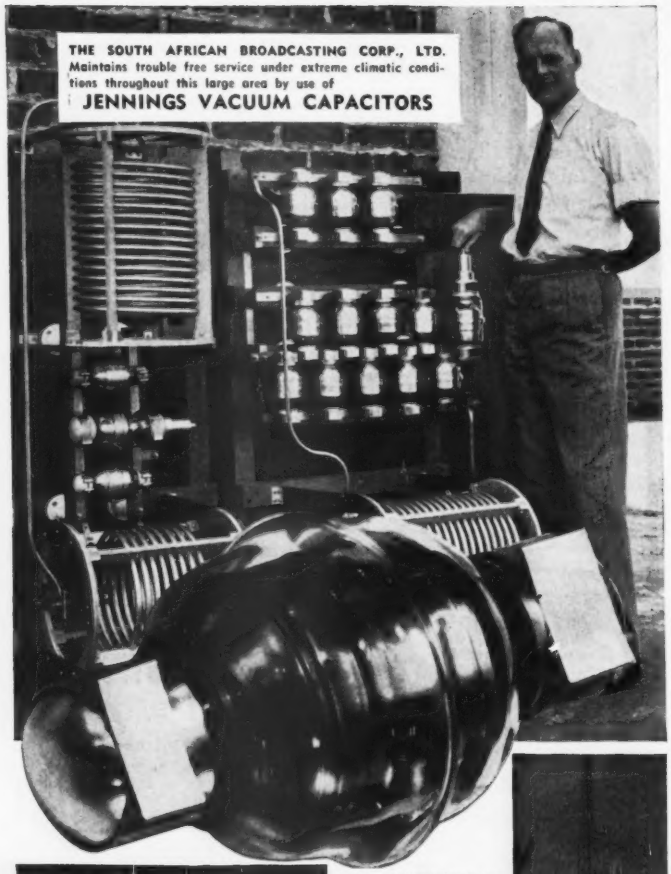
THE SOUTH AFRICAN BROADCASTING CORP., LTD.
Maintains trouble free service under extreme climatic conditions throughout this large area by use of
JENNINGS VACUUM CAPACITORS

Jennings RADIO
VACUUM ELECTRONIC COMPONENTS

MR. ALF GOODMAN, in charge of construction, SOUTH AFRICAN BROADCASTING CORP., Ltd.

JENNINGS TYPE M VACUUM FIXED HIGH VOLTAGE CAPACITOR

Number two of a series

Another Capacitor Problem Solved—

Jennings Vacuum Capacitors have proven their rugged strength and in-built quality by giving years of trouble-free service under the most difficult conditions in many parts of the world.

We picture here a Jennings Capacitor installation for the antenna coupling and "rejector" (trap circuit) for the South African Broadcasting Corp., Ltd., located a few miles from Johannesburg, South Africa.

These Jennings units have helped greatly to reduce the cost of maintenance under extreme climatic conditions throughout this large area.

Jennings Vacuum Capacitors are available in any capacity from 1 mmfd. to 2000 mmfds. in either variable or fixed form. They carry high current and voltage and yet reduce the space requirements to a minimum.

Write us for information regarding your own Capacitor or electronic problem. Literature available.

JENNINGS RADIO MANUFACTURING CO. • 970 McLAUGHLIN AVE. • P. O. BOX 1278 • SAN JOSE 12, CAL.

include ultrasonics, frequency control of radio transmitters, crystal filters, frequency standards and miscellaneous uses such as pressure gages and accelerometers. The description of the Post Office frequency standard, its relation with the Royal Observatory and its comparison with frequency standards of other countries should find wide general interest.

The aging phenomena of quartz elements is given a separate chapter and temperature control of crystal units is generously treated.

This book is as up-to-date and complete as can perhaps be expected in view of the rapid current progress in this field. It most certainly meets the authors' intent in every respect, and an extensive bibliography makes it a convenient reference on the subject.—I. E. FAIR, *Bell Telephone Laboratories, Murray Hill, N. J.*

THUMBNAIL REVIEWS

PROCEEDINGS OF THE NATIONAL ELECTRONICS CONFERENCE, 1950, Vol. VI. National Electronics Conference, Inc., 852 E. 83rd St., Chicago 19, Ill., 564 pages, $5.00. Official record of the 1950 Conference held in Chicago, containing all of the papers, or digests thereof, that were presented. Volumes 2, 3, 4 and 5 are also available at $5.00 each.

ELEMENT VIII-SHIP RADAR TECHNIQUES (Supplement to RADIO OPERATOR'S LICENSE Q&A MANUAL—2nd Edition). By Milton Kaufman. John F. Rider Publisher, Inc., New York, 1951, 32 pages, $0.78. Answers to 69 FCC Study Guide questions suggested as preparation for radiotelegraph operators desiring to qualify by examination for ship radar endorsement to their present licenses.

RAPID TV TROUBLE SHOOTING METHOD. H. G. Gisin, author and publisher, 200 Clinton St., Brooklyn 2, N. Y., 1951, 23 pages, $1.00. Step-by-step classification of symptoms, causes and checks to be made for isolating trouble rapidly in television receivers.

TELEVISION ANTENNAS. Donald A. Nelson. Howard W. Sams & Co., Indianapolis, 1951, Second Edition, 223 pages, $2.00. Expanded and revised to cover recent antenna developments and to place emphasis on the choice of the best and most economical type of antenna installation for a given location. Includes chapter on suppression of interference, avoiding or minimizing ghosts, and solving other common antenna installation problems.

FUNDAMENTALS OF ELECTRICAL ENGINEERING. Fred H. Pumphrey, Univ. of Florida. Prentice-Hall, Inc., New York, 1951, 668 pages, $7.65. For first-year electrical engineering students specializing in some field other than electronics. Of the 28 chapters, 8 deal with electronic topics: Electron Tubes; Rectifiers; Amplifiers and Oscillators; Electron Tubes as Switches; Electronic Instruments; Other Types of Electron Tubes; Heating, Welding and Electrochemical Processes; Electrical Communication.

BIBLIOGRAPHY ON INDUSTRIAL RADIOLOGY, 1948-50. By H. R. Isenburger. St. John X-Ray Laboratory, Califon, N. J., $2.00.

STATHAM DYNAMICALLY BALANCED TRANSDUCER

MODEL P69



The Model P69 pressure transducer is designed for long life and excellent performance under conditions of vibration and acceleration such as are encountered in flight test and guided missile applications. This dynamically balanced, temperature compensated transducer is offered for the measurement of gage, differential, or absolute pressure. The full bridge of the transducer will operate successfully with a wide variety of controlling, indicating, recording and telemetering circuits.

Please Request Bulletin No. 3.3

We invite correspondence with our engineering staff when you are considering instrumentation for the measurement of acceleration, pressure, force or displacement.

STATHAM LABORATORIES — SCIENTIFIC INSTRUMENTS

12401 WEST OLYMPIC BLVD.
LOS ANGELES 64, CALIFORNIA

WINCHESTER ELECTRONICS, INCORPORATED

high voltage • heavy duty • pressure tight



CIRCUIT CONNECTORS

SERIES 200 to 900

(Mounted in Standard "A-N" Shells)

The High Voltage (Center) contacts are separated by deep barriers in the molded melamine inserts for resistance to high voltage breakdown. These contacts can be removed for soldering cable wires and replaced in the field. Other contacts are for lower voltage. All contacts are precision machined brass or phosphor bronze gold plated over silver and pressure tight sealed in the insert with individual neoprene seal rings.

The MONOBLOC* inserts of molded melamine are mounted and sealed with neoprene seal rings in standard A-N shells in the sizes as indicated.

Write or telephone our Engineering Department for additional details.

Heavy Duty Connectors are available in various sizes:-

Plug Code No.	Recpt. Code No.	Low Vol. Contacts	High Vol. Contacts	Size A-N Shell
450	451	—	1	#18
455PR	456PR	—	2	#24
201BPR	202BPR	12	3	#36
301	302	20	1	#40
421	422	20	3	#44
901	902	26	—	#28

*Trade Mark Pat. No. 2513080

Winchester Electronics
INCORPORATED
GLENBROOK, CONNECTICUT, U.S.A.

THIS IS IT!

World-wide recognition for this outstanding line of electric soldering irons—

HEXACON

– specified by the big names for the *TOUGH JOBS!*

WESTERN ELECTRIC, BENDIX, MINNEAPOLIS HONEYWELL RADIO CORP. OF AMERICA, STROMBERG CARLSON, SPERRY, WESTINGHOUSE, EMERSON, KAISER, etc.

PLUG OR SCREW TIPS 40 to 700 Watts
⅛" to 1¼" Tip Dia.

Follow the leaders and you'll specify HEXACON! They'll efficiently solve your soldering problems. Write for literature.

Here's the famous HATCHET TYPE

These irons feature better balance for reduced operator fatigue. Efficiency is stepped up, and quality of work is improved. The ideal iron for inaccessible and intricate jobs.

HEXACON ELECTRIC CO.
130 W. CLAY AVE. ROSELLE PARK, N. J.

Standard TIMERS

AN ECONOMICAL INVESTMENT IN LONG-LIFE PERFORMANCE AND EXTREME ACCURACY. RUGGED, FOR HEAVY-DUTY SERVICE: FLEXIBLE IN APPLICATION.

Model	Scale Divisions	Totalizes	Accuracy
S-100	1 5 sec.	6000 sec.	± 1 sec.
S-60	1 5 sec.	60 min.	± 1 sec.
SM-60	1 100 min.	60 min.	± .002 min.
S-10	1 10 sec.	1000 sec.	± .02 sec.
S-6	1 1000 min.	10 min.	± .0002 min.
S-1	1 100 sec.	60 sec.	± .01 sec.
MST	1 1000 sec.	360 sec.	± .001 sec.
MST-500	1 1000 sec.	30 sec.	± .002 sec.

The clutch coil can be connected directly in the plate circuit of electronic tubes. For this use the coil has a resistance of 2000 ohms and requires 50 to 60 milliamperes. When ordering for this purpose, always specify 120V DC clutch coil. Write for Bulletin 153. T-1E

THE Standard Electric Time Co.
97 Logan Street — STANDARD FOUNDED 1884 — Springfield, Mass.

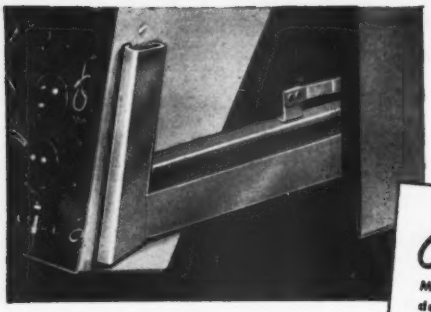

Try Remler for Service-Tested "Hard-to-Get" Components

Custom Components

Metal-plastic components designed and manufactured to order. Write for quotations specifying electrical and mechanical characteristics. Describe application. No obligation.

FOR EFFICIENT MAINTENANCE

SPECIFY REMLER TILT-UP

EQUIPMENT SLIDES

Remler slide rails for rack or cabinet mounting permit complete withdrawal or inspection of top and bottom of apparatus chassis. Positive . . . self-locking. Full roller type . . . handles equipment up to 50 lbs. Stainless steel for military applications; cadmium plated cold rolled steel or bonderized cold rolled steel. Nickel plated brass rollers; roller studs in stainless or copper flashed cold rolled steel.

Remler Company Ltd. 2101 Bryant St. San Francisco 10, Calif.

Remler

Since 1918 **PIONEERS IN ELECTRONICS AND PLASTICS**

NWL

Nothelfer

SPECIALISTS IN TRANSFORMERS

NOTHELFER

WINDING LABORATORIES

9 ALBERMARLE AVE. TRENTON 3, N. J.

BACKTALK

(continued from page 152)

maximum efficiency can be achieved.

The field engineer assigned to such a program will find himself confronted with many problems which are nontechnical, and which will arise generally from the relationship of the engineer with the people with whom he works. Roughly, the relationships may be divided into three classes:

(1) Relationship with military
(2) Relationship with co-workers
(3) Relationship with employer

Relationship With Military

In dealing with officers of the military, problems not normally encountered in civilian practice may arise. Because of the complexity of military organizations, armies generally operate with firmly fixed lines of organization known as "chains of command." Fields of responsibility are assigned to each person within the military structure. The engineer will be assigned a field of responsibility within the military organization. Usually, an officer will be designated whose responsibility will include the activities of the engineer. The military field engineer may find that the officer directly in charge of coordinating his activities has a technical background and will understand the complexities of field problems. In other cases, the coordinating officer will be purely an administrator. In this event, the field engineer is faced with the necessity of presenting problems in a clear-cut, nontechnical method so that they will be fully understood.

Often, more than one officer will be concerned with the activities of a field engineer. For this and other reasons, clear, concise reports should be rendered as frequently as conditions warrant, as new field problems arise, or as existing problems are solved. Copies of these reports (consistent with security regulations) will serve as a valuable aid to the employer of the engineer in providing an insight into the problems existing at the field level.

Relationship With Coworkers

In some cases, the personnel with whom the field engineer works will



ACME RADIO RANGE FILTERS

On air lines all over the world, thousands of Acme's Radio Range Filters have given faithful service for years. Like most Acme designed filters, they are light, compact, hermetically sealed. They carry CAA type certificate No. 1120. Write for catalog sheet.

Acme ELECTRONICS, INC.

300 No. Lake Ave., Pasadena 4, Calif.
Formerly Acme Metal Die, Inc.

Wave Filters • Delay Lines • Magnetic Amplifiers • Special Transformers & Chokes • Toroidal, Universal & Solenoid Wound Inductors

INCREASED ACCURACY

- **SWEEPS .01 sec/cm to .1 μsec/cm Accuracy 5% or greater.**
- **.04 μsec RISE TIME**
- **FULLY REGULATED POWER SUPPLY.**
- **NEW SQUARE WAVE VOLTAGE CALIBRATOR 3% Full Scale Accuracy.**



TEKTRONIX TYPE 511 AD OSCILLOSCOPE
Price $845.00 f. o. b. Factory

Increased accuracy in sweep time calibration is made possible by the use of dual Sweep Multiplier dials. The 2 megohm variable carbon resistor formerly used has been replaced by a combination of 1% fixed resistors and a variable element which comprises only 10% of the total. Electronic regulation of all DC voltages preserves the inherent accuracy regardless of severe line voltage variations.

Write for further information on the Type 511 AD and other Tektronix instruments.

TEKTRONIX, INC.

712 S.E. Hawthorne Blvd. Portland 14, Ore.

THEY ALL Sound BETTER WITH A McIntosh

WORLD'S FINEST AUDIO AMPLIFIER

50 WATT AMPLIFIER



50 WATTS (peak: 100) 50W-2 $249.50

Unequalled for quality reproduction of any sound source, the McIntosh is the most advanced amplifier of the day. Its unique, compact design offers: HIGHEST EFFICIENCY—over 65%; LESS THAN 1% DISTORTION AT PEAK POWER; DYNAMIC RANGE: OVER 70 db; FREQUENCY RESPONSE: 20-20,000 cps.

AE-2 Amplifier Equalizer - $74.50

20 WATT (peak: 40) 20W-2 - - $149.50

SEND FOR *Free* CATALOG Dept. B-1

McINTOSH Engineering Laboratories, Inc.
320 Water Street, Binghamton, N. Y.

PIX WIRE FORMING SPECIALISTS

Precision Parts to meet your Production and Engineering needs. From .002" dia. to .125" dia. Radio tube parts—Stampings—Drawings Modern facilities, high-production equipment.

Metal Crystal Holder Parts

Send sketch or print for quotation.

PIX MANUFACTURING CO., Inc.
24 Bedford St., Newark 3, N. J.



Little thought-of facts about capacitors

The short time breakdown voltage of a well-made D.C. capacitor is not less than 5 to 6 times the actual working voltage at 20°—

E = 5 × e min
E = Breakdown voltage
e = Rated d.c. working voltage

INDUSTRIAL CAPACITORS are unvaryingly held to this formula.

Designed for maximum safety and the smallest possible volume, INDUSTRIAL CAPACITORS are the most widely used capacitor in industrial applications.

WRITE TODAY FOR DETAILED CATALOG

INDUSTRIAL CONDENSER CORP.

Watch this space for other capacitor facts that will help you.

Sales Offices in All Principal Cities
3243 N. California Ave.
Chicago 18, Illinois

20,000 OHMS per VOLT

MULTITESTER

MODEL 105

Another OAK RIDGE
PORTABLE PRECISION TESTER

The Oak Ridge Multitester is designed to double your bench space—engineered to give 20% greater accuracy than any other popular priced Multitester.

Ranges:

DC and AC Volts: 0-2.5-10-50-250-1000-5000
Output: 0-2.5-10-50-250-1000
DC Milliamps: 10-100-500
DC Microamps: 100
Decibels: —12 to +55 in 5 ranges
Ohms: 0-2000, 0-200,000, 0-20 meg.

Oak Ridge are creators of the world famous miniature precision test instrument line:

- Synchro Sweep Generators
- Signal Generators
- Kilovoltmeters
- Substitution Testers
- Cathode Ray Tube Testers
- Dynamic Tube Testers
- Multitesters

Available at your local distributor or write direct.

OAK RIDGE PRODUCTS
37-01 Vernon Blvd. Long Island City 1, N. Y.
Mfg. Division of VIDEO TELEVISION INC.

be American military people. In other locations it may be foreign personnel with whom the field engineer will have everyday contact.

In either event, there will exist a certain unfamiliarity which must be bridged before the engineer is "accepted." The field engineer is a guest of the military unit or the foreign country in which he is working. It is easy to gain entree if the ordinary rules of conduct for a guest are followed.

There are several taboos. The guest who criticizes the method by which his host prepares food is no more welcome than the field engineer who makes unfavorable comparisons between the methods used by the personnel with whom he works, and the method he learned at school or the method HE uses.

Naturally, situations will arise where the experience and knowledge of the field engineer will indicate that a change in technique is advisable. One measure of the engineer's success is the manner in which such changes are suggested. Before suggesting a change, he would be wise to investigate fully the existing situation, and ascertain whether peculiarities of the local scene or requirements of military organization dictate different methods from those which would be used normally.

The military field engineer should not expect preferential treatment by virtue of his civilian status. Certain personal discomforts will be encountered which will be greater than those in comparable civilian positions. These should be accepted with good grace. Because he is a civilian, less grumbling will be tolerated from the engineer than from a soldier. Generally, the field engineer is where he is through choice. The soldiers with whom he is working are there as part of their military duty.

Again, due to the civilian status of the engineer, a certain delicacy of position will result. He will be able to advise only. While some mention has been made of chain of command, the field engineer will find that although he has been assigned a field of responsibility within his chain of command, he has no place directly in the line of

NEW
BRAZING ALLOY
for VACUUM TUBE COMPONENTS
"NICORO"
Alloy of Nickel, Copper and Gold . . . our exclusive development

- SUPERIOR FLOW CHARACTERISTICS
- MINIMUM "LEAKERS"
- GREATER STRENGTH

WRITE FOR FACTUAL DATA AND PRICES

MAIL THIS COUPON

Your name .....
Firm name .....
Address .....
City ..... State .....

WESTERN GOLD & PLATINUM WORKS
Smelters • Refiners • Manufacturers
589 BRYANT STREET
SAN FRANCISCO 7, CALIF.

See our display at the 7th Annual Pacific Electronic Exhibit, Civic Auditorium, San Francisco, Space #114, Aug. 22, 23, 24.

SYNCROMOUNT POTENTIOMETER



Giannini, standard with the leaders, develops this small ballbearing potentiometer with a variety of unique features to meet the latest computer requirements. Runout and concentricity within .001 in. Total resistance up to 100,000 ohms, torque less than 0.2 inch ounces.

For details on this and other instruments write:

G. M. GIANNINI & CO., INC.
PASADENA 1, CALIFORNIA

giannini

put

BACK ISSUES

to work

Whatever you do with this magazine after you've clipped pertinent articles or advertisements, *please don't destroy it.*

HERE'S WHY:

Churches, Boy Scouts, civic and veterans organizations will welcome all the wastepaper you have. They can get a good price for it. Increase their funds.

And, you can make a direct contribution to American mobilization by saving paper of all types — whether in magazine form or not. Since the Korean War began, there's been a great increase in the demand for products manufactured from wastepaper.

Save it for your favorite organization. Chances are they have scheduled pick-ups.

Kahle *specialists in custom-built, ultra-precision*

ELECTRON TUBE MACHINERY

KAHLE CUSTOM-BUILDS machines to make the exact tubes you require—from big 20-inchers to tiny sub-miniature—from laboratory types to those for high-speed production. Kahle puts each unit through exhaustive trial runs in our plant to assure trouble-free operation in yours.



Production-boosting, labor-saving equipment for complete manufacture of cathode ray tubes, standard, miniature and sub-miniature radio tubes, fluorescent lamps, photocells, x-ray tubes, glass products.

#1384 SUB-MINIATURE BUTTON STEM MACHINE (12 HEAD)

Button ¼" in diameter with 5 long wires. Hand loading and unloading. Dual motor drive. Available for any stems, any number of heads and automatic feeds.

Consultations invited
Send for our new catalog

Kahle ENGINEERING CO.

1309 Seventh Street, North Bergen, New Jersey

HOBSON PRECISION COMPONENTS

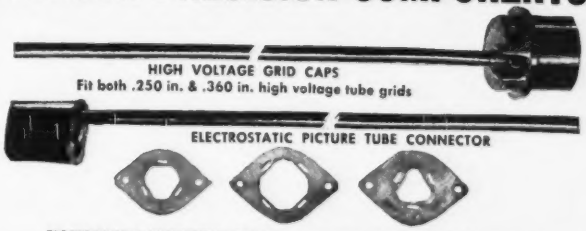

HIGH VOLTAGE GRID CAPS
Fit both .250 in. & .360 in. high voltage tube grids

ELECTROSTATIC PICTURE TUBE CONNECTOR

ELECTROLYTIC MOUNTING PLATES Fit 1 in. & 1⅜ in. condenser cans

HOBSON BROS. • 4049 W. Fullerton St. • CHICAGO 39, ILL.

WASHERS—ALL KINDS



WASHER SPECIALISTS for nearly half-a-century. Dies in stock will produce most sizes. Big runs made with automatic presses. An economical, accurate, and highly reliable source for washers, also all kinds of metal stampings. HAVE WHITEHEAD'S CATALOG ON FILE; write for it.

BEVELED
CUP
D-HOLE
RETAINER
LOCK
SPACERS
SPRING TENSION
SQUARE HOLE
STAR LOCK
THRUST
TONGUE

EST. 1903 **WHITEHEAD STAMPING COMPANY**

1691 W. LAFAYETTE • DETROIT 16, MICH.

MICROPOT

PRECISION TEN-TURN POTENTIOMETER

1. You get permanent accuracy because the resistance wire is locked in place. It is precision positioned and moulded integrally with the housing.
2. You get permanently accurate settings, smooth action and low uniform torque provided by the stainless steel, precision ground, double thread lead screw guiding the moving contact.
3. You get precise positioning of the moving contact because of the two bearings supporting the rotor assembly.
4. You get good rigid terminals because they are moulded integrally with the housing.
5. Terminals soldered to ends of resistance element before moulding. Entire resistance circuit is an integral part of the housing.
6. You get accurate setting and resetting due to anti-backlash spring in contact guide.
7. You get a fine resolution because of the 43⅛" length of resistance wire in the spiral element.
8. You get a resistance output directly proportional to shaft rotation within ±0.1% of the total resistance. Every potentiometer is automatically machine tested for linearity at 101 points.



LINEARITY ACCURACY ± 0.1%

Units for immediate shipment:
1,000 to 30,000 ohm range.
Special resistance values made to order.

WRITE TODAY FOR ENGINEERING INFORMATION

BORG EQUIPMENT DIVISION
THE GEORGE W. BORG CORPORATION
DELAVAN • WISCONSIN

NEW DELAY LINE

TYPE 1477-A

RUGGED • COMPACT

CONVENIENT SOLDER TAP-OFF POINTS

Available now. This new, versatile Type 1477-A Delay Line permits delay intervals ranging from 0.05 microseconds to 0.9 microseconds. Compact yet flexible design facilitates circuit installation.

Other designs with variations of impedance, bandwidth and delay are available. Inquiries solicited.

SPECIFICATIONS

Sections: 18
Characteristic Impedance: 680 ohms
Delay per section: 0.05 microsecond
Total Delay: 0.9 microsecond
Bandwidth: 4.3 megacycles
Overall Dimensions: 9¾" x ⅞" x 1¼"
Price: $12.50 f.o.b. our plant

Manufacturers of a complete line of TV and Radar Test Equipment

TIC Tel-Instrument Co. Inc.

50 PATERSON AVENUE • EAST RUTHERFORD, N. J.

command. The duties of the engineer, almost without exception, will be confined to those of a technical nature. Any attempt to command on his part will result in a complete negation of his position and create resentment on the part of all concerned. Leadership is best demonstrated by example. It will be difficult for the trained engineer to observe instances of inefficient or incorrect methods and yet refrain from saying, "This is the method which must be used."

The technique of diplomatic suggestion must be employed, particularly when working with foreign nationals. Great care should be taken not to offend personal or national pride. It should be remembered that most of the countries which are friendly to us and have need of our services have suffered greatly during the past war. Education, manufacturing techniques, all the processes which contribute to technical advancement, have been retarded under the pressure of war or occupation. Therefore, while some disparity between American and foreign methods may exist, it should never be attributed to a lack of ability, but rather to a lack of opportunity.

Relationship With Employer

Of equal importance to the success of the engineer's assignment is his relationship with his employer. In many cases, the employer has been selected by the military because the employer is the manufacturer of military equipment and is, therefore, eminently qualified to provide trained engineers familiar with such equipment.

A general corollary which may be drawn is that no engineer can function efficiently without the full backing and assistance of the home office. Correspondence from the field engineer should be answered promptly and correctly whether the problems posed are technical or personal. The term Field Engineer means exactly that—an engineer functioning in the field, independent of the laboratory and administrative facilities normally available. No field engineer can function efficiently if he feels stranded and forgotten, several thousand miles from

SUPPRESS RADIO INTERFERENCE!

Real Accuracy . . .

- ✓ for radio inspection and quality control
- ✓ for R-F calibration
- ✓ for susceptibility, spurious radiation and other tests

Low-cost Shielding

- ✓ for sensitive medical instruments
- ✓ for diathermy apparatus
- ✓ for induction heating

. . . and similar equipment that must meet FCC interference regulations.

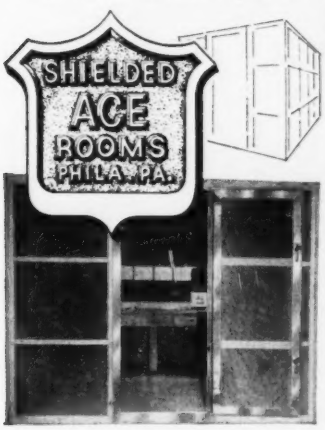

Ace screen rooms provide an attenuation as high as 100 db. from 0.15 to 10,000 mc.—and even higher with special design. They're installed complete in a few hours—are easy to enlarge or move to a new location. Used and approved for today's most exacting shielding jobs. Write, wire or 'phone for details.

ACE ENGINEERING AND MACHINE CO., INC.
3644 N. Lawrence Street
Philadelphia 40, Pa. REgent 9-1019

MICRODIAL
TEN TURN-COUNTING DIAL

Microdial is composed of two concentrically mounted dials . . . one for counting increments of each turn and the other for counting turns. The incremental dial has 100 equal divisions and is attached rigidly to the shaft so there is no backlash. Thus the contact position is indicated to an indexed accuracy of 1 part in 1000. Rotation is continuous in either direction. There are no stops on the Microdial assembly.

COMPACT . . . Microdial has same O.D. as Micropot . . . requires no more panel space.

CLEAR READING . . . Forced fast-reading tests showed only 1/20th as many errors with Microdial open window as with next most legible dial. Turn counter distinguishes between 0 and 10 turn readings, and accelerates to avoid confusion on readings near integral turns. Precise readings are made from larger dial with maximum separation of graduations and wide angle visibility.

CONVENIENT . . . delivered completely assembled with dials synchronized. Easily mounted in a few seconds. All dials may be locked.

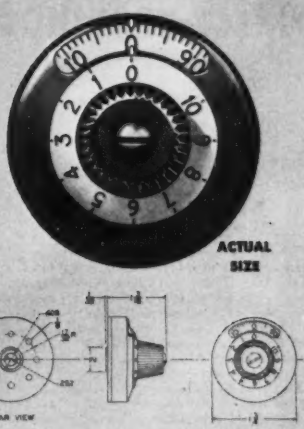

Microdial . . . turn-counting dial, primarily designed for use on Micropot ten turn linear potentiometers . . . use it on any multiturn device having ten turns or less.

BORG EQUIPMENT DIVISION
THE GEORGE W. BORG CORPORATION
DELAVAN • WISCONSIN

PERFECTION THROUGH INSPECTION IN EVERY DANO COIL

- Form Wound
- Paper Section
- Acetate Bobbin
- Bakelite Bobbin
- Cotton Interweave
- Coils for High Temperature Applications

ALSO, TRANSFORMERS MADE TO ORDER

Inspection and testing! No Dano coil can be "shipped out" unless it passes methodical testing and inspection in all vital stages of production operations. That's why you can always be sure of perfect performance in every Dano coil.

THE DANO ELECTRIC CO.
MAIN ST., WINSTED, CONN.

RECOGNIZED . . FOR SERVICE TO THE INDUSTRY

A Complete Line of Radio and Television KNOBS

Ceramic Stand-off, Feed Thru, & Tie Terminals
Army-Navy Approved

ROHDEN MANUFACTURING CO.
Designers · Engineers
• KNOBS • PLASTIC EMBOSSING • TERMINALS
4739 Montrose Ave. Chicago 41, Ill.

Simplifying **HF** *Power Measurement*

Model 67 TERMALINE
DIRECT-READING R-F WATTMETER

30 mc to 500 mc
(to 1000 mc if specified)

50 ohms

Triple Range 0-25 watts
0-100 "
0-500 "

Type N Input Connector
(Adaptor for PL-259 supplied)

• Model 67 is the same type absorption instrument as the well-known AN-ME-11/U (our Model 611) R-F Wattmeter. Specifically designed for fixed station transmitters to 500 watts output, it may be used nicely on low range for mobile gear. Provided with an aluminum cased, shock-mounted meter, Model 67 is as simple to use as a DC voltmeter. Now in general use throughout the industry, TERMALINE Wattmeters may be depended upon for fast, accurate and repeatable power readings.

NON-RADIATING
... Accuracy — 5%

RUGGED CONSTRUCTION
... Size — 17"x9"x6"
Wght. — 30 pounds

BIRD ELECTRONIC CORP.
TERMALINE COAXIAL LINE INSTRUMENTS

1800 EAST 38TH ST.
CLEVELAND 14, OHIO
West Coast:
NEELY ENTERPRISES
HOLLYWOOD 46, CAL.



PRECISION POTENTIOMETERS

SINUSOIDAL TYPE



RL-11C

CONDENSED SPECIFICATIONS

	RL 11-C	RL-14 MS
Total resistance	16,000 ± 10%	35,400 ± 1%
Percent resistance within brush circle	Approx. 85%	99 ± ¼%
Angle of rotation	360°	360°
Weight	4.75 oz.	1.8 lbs.
Torque (Approximate)	¾ oz. in.	2 oz. in.
Wire	80 Ni 20 Cr	80 Ni 20 Cr
Resolution	.4°	.2°
Angular accuracy	±.6°	±.5°
Amplitude accuracy	±.8%	±.6%
Maximum volts across winding	150	350
Maximum speed	60 rpm	60 rpm
Expected Life	350,000 cycles	200,000 cycles

Illustration shows RL-11C unit, RL-14MS unit is approximately twice as large. Minor variations of these standard designs, available on special order, permit operation at high rotational speeds with some loss of accuracy but, with a substantial increase in expected life. Sine and cosine voltages are produced simultaneously. Resistances other than those shown above are available within certain limits.

FOR COMPLETE DETAILS SEND FOR BULLETIN F-68-A

THE GAMEWELL COMPANY
NEWTON UPPER FALLS 64, MASSACHUSETTS

his usual environs.

The converse is also true. The home office is completely helpless unless it receives a complete and accurate flow of information. In order that administrative personnel in the home office may plan for future requirements and meet present demands, the field engineer must provide the necessary information. Of course, all such information must conform to local security requirements. An apparently harmless piece of information relative to training procedures or supply requirements can, in the wrong hands, be used as an accurate gauge to the size and fitness of military units. In many cases, the reports will be carried by postal systems of foreign nations, with a consequent lack of military security.

WILLIAM J. LAPERCH
RCA Service Co., Inc.
Field Engineer Assigned to MDAP
Belgium

Mixed

DEAR SIRS:

IN YOUR December 1950 issue under the heading "Mixed" on the *Cross Talk* page you stated: "Unfortunately the mixed-highs technique cannot be used in the field sequential (CBS) system."

I would like to describe a possible method for using the mixed-highs technique in a field sequential system, thereby making more efficient use of the frequency spectrum than the present CBS system. The ideas expressed are solely the opinions of the writer.

The system provides a complete picture in four fields and yet would appear to have better apparent definition than the CBS system which requires six fields. The following information is contained in the four fields that are transmitted:

Field 1—Green plus mixed highs
Field 2—Green plus mixed highs
Field 3—Blue plus mixed highs
Field 4—Red plus mixed highs

As in the present black and white system, line interlacing is employed between adjacent fields.

At the receiving end, a green filter is used for fields 1 and 2. A blue filter is used for field 3, but during this field the scanning spot

SECON development and production METALLURGISTS

BASE, RARE AND PRECIOUS METALS AND ALLOYS

SMALL UNITS

SMALL SIZES

CLOSE TOLERANCES

Nickel alloy, filament wire and ribbon: flat, grooved, crowned.

Grid wire electroplated.

Alloys for special requirements, bare or enamelled.

•

Further details upon request.

SECON

METALS CORPORATION

228 East 45th Street, New York 17, N. Y.

MUrray Hill 7-1594

Engrave

. . . PANELS UP TO 25" WIDE IN YOUR OWN SHOP WITH THE NEW ENGRAVOGRAPH

Portable Model 1-S

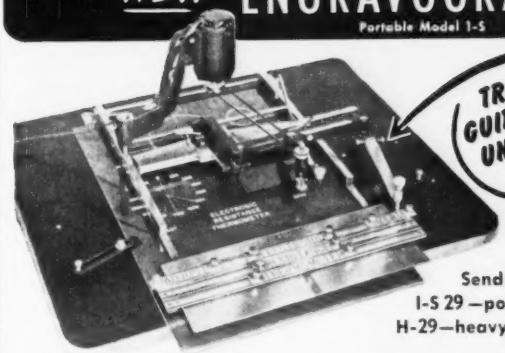

Send for Booklets
I-S 29—portable model
H-29—heavy duty model

NEW HERMES, Inc. • 13-19 University Place, New York 3, N. Y.

CANADA: 359 St. James St., Montreal

PICKERING

SOLENOIDS

For DC Circuits



Pickering engineering service is available for special applications where Pickering standard Solenoids do not apply.

For details and literature address Department

PICKERING & CO., INC.

Manufacturers of world-famous electro-magnetic phonograph cartridges and audio equipment.

Oceanside, L. I., New York

new hermes

Engravo graph

- The *only* portable machine which reproduces 15 sizes from *one* master alphabet.
- The *only* one with *adjustable* copy holding slides for multiline engraving in one set-up.
- Self-centering holding vise for nameplates and dials.

NEW HERMES, Inc. • 13-19 University Place, New York 3, N. Y.

World's Largest Manufacturer of Portable Engraving Machines

THE DEFENCE RESEARCH BOARD REQUIRES

A SONICS SCIENTIST

SALARY: Dependent on qualifications and experience.

DUTIES: To be responsible for a sonics section with a staff of several junior scientists; will be required to work on fundamental sonics problems in voice communication, speech intelligibility; measurement of hearing losses in humans and noise and blast problems.

QUALIFICATIONS: A physicist or biophysicist with a Ph.D. degree; good grounding in acoustics with two or more years' experience in sonics research. British subject.

APPLY TO: Director of Research Personnel,
Defence Research Board,
Department of National Defence,
"A" Building, Ottawa, Ontario.

Please refer to Competition G-8.

REXOLITE
1422
(FORMERLY G. E. TEXTOLITE 1422)

THE *Better* PLASTIC
U. H. F. INSULATION
BECAUSE OF:—

- outstanding electrical properties
- superior machinability
- high heat resistance
- dimensional stability
- and extremely low initial cost

Rexolite 1422 has been specifically designed and developed to meet the growing need for a lightweight — low cost U. H. F. insulating material.

Rexolite 1422 is available for immediate delivery as centerless ground rod in any diameter up to 1". Also cast in larger diameter rods and sheets.

Meets JAN-P-77 and MIL-P-77A specifications.

The unusual chemical inertness and physical properties of Rexolite 1422 allow its use where other materials fail.

For use in: connectors, coaxial connectors, waveguide, antennas, leads and spacers, spreaders and air wound coil supports, coil forms.



Write today for technical bulletins and samples. Our engineering staff is always at your disposal.

Manufacturers of Non-strip wire, High Temperature Electrical Tubing and other extruded plastic products.

THE REX CORPORATION
60 LANSDOWNE STREET
CAMBRIDGE 39, MASS.

on the tube is enlarged (defocused) either electronically or optically so that the resultant line is twice as wide as the line on the previous green field. Thus instead of the normal two interlaced fields required for complete picture coverage the picture is completely covered in one field. The identical procedure is used for field 4 except a red filter is used. By making the scanning spot larger we are essentially reducing the number of elements required for one complete picture coverage. For a compatible system the elements for the blue and red picture would be reduced to approximately 66,750 rather than the 267,000 elements used in a complete black and white frame.

Several independent observers[1] have proved experimentally that the the human eye cannot tell the difference between 267,000 color elements per picture and 66,750 color elements per picture as long as mixed-highs are used to obtain the detail. In this sequential system the persistence of vision phenomena is used to combine the low-definition color with the mixed-highs. The mixed-highs are presented as a green picture in order to keep the number of required fields per complete color picture to a minimum. From experiments that others have made it does not seem to make much difference whether the mixed highs are presented as a green picture or as a white picture. Evidently this is due to the fact that the eye is most sensitive to green colors.

The mixed highs are sent with fields 3 and 4 so that a slightly better black and white picture will result if the system is compatible. If compatibility is not desired then maybe a slightly more realistic picture would result if the scanning spot at the iconoscope were also enlarged when frames 3 and 4 were transmitted.

If each field were transmitted at a 60-cps rate and a line frequency of 15,750 cps were used, then the system would be a compatible. However, for pictures containing large solid areas of one color, there might be a noticeable flicker. It might be more desirable to transmit the fields at a higher rate such as 120 cps. If this frequency were used the actual frame flicker frequency would be

EMPIRE DEVICES



UHF IMPULSE GENERATOR
Model IG-102

Pulse width less than 0.001 microseconds, spectrum flat within 0.5 DB from 0.01 MC to 1000 MC; Pulse repetition rate 2 to 2500 CPS; Output level continuously adjustable from 7 to 70,000 microvolts per megacycle bandwidth; Impedance 50 ohms; Permanent accuracy and stability.

Application: Standard signal source for study and measurement of RF interference. Calibrating standard for noise meters. Bandwidth measurements. Transient response and receiver alignment.

STEP ATTENUATOR
Model AT-100

50 ohm resistive networks; VSWR-1.2 from DC to 1000 MC; Six positions; Up to 80 DB attenuation.

UHF ATTENUATOR
Model AT-50

50 ohm precision pad; VSWR-1.1 from DC to 4000 MC; Attenuation from 1 DB to 80 DB; Accuracy—3%.

NOISE AND FIELD INTENSITY METER
Model NF-105

Frequency range 20 to 400 MC; Built-in standard impulse noise and sine wave calibrators; Regulated "A" and "B" supply; Slide back and meter indication; True peak reading meter; Sensitivity 2 to 100,000 microvolts.

Accessories: Broad band antenna, Dipoles, Magnetic and electric field probes, Line probes, Inverter for battery operation and Remote indicator.

Further technical data available
Your inquiries are invited

EMPIRE DEVICES, INC.
38-25 BELL BOULEVARD
BAYSIDE, N. Y.

30 cps whereas with the CBS system it is 24 cps. It would also get around the 120-cycle power supply hum problem that exists with the present CBS system.

One possible solution to the whole color television controversy might be to adapt, for the time being, the above-described compatible color system so that present television set owners could still receive the black and white version of the color transmissions on their receivers (without any modifications at all), and yet those who were anxious to receive color could buy an adapter and attach it to their present set. A perfect color picture would result except for the slight color flicker problem previously mentioned. At some later date (say 5 or 10 years from now when more research has been accomplished in both black and white and color television problems) one might consider changing both the black and white and the color standards since it is now apparent that even the black and white transmissions are not using the available bandwidth very efficiently.[2]

REFERENCES

(1) Paper presented by A. V. Loughren of Hazeltine Electronics Corp. at Long Island Subsection of IRE on Nov. 22, 1950.
(2) R. B. Dome, Frequency-Interlace Color Television, ELECTRONICS, Sept. 1950.
P. Mertz and F. Gray, Theory of Scanning and Its Relation to the Characteristics of the Transmitted Signal in Telephotography and Television, *BSTJ*, Jul. 1934.

J. M. LESTER
Hempstead, N. Y.

Crossed Bridges

DEAR SIRS:

THE EDITORS of ELECTRONICS and J. F. Graham are to be congratulated on the thought-provoking paper entitled "Automatic A-C Bridges" which appeared in the February issue (p 110) of the magazine.

In it Graham points out the desirability of using a bridge circuit where the contours of unbalanced impedances form a rectangular grid. However, since the contours are arcs of circles, this is just one more of those engineering ideals we are tempted with. Graham neglects to mention that a good approximation can be attained by operating the bridge in the region of a contour of infinite radius. In

GAIR
SHIPPING CONTAINERS
Eliminate Many Hazards of Shipping

Gair Corrugated Containers are so scientifically constructed that they offer the utmost PROTECTION against the many hazards of shipping . . . truly amazing how they withstand tremendous knocking about and rough usage.

Without obligation Robert Gair offers a helping hand in solving shipping container problems.

WRITE TODAY
for technical information

ROBERT GAIR COMPANY, INC.
155 EAST 44TH STREET, NEW YORK • TORONTO
PAPERBOARD • FOLDING CARTONS • SHIPPING CONTAINERS



when MAXIMUM
SIGNAL RESOLUTION
IS A "MUST"...SO ARE



PANORAMIC
PANALYZOR SB-8 AND
PANADAPTOR SA-8

These instruments enable spectrum analysis of signals so close in frequency that their corresponding indications would normally mask one another.

FEATURES—*Continuously variable resolutions • Continuously variable scanning width • Long persistence cathode-ray tube . . . 5" Screen • Intensity grid modulation for pulse analysis • Synchronous and non-synchronous scanning • Variable scanning rates • Linear and log amplitude scales.*

Let a Panoramic specialist advise you on your individual problems.

Write for fully detailed bulletin.

PANORAMIC
RADIO PRODUCTS, INC.
10 SOUTH SECOND AVENUE, MOUNT VERNON, N. Y.

Electra
carbon-coat
PRECISION RESISTORS

deposited carbon resistors

The right choice for ACCURACY ... ECONOMY ... and STABILITY in circuits where wire wound resistors are often times too expensive and the characteristics of carbon composition resistors are not suitable. Deposited carbon resistors are especially adapted to high frequency applications that require high stability and close tolerance of resistance values. Manufactured to customer's specifications. For complete data mail coupon.

ELECTRA MFG. COMPANY
RESISTOR DIVISION
2537 Madison Ave. • Kansas City 8, Mo.
FOR 25 YEARS A MANUFACTURER OF PRECISION ELECTRICAL EQUIPMENT

ELECTRA MFG. COMPANY
2537 Madison Ave. • Kansas City 8, Mo.

Please send Bulletin E-1—Complete Data on Deposited Carbon Resistors.

NAME _____

COMPANY _____

ADDRESS _____

CITY _____

STATE _____

separating his Fig. 15 into parts B and C, Graham infers that something horrible happens as the radius becomes infinite. Actually the contour system is not merely continuous; it is very favorable for self-balancing bridges in that phase changes are slow and the contours run at right angles when the bridge is resonant. Graham also states that if this capacitive reactance is greater than the inductive reactance, balance cannot be obtained in a normal Owens bridge circuit. This statement is not true near resonance; if the Q of the inductive arm of the bridge is kept low, balance may be obtained without difficulty. In particular, if the Q is adjusted to unity and $X_s = R$, the bridge will be balanced at resonance. By properly selecting the resonant frequency, the grid system near balance will be so spaced as to give good sensitivity. Because of the low Q involved, the bridge should not be too frequency-sensitive and might well suit applications such as Graham describes.

F. CHOWN
A. V. Roe, Canada Ltd.
Toronto, Ontario, Canada

Electronics Quiz

LAST month's problem involved two capacitors connected in series with a switch and a 50-volt battery. Originally the switch is open, but the capacitors are charged to voltages of plus 20 and minus 40 (with respect to the battery voltage). The problem was to find the final voltage after the switch was closed. Robert C. Burns, of Hicksville, N. Y., who submitted the problem, gives the solution as follows:

After the switch is closed the change in voltage on C_1 must equal the change in voltage across C_2. The sum must equal the battery voltage. Thus

$$(20 + \Delta E_1) + (-40 + \Delta E_2) = 50$$
$$-20 + \Delta E_1 + \Delta E_2 = 50$$
$$2\,\Delta E_1 = 70$$
$$E_1 = 35$$

Then the final capacitor voltages would be

$$E_{c1} = 20 + 35 = 55$$
$$E_{c2} = -40 + 35 = -5$$

New Quiz Problem

A new quiz problem will be published in this department in next month's issue.

GRANT Electronic EQUIPMENT
SLIDES
for Consoles • Chassis • Racks

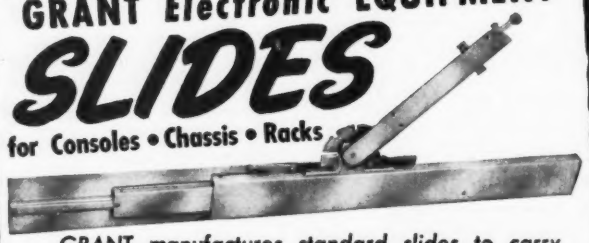

GRANT manufactures standard slides to carry from 25 pounds to 2000 pounds for your every requirement.

GRANT No. 392 Electronic Equipment Slide—Three section, progressive action type slide which locks in open position. Slide includes mechanism for unlocking from outside of chassis and for tilting to 90° angle. Mechanisms vary to suit the individual installation. This slide has been adapted to the standard 19" rack. Load capacity: 100 lbs. per pair depending on length of slide and travel.

Other outstanding advantages:
• Continuous ball bearing action
• Closely fitted sides eliminate chassis rattle

GRANT also manufactures:
• Single or double acting slides
• Side or undercarriage mounting types
• Slides with locking and pivoting devices

Consult with our engineering department on any slide problem.
Write Dept. E2 for complete illustrated information.

GRANT PULLEY & HARDWARE CO.
31-87 Whitestone Parkway, Flushing, L. I., N. Y.

The foremost name in Sliding Devices

CONTACTS

FOR THE FIELD OF ELECTRONICS

FINE RIBBONS OF TUNGSTEN and Molybdenum

Quality and accuracy in our fabrication of Tungsten & Molybdenum Ribbons have characterized our service to the Electronic industry.

A development of

H. CROSS Co.

15 Beekman St., New York 7, N. Y.

MORE THAN 70 DIFFERENT TYPES & SIZES

MINIATURE BALL BEARINGS for application in precision mechanisms minimize friction and wear. High load capacity. Least weight and space. Special designs and complete engineering service for your application. Write for catalog E.

MPB MINIATURE *Precision* BEARINGS INCORPORATED KEENE, NEW HAMPSHIRE, U.S.A.

The nonmelting SILICONE insulating and waterproofing compound, stable at temperatures from -70 F. to +400 F.

DOW CORNING 4 COMPOUND

MEETS ALL REQUIREMENTS OF AN-C-128a

More water repellent than paraffin, Dow Corning 4 Compound is highly resistant to oxygen, ozone and to deterioration caused by corona discharge.

POWER FACTOR up to 10 megacycles ... 0.001

VOLUME RESISTIVITY ohm centimeters .... 10^{17}

DIELECTRIC STRENGTH volts/mil 500

for switches and contacts in the POWER INDUSTRY

for ELECTRONIC EQUIPMENT

Write Today!

for your copy of our new booklet on Dow Corning 4 Compound, Address Dept. J

DOW CORNING CORPORATION, Midland, Michigan

ALUMINUM

Sheets—Circles

25/35/52S

Mill Certification for Defense Orders from warehouse stock

HENRY B. LUST

310 West 85th St. New York 24, N. Y.

Telephone: TRafalgar 7-6329

SUB-CONTRACTING

MILITARY and COMMERCIAL

receivers — test equipment

transmitters — controls

sub-assemblies

TELETRONICS LABORATORY, INC

Westbury, L. I., N. Y., Westbury 7-1028

We invite inquiries on



WRITE FOR CATALOG

REX RHEOSTAT CO.

BALDWIN, L. I., N. Y.

ELECTRICAL

COILS

TO MEET YOUR EXACT REQUIREMENTS D. O. & MILITARY SPECIFICATIONS

Any type construction, materials, leads, taps, wire, or finish. For ignition, solenoid, relay, voice, choke, transformer, clock, motor, switch, television, or communications.

Send your specifications for quotations.

THE FIVE STAR CO.

110 MIXVILLE ROAD

WEST CHESHIRE, CONN.

Shorted Turn Indicator

MODEL 101C BULLETIN 42

HUNTINGTON BEACH, CALIF.

KARTRON

ALLEN FLUXES

6751 BRYN MAWR AVE.

EL-TRONICS, INC.

Research, development, and manufacture of electronic equipment—a single model to large quantities.

Write Today for Free Resume of Our Plant Facilities

Specialists in Geiger-Muller equipment

2647-67 N. Howard St.-Phila. 33, Pa.-GArfield 5-2026

FOR MAINTENANCE OF MOBILE COMMUNICATIONS SYSTEMS

MICROMETER FREQUENCY METER

FM MODULATION METER

LAMPKIN LABORATORIES, INC.

Bradenton, Florida

EISLER Manufactures Complete Equipment for:

SPOT WELDERS, Electric, for 1/4 to 250 KVA
TELEVISION TUBE GLASS WORKING EQUIPMENT
TRANSFORMERS, Special and Standard Types
INCANDESCENT LAMP Manufacturing Equipment
FLUORESCENT TUBE Manufacturing Equipment
NEON SIGN MAKERS EQUIPMENT
ELECTRONIC EQUIPMENT, Vacuum Pumps, etc.
WET GLASS SLICING and Cutting machines for Laboratory use

EISLER ENGINEERING CO., Inc. 751 So. 13th St., Newark 3, N. J.

This

CONTACTS

Section

supplements other advertising in this issue with these additional announcements of products essential to efficient and economical production and maintenance. Make a habit of checking this page, each issue

Classified Advertising Division

ELECTRONICS

PROFESSIONAL SERVICES

AMERICAN SPEEDLIGHT CORP.
(AFFILIATED WITH J. G. SALTZMAN, INC.)
HARRY L. PARKER, PRESIDENT and CHIEF ENGINEER
Specialist in Flash and Electronic Equipment for Photography
Consultation—Development—Design and Manufacture
480 Lexington Avenue — New York 17, N. Y.

CROSBY LABORATORIES, INC.
Murray G. Crosby & Staff
Radio-Electronic Engineering, Research & Development
FM, Communications, TV Test Equipment
Offices, Laboratory & Model Shop at: 126 Herricks Rd., Mineola, N. Y. Garden City 7-0284

DUBROW DEVELOPMENT CO.
Design — Development — Mfr.
Quality Electronic Equipment
847 High St. — Burlington, N. J.
Burlington 3-0446

EDGERTON, GERMESHAUSEN & GRIER, INC.
Consulting Engineer
Research Development and Manufacture of Electronics and Stroboscope Equipment
Specialists in High-Speed Photography
160 Brookline Avenue, — Boston 15, Mass.

ELECTRONIC ENGINEERING CO. of CALIFORNIA
Radio and Electronic Consulting and Designing.
180 S. Alvarado — Los Angeles
DUnkirk 2-7353 — California

ERCO RADIO LABORATORIES, INC.
Radio Communications Equipment
Engineering - Design - Development - Production
Pioneers in Frequency Shift Telegraph
Garden City • Long Island • New York

GEORGE H. FATHAUER
Development and Design
of FM, TV, VHF Communications Equipment
Complete Laboratory and Model Shop Facilities
4005 E. Michigan St. — Telephone
Indianapolis 1, Indiana — BLackstone 1330

HERMAN LEWIS GORDON
Registered Patent Attorney
Patent Investigations and Opinions
Warner Building, — Washington 4, D. C.
NAtional 2497

HANSON-GORRILL-BRIAN INC.
Products & Mfg. Development
ELECTRICAL - ELECTRONIC
HYDRAULIC - MECHANICAL
One Continental Hill — Glen Cove, N. Y.
Glen Cove 4-1922

WHEN TIME IS SHORT . . . .

put the solution of your problems up to a specialized Consultant whose professional card appears on this page. His broad experience may save you months of costly experimentation.

ELECTRONICS
330 West 42nd St., New York 18, N. Y.

R. W. HODGSON
PATENT-INVENTION RESEARCH & DEVELOPMENT ENGINEER SPECIALIZING IN ELECTRONICS
Gadget-of-the-Month Club Bldg.
6600 Lexington Ave., Hollywood 38, Calif.
All mail to Box 874, Sherman Oaks, Calif.
GLadstone 9680 — HUdson 2-2311 — STate 4-9318

HOGAN LABORATORIES, INC.
John V. L. Hogan, Pres.
Applied Research, Development, Engineering.
Est. 1929. Exceptionally competent staff. Electronics, Optics, Mechanisms, Facsimile Communication, Electro-sensitive recording media, Instrumentation.
155 Perry Street, New York 14 — CHelsea 2-7855

MEASUREMENTS CORPORATION
Research & Manufacturing Engineers
Harry W. Houck — Jerry B. Minter
John M. van Beuren
Specialists in the Design and Development of Electronic Test Instruments
Boonton, N. J.

Eugene Mittelmann, E.E., Ph.D.
Consulting Engineer & Physicist
High Frequency Heating—Industrial Electronics
Applied Physics and Mathematics
549 W. Washington Blvd. — Chicago 6, Ill.
State 2-8021

NIAGARA ELECTRON LABORATORIES
CONSULTATION - DESIGN - CONSTRUCTION
MFG. THE THERMOCAP RELAY
Specializing in solution of problems of electronic and electro-physical instrumentation for the research or analytical laboratory. Industrial plant problems also invited.
Andover, New York Cable Address: NIATRONLAB

PHYSICAL RESEARCH ASSOCIATES
Consulting Physicists & Engineers
Arthur M. Vigilante, Director
Research, Development, Design and Manufacture of Detection and Recording Systems. Industrial and Analytical electro-physical instrumentation. Dynamic Condenser Electrometers.
21 Arurelee Drive — Malibu, Calif.
Malibu 8444

PICKARD AND BURNS, INC.
Consulting Electronic Engineers
Analysis and Evaluation of Radio Systems
Research, Development & Design of Special Electronic Equipment
240 Highland Ave., — Needham 94, Mass.

ALBERT PREISMAN
Consulting Engineer
Television, Pulse Techniques, Video Amplifiers, Phasing Networks, Industrial Appliances
Affiliated with
MANAGEMENT-TRAINING ASSOCIATES
3308-14th St., N.W. — Washington 10, D. C.

JOSEPH RACKER COMPANY
Radar Consultants & Editors
Technical Manuals
Research and Development
67 West 44th Street, — New York
Murray Hill 2-9026

SKINNER, HARLAN AND IRELAND, INC.
Consulting Engineers
Specializing in Magnetic Materials and Their Application
Office and Laboratory — Indianapolis 7, Indiana

ALFRED W. SUTTER
Consulting Engineer
CONTRACT NEGOTIATION & RE-NEGOTIATION
RECLAMATION • TERMINATION
PROCUREMENT ADMINISTRATION
141 E. 44th St., N. Y. 17, N. Y. Murray Hill 2-2656

THE TECHNICAL MATERIEL CORPORATION
Communications Consultants
Systems Engineering
General Offices and Laboratory
121 Spencer Place, Mamaroneck, N. Y.

TELECHROME, INC.
Electronic Design Specialists
COLOR TELEVISION EQUIPMENT
Flying Spot Scanners, Color Synthesizers, Keyers, Monitors, Oscilloscopes and Related Apparatus
J. B. Popkin-Clurman, *Pres. & Ch. Engr.*
88 Merrick Rd. — Amityville, L. I., N. Y.

FREDERICK P. WARRICK
Engineering Consultant
Development & Manufacture of High Speed Moving Film Cameras for Oscillography & Stroboscopic Photography.
1960 Grasfield Road — Birmingham, Michigan

WHEELER LABORATORIES, INC.
Radio and Electronics
Consulting—Research—Development
R-F Circuits—Lines—Antennas
Microwave Components—Test Equipment
Harold A. Wheeler and Engineering Staff
Great Neck, N. Y. — Great Neck 2-7866

YARDNEY LABORATORIES, INC.
Research - Design - Development
Electro-Chemical Generators of Energy
105 Chambers Street — WOrth 2-3534, 35, 36
New York 7, N. Y.

DEVELOPMENT ENGINEER
PROJECT ENGINEER

We require the services of the following engineers to design and develop precision test instruments.

- SENIOR DEVELOPMENT ENGINEER preferably with a master's degree or equivalent training and five to eight years of industrial experience.
- SENIOR PROJECT ENGINEER with five to eight years of industrial experience.

These are permanent positions with a progressive organization offering stimulating work, congenial associates, pleasant surroundings, and advanced personnel policies.

Submit resume of education and experience.

BOONTON RADIO CORPORATION

BOONTON, NEW JERSEY

DESIGN ENGINEER—TEST EQUIPMENT

For designing and developing production test equipment for audio and power transformers. Position permanent with unlimited opportunities. Apply by letter only.

NEW YORK TRANSFORMER CO., INC.

Alpha, New Jersey

We Offer

INDUSTRIAL TRAINEE PROGRAMS

Electronic Electrical Inspectors—qualifies personnel for wiring, soldering, cable making, circuit tracing and testing, and quality control.

Mecahnical Inspectors—qualifies personnel for blueprint reading, tolerance checks, and quality control.

Short intensive training, available resident or in plant.

Write for details to

M-1318, Electronics
330 W. 42 St., New York 18, N. Y.

FOR SALE
FULLY WIRED AND EQUIPPED FOR ELECTRONICS

Approx. 4150 square feet in a real modern building—fully fireproofed—all on one floor—on a plot of 7875 sq. ft.

FEATURES:

- Immediate possession
- Zoned for light industry
- 2 street frontages
- Winter air-conditioned
- Brick and concrete construction
- Fluorescent lighting throughout
- Excellent natural light
- Asbestos tile floors throughout
- Abundance of good labor
- Finest transportation facilities
- Ample parking with no congestion
- Flood lighted at night
- Fully landscaped

This building has 2 lavishly appointed showrooms with sound-proof ceilings. PLUS an executive office entirely knotty-pine panelled.
The large workroom and stockroom with double washrooms for help occupy over two-thirds of the building.
The premises are in perfect condition and no repairs are required.

PRICE: $57,500 (Duplication would cost $75,000) **TAXES: $775 Annually**

PRINCIPALS ONLY

This listing is made subject to errors, omissions, change of price, prior sale, and withdrawal without notice. For further information contact:

RAJAH FABRICS CORPORATION, 50 NO. CENTRAL AVE., ELMSFORD, N. Y.
Phone—Elmsford 6-0366

DIRECTIONS: 1 Block from Saw Mill River Pkwy. and new Buffalo-New York Throughway at Elmsford, N. Y.—Westchester County. 30 Minutes from downtown New York.

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (18)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

POSITION VACANT

ENGINEER, THOROUGHLY experienced in mechanization and elimination of hand operations. Also with production experience in mass produced, low cost electronic assemblies, preferably with direct experience in the manufacture of radio rotary switches or volume controls. P-1254, Electronics.

AIRCRAFT INSTRUMENT project engineers. For development of engine and flight type electronically operated aircraft instruments. Position is with a small rapidly growing company that has an excellent reputation and record of achievement in these fields. Applicants must be fully experienced. Complete resume requested. P-1316, Electronics.

SELLING OPPORTUNITY OFFERED

MOLDER OF Teflon shapes requires resident representative for sale of our product on commission basis to the Aviation, Electronic, Radar and Atomic Energy projects in the following trade territories: Cleveland, Dayton, Detroit, Cincinnati, Denver, Pittsburgh, Minneapolis, Des Moines. RW-1289, Electronics.

POSITIONS WANTED

GRADUATE ENGINEER would like to represent a reliable concern in the Dayton, Ohio area. Have had considerable experience with governmental procedure. Experienced in high frequency and electromechanical computing devices. PW-1281, Electronics.

PH.D. AGE 48, married—experience research, production, management in USA and Europe espec. electronic components—resistors, capacitors, ceramic to metal seals—and insulating and dielectric ceramic materials. Presently employed, excellent commercial abilities, foreign languages and knowledge of current European conditions seeks interesting position with European branch of American company preferably in Paris, France. PW-1195, Electronics.

BUSINESS OPPORTUNITY

If you are planning on expanding, or increasing your production in other areas because of the crisis, write or call Mayor G. A. Gilbert or J. G. Ihnet, City Promotional Manager, for a copy of "A Preliminary Industrial Survey of Watertown, South Dakota."

PATENTS

Consult: Z. B. Polachek, Reg. Pat. Attorney, 1234 Broadway, New York 1, N. Y.

DO YOU HAVE YOUR SHARE OF GOVERNMENT BUSINESS?

Is your government business properly handled?

A former highly-placed Army Signal Corps procurement official capable of operating effectively throughout the area of government contract relationship is now available.

a. Bidding procedures
b. Contract negotiation
c. Contract and specification changes
d. Inspection procedure
e. Price adjustments
f. Government financing
g. Equitable terminations

Will consider full time position or will take your account with a few other non-competing lines.

PW-1276, Electronics
330 W. 42 St., New York 18, N. Y.

CALIFORNIA

Manufacturers Representative

Growing organization has capacity for another product in the electro-mechanical field. An established sales and engineering service of unusual quality.

H. G. WEIGHTMAN
Brown Professional Bldg.
140 S. Glenoaks Blvd. Burbank, Calif.

EXPERIENCED
electronic
and
mechanical
engineers

Organization established in 1942. Electronic research, development, and production must expand to meet long-term, pre-Korea commitments. Openings in all branches of electronics, including

RECEIVERS TRANSMITTERS
ANTENNAS RADARS
RELATED EQUIPMENT

Positions available for men with at least 5 yrs experience

Write or telephone Howard J. Gresens at

Airborne Instruments Laboratory
INCORPORATED
160 Old Country Road, Mineola Long Island, N. Y.
Garden City 7-6880

A CHALLENGE
to Outstanding
ENGINEERS
PHYSICISTS

Take Advantage of the Present to Assure Your Future

POSITIONS with SCOPE and IMAGINATION NOW OPEN

Minimum Requirements Are:

Four years experience in advanced research and development on Radar Systems, Computers, Wave Guide and Antennas, Fire Control, Moving Target Indication, Servomechanisms, Pulse Techniques, Gyroscopic Equipment and Related Fields.

Please send resume and salary requirements to:

The **W. L. MAXSON**
CORPORATION
460 W. 34th St., NEW YORK 1, N. Y.

A TOP FLIGHT
PRODUCT ENGINEER
WANTED

To head the Product Engineering Section of an Electronic Manufacturing Organization

MELPAR INC.

— THAT —

- HAS GROWN STEADILY SINCE ITS ORGANIZATION SIX YEARS AGO.
- HAS BEEN PRIMARILY A RESEARCH & DEVELOPMENT ENGINEERING TEAM.
- IS NOW ENTERING A LONG TERM MANUFACTURING PROGRAM BASED ON OUR DEVELOPMENTS . . . CURRENT VOLUME $5,000,000.00

THE MAN WE WANT

- KNOWS HOW TO DESIGN FOR ECONOMICAL MANUFACTURE IN LOTS OF TEN TO TEN THOUSAND . . .
- KNOWS THAT QUALITY IS THE RESULT OF DESIGN, AND NOT INSPECTION . . .
- HAS TEN YEARS OF VARIED EXPERIENCE IN THE ELECTRONIC INDUSTRY . . .
- CAN SUPERVISE AND INSPIRE A SMALL FAST WORKING GROUP . . .
- CAN REDUCE COMPLEX AND NOVEL EQUIPMENT DESIGNS TO EASILY PRODUCED ASSEMBLIES . . .
- LIKES TO WORK WHERE EVERY NEW TASK IS A NEW CHALLENGE . . .
- WANTS TO LEARN MORE ABOUT MINIATURIZATION AND AUTOMATIC PRODUCTION . . .

All replies will be held confidential

IF YOU ARE THIS MAN
Write Dr. W. G. Tuller, Chief Engineer
MELPAR, INC.
452 Swann Avenue Alexandria, Virginia

Electrical ENGINEERS or PHYSICISTS

Microwave . . .
to develop test sets and methods on long-distance radio relay equipment. Experienced in performance of amplifiers, modulators, filters and cavities at microwave frequencies.

Filters and Networks . . .
to develop manufacturing facilities and methods of manufacture.

Test . . .
to develop test facilities for the manufacture of communication and television transmission. Basic knowledge of transmission theory required.

Minimum Qualification B.S. Degree or Equivalent

Write Dept. E giving details of qualifications, experience and salary expected, or

Apply in Person
Employment Department
Monday through Saturday,
7:30 AM to 3:30 PM

Applicants should furnish proof of citizenship and social security number. Veterans should present discharge papers.

WESTERN ELECTRIC CO.
- 100 Central Ave., Kearny, N. J.
- SUPPLY UNIT of the BELL SYSTEM

BENDIX RADIO DIVISION

Bendix
AVIATION CORPORATION

TV RECEIVER DESIGN ENGINEERS —Progressive TV Design Section has excellent opportunity for highly experienced men with proven ability. Desirable openings also available for promising young engineers. We will be pleased to discuss salaries at all levels.

ELECTRONICS ENGINEERS — At all salary and experience levels.

RESEARCH ON: Antennae, Servomechanisms, Microwave ccts. and other phases of communications and navigation equipment.

PRODUCTION DESIGN OF: Military and commercial communications and navigation equipment.

FIELD ENGINEERS — Supervise installation and maintenance of radio and radar equipment. Factory training will be given. Base salaries from $4200 to $6900 per year. 25% bonus for time spent overseas. Traveling and living expenses paid by Bendix. Insurance plan.

TEST AND INSPECTION ENGINEERS — Practical knowledge of radio, radar, or TV manufacturing processes. Good knowledge of radio fundamentals essential. Base salaries from $3900 to $5880.

TECHNICAL WRITERS — Knowledge of radar fundamentals or radio required. Work closely with engineers to gather material for instruction and maintenance manuals. Base salaries from $3400 to $4300.

LABORATORY TECHNICIANS — Require knowledge of radio fundamentals and skill in use of measuring instruments and laboratory equipment. Previous industrial experience essential. Salaries from $262 to $321 per month.

BASE SALARIES FOR ALL POSITIONS LISTED ABOVE ARE SUPPLEMENTED BY UP TO 30% FOR REGULARLY SCHEDULED 48-HOUR WEEK.

Housing is no problem in Baltimore.

Excellent group insurance and family hospitalization plan.

Attractive retirement plan for professional personnel.

Write for application:

Engineering Personnel Supervisor
Department E
BENDIX RADIO DIVISION of
Bendix Aviation Corporation
Baltimore 4, Maryland
TOwson 2200

RESEARCH - DEVELOPMENT - DESIGN

ENGINEERING WITH A FUTURE

The steady growth of several established research and development projects has created a number of exceptional engineering opportunities with a future.

PHYSICISTS—ENGINEERS

Positions are now available in our organization for qualified physicists and engineers with backgrounds in circuit analysis, microwaves, servomechanisms, analog computers, etc. Openings exist at several levels with salaries dependent on education, ability, and experience.

If you are qualified and interested in a position which combines stability and unusual opportunity, write, giving full details to Mr. C. G. Jones, Manager, Salary Personnel.

GOODYEAR
AIRCRAFT CORPORATION

Akron 15, Ohio

Leading Radio Correspondence School
seeks

DIRECTOR OF INSTRUCTION

An electronics engineer with academic leanings will enjoy this varied and challenging assignment. Should have B.S. or M.S. from recognized engineering college. Requires practical experience in radio, television and electronics. Responsibilities include direction of department, creation and revision of instructional material. Teaching experience not essential. Attractive salary, bonus and profit-sharing plan. Age 32 to 45.

P-1288, Electronics
330 W. 42 St., New York 18, N. Y.

Admiral

Electronic Engineers

Needed Immediately for

Long Range Research Program

Admiral Corporation, one of America's largest electronic and appliance manufacturers, needs electronic engineers for long range research program covering both consumer as well as governmental projects. Project and senior project engineers with minimum of two to five years' experience needed immediately. Top pay with excellent opportunities for advancement. Send resume of experience and education to Engineering Personnel Manager . . .

ADMIRAL CORPORATION

Dept. E, Chicago 47.

AC SPARK PLUG DIVISION

of

GENERAL MOTORS CORPORATION

PRECISION INSTRUMENT PLANT

Positions now available for highest caliber personnel in the field of airborne automatic electro-mechanical control equipment.

MECHANICAL DESIGN ENGINEERS
ELECTRONIC ENGINEERS
SERVO ENGINEERS
JUNIOR ENGINEERS

New and expanding division of an established firm with 20 years of successful experience in the instrument field. Work involved deals with the manufacture and development of highly complex equipment of the most advanced type.

Write or Apply

AC Spark Plug Division
GENERAL MOTORS CORPORATION
1925 E. Kenilworth Place
Milwaukee 2, Wisconsin

Wanted

ENGINEERS AND SCIENTISTS

Unusual opportunities for outstanding and experienced men.

These top positions involve preliminary and production design in advanced military aircraft and special weapons, including guided missiles.

Immediate positions include:

Electronic project engineers
Electronic instrumentation engineers
Radar engineers
Flight test engineers
Stress engineers
Aero- and thermodynamicists
Servo-mechanists
Power plant installation designers
Structural designers
Electro-mechanical designers
Electrical installation designers

Excellent location in Southern California, Generous allowance for travel expenses.

Write today for complete information on these essential, long-term positions. Please include resume of your experience & training. Address inquiry to Director of Engineering,

NORTHROP AIRCRAFT, INC.
1009 E. Broadway
Hawthorne (Los Angeles County) California

PHYSICISTS and ELECTRONIC ENGINEERS

Both junior and senior engineers as well as administrative personnel with technical background are needed for employment with expanding research and development organization specializing in Instrumentation, Radio Telemetering, Missile Guidance, Telemetering Data Treatment and special electro-mechanical devices. New laboratory facilities located in research center. Corporation has five year history and is operating on pre-Korean contracts.

Replies held in strictest confidence.

Please send complete resumes to:

APPLIED SCIENCE CORPORATION OF PRINCETON
Post Office Box 44
Princeton, New Jersey

WANTED

PRINTED CIRCUIT ENGINEER

for permanent position with

IBM

Electrical or chemical engineer familiar with printed circuit techniques to assist in an expanding development program. Reply direct to Mr. P. T. Vanness, Personnel Manager, International Business Machines, Dept. 1723, Poughkeepsie, New York.

Engineers...
Physicists....
Chemists.....
Metallurgists....

A Reminder
from
GENERAL ELECTRIC

Tremendous material resources ... the stimulation of highly creative work ... long-range security and professional recognition ... these are but a few of the assets General Electric offers you in unusual positions now available in:

Advanced Development, Design, Field Service and Technical Writing.

If you have a Bachelor's or Advanced Degree in Electrical or Mechanical Engineering, Physics, Metallurgy or Physical Chemistry and experience in the Electronics Industry, you can expand your training and experience to the fullest in openings in connection with:

.. MILITARY RADIO & RADAR
.. MOBILE COMMUNICATION
.. MULTIPLEX MICROWAVE COMMUNICATIONS
.. ELECTRONIC COMPONENTS
.. TELEVISION, TUBES and ANTENNAS.

Please send resume to:
TECHNICAL PERSONNEL
ELECTRONICS PARK

GENERAL ELECTRIC
Syracuse, New York

ATOMIC ENERGY INSTALLATION
NEEDS
ELECTRONICS ENGINEERS

Two to ten years' experience in research, design, development or test. Patent history desirable but not necessary. A variety of positions open for men, with Bachelor's or advanced degree, qualified in one or more of the following fields:

- RELAYS
- PULSE CIRCUITS
- SERVO-MECHANISMS
- LOW POWER APPLICATION
- TELEMETERING
- UHF TECHNICIANS
- INSTRUMENTATION
- QUALITY CONTROL

TEST EQUIPMENT RELATING TO THE ABOVE

CAREER
DRAFTSMEN

EXPERIENCED CAREER DRAFTSMEN WITH NO COLLEGE DEGREE.

These are PERMANENT POSITIONS with Sandia Corporation in Albuquerque, New Mexico. Sandia Laboratory is operated by Sandia Corporation, a subsidiary of Western Electric Company, under contract with the ATOMIC ENERGY COMMISSION. This laboratory offers good working conditions and liberal employee benefits, including paid vacations, sick leave, and a retirement plan.

Albuquerque, center of a metropolitan area of 150,000, is located in the Rio Grande Valley, one mile above sea level. The "Heart of the Land of Enchantment." Albuquerque lies at the foot of the Sandia Mountains, which rise to 11,000 feet. Climate is sunny, mild and dry the year 'round.

Make Application to:

PROFESSIONAL EMPLOYMENT DIVISION
SANDIA CORPORATION
SANDIA BASE ALBUQUERQUE, NEW MEXICO

IF

YOU are an engineer or a physicist . . . . . and
YOU have skills and interests related to diverse armament development projects . . . . and
YOU are capable of assuming greater responsibility . . and
YOU prefer the personalized attitudes and policies and the demands for ingenuity and versatility offered by a small progressive company—

WE would like to make your acquaintance

AIRCRAFT ARMAMENTS INC.
4415 REISTERSTOWN RD.
BALTIMORE 15, MARYLAND

ENGINEERS

Design and Development

Experienced in any of the following fields

GYROSCOPES
COMPUTERS
SERVOMECHANISMS
INSTRUMENTATION
FIRE CONTROL
RADAR
CONTROL CIRCUITS
ELECTRICAL COMPONENTS

Excellent Working Conditions
Permanent Positions
Good Starting Salaries
Opportunity for Professional Growth and Advancement

APPLY by sending complete resume to

Technical Personnel Office

ARMA CORP.

254 36th St., Bklyn. 32, N. Y.

We want Representation in 4 Markets

New York — Boston
Chicago — Los Angeles

Prominent Middle West manufacturer of electronic equipment wants qualified manufacturer's representative.

We are especially interested in a company or man now contacting manufacturers and wholesalers on electronic, electrical and radio component products. Our product has widespread application in major appliances and related production. Design experience is valuable.

This would be a straight commission arrangement. Please give us full details on lines you now handle, area covered regularly, and other pertinent facts.

Address: RW-1302, Electronics
520 N. Michigan Ave., Chicago 11, Illinois

PHILADELPHIA AREA

Aircraft Industry

ELECTRONIC ENGINEERS

—All Grades—

Men whose education and interest or experience qualifies them for the development or design of airborne or ground radio, radar, or other electronic equipment can work under ideal conditions. We have openings in our small, efficient group (under 20 people) where the work is personalized and individual ability can be recognized and rewarded.

Write or telephone
Chief Engineer

Kellett Aircraft Corporation
Central Airport, Camden 11, N. J.
Merchantville 8-4800
Founded 1929

ELECTRONIC ENGINEERS

SENIOR ENGINEERS or PHYSICISTS
Degree and experience in Radar, Pulse Circuits, Digital or Analogue Computers, or Servomechanisms
JUNIOR ENGINEERS and recent graduate in EE or Physics.

ELECTRONIC ENGINEERING COMPANY
OF CALIFORNIA
180 S. Alvarado St. Los Angeles 4, Calif.

CHIEF ENGINEER

Progressive middle-size Chicago electrical components firm is seeking a qualified man to direct all phases of its engineering program. Engineering degree required. Must have successful experience in administering engineering program. This is an unusual opportunity for a strong idea man with administrative talent. Salary commensurate with ability and background. Replies held in strict confidence.

P-1295, Electronics
520 N. Michigan Ave., Chicago 11, Ill.

WANTED

Sales Engineer to cover Long Island on protected basis for manufacturer's representative having outstanding line of nationally advertised electronic instruments covering range from DC to micro waves. Salary—Commission—Expenses. State education, experience, past earnings.

SW-1252, Electronics
330 W. 42 St., New York 18, N. Y.

WANTED

Research and Development Engineers and Physicists with educational background in mechanical, electrical or electronic engineering, physics or engineering physics for openings in plant and laboratory instrumentation, physical measurements, geophysics, and industrial electronics. Prefer persons with two to four years experience in experimental research design and development of instruments, intricate mechanisms, electronic apparatus, optical equipment, servo-mechanisms or allied fields. Positions are of immediate and permanent importance to our operations.

Write Personnel Director
Research and Development Department
PHILLIPS PETROLEUM COMPANY
Bartlesville, Oklahoma

Engineers and Technicians

Land-Air, Inc., engaged in a major expansion program, has immediate and near future requirements at Holloman Air Force Base (vicinity Alamogordo, New Mexico) for electronic, mechanical and optical engineers and technicians to work with cinetheodolites, special optical instruments, recorders, radars (and special electronic telemeters) devices as used for guided missile test instrumentation in field measurement. Work consists of operation, maintenance, design, development and construction with time spent both in the laboratory and on the range.

Salary offers, based on application or personal interview, are commensurate with education, training, experience, position responsibility and other factors. Monthly salary ranges: Engineers—$480-$740; Technicians—$360-$480.

Personal and family transportation reimbursed, paid group insurance and other benefits. Write for application form to:

LAND-AIR, INC.
Holloman Air Force Base, New Mexico

ENGINEERS

If You're Interested in Yourself—We're Interested in YOU!

You may think this an unusual attitude for an employer to take, but the fact is, "self-interest" is often overlooked and even considered undesirable by some employers.

But here at Honeywell, we believe self-interest is healthy for our employees and for this company. And we back up our belief not only with money, security and the usual "fringe benefits," but also by giving people satisfying, challenging work and opportunity for advancement NOW – not tomorrow or next year.

Consider the self-interested engineer. He wants always to use the latest in electronic and engineering techniques. He wants to work at his full creative capacity. He wants to show more than just a fraction of his actual potential. Because he knows that in this kind of position lies his best opportunity to further his career.

So—here at Honeywell—we take great care to put a self-interested engineer in his proper field—research, development or design. We let him loose in basic research. Or we give him meaty problems in electronics and electro-mechanical devices. We let him tear into gyro, servo-mechanism, relay, heat transfer, electrical contact phenomena or aeroelasticity. In other words—we give him the work he wants and needs to do.

Yes, Honeywell goes for self-interested engineers. We want them when we find them and we keep them when we get them.

If this kind of thinking appeals to you, the chances are you'll be mighty valuable to yourself and to us by working at Honeywell. Why not start *right now* to do something about it? Depending on the location you prefer, write to H. D. Elverum, Personnel Department EL-2, Minneapolis 8, Minn. or W. Reiterman, Personnel Department EL-2, Philadelphia 44, Pa., giving your qualifications and experience. Your letter will be held in the strictest confidence, of course.

MINNEAPOLIS **Honeywell**

First in Controls

Development Engineers for Electronic Aircraft Armament

ELECTRONIC INSTRUMENTATION • ELECTRONIC COMPONENTS • SERVOMECHANISMS • RADAR • ELECTRONIC PACKAGING • CALIBRATION AND TESTING ENGINEERS FOR PRODUCTION

Job openings range from recent graduates to Engineers with years of experience. Attractive employee benefits include group insurance and pension plans; paid holidays and vacations.

Send complete resume, listing salary requirements and availability, to:

Technical Employment Supervisor, Station 483-J

THE EMERSON ELECTRIC MFG. CO.

8100 Florissant • St. Louis 21, Missouri

LEADERS IN THE ELECTRICAL INDUSTRY SINCE 1890

CORNELL AERONAUTICAL LABORATORY, INC.

an affiliate of Cornell University

employs about 700 people on vital research work in all branches of aeronautical science. We are gradually expanding our scientific staff, and have several permanent positions open for:

ELECTRONICS ENGINEERS
PHYSICISTS
MECHANICAL ENGINEERS
AERODYNAMICISTS
AERONAUTICAL ENGINEERS
CHEMICAL ENGINEERS

in such fields as:

GUIDED MISSILES
RADAR RESEARCH
BASIC AND APPLIED PHYSICS
ELECTRONIC COMPUTERS
SYSTEMS ANALYSIS
AIRCRAFT PRECISION INSTRUMENTATION
WIND TUNNEL RESEARCH
FLIGHT RESEARCH
DEVELOPMENT ENGINEERING
HEAT TRANSFER
THERMODYNAMICS

Minimum requirement is a B.S. Advanced degrees are even better, but experience to back up the degree is really best. We pay industrial wages. Other tangible advantages here (for example, our self-sponsored internal research policy) should be of particular interest to men with intelligence, ingenuity, and initiative. Send us your resume; all inquiries are strictly confidential. Promising candidates will be invited to Buffalo for interviews at Laboratory expense.

CORNELL AERONAUTICAL LABORATORY, INC.

P. O. Box 235, Buffalo 21, New York

ELECTRONIC ENGINEERS AND PHYSICISTS

FOR RESEARCH IN TELEVISION AND ALLIED FIELDS

EXCELLENT OPPORTUNITIES FOR SPECIALISTS IN

- **UHF CIRCUITS**
- **CATHODE RAY TUBE DESIGN**
- **ELECTRONIC CIRCUITS**
- **VACUUM TUBE TECHNIQUES**

QUALIFIED APPLICANTS ARE INVITED TO WRITE:

MANAGER, TECHNICAL EMPLOYMENT

WESTINGHOUSE ELECTRIC CORP.

306 4TH AVE., PITTSBURGH, PA.

Coaxial relay K-101—SPDT—24v DC	$ 6.59
Set of 83-1SP coax-connectors for above	1.35
RG59U coaxial cable—75 ohm	
150' roll	$11.95
300' roll	22.50
300 ohm twin lead, 300' minimum—per ft	.03
Sigma plate relay 800 ohm—SPDT	2.75

R·H·S
ALL OF THE MONTH

1000KC crystal BT cut	$3.96
3" scope shield	1.29
2 speed dial drive for ¼" shaft ratios 5:1 1 to 1	.39
ATC 100 mmfd air trimmer screwdriver shaft	.29
Centralab 850 S 50MMF 5KV button cond	.39
25.6 mfd @ 1000v cont. 2000v int	6.95

TUBES!! BRAND NEW! STANDARD BRANDS! NO SECONDS! COMPARE! TUBES!!

OA3/VR75	$1.69	3C24	$2.25	215A	.19	808	$7.25	2051	$1.45	WL616	$37.50	5X4G	$1.28	6SJ7	$1.30	12SH7	$1.50
OB3/VR90	1.29	3C31/C1B	3.49	217C	8.95	809	2.45	8005	5.95	WL619	18.95	5Y3GT	.89	6SK7	1.50	12SL7	1.10
OC3/VR105	1.49	3C45	19.95	227A/		810	9.95	8011	1.75	WL677	34.50	5Y4G	.98	6SL7GT	1.50	12SN7	1.35
OD3/VR150	1.29	3CP1	2.25	5C27	$5.95	811	3.25	8012	3.95	WL681	32.50	5Z3	1.05	6SN7GT	1.60	12SQ7	1.25
1B22	3.45	3CP1S1	2.95	249C	3.95	812	2.95	8013	2.95			6Z4	1.40	6SQ7	1.15	12SR7	.98
1B23	12.50	3DP1	4.95	250B	12.95	812H	6.95	8014	29.95	0A2	2.95	6A3	1.35	6SR7GT	1.10	12Z3	1.15
1B24	9.95	3DP1A	6.95	250TH	22.50	813	8.95	8020	1.29	0A4G	1.35	6A4LA	1.45	6SS7	1.50	14A4	1.20
1B26	3.95	3DP1-82A	8.95	250TL	21.50	814	3.95	8025	5.95	0B2	1.25	6A5T	1.45	6ST7	1.45	14A7	1.15
1B27	24.50	3D21A	1.98	274A	9.50	815	2.95	9001	2.25	0Z4	.98	6A7	1.10	6SU7GTY	2.25	14B8	1.15
1B29	2.75	3E29	14.95	274B	2.65	816	1.30	9002	2.25	01A	.90	6A8	1.25	6ST7	1.45	14F7	1.15
1B32	8.95	3FP7	3.95	276A	9.95	826	.98	9003	2.25	1A3	1.32	6AB7	1.49	6T7G	1.65	14F8	1.30
1B36	24.96	3GP1	4.75	276A	9.95	828	12.75	9004	.75	1A4P	1.30	6AC5GT	1.40	6T8	1.65	14H7	1.20
1B38	32.50	3HP7	3.95	283A	1.98	829	14.95	9005	2.95	1A5GT	1.05	6AC7	1.45	6U5G	1.25	14J7	1.28
1N21	Xtal 1.25	4C35	14.21	294A	5.75	829B	14.95	9006	.49	1A6	1.10	6AD7GT	1.45	6U6GT	1.25	14N7	1.30
1N21A	" 2.25	4-125A	26.95	300B	9.95	830B	3.95	CIJA	9.95	1A7GT	1.35	6AE6G	1.05	6U7G	1.05	14Q7	1.15
1N21B	" 4.25	4-250A	29.95	304TH	27.50	832	12.95	C5B	9.95	1AB5	.98	6AF6G	1.45	6V6	2.00	14R7	.89
1N22	1.35	4AP10	4.95	304TL	27.50	832A	12.95	C6A	7.95	1B3/8016	1.85	6AG5	1.35	6V6GT	1.50	19	1.30
1N23	2.25	4B22/EL5B	9.95	305A	34.95	833A	39.50	C10D	6.95	1B4	1.30	6AG7	1.65	6W4	1.15	24A	1.20
1N23A	3.25	4B24/EL3C	7.95	307A/RK75	5.95	836A	3.95	C10DD	1.49	1B5/25S	.98	6AH6	2.10	6W7G	1.30	25L6GT	1.10
1N23B	6.95	4B25/6CF	8.95	310A	6.95	837	1.69	CK502AX	2.95	1B7GT	1.75	6AJ5	2.65	6X4	1.05	25Z5	1.05
1N27	1.69	4B26/2000	8.95	316A	.65	838	.98	CK503AX	2.95	1C5GT	.98	6AK5	2.25	6X5GT	1.05	25Z6GT	1.05
1N34	1.40	4B28	4.95	323A/B	24.50	841	.45	CK505AX	2.25	1C6	1.05	6AK6	1.85	6Y6G	1.48	26	.98
1N34A	1.40	4B32	9.95	327A/5C37	4.95	843	.98	CK506AX	2.25	1C7G	1.05	6AL5	.98	6Y7G	1.55	27	.98
1P23	3.95	4C27	CV92 49.50			845	4.95	CK507AX	2.25	1D5GP	1.15	6AQ5	1.20	6ZY5G	1.20	28D7	.98
1P24	1.79			328A	13.95	849	29.50	CK512AX	2.25	1D7G	1.15	6AQ6	1.20	7A4/XXL	1.10	30	.89
1P26	2.95	4C35	34.50	331A	12.95	851	69.95	CK514AX	6.45	1D8GT	1.15	6AR5	1.25	7A5	1.10	31	.89
1N21	6.95	4E27/	257B 17.95	350A	8.95	852	29.95	CK1005	.89	1E5GT	1.65	6AT6	1.05	7A6	1.10	32	1.05
2AP1	11.95			350B	4.95	860	19.95	CK1006	2.25	1E7G	1.55	6AU5	2.35	7A7	1.10	32L7GT	.98
2AP5	.69	5AP1	3.69	368AS	7.95	861	29.50	E1148	.35	1F4	.95	6AU6	1.10	7A8	1.80	33	1.05
2C21/RK33	.69	5AP4	3.69	371A	1.49	864	.49	EF50	.69	1F5G	1.75	6AV6	1.05	7AG7	1.65	34	.98
2C22/7193	.69	5BP1	5.95	371B	.98	865	1.45	F123A	8.75	1G4	1.10	6B6G	1.25	7B4	1.10	35/51	.98
2C26A	.49	5BP4	5.95	388A	2.75	866A	1.39	F127A	22.50	1G6GT	.95	6B7	1.25	7B5	1.10	35A5	1.10
2C34/RK34	.89	5CP1	4.95	393A	6.95	866JR	1.39	F128A	89.50	1H4G	.95	6B8G	.83	7B6	1.10	35B5	1.10
2C39	24.50	5CP7	4.95	394A	4.95	869B	49.50	F606	37.60	1H5GT	1.08	6BA6	1.05	7B7	1.10	35C5	1.25
2C40	8.95	5C22	53.00	417A	12.95	872A	2.95	F660	79.50	1H6GT	1.08	6BC5	1.25	7C4	.79	35L6GT	1.30
2C43	14.95	5D21	24.50	434A	4.95	874	1.49	FG17	3.95	1J6	1.35	6BE6	1.15	7C5	1.10	35W4	1.25
2C44	1.49	5FP7	1.95	446A	4.95	876	.99	FG27A	8.75	1L4	.98	6BF6	1.05	7C6	1.25	35Y4	1.08
2C46	7.50	5GP1	4.95	446B	4.95	878	2.25	FG32	7.95	1LA4	1.15	6BG6G	2.45	7C7	1.25	35Z3	1.08
2C51	2.95	5JP1	24.45	450TH	47.50	884	1.83	FG57	14.95	1LA6	1.35	6BH6	1.20	7E5	.89	35Z4	1.05
2D21	1.79	5JP2	24.45	450TL	47.50	885	1.49	FG81A	2.95	1LB4	1.35	6BJ6	1.48	7F6	.89	35Z5	1.05
2E22	1.95	5JP4	24.45	527	12.75	902	11.95	FG105	22.95	1LC5	1.10	6BQ6	2.50	7F7	1.05	36	1.05
2E24	4.89	5J23	12.95	559	1.39	905	3.89	FG172	34.50	1LC6	1.18	6C4	1.40	7F8	1.10	37	.89
2E25	2.95	5J29	12.95	562	57.50	908	12.95	FG1446	6.95	1LD5	1.30	6C6	.85	7H7	1.10	38	.98
2E26	2.29	5J30	49.50	575A	13.95	918	1.69	FG4344	4.95	1LE3	1.18	6C8	1.10	7K7	1.49	39/44	.98
2E30	2.29	5J32	99.50	701A	5.95	919	2.79	FG4345	4.95	1LH5	1.18	6C10	1.10	7L7	1.10	41	.98
2J21A	9.95	5JP1	15.95	702A	3.95	922	.98	FG502A	1.85	1LH4	1.75	6CB6	1.48	7N7	1.65	42	1.20
2J22	8.45	5NP1	5.95	703A	7.95	923	1.05	FG562	97.50	1LN5	1.30	6D6	1.10	7Q7	1.10	43	.98
2J27	29.50	5AB6	3.69	704A	1.95	927	1.35	FG5592	1.45	1N5GT	1.05	6D8	1.10	7S7	1.10	45Z3	1.05
2J30	99.50	6C21	24.50	705A	2.95	930	1.20	HF125	14.95	1P5GT	1.05	6F5	1.15	7S7	1.35	45Z5	1.05
2J31	39.50	6F4	5.95	706BP	39.50	931A	4.95	HF300	19.95	1Q5GT	1.18	6F6	1.05	7V7	1.35	45Z5	1.10
2J32	39.50	6J4	8.95	706CY	39.50	934	.39	HY114B	.79	1R4	1.05	6F7	1.08	7W7	1.45	46	1.25
2J33	39.50	7HP7	8.95	706FY	42.50	955	.45	HY115	.79	1R5	1.39	6F8G	1.35	7X7	1.69	47	1.28
2J34	39.50	9GP7	14.95	707BP	42.50	956	.45	HY131	.89	1S4	1.50	6F8G	1.35	7Y4	.98	48	1.10
2J36	97.50	9JP1	14.95	707B	17.95	957	.45	KC4	37.50	1S5	1.50	6H6	1.25	7Z4	.98	49	1.10
2J37	12.75	9LP1	14.95	708A	4.95	958	.45	KC5	9.95	1T4	1.50	6H6GT	1.15	10Y	1.10	50A5	1.10
2J38	12.75	9LP2	14.95	709A	3.95	959	.69	ML101	69.50	1T5GT	1.18	6J5	.89	12A6	.75	50B5	1.20
2J39	39.50	10BP4	22.50	710A/8011	1.75	991/NE16	.39	REL21	3.95	1U4	1.30	6J5GT	.79	12A7	1.25	50C5	1.25
2J40	39.50	7DP4	17.95	713	1.45	1603	5.25	RK20	1.95	1V	.89	6J7	1.05	12AH7GT	1.25	50L6GT	1.15
2J46	39.50	10	.49	714AY	6.95	1613	1.25	RK25	4.49	1X2	1.60	6J7	1.40	12AH7GT	1.85	50Y6	1.25
2J48	29.50	12DP7	16.95	715A	7.95	1614	2.25	RK34	.89	2A3	1.65	6K6GT	1.35	12AL5	1.35	53	1.35
2J49	39.50	12GP7	16.95	715B	9.75	1616	.98	RK34	.89	2A4G	1.40	6K6GT	1.30	12AT6	1.05	56	.98
2J50	22.50	12HP7	16.95	715C	29.95	1619	.35	RK48A	4.49	2A5	1.05	6K7	.98	12AT7	2.25	57	1.05
2J54B	39.50	12LP4	22.50	717A	1.69	1622	.35	RK59	2.95	2A6	1.25	6K8	1.25	12AU6	1.35	58	1.05
2J55	97.50	15E	1.19	721A	2.59	1624	1.98	RK60/1641	1.89	2A7	.98	6L5G	1.28	12AU7	1.45	59	1.25
2J61	49.50	15K	.89	722A	2.95	1625	.45	RK63	24.50	2B7	1.20	6L6	2.49	12AV6	1.10	70L7	1.30
2J62	49.50	16AP4	42.50	723A	9.95	1626	.45	RK72	.59	2V3G	.98	6L6G	2.65	12BA6	1.25	71A	1.25
2K25/		16CP4	42.50	723A/B	14.95	1629	.98	RK73	.59	2X2	.65	6L6GA	2.65	12BE6	1.25	75	1.25
	723AB 29.50	19T8	3.89	724B	3.89	1630	.98	RK201A	2.95	3A4	.69	6L7	1.25	12C8	1.70	76	.89
2K28	36.25	23D4	.45	725A	7.95	1631	1.29	RK120	8.95	3A4	.69	6L7G	1.25	12F5GT	.98	77	.89
2K29	24.50	28D7	.98	726C	6.95	1632	.79	T-0D	6.95	3A5	.69	6N7	1.45	12H6	.89	78	1.10
3AP1	12.95	30	Special .89	726B	29.50	1633	.75	VR78	.89	3B7/1291	.69	6Q7	1.45	12J5GT	.79	80	1.10
3B22/E1c	2.95	35TG	4.98	726C	49.50	1634	.75	VR91	1.49	3D6/1299	.69	6R7	1.20	12J7GT	1.05	82	1.20
3B23/RK22	4.85	35	Special .39	730A	12.95	1636	3.25	VR105	1.49	3LF4	1.10	6S7G	1.35	12K7GT	1.05	83	1.10
3B24	5.95	53A	5.95	750TL	79.50	1638	.65	VT127A	3.95	3Q4	.95	6S8GT	1.35	12K8	1.05	83V	1.38
3B24W	7.95	75TL	6.95	800	1.95	1641	.98	VT501	14.95	3Q5GT	1.25	6SA7	1.15	12Q7	.98	84/6Z4	1.10
3B25	4.65	100B	.89	801A	.49	1644	.98	VU29	2.95	3S4	1.10	6SC7	1.75	12SA7GT	1.15	89	.98
3B26	3.95	100TH	9.95	802	4.49	1654	2.39	VU111	1.49	3V4	1.25	6SD7GT	1.80	12SC7	1.45	89Y	.98
3B27	3.95	203A	2.98	803	4.49	1665	1.49	WL530	12.95	5BP4GY	1.75	6SF5	1.10	12SF5	1.20	117L7/M7	1.75
3B28	8.95	203A	8.95	804	9.95	1851	1.89	WL530	12.75	5T4	1.95	6SF5GT	1.20	12SF7	1.05	117N7	1.75
3BP1	8.95	204A	69.50	805	4.49	1960	.79	WL531	12.75	5U4G	1.25	6SG7	1.25	12SG7	1.05	117P7	1.75
3C22	64.50	211	.89	806	29.95	1961	4.99	WL532	2.95	5V4G	2.40	6SH7	1.50	12SH7	1.05	117Z3	1.05
3C23	9.95	212E	49.50	807	1.98	2050	1.25	WL578	1.29	5W4	1.10	6SH7	1.10	12SG7	1.15	117Z6	1.25

FULL-WAVE SELENIUM RECTIFIER STACKS

Max. A.C. Input Volts RMS	Max. D.C. Volts	Cell Size in Inches	Max. D.C. Amps. Output Continuous	Order by This Number	Price
SINGLE PHASE BRIDGE					
0-18	0-14.5	1¾x1¾	1.3	18B4D1S1	$ 3.95
"	"	2-3/16"x2-3/16"	2.4	18B4E1S1	4.95
"	"	3⅜x"	6.6	18B4F1S1	7.95
"	"	4½x"	13.0	18B4K1S1	12.95
"	"	5"	17.5	18B4J1S1	15.45
"	"	5"	26.0	18B4K1S2	22.50
"	"	4½x"	39.0	18B4K1S3	37.50
"	"	4½x"	52.0	18B4J1S3	45.50
"	"	4½x"	70.0	18B4J1S4	54.50
9-40	0-24	1¾x"	0.60	40B4D1S1	4.95
"	"	2-3/16"x2-3/16"	1.2	40B4EW1S1	6.95
"	"	3⅜x"	3.2	40B4FW1S1	9.75
"	"	4½x"	6.0	40B4K1S1	16.95
"	"	5"	9.0	40B4JW1S1	17.50
"	"	4½x"	12.0	40B4K1S2	28.75
"	"	5"	18.0	40B4JW1S2	34.50
"	"	4½x"	25.0	40B4J1S3	42.50
"	"	4½x"	34.0	40B4J1S4	54.25
"	"	5"	36.0	40B4JW1S4	62.25
0-120	0-100	1¾x"	0.60	40B4D3S1	12.45
"	"	2-3/16"x2-3/16"	1.2	40B4EW3S1	14.95
"	"	3⅜x"	3.2	40B4FW3S1	24.50
"	"	4½x"	6.0	40B4K3S1	42.50
"	"	5"	9.0	40B4JW3S1	42.50
CENTER-TAP					
10-0-10	0-8	1¾x"	1.2	20C2D1S1	2.35
"	"	2-3/16"x2-3/16"	2.4	20C2EW1S1	3.10
"	"	3⅜x"	6.6	20C2FW1S1	4.25
"	"	4½x"	12.0	20C2K1S1	6.95
"	"	5"	16.0	20C2J1S1	8.95
"	"	4½x"	24.0	20C2K1S2	14.75
"	"	4½x"	36.0	20C2K1S3	19.65
"	"	4½x"	48.0	20C2J1S3	27.50
"	"	4½x"	64.0	20C2J1S4	34.50
"	"	4½x"	80.0	20C2J1S5	42.50
"	"	4½x"	84.0	20C2JW1S7	49.50
"	"	5"	96.0	20C2J1S6	59.50
"	"	5"	128.0	20C2J1S8	67.50
3 PHASE BRIDGE					
0-120	0-150	1¾x"	0.90	40B6D3S1	24.50
"	"	2-3/16"x3-3/16"	1.8	40B6EW3S1	29.50
"	"	3⅜x"	4.75	40B6FW3S1	42.50
"	"	4½x"	9.0	40B6K3S1	79.50
"	"	5"	12.5	40B6J3S1	86.75

SPECIAL RECTIFIERS ON REQUEST

TRANSFORMERS—115v 60 CY HI-VOLTAGE INSULATION

2700 @ 2 MA; 6.3v @ .6A; 2.5v @ 1.75A	$ 4.45
2500v @ 15 MA; 5v @ 2A	3.95
1540v @ 5 MA; 340-0-340 @ 300 MA	4.35
925v @ 10 MA; 325-0-325v @ 60 MA; 2x5v @ 3A; 6.3v @ 3.5A; 6.3v @ 1A	4.85
415-0-415v @ 60 MA; 5v @ 2A; 115/230 Dual Pri	4.25
400-315-0-100-315v @ 200 MA; 2x6.3v @ 9A; 5v @ 3A; 2.5v @ 2A	4.75
500-385-0-385v @ 200 MA; 3x6.3v @ 6A; 5v @ 3A; 2.5v @ 2A	4.75
325-0-325v @ 12 MA; 255-0-255v @ 240 MA	4.25
300-0-300v @ 65 MA; 6.3v @ 2.5A; 6.3v @ 1A; 2x5v @ 2A	3.25
0-17.4/21.6/25.8v @ 400 MA; 6.4v @ .5A; 2.6v CT @ 2.5A Pri 115/230	3.85
12.6v CT @ 10A; 11v CT @ 6.5A	3.35
3x10v @ 7A	6.95
6.3v @ 12A; 6.3v @ 2A; 115v @ 1A	3.50
6.5v @ 8A; 6.3v @ 6A; 2.5v @ 1.75A	4.17
6.3v @ 1A; 2.5v @ 2A $2.29 4-0-4v @ 1A	.87
6.3v CT @ 1A	1.29
5v CT @ 20A, 10 KV INS	6.95
.6v @ 15A RMS	1.47

TRANSFORMERS—220v 60 Cyc

512.5-0-512.5 @ 427 MA	$ 5.35
3x5v @ 6A; 4v @ 25A	2.95
3x6.3v CT @ 3A; 6.3v CT @ 1.6A	2.95
10v CT @ 6.5A; 6.3v CT @ 2.5A; 6.3v CT @ 1.8A 220/440 Pri	3.95
Step Up/Down 110/220, 500 watt	10.95

FILTER CHOKES HI V INS

.025 HY @ 1.36A	$1.98	10/20 HY @ 85 MA	$1.49
3 HY @ 50 MA	.39	5 HY @ 100 MA	1.68
5 HY @ 70 MA/2 HY @ 350 MA Dual	2.39	5.3 HY @ 225 MA	2.79
		6.6 HY @ 175 MA	2.10
10 HY @ 55 MA	.89	8 HY @ 150 MA	1.79
10 HY @ 250 MA	3.95	200 HY @ 10 MA	2.95
10 HY @ 100 MA	1.29	325 HY @ 2 MA	2.95
13 HY @ 130 MA	1.58	600 HY @ 1 MA	2.95
15 HY @ 70 MA	1.39	9/60 HY @ 50/400 MA	9.95

OIL CONDENSERS—DC RATINGS

3x.1	MFD	600v	$ .59	.1"	MFD	2500v	$1.15
.1	"	"	.45	.25	"	"	1.25
.5	"	"	.45	.5	"	"	2.25
1	"	"	.69	1	"	"	3.48
2	"	"	.85	.01	"	3000v	1.25
2x2	"	"	.85	.05	"	"	1.49
4	"	"	1.29	.1	"	"	1.35
6	"	"	.98	.25	"	"	2.75
8	"	"	2.49	.5	"	"	2.85
10	"	"	2.79	1	"	"	3.95
3x.1	"	1000v	.85	2	"	"	4.25
.5	"	"	.89	4	"	"	6.35
1	"	"	1.45	12	"	"	9.35
2	"	"	1.75	1	"	3600v	3.98
4	"	"	1.85	.25	"	4000v	3.49
8	"	"	3.55	.5	"	"	3.75
10	"	"	3.19	1	"	"	3.95
20	"	"	4.25	2	"	"	5.75
.5	"	1500v	1.29	3	"	"	5.89
1	"	"	1.19	1	"	5000v	2.75
2	"	"	1.69	.25	"	"	2.95
4	"	"	2.69	1	"	"	3.10
.1	"	2000v	1.75	.01	"	7500v	1.29
.25	"	"	1.92	.02	"	"	2.25
.5	"	"	1.95	.03	"	"	2.35
1	"	"	2.29	.05	"	"	2.35
2	"	"	2.85	.1	"	"	2.49
4	"	"	4.45	2x.1	"	"	7.95
8	"	"	4.95	.02	"	12000v	12.95
15	"	"	6.95				

HIGH CAPACITY CONDENSERS

2x3500	MFD	25v	$3.47	2000	MFD	35v	$ .57
2500	"	3v	.35	100	"	50v	.45
3000	"	25v	2.45	4000	"	30v	3.25
650	"	80v	1.29	2350	"	25v	2.65
2000	"	15v	1.69	10000	"	25v	4.57

RADIO HAM SHACK Inc.
189 GREENWICH STREET . NEW YORK, N. Y.

PHONE DIGBY 9-0347
WRITE FOR QUANTITY PRICES
Prices subject to change without notice. F.O.B. NYC. minimum order $10.00. 20% deposit required. All merchandise guaranteed.

WANTED! WANTED!

ATTENTION colleges, schools, hams, industrials!! Highest prices paid for surplus equipment, parts, and tubes. We are especially looking for test equipment TS-12, 13, 35, 14/AP, 15/AP, 144-UP, 173, 174, 175, 259, 260, 265. Any types with TS prefix. Write wire or call.

R·H·S
SPECIALS OF THE MONTH

WANTED! WANTED!

APR-4, 5, 7 and tuning units. ARC-1, 2. ART-13. ATC. APS-10, microwave equipment in S, K, X-band. APS-15, APQ-13, APS-13, SCR-300, 284, 694, etc. BC-221, 342, 348. BC-1016 tape recorders. Write, wire or call.

RADAR — COMMUNICATIONS AND TEST EQUIPMENT

TS-35/AP X-band Signal Generator. Pulsed and C.W. freq. range. 8400-9600 mcs. This unit will measure power and frequency. 115v 60-2600 cyc.

TS-3/AP S-band Frequency and Power Meter. Portable. Battery operated. Complete with all cables.

TS-33/AP X-band Frequency Meter. 8500-9600 mcs. Contains crystal detector and indicating meter. Output to scope will indicate pulse wave shape.

TS-62/AP X-band Echo Box. 8400-9600 mcs. tuned and untuned input. Will indicate resonance on meter. Complete with pick up antenna and cable.

TS-268/UP Crystal Diode Test Set. Used to check 1N21, 1N22, 1N23, etc. Battery operated. Portable. Complete with spares.

TS-89/AP Voltage Divider. 1:10 and 1:100 ratios. Wide band for true pulse shape. Output to scope.

TS-10/APN Altimeter Test Set. Good condition. Complete with cables and dummy antenna....$35.00

TS-12/AP V.S.W.R. Test Set for X-band. Complete with amplifier, slotted line, termination, adaptors, etc. In 2 carrying cases. Excellent.

TS-45/APM-3 X-Band signal generator. 8400-9600 MCS pulsed & CW output. Used to check APS4 & similar sets.

TS-36/AP X-band Power Meter. Consists of power measuring circuit. Horn antenna, co-ax to wave guide adaptor, connecting cable and probe. Will measure either absolute or relative power. Nominal band of usefulness is approx. 8.5-9.7 KMC. Excellent condition.

TS-118/AP R.F. Wattmeter for the range of 20-750 mcs. Will measure power up to 500 watts. Complete.

TS-174/U Freq. Meter. Freq. range is 50-250 mcs. High freq. version of BC-221. Excellent Condition $385.00

1-185 Signal Generator. L-band search. S-band track. Used with SCR-545 and similar sets. Complete with cables. Good condition.

TS-61/AP S-band Echo Box. Using meter provided it is possible to maximise the XMTR adjustment and determine relative power output. Complete with probe and cable. Very good condition.

TS-13/AP Xa band signal generator, wave meter, wattmeter. Precision lab microwave. Test set. Will provide either pulsed or CW output in Xa band. Input 115v 60-800 cyc.

TS-226/AP used to measure peak power output of any xmitter in the range of 200-1000 mcs. Has provision for oscilloscopic signal observation and built in calibration. Part of AN/APM-39. Excellent.

TSX-48E X-band spectrum analyzer. Unit will analyze magnetron & klystron output from 8400-9600 MCS. Double moding, pulling, sparking, etc., can be observed. 115v 60 cyc. input.

TS-14/AP consists of S-band signal generator, freq. meter, wattmeter and cables. Power input is 115v 50-2600 cyc. Used to check various S-band radars and beacons.

TS-170/ARN-5 XTAL controlled test osc. with the following freq. ranges: 332.6, 333.8, 335.0 depending on XTAL in use. This set is used to align glide path receivers. Batteries and antenna are self contained. Excellent condition.

AN-APS-3 Airborne X-band Search and Homing radar. Complete. Contains RF head, modulator, synchronizer, control boxes, plugs, antenna, etc. 115v 400 cyc. Excellent condition.....$675.00

ASB-5 L-band Search and Homing radar. Complete. Contains xmitter, receiver, power unit, control box, plugs, etc. 115v 400 cyc. Excellent condition $125.00

SCR-518 Radar Altimeter. 500 mcs. equipment. Complete with xmitter, receiver, control box, power unit, junction box with all cables, racks, etc. Unit will indicate altitude up to 50,000 ft. Power input is 28v. New condition.....$99.50

AN/APS-15 R.F. Head and Modulator. X-band. Complete with all tubes. Good condition.....$99.50

AN/APA-23 Automatic Signal Strength and Time Recorder. Unit will scan a receiver thru its range and record all signals on electrosensitive paper. Input is 115v 60-2600 cyc. and 28v DC. Excellent condition $175.00

DYNAMOTORS AND POWER UNITS

Type	Input Volts	Output Volts	Amps	Price
DM-19	12	500	.200	$ 4.95
PE-125	12v/24v	475	.200	14.50
DM-32	24	250	.060	1.75
DM-33	24	570	.160	2.95
DM-34	12	220	.080	8.95
DY-12	12	275	.110	
		500	.50	
PE-73	28	1000	.350	10.00
PE-94	28	300	.250	
		150	.010	
		14.5	.5	2.25
PE-97	Vibrator Power Supp			8.95
PE-96	12v	300v		35.00
PE-101	28	400		
		800		5.75
PE-103	6 & 12	500		15.00
PP-18-AR	Vibrapack			15.95
RA-45	(for BC-639 Receiver)			29.95
ATR	Inverter			
	12v	110v AC 125 watts		14.95

AN/CRT-3 Victory Girl. Dual frequency emergency lifeboat xmitter. Complete with xmitter, kite hydrogen generator, etc. New in knapsack. C.A.A. approved $69.50

AN-APR-5 Radar Search Receiver. Freq. range 1000-3100 mcs. Will detect signals up to 10,000 mcs. with reduced sensitivity. Contains oscillator and mixer cavity, IF strip, power supply. Input 60-2600 cyc. 115v. Excellent condition.....$375.00

T-50 Radiotelegraph Transmitter complete with power supply and all accessories with spares. Portable. New in cases $275.00

AN-APT-5 300-1500 mcs. xmitter cavity oscillator using 3C22 lighthouse tube. Power output 30 watts. Noise modulated. Excellent condition. Complete with all tubes.....$149.50

SK-1M Radar Receiver Indicators. Freq. 195 mcs. 2 R.F. stages, 3 IF stages. 1 video, etc. New condition $125.00

SCR-183 Airborne Command Equipment. Freq. range 201-398KC and 2500-7700KCS. Complete. Contains receiver, xmitter, dynamotor, antenna switch, control box, coils, etc. Power input 24-28v. Brand new in original cases. Manufacteured by Western Electric $125.00

NAVY RU Command Equipment. Similar to SCR-183 .....$125.00

DU-1 Direction Finding Equipment for SCR-183 and RU Series Equipment. Can be used with any receiver for direction finding in freq. range 200-1600KC. New. Complete.....$45.00

SCR-515 (BC-645) contains xmitter, receiver, dynamotor PE-101, control box, manual, etc. New $18.95

AN/PPN-1 EUREKA! Ground portable beacon responder. Unit will work into the AN/APN-2 transponder for purposes of homing. C.W. communication can also be carried on between plane and ground. Unit comes complete with xmitter, receiver, power pack, phones, etc. Brand new in knapsack. AN/APN-2 EQUIPMENT CAN BE SUPPLIED ON ORDER.

SCR-269-G Automatic Radio Compass. Freq. range 200-1750KC. Complete with BC-433-G receiver, BC-434, LP-21, 1-51, 1-82, BK22, etc. Very good condition $129.95

SCR-300 Frequency Modulated Transceiver. Freq. range 40-48 mcs. complete with 18 tubes, handset and antenna. Powered from self contained battery pack. Excellent condition. Weight approx. 35 lbs. with battery, each.....$275.00

TCS Marine Radio Telephone and Telegraph Xmitting and Receiving Equipment. Freq. range 1560-12000KC. Consists of xmitter, receiver, antenna loading coil, remote control box, power unit, cables, etc. Power input is 12 or 32v DC. We can supply an 110v AC power supply for stationary use at additional cost. Excellent condition.

SCR-536 Xmitter-Receiver (handy-talkie). Freq. range 3885-5500KC. Complete with coils, tubes, crystals. Very good condition.....$49.95

AN/APA-10 Panoramic Adaptor for use with any receiver with following I.F.'s: 455KC, 1.6 mcs, 30 mcs. Unit will give panoramic presentation (1 mc wide for 455KC input) (100KC for 5MC input) (2MC for 30 mcs input). Power input 115v 400 cyc. but can be changed with the addition of a proper power transformer. Excellent condition.....$175.00

10 CM R.F. package. 2700 mcs. Consists of BC-1007 modulator & BC-1091 RF head. Power output approx 40 KW. Complete with tube.....$195.00

RT-329/APG-5 10 CM LHTR R.F. head & modulator. Low power approx 2 KW. Lighthouse tube rec & trans w/T.R. tunable. New.....$135.00

SCR-510 Freq. Modulated Portable Transceiver. Covering range of 20.0-27.9 mcs in 80 channels 100KC apart. Complete equipment consisting of BC-620 transceiver, power supply PE-97A, T-17 mike, handset, AN-45 antenna, battery operated or 6 or 12v input. Excellent condition.....$99.95

SCR-610 similar to SCR-510 except for freq. range which is 27.0-38.9 mcs. Excellent condition...$79.95

AN/APA-11 Pulse Analyzer to work with Search Receiver for analysis of received pulsed signals. PPS, pulse width, wave shape, can be displayed on an CR tube. Unit can also be used as a standard oscilloscope for general servicing type work. Input is 115v-400-2600 cyc. but can be changed with the addition of a 60 cyc. transformer. Very good condition.

SCR-694 Field Radio. Light weight version of SCR-284. Freq. range is 3.8-6.5 mcs. Power output is A1-20, A3-5; comes with transceiver BC-1306, GN-45 or 58 hand generator, antenna system, microphone, headset, etc. In excellent condition.

PE-237 AC Power Supply for stationary use can be supplied at additional cost.

SCR-522 VHF Airborne Command Equipment. Freq. range 100-156 mcs. in 4 channels receiver and transmitter. Crystal controlled. Complete equipment. Consists of trans/rec, control box BC-602, dynamotor PE-94, AN104A antenna, plugs, etc. Power input with PE-94 is 28v. Excellent condition. We can supply PE-98 dynamotor for 12v input at additional cost.

COMMAND EQUIPMENT

ARC-5 274N OTHERS

RECEIVERS

ARA 500-1500KC. New	$24.95
453B 200-550KC. Good	19.95
455B 6-9 mcs. Good	19.95
433 200-1750KC. Good	29.95
ARR-2 234-258 mcs. New	19.95

TRANSMITTERS

459-A 7-9.1 mcs. Good	$19.95
696-A 3-4 mcs. New	29.95
TYPE O 5.3-7 mcs. New	9.95
AVT-23 3000-13,000KC complete w/control box, manual, etc. C.W. or phone. 14 or 28v input. Brand new. Original cases	79.50
BC-950A 100-156 mcs. New	59.96

ACCESSORIES

BC-456 Modulator. Good	$2.25
BC-450 Control Box (3 rec). Used	1.25
BC-451 Control Box (xmitter). Used	.98
BC-442 Relay Unit (ANT.). Used	1.95
Flexible Shafting Available	

MISCELLANEOUS SPECIALS!

Sound Powered Chest and Headsets MI-2454-B type O, mfg. BCA. Brand new in original boxes. Pair	$ 29.95
Trailing Wire Antenna Feed Tube. New	5.95
Goniometer for SCR-277 Direction Finder. Excellent	39.95
RL-7 Interphone Control Box. New	1.95
PT-154 BC-348 Shock Mounts	2.98
AN/CRW Receiver for Remote Control	5.95
BC-1206 Beacon Receiver 200-400KC. 28v in. Excellent	4.95
MN/26-Y Compass Receiver. Very good	24.95
BC-453G Compass Receiver, 200-1750KC in 3 bands. Excellent	39.95
BC-778 Gibson Girl 500KC. Good condition	3.95
BC-1016 Tape Recorder. Complete. New	439.50
CFI Unit with 200KC Xtal. New	14.95
BC-733D receiver with tubes	29.95
BC-329 Transmitter. Excellent	89.95
QHG-1 Sonar complete with Hydrophone. Excellent	125.00
BC-606 automatic keyer for SCR522	5.95
AN-104A Antenna for SCR-522, ax handle. New	3.95
BC-1284 lighthouse tube preamplifier. Excel	69.95
A8S 500 mcs YAGI Antenna Dual 6 Element	14.95
Single 5 Element	8.95
AN/APA-17 Radar Direction Finding Antenna, back to back parabola, freq. range 500-1000 mcs. Horizontally and vertically polarized. Excellent	59.00
BC-996 Interphone Amplifier. Good	9.95
ART-13 Loading Condenser. Excel	2.95
CWT-3 Lecr Coil & Crystal	29.50
CU-25 Loading Box for ART-13	49.95
AS-37/ARN5 Antennas. Very good	4.95
SA-1/ARN-1 Part of ARN-1. Very good	2.95
1D-80/APA-17 Indicator. Excel	129.95
RRM-4 Receiving Central. Complete with all Power Supplies, Carrying Case & Cables. New	325.00
AVR-15 Aircraft Receiver. Very good	19.95
BC-923 Receiver. Very good	39.95
BC-946 Xmitter-Receiver. Very good	39.95
RA-300 FM Exciter. (MFG Tempco). New	32.50
A-55 Dummy Antennas. Very good	2.25
BC-1365 Control Box. Good	3.95
FL-8 Filter	3.95
FL-5 Filter. Less Cables. Fair	2.65
3C-16-D GSAB Gun Camera Computers with all Accessories. New	19.95
AT-2A/APN-2 Antenna. Fair cond	4.95
Spares for ARC-5 & 274/N, APX-1, ASG-10. We have a large stock of TS-34A/AP spares.	

CORDS AND PLUGS

CG-(172/173) CPN-8 CM Coax Patch Cable. New	$4.95
CX-548/CRD-3 Cable. New	1.25
CX-546/CRD-3 Cable. New	1.25
CD-509A w/8W 14-U & 2 Cord Attachments with JK-48 Jack & PL-68 Plug. New	.75
CD-307A with PL-55 and JK. New	1.29
PL-55 Plug. New	.49
83-168 Adapter. New	.17
83-1SP Connector. New	.69
83-1R Coax. Connector. New	.69
83-1AF Angle Coax. Connector. New	.22
83-1J Feed Thru. New	.90
83-1F Feed Thru. New	1.30

BC-221 FREQUENCY METER

This is a Terrific Value! QUANTITY IS LIMITED—so first come, first served. They are just like new, with original calibration charts. Range 125-20,000 KC with crystal check points in all ranges. Complete with crystal and tubes. ONLY **$72.50**

PHONE DIGBY 9-0347
WRITE FOR QUANTITY PRICES
Prices subject to change without notice. F.O.B., NYC minimum order $10.00. 20% deposit required. All merchandise guaranteed.

RADIO HAM SHACK Inc.
189 GREENWICH STREET . NEW YORK, N. Y

NEW YORK'S RADIO TUBE EXCHANGE

TYPE	PRICE	TYPE	PRICE	TYPE	PRICE	TYPE	PRICE	TYPE	PRICE	TYPE	PRICE
OA2	$2.00	2J32	69.95	5CP1	4.95	323A	25.00	724A	4.95	876	.90
OA3	1.50	2J36	105.00	5CP7A	15.00	327A	3.95	724B	6.95	878	1.95
OA4G	1.35	2J38	17.95	5D21	27.50	350A	7.95	725A	9.95	884	1.95
OB2	3.00	2J42	150.00	5JP1	27.50	350B	5.95	726A	6.95	885	1.75
OC3	1.75	2J49	109.00	5JP2	17.50	357A	27.50	726B	56.00	889R	199.50
OD3	1.50	2J50	69.50	5JP4	27.50	368AS	6.95	726C	69.00	913	12.95
C1A	4.95	2J61	75.00	5LP1	18.95	371B	1.95	728AY	27.00	914	75.00
C1B	6.95	2J62	75.00	5LP1A	19.50	385A	4.95	730A	28.95	931A	6.95
1B21A	2.75	2K25	47.50	5R4WGY	3.75	388A	2.95	801A	1.00	954	.35
1B22	3.95	2K28	37.50	6C21	29.50	393A	8.95	802	4.25	955	.55
1B23	9.95	2K29	27.50	C6A	3.95	394A	8.95	803	5.95	956	.69
1B24	17.95	2K41	99.00	C6J	7.95	MX408U	.75	804	13.50	957	.29
1B26	2.95	2K45	199.50	7BP7	7.95	417A	17.95	805	5.95	958A	.69
1B27	19.50	2V3G	2.10	7DP4	10.00	434A	17.95	806	25.00	959	.69
1B32	4.10	3B24	5.50	12AP4	55.00	446A	1.95	807	1.69	975A	17.95
1B38	33.00	EL3C	5.95	15E	2.95	450TH	45.00	808	3.50	991	.45
1B42	19.95	3C24	1.95	15R	.95	450TL	45.00	809	2.45	E1148	.29
1B56	49.95	3C31	5.95	NE16	.45	464A	9.95	810	11.00	1280	1.95
1B60	69.95	3C45	13.95	FG17	6.95	471A	2.75	811	3.15	1611	1.95
1N21	1.35	3DP1A	10.95	RX21	3.95	527	15.00	813	8.95	1613	1.38
1N21A	1.75	3E29	15.50	35T	4.95	WL530	22.50	814	3.95	1616	2.95
1N21B	4.25	SN4	5.50	45 Special	.35	WL531	12.50	815	4.50	1619	.89
1N22	1.75	4A1	1.75	RK39	2.95	700A/D	25.00	816	1.45	1620	5.95
1N23	2.00	4B26	6.95	VT52	.35	701A	7.50	829	9.95	1622	2.75
1N23A	3.75	4C27	25.00	RK72	1.95	703A	6.95	829A	11.95	1624	2.00
1N23B	6.75	4C28	35.00	RK73	1.95	705A	3.95	829B	15.95	1625	.45
1N27	5.00	4E27	17.50	100TH	9.00	706AY	48.50	830B	11.50	1629	.69
1N48	1.00	4J25	199.00	FG105	19.00	706CY	48.50	832	5.95	1851	1.85
1S21	6.95	4J26	199.00	F123A	8.95	706A	17.95	832A	9.95	2050	1.85
2B22	4.95	4J27	199.00	203A	8.95	707B	27.00	833A	49.95	2051	1.80
2B26	3.75	4J30	395.00	211	.75	714AY	5.95	834	7.95	8012	4.25
2C34	.35	4J31	99.00	217C	18.00	715A	7.95	836	4.95	8013	2.95
2C39	32.00	4J32	99.00	242C	10.00	715B	15.00	837	2.95	8013A	5.95
2C40	27.00	4J33	99.00	249C	4.95	715C	25.00	838	4.95	8014A	29.95
2C43	27.00	4J37	99.00	250TL	19.95	717A	1.75	845	5.59	8020	3.50
2C44	.90	4J38	89.00	274B	3.00	718AY/EY	48.50	849	52.50	8025	6.95
2D21	1.75	4J39	99.00	304TH	15.00	719A	29.50	851	80.50	9001	1.75
2E22	3.75	4J41	99.00	304TL	14.50	720A/B/C/D/Y	96.00	860	4.95	9002	1.50
2E30	2.75	4J52	350.00	307A	4.95	721A	3.95	861	39.50	9003	1.75
2J26	27.75	C5B	2.95	310A	7.95	722A	3.95	866A	1.79	9004	.75
2J27	29.95	5BP1	4.95	311A	7.95	723A/B	24.95	869B	37.50	9005	1.90
2J31	29.95	5BP4	4.95	312A	3.95			872A	3.95	9006	.35

This Month's Special 4C28 . . . . . $35.00 OTHERS

ATTENTION PURCHASING AGENTS AND BUSINESS MANAGERS

WE PURCHASE COMPLETE INVENTORIES AND ELECTRONIC PARTS AND TUBES FOR CASH. CAN WE HELP YOU TO OBTAIN URGENTLY NEEDED ELECTRONIC MATERIALS? OUR ORGANIZATION IS DEDICATED TO SERVE THE ELECTRONIC FIELD.

YOU CAN REACH US ON TWX NY1—3235

TEST EQUIPMENT

ATTENTION PURCHASING AGENTS AND BUSINESS MANAGERS

WE BUY—WE SELL—WE EXCHANGE—WILL PAY CASH FOR YOUR INVENTORY NO MATTER HOW SMALL OR LARGE. —TURN YOUR OVERSTOCKED ITEMS INTO CIRCULATION

Test Equipment

Microwave K Band 24,000 MC

TSKI-SE Spectrum Analyzer
K Band Flap Attenuator

X Band 10,000 MC

TS 12 Unit 1 USWR Measuring Amplifier, 2 channel
TS 12 Unit 2 Plumbing for above
TS 83 X Band Power and Frequency Meter
TS 35 X Band Pulsed Signal Generator
TS 36 X Band Power Meter
TS 45 Band Signal Generator
TS 146 X Band Signal Generator
TS 263 Navy Version of TS 146
TS 62, TS 102, TS 168
X Band Magic T Plumbing
X Band Tunable Crystal Mounts
TVN #3EV Bridge, Cy 94

S Band 3000 MC

TS 102, TS 270
TS 125, TS 155, TS 127
RF 4 Electrically Tuned S Band Echo Box
BC 1277/60ABQ S Band Pulsed Signal Generator
PE 102 High Power S Band Signal Generator

L Band

Hazeltine 1030 Signal Generator 145 to 235 Megacycles
Measurements Corp. type 84 Standard Signal Generator
TS 47, 40 to 400 MC Signal Generator
TS 226, AN/UPM1

Audio Frequencies

RCA Audio Chanalyst

Broadcast Wave Bands

162C Rider Chanalyst
Short Wave Adapter for 162C
TS 174 Signal Generator

Oscilloscopes

TS 239A Lavoie
BC 1287A used in LZ sets
Supreme 564
APA10, APA28
TS 34 Oscilloscopes WE
TS 126

Other Test Equipment and Meters

TS 15/A Magnet Flux Meter
General Radio V T Voltmeter 728A
Calibrator WE 1-147
General Radio 1000 cycles type 213
Limit Bridges
Boonton Standard instructions
Model 40 Pyrometer
Rawson, meters 0-10 Microampere 0-2 Millivolt

RADAR Sets & Parts

APS 3—APS 4—R-111/APR5A

Minimum Order $25.00

Prices Subject To Change

LIBERTY ELECTRONICS, INC.

PHONE WORTH 4-8262 — 135 LIBERTY ST., NEW YORK 6, N.Y.

A LEADING SUPPLIER OF ELECTRONIC & AIRCRAFT EQUIPMENT

IMMEDIATE DELIVERY -- FULLY GUARANTEED

A C MOTORS

5071930 DELCO, 115 V., 60 Cy., 7000 RPM. PRICE $6.50 EA.

TELECHRON SYNCHRONOUS MOTOR, Type B3, 110 V., 60 Cy., 4 W., 2 RPM. PRICE $5.00 EA.

TELECHRON SYNCHRONOUS MOTOR, Type BC, 110 V, 60 Cy., 6 W., 60 RPM. PRICE $4.00 EA.

EASTERN AIR DEVICES, Type J33, Synchroneus, 115 V., 400 Cy., 3 ϕ, 8000 RPM. PRICE $15.00 EA.

HAYDON TIMING MOTORS 110 V., 60 CY.

TYPE 1600, 2.2 W., 4/5 RPM. PRICE $3.00 EA.
TYPE 1600, 2.2 W., 1/240 RPM. PRICE $3.00 EA.

TYPE 1600, 2.3 W., 1 RPM. PRICE $3.00 EA.
TYPE 1600, 2.2 W., 1-1/5 RPM. PRICE $3.00 EA.

TYPE 1600, 3.5 W., 1 RPM. With shift unit automatic engaging and disengaging shaft. PRICE $3.75 EA.

TYPE 1600, 2.2 W., 1/60 RPM. PRICE $3.00 EA.

SERVO MOTORS

CK1, PIONEER, 2 ϕ, 400 Cy. PRICE $10.00 EA.
CK2, PIONEER, 2 ϕ, 400 Cy. PRICE $14.00 EA.
CK2, PIONEER, 2 ϕ, 400 Cy., with 40:1 reduction gear. PRICE $15.50 EA.
10047-2-A, PIONEER, 2 ϕ, 400 Cy., with 40:1 reduction gear. PRICE $10.00 EA.
MINNEAPOLIS HONEYWELL Type B, Part No. G303AY, 115 V., 400 Cy., 2 ϕ, built-in reduction gear, 50 lbs. in torque. PRICE $10.00 EA.
MINNEAPOLIS HONEYWELL Amplifier Type G403, 115 V., 400 Cy., Used with above motor. PRICE $10.00 EA, WITH TUBES

REMOTE INDICATING COMPASSES 26 V., 400 CY.

PIONEER TYPE AN5730-2 Indicator and AN5730-3 Transmitter. PRICE $40.00 PER SET

KOLLSMAN TYPE 680K-03 Indicator and 679-01 Transmitter. PRICE $15.00 PER SET

D C MOTORS

DELCO TYPE 8069625 Constant Speed, 27 V. D.C., 120 RPM. PRICE $15.00 EA.
JOHN OSTER TYPE C-28P-1, 27 V., 0.7 Amp., 7,000 RPM, 1/100 H. P. PRICE $5.00 EA.
JAEGER WATCH CO. TYPE 44K-2 Contactor Motor, 3 to 4.5 V. Makes one contact per second. PRICE $2.50 EA.
GENERAL ELECTRIC TYPE 5BA10AJ52C, 27 V., 0.65 Amp., 14 oz. in torque, 145 RPM. PRICE $6.50 EA.
GENERAL ELECTRIC TYPE 5BA10AJ37, 27 V., 0.5 amps., 8 oz. in. torque, 250 RPM. PRICE $6.50 EA.
GENERAL ELECTRIC TYPE 5BA10AJ18D, 27 V., 0.7 Amps., 110 RPM, 1 oz. ft. torque. PRICE $6.50 EA.
BARBER-COLMAN CONTROL MOTOR, Type AYLC 5091, 27 V., 0.7 Amps., 1 RPM. Contains 2 adj. limit switches. 500 in. lbs. torque. PRICE $6.50 EA.
WHITE RODGERS ELECTRIC CO., Type 6905 No. 3, 12 V., 1.3 Amps., 1½ RPM, torque 75 in. lbs. PRICE $10.50 EA.

RECTIFIER POWER SUPPLY

GENERAL ELECTRIC TYPE 6RC146. Input 230 V., 60 Cy., 3 ϕ, adjustable input taps. Output 130 Amps., at 28 V. D.C. Continuous duty. Size 46" high, 28" wide and 17.5" deep. PRICE $225.00 EA.

INVERTERS

WINCHARGER CORP. PU-16/AP, MG750. Input 24 V. D.C., 60 Amps. Output 115 V., 400 Cy., 1 ϕ, 6.5 Amps. PRICE $75.00 EA.

HOLTZER CABOT TYPE 149F, Input 24 V. D.C. at 36 Amps., Output 26 V. at 250 V.A., 400 Cy., and 115 V., 400 Cy., at 500 V.A., 1 ϕ. PRICE $55.00 EA.

PIONEER TYPE 12117. Input 12 V. D.C., Output 26 V., 400 Cy. at 6 V.A. PRICE $30.00 EA.

PIONEER TYPE 12117. Input 24 V. D.C., Output 26 V., 400 Cy. at 6 V.A. PRICE $30.00 EA.

PIONEER TYPE 12116-2-A. Input 24 V. D.C. at 5 Amps. Output 115 V., 400 Cy., 1 ϕ at 45 watts. PRICE $100.00 EA.

GENERAL ELECTRIC TYPE 5D21NJ3A. Input 24 V. D.C. at 35 Amps. Output 115 V., 400 Cy., 485 V.A., 1 ϕ. PRICE $25.00 EA.

LELAND PE 218. Input 24 V. D.C. at 90 Amps. Output 115 V., 400 Cy., 1 ϕ at 1.5 K.V.A. PRICE $47.50 EA.

PIONEER AUTOSYNS

TYPE AY1, 26 V., 400 Cy. PRICE $8.50 EA.

TYPE AY5, 26 V., 400 Cy. PRICE $8.50 EA.

TYPE AY14G, 26 V., 400 Cy. PRICE $15.00 EA.

TYPE AY14D, 26 V., 400 Cy. PRICE $15.00 EA.

TYPE AY54D, 26 V., 400 Cy. PRICE $10.00 EA.

TYPE AY131D Precision Autosyn. Price $35.00 EA.

PIONEER AUTOSYN POSITION INDICATORS & TRANSMITTERS

TYPE 5907-17. Dial graduated 0 to 360°, 26 V., 400 Cy. PRICE $25.00 EA.

TYPE 6007-39. Dual Dial graduated 0 to 360°, 26 V., 400 Cy. PRICE $40.00 EA.

TYPE 4550-2-A Transmitter, 26 V., 400 Cy., 2:1 gear ratio. PRICE $20.00 EA.

VOLTAGE REGULATORS

LELAND ELECTRIC CO. TYPE B, Carbon Pile type. Input 21 to 30 V. D.C. Regulated output 18.25 at 5 amps. PRICE $6.50 EA.

WESTERN ELECTRIC TRANSTAT VOLTAGE REGULATOR Spec. No. V-122855, Load K.V.A. 0.5. Input 115 V., 400 Cy. Output adjustable from 92 to 115 V. PRICE $10.50 EA.

RATE OR TACHOMETER GENERATORS

EASTERN AIR DEVICES J36A, .02 V. D.C. per RPM. Max. speed 5000 RPM. PRICE $12.50 EA.

ELECTRIC INDICATOR CO. TYPE B68 Rotation Indicator, 110 V., 60 Cy., 1 ϕ. PRICE $14.00 EA.

GENERAL ELECTRIC TACHOMETER GENERATOR TYPE AN5531-1. Variable frequency, 3 ϕ output. PRICE $20.00 EA.

GENERAL ELECTRIC TACHOMETER GENERATOR TYPE AN5531-2. Variable frequency, 3 ϕ output. PRICE $25.00 EA.

ALL PRICES F. O. B. GREAT NECK N. Y.

SYNCHROS

1F SPECIAL REPEATER, 115 V., 400 Cy. PRICE $15.00 EA.

2J1F3 GENERATOR, 115 V., 400 Cy. PRICE $5.50 EA.

2J1G1 CONTROL TRANSFORMER, 57.5/57.5 V., 400 Cy. PRICE $3.50 EA.

2J1F1 GENERATOR, 115 V., 400 Cy. PRICE $4.00 EA.

5SDG DIFFERENTIAL GENERATOR, 90/90 V., 400 Cy. PRICE $20.00 EA.

5G GENERATOR, 115 V., 60 Cy. PRICE $50.00 EA.

W. E. KS-5950-L2 Size 5G, 115 V., 400 Cy. PRICE $10.00 EA.

D C ALNICO FIELD MOTORS

DIEHL TYPE 5.5. FD6-23, 27 V., 10,000 RPM. PRICE $6.50 EA.

DELCO TYPE 5069466, 27 V., 10,000 RPM. PRICE $15.00 EA.

DELCO TYPE 5069370, 27 V., 10,000 RPM. PRICE $15.00 EA.

DELCO TYPE 5072400, 27 V., 10,000 RPM. PRICE $10.00 EA.

BLOWER ASSEMBLIES

JOHN OSTER TYPE MX215/APG, 28 V. D.C., 7,000 RPM, 1/100 H.P. PRICE $8.50 EA.

WESTINGHOUSE TYPE FL, 115 V., 400 Cy., 6,700 RPM, Airflow 17 C.F.M. PRICE $7.50 EA.

DELCO TYPE 5068571 Motor and Blower Assembly, P.M. Motor, 27 V., 10,000 RPM. PRICE $15.00 EA.

GENERAL ELECTRIC D C SELSYNS

8TJ9-PAB, TRANSMITTER, 24 V. PRICE $4.00 EA.

8DJ11-PCY, INDICATOR, 24 V. Dial marked −10° to +65°. PRICE $6.00 EA.

8DJ11-PCY, INDICATOR, 24 V. Dial marked 0 to 360°. PRICE $7.50 EA.

MISCELLANEOUS

SPERRY A5 AMPLIFIER RACK, Part No. 644890. PRICE $20.00 EA.

SPERRY A5 CONTROL UNIT, Part No. 644836. PRICE $7.50 EA.

SPERRY A5 AZIMUTH FOLLOW-UP AMPLIFIER, Part No. 656030, with tubes. PRICE $5.50 EA.

SPERRY A5 DIRECTIONAL GYRO, Part No. 656029, 115 V., 400 Cy., 3 ϕ. PRICE $25.00 EA.

PIONEER TYPE 12800-1 GYRO SERVO UNIT, 115 V., 400 Cy., 3 ϕ. PRICE $20.00 EA.

ALLEN CALCULATOR TYPE C1 TURN & BANK INDICATOR, Part No. 21300 28 V. D.C. PRICE $15.00 EA.

TYPE C1 AUTO-PILOT FORMATION STICK, Part No. G1080A3. PRICE $15.00 EA.

PIONEER GYRO FLUX GATE AMPLIFIER Type 12076-1-A, 115 V., 400 Cy. PRICE $40.00 EA.

INSTRUMENT ASSOCIATES

363 GREAT NECK ROAD, GREAT NECK, N. Y.
Telephone GReat Neck 4-1147

Write for Catalog NE100

U. S. Export License-2140

Western Union address: WUX Great Neck, N. Y.

RELAYS FOR EVERY PURPOSE

RECENT ADDITIONS TO OUR STOCK OF OVER A MILLION RELAYS . . .

Each relay is brand new, standard make, inspected, individually boxed and fully guaranteed. This is only a partial list. Write or wire us for information on types not shown.

STANDARD DC TELEPHONE RELAYS

Stock No.	Voltage	Ohmage	Contacts	Unit Price
R-868	30/162 VDC	3300	1C	$1.90
R-873	6	12	3C, 3A Micalex	3.00
R-918	52/228 VDC	6500	1C	3.60
R-852	52/228 VDC	6500	1C, 1A	1.55

SHORT TELEPHONE RELAYS

R-907	24/32 VDC	3500	1C	2.00
R-914	110 VAC	200	3B	2.50
R-908	6 VDC	15	4A @ 4 amps.	1.50

KEYING RELAYS

R-850	12 VDC	450	1A @ 1.5 amps.	1.50
R-935	28 VDC	1000	1C @ 1.5 amps.	1.65
R-949	2.4 VAC		1A @ 5 amps.	1.95
R-891	24 VDC	475	1C @ 5 amps.	1.45
R-858	27.5 VDC	250	1A Dbl. Brk.	1.45
R-833	6.5 VDC	1300	2C	3.95
R-960	24 VDC	230	3C @ 15 amps.	2.95
R-828	6/8 VDC	42	1A	1.50
R-855	110 VAC	160	1A Dbl. Brk. @ 15 amps.	3.25
R-948	110 VAC	330	3A @ 15 amps.	3.00
R-924	12 VDC	72	1C Dbl. Brk.	1.65
R-950	2.4 VAC		1A @ 8 amps.	2.25
R-978	6 VAC	1.7	1A 1B @ 1.5 amps.	1.95
R-979	6 VAC	1.7	2A @ 1.5 amps.	1.95
R-917	18 VAC	31	1A @ 12 amps.	3.25
R-965	24/30 VAC	38	1A 1B @ 1.5 amps.	1.95
R-966	24/30 VAC	38	2A 2B @ 1.5 amps.	2.25
R-967	24/30 VAC	38	2A 3B @ 1.5 amps.	2.40
R-968	24/30 VAC	38	1A 5B @ 1.5 amps.	2.55
R-969	24/30 VAC	38	1A 6B @ 1.5 amps.	2.70
R-974	24/30 VAC	48	1A 1B @ 1.5 amps.	2.25
R-971	24/30 VAC	48	1A 2C @ 1.5 amps.	2.40
R-973	24/30 VAC	48	2A @ 1.5 amps.	2.25
R-970	24/30 VAC	48	2A 1C @ 1.5 amps.	2.40
R-975	24/30 VAC	48	1B 1C @ 1.5 amps.	2.40
R-976	24/30 VAC	48	2C @ 1.5 amps.	2.55
R-977	24/30 VAC	48	3A 1C @ 8 amps.	2.70
R-883	115 VAC	1200	1A 1C TD	2.00
R-853	6/8 VDC	30	2A @ 10 amps.	1.55
R-875	6/8 VDC	240	1A @ 12 amps. 1C @ 1.5 amps.	1.50
R-830	24 VDC	330	2A	1.45
R-832	24 VDC	375 C.T.	1A @ 15 amps.	1.70
R-959	24 VDC	747	2C	1.50
R-929	24 VDC	425	1A Dbl. Brk.	1.25
R-982	12 VDC	24	1A Dbl. Brk.	1.55
R-947	12/24 VDC	320	1C @ 3 amps.	1.25
R-900	24 VDC	95	1A Dbl. Brk. @ 20 amps.	1.55
R-926	24 VDC	95	4C @ 15 amps.	3.55
R-983	24 VDC	265	3A	1.65
R-984	24 VDC	375	1C	1.65
R-878	24 VDC	375	1C Micalex	1.65
R-871	18/24 VDC	2000	2C	3.65
R-936	28 VDC	1000	1C @ 1.5 amps.	1.65
R-829	12/18 VDC	270	1A	1.45
R-905	32 VDC	1500	1C Dbl. Brk. @ 15 amps.	3.25
R-869	115 VDC	600	1A Dbl. Brk.	2.25
R-963	220 VAC		2C-1A Dbl. Brk.	7.50
R-920	350 MA	1.75	1C @ 6 amps.	1.25
R-953	12 VDC	65	1A @ 100 amps.	4.95
R-955	12 VDC	65	1B @ 100 amps.	4.95
R-956	24 VDC	160	1A @ 100 amps.	4.95
R-876	12 VDC	175	2A 1B	1.50
R-882	24 VDC	300	1A	3.00
R-860	48 VDC	3000	2A @ 1 amp. 230 v	2.60
R-923	24 VDC	1050	2C	2.75
R-958	60 VDC	1550	2A @ 12 amps.	1.50

W-E TYPE "E" RELAYS

Stock No.	Voltage	Ohmage	Contacts	Unit Price
R-918	...	6/35/35	2A Split Cont.	$3.50
R-904		35/175	1A	1.25
R-901	12 VDC	270	2B-2C	1.50
R-870	24 VDC	2600	1A	1.30
R-863	48 VDC	4000	3A	2.00

SLOW ACTING

R-897	6 VDC	150	1A Slow Break	2.65
R-865	24 VDC	200	1C Slow Break	1.75
R-934	24 VDC	3000	2B Slow Break	2.95
R-962	6 VDC	150	1A Slow Make	2.65

DIFFERENTIAL RELAYS

R-849	220/250 VDC	8000	2C	3.65

SEALED RELAYS

R-861	32 VDC	8000	1B	4.00

VOLTAGE REGULATORS

R-986	6 VDC	...	3 Terminal	2.25
R-886	6 VDC	1	with 15 ohm 50 watt	1.95

CONTACTORS

R-890	24 VDC	60	1A @ 10 amps.	3.45
R-816	24 VDC	80	1A @ 25 amps.	2.95
R-885	24 VDC	120	1A @ 25 amps.	3.00
R-845	220 VAC		3A	6.95
R-838	90/120 VDC	925	2A	4.50
R-842	115 VDC	925	3A	5.50
R-849	115 VDC	1200	2A—Size 1	5.50
R-843	115 VDC	1200	3A	4.50
R-841	115 VDC	1200	3A-1A (Aux.) Size 2	4.00
R-844	115 VDC	1200	3A-1B (Aux.)	4.50
R-988	24 VDC	6	1A @ 250 amps.	5.50
R-942	24 VDC	80	1A @ 200 amps.	3.95
R-888	115 VAC	32	2A Dbl. Brk. Size 1	7.50
R-903	24 VDC	65	1A @ 200 amps.	5.50
R-938	24 VDC	70	1A @ 200 amps.	5.50
R-939	24 VDC	40	2A @ 200 amps.	7.50
R-854	24 VDC	100	1A @ 50 amps.	4.05
R-933	24 VDC	100	1A @ 50 amps.	4.75
R-881	24 VDC	150	1A	2.50
R-944	115 VAC	40	4A (1B-Remote)	4.50
R-943	115 VAC	100	4A-4B @ 10 amps.	6.75
R-941	14 VDC	12	1A @ 200 amps.	4.95
R-956	28 VDC	160	1A Dbl. Brk. @ 50 amps.	4.05
R-880	18/24 VDC	375 C T	1A Dbl. Brk.	2.50
R-895	18/20 VDC	160	1A Dbl. Brk.	2.50
R-899	24 VDC	70	1C @ 50 amp. 1B Aux.	2.50
R-898	28 VDC	8	1A @ 200 amps.	4.50
R-909	24 VDC	11	1A @ 250 amps.	5.50
R-937	24 VDC	150	1A @ 50 amps.	4.75

Wide Selection of Electronic Components at

WELLS

- Resistors
- Condensers
- Wire and Cable
- Volume Controls
- Co-Ax Connectors
- Relays
- Rectifiers
- Transformers
- Chokes
- Micro Switches
- Toggles
- Antennas
- Accessories
- Electronic Assemblies
- Dial Light Assemblies

Stock No.	Voltage	Ohmage	Contacts	Unit Price
R-831	7.5/29 VDC	6.5	1A @ 250 amps.	$5.50
R-925	24 VDC	100	1A @ 50 amps.	4.85
R-940	24 VDC	132	1A @ 200 amps.	5.50
R-879	24 VDC	150	1A @ 50 amps.	3.75
R-874	24 VDC	140	1A Dbl. Brk. @ 25 amps.	2.00
R-945	12 VAC	1	2A @ 30 amps.	3.25
R-946	125 VDC	3200	2A @ 30 amps.	2.75
R-860	115 VAC	175	2A @ 30 amps.	5.95

MIDGET RELAYS

R-857	24 VDC	260	1D	1.75
R-912	4.5 VDC	20	3A-1C Ceramic	1.45
R-921	6.7 VDC	18	1A Dbl. Brk. @ 10 amps.	1.45
R-922	12 VDC	75	1A Dbl. Brk. @ 10 amps.	1.45
R-893	14 VDC	150	1A, 1C	2.50
R-895	14 VDC	150	2A, 1B, 1C	2.50
R-896	24 VDC	260	2A	2.50
R-894	24 VDC	260	3A, 1C	2.50
R-856	18/24 VDC	300	1B	1.45
R-913	6 VDC	20	3A, 1C Ceramic	1.45
R-915	12 VDC	70	1A Dbl. Brk. @ 10 amps.	2.00
R-834	6 VDC	20	3A, 1C	1.45

SPECIAL RELAYS

R-846	5/8 VDC	19	1C Coax	6.95
R-920	6 VDC	18	1A @ 25 amps.	1.25
R-931	Min. 1.5 Ma.	150	1C	7.50
R-927	220 VAC	2500	1A @ 5 amps.	15.00
R-951	115 VAC		⅝" Stroke	1.45
R-887	.5 Adj. 1.5 Amp.	40	2 Pole 2 Pos.	27.50
R-937	6 V. @ 112 amps. 12 V. @ 56 amps. 24 V. @ 28 amps.			4.25
R-930	25/50 VAC	25 ea. coil	2B-1H @ 8 amps. 1A @ 12½ amps.	3.75
R-972	40/50 VAC		1B @ 12½ amps. 1 MBM @ 1½ amps.	3.25
R-256	26 VDC	65	2B-1A @ 1KW	10.95
R-906	40 VDC	600	1A @ 30 amps.	3.95
R-864	24/24 VDC	95/95	1A,1B,1C/1A,1B,1C	5.50
R-847	10/15 VDC	70	4C	4.75
R-964	220 VAC		2A Dbl. Brk. @ 3 KV.	8.95
R-952	24 VDC	175	1A-Grounded	2.95
R-884	12 VDC	670	2A	
R-902	28 VDC 115 VAC	230	12 Pos. Rotary 1A @ 25 amps. 440 VAC 1A @ 2 amps. 300 VDC 1A @ 5 amps. 115 VAC	12.95
R-866	Adj. from 1 Ma.	6200	1C	17.50
R-957	12 VDC	.5	1B 2 Aux. Cont.	1.50
R-919	6/8 VDC	50	1C	5.25
R-911	40 VDC	200	1C @ 20 amps. 1A Mom.	7.95

TYPE 82

Stock No.	Voltage	Ohmage	Descriptive Information	Price
R-989	28 VDC	7	360° Rotation in 12 steps with 7° lg. shaft	$2.45
R-766	28 VDC	4/230	360° Rotation in 12 steps with 2¼" lg. shaft and 8-6 Terminal Wafers mounted on 12° x 5° Terminal Board with 63 Screw Terminals plus lugs	4.90

ROTARY RELAYS Type 76-77 14 VDC—2 Ohm Energizing, 125 Ohms Holding Coil 30° Rotation ½" Long Shaft.

Stock No.	First Wafer Circuit 1	Circuit 2	Circuit 3	Term*	Second Wafer Circuit 1	Circuit 2	Circuit 3	Circuit 4	Term	Price
R-877	1 NC	1 NC	.....	4	1 NO	1 NO	1 NO	SPDT	9	$2.25
R-892	3 NO			4	SPDT			Ceramic	6	2.40
	28 VDC—7 Ohms Energizing, 230 Ohms Holding Coil 30° Rotation ¼" Lg. Shaft									
R-711	SPDT	2 pole reversing	.....	8	With Coupling					2.05
R-712	1 NC	1 NC	1 NC	6	.....	.....	.....	.....	.....	2.05
R-573	2 pole reversing	.....	.....	5	.....	.....	.....	.....	.....	2.05
R-901	2 NO-1 NC	.....	.....	4	SPDT	SPDT	3 NC	.....	10	2.25
R-616	1 NC	1 NC	.....	4	1 NC	1 NC	1 NC	1 NO	8	2.40

* NOTE: Number of terminals excludes those required for operation of relay.

BASIC CONTACT ASSEMBLIES SHOWN IN UNOPERATED NORMAL POSITION



Form A—"Make" (Single Throw, Normally Open)

Form B—"Break" (Single-Throw, Normally Closed)

Form C—"Break-Make" (Double-Throw)

Form D—"Make-Before-Break"

Form E—"Break-Make-Before-Break"

WELLS SALES, INC.

WRITE FOR WELLS CATALOG

833 W. CHICAGO AVE. DEPT. SL, CHICAGO 22, ILL.

Telephone SEeley 8-4143

UNITS • TORQUE UNITS • AMPLIDYNES • INVERTERS • ELECTRONIC SERVO SYSTEMS • TACHOMETER GENERATORS

SYNCHROS • AMPLIFIERS • ALNICO MOTORS • SHUNT MOTORS • BLOWERS • RATE GENERATORS • SUB-FRACTIONAL HORSEPOWER AC MOTORS • SELSYN

AUTOMATIC PILOT COMPONENTS • DC MOTORS • SINE-COSINE GENERATORS • U. S. NAVY SYNCHROS • AUTOSYNS • SERVO MOTORS • DYNAMOTORS

IMMEDIATE DELIVERY — Servo-Tek — FULLY GUARANTEED

ANTENNA TILT INDICATOR

D C Selsyn type tilt indicator. G E. 8DJ29AAK. 24 volt. Stock #SA-296. **Price $5.75 each.**

JOHN OSTER MOTORS

Types B-9-1 & B-9-2 27.5 V DC & 12 V DC. 5600 rpm. Built-in noise filter. Large qty. PRICES ON REQUEST

BODINE NSHG-12 MOTOR

Constant speed

27 v. D-C Governor controlled 3600 rpm. 1/30th hp. Stock #SA-39. **Price $17.50 each.**

REVERE CAMERA MOTOR

27 v. D-C. Split field series. Approx. 2½" sq. x 2⅝" lg. Stock #SA-315. **Price $6.75 each.**



PM MOTOR

Sampsel 27 V DC PM motor. Type S—151273. One in./oz. torque at 7000 rpm. 1⅛" x 1⅛" x 2¾" Lg. Stock # SA-283. **Price $12.75 each.**

DC MOTOR

High speed 27 v motor with high inertia flywheel. Ideal for gyro demonstrations.

Stock #SA*8-313 **Price $9.75 each.**

SWEEP GENERATOR CAPACITOR

Hi-speed bearings. 3plit-stator. Silver-plated coaxial type. 5-10 mmf.

Stock #SA-167 **Price $2.75 each**

MINIATURE DC SELSYN INDICATOR

G.E. miniature indicator. 24 v. d-c operation with G.E. Position Transmitter or with Ohmite 350° type potentiomeoter. Has iron plug for zero dial adjustment. Stock #SA-243. **Price $14.50 each.**

AIRCRAFT AMPLIDYNES



G.E.

5AM31 NJ18A. Input 27 V.D.C. @ 44 amps. Output 60 V.D.C. @ 8.8 amps. max. 530 watts. Stock #SA-111.

5AM31NJ9—Similar to above. Stock #SA-196. **Prices on request.**



Aircraft Generator Eclipse NEA-3

Output 115 VAC; 10.4 amps 400 cycles at 2400 rpm. Also 30 VDC at 6 amps. Stock #SA-306. **Price $49.50 each.**

PRECISION AUTOSYN

Pioneer Type AY-150 Control Autosyn. Precision type. 26 v. 400 cycle. Stock #SA-297. **Special low price $14.50 each.**

A-5 Autopilot Indicator

Autosyn Type Pilot Indicator for A-5 Autopilot. 26 v. 400 cycles. Stock #SA-299. **Price $12.50 each.**

¾ HP DC MOTOR

Electric Specialty Co. HCA315T.

24 volts DC. 3800 rpm. Stock #SA-321.

Special Price $24.50 each.

ARMA 5A MOTOR

10 Watt Servo Motor—2 phase 115 v. 60 cycles. 2⅛" lg. x 2¼" diam. 1" shaft ext. 0.250 diam. one end, other ext. ⅛" lg. 0.250 diam. Stock #SA-231. Limited quantity. **Price $49.50 each.**

400 CYCLE AIRCRAFT ACTUATORS

Manufactured by AirResearch. 115 volt 400 cycle operation. 2½" linear travel. Stat. load 200 lbs. Ten. 75-100 lbs. Comp. 75-100 lbs. Stock #SA-326. **Price $34.50 each.**

WINCO DYNAMOTOR

Model 4186. 12 v D-C in. @ 13 A. Output 250 v @ 0.60 A and 300v @ .225 A. Stock #SA-323.

Price $9.50 ea.

800 Cycle Inverter

Navy Type CRV-21AAR. GE. 5AS121LJ2. 27 v. DC input @ 45 amps. 120 v. 400 cy. output @ 750 V. A. P.F. 0.90. Wt. 22.5 lbs. Stock #SA-192. **Price $50.50 each.**

Compass Indicator

I-82F Compass Indicator 0-360°-5 in. dial. 26 v 400 cy. 8-12 v. 60 cy. Ideal position indicator. Stock #SA-284.

Price $6.50 each

DC SERVO MOTOR

Elinco Type B-64. 1/143 hp at 3100 rpm. Field volts 27.6 Max. armature voltage 80. Ideal for thyratron servo control Stock #SA-211. **Price $16.50 each**

Pioneer Servo Motors

Type 10047-2A. 2ϕ 400 cycle low inertia. 26 v fixed phase. 45 v. max. variable phase. Stock #SA-90. **Price $12.50 each.**

PIONEER CK-17

400 cycles 2 phase, 26 v fixed phase. 45 v. max. variable base. Built in gear reduction. Output shaft speed approx. 4 rpm. Stock #SA-287. **Price $16.50.**

400 CYCLE WESTINGHOUSE FL BLOWER

115 v. 40 cy. 17 c.f.m. Includes capacitor. Stock #SA-144. **Price on request.**

INVERTER

Pioneer 12130-4-B Input 28 VDC at **14 amps.** Output **120 v** 400 cy. Single Phase at 1.15 amps. (140 VA.) Voltage and **frequency regulated. Made 1949.** Stock #SA-304. **Price $49.50 each.**

MICROPOSITIONER

Barber Colman AYLZ-3183. Polarized dc relay. Double coil differential current sensitive. Alnico PM polarized field. 24 v. Contacts 0.5 amps 28 v. Use for remote positioning, synchronising, control, etc. Sens. 1.25 ma. diff. Use to 100 cy. Stock #SA-290.

Price $12.50 each.

JA1 MOTOR (D-C)

Electric Specialty. ¼ hp. 24 v. D-C. (Wing flap motor.) Stock #SA-325. **Price $19.50 ea.**

Synchros - Selsyns

1SF, 1G, 5G, 5F, 5CT, 5HCT, 5SDG, 5DG, 59G, 58F, 5HSF, 6G, 6DG, 7G, 2J1F1, 2J1G1, 2J1H1, 2J5FB1, 2J5R1, 2J1F2, XXI, X, XV, VII, II, IV, etc.

WRITE FOR LISTING

Prices F.O.B. Paterson

Phone ARmory 4-3366

Servo-Tek products co.

4 Godwin Ave. Paterson, N. J.

SPECIALISTS IN FRACTIONAL HORSE POWER MOTOR SPEED CONTROL

MOTOR GENERATORS
DYNAMOTORS, INVERTERS, ETC.

2.5 KVA MG Set. Diehl Elec. Co. 120V D.C. to 120V A.C. 60 cy. 1Ph., 4PF. Complete with Magnetic Controller, 2 Field Rheos and Full Set of Spare Parts including Spare Armatures for Generator and Motor. Full specs. on request. New $285.00

2 KVA MG SET. O'Keefe and Merritt. 115V DC to 120V AC, 50 cy. Idles at 3 Ph. synco motor on 208V, 50 cy. New. Export crated $168.00

1.25 KVA MG SET. Allis-Chalmers. 230 DC To 120 AC, 60 cy. 1 Ph. Fully enclosed, Splashproof Ball Bearings, centrifugal starter. New, complete with kit of Spare Parts....$150.00

MG Set. Onan MG-215H. Navy type PU/13. Input 115/230, 60 cy, 1 Ph. Output 115, 480 cy, 1 Ph. 1200W and 24V DC at 4 amps. New.....$295.00

MG SET FOR NAVY TBS TRANSMITTER. Type CG-21302. 440V AC, 60 cy, 3 Ph, 1500 VA to 875 DC and 300V DC. New $69.50

DYNAMOTOR. Navy-Type CAJO-211444. 105/130V-DC to 12V DC at 40A or 26V DC at 20A. Radio filtered. Complete with Line Switch. New. $69.50

DYNAMOTOR. Elcor. 64V DC to 110V AC, 60 cy, 1 Ph. 2.04 Amps. New.....$24.50

DYNAMOTOR. Elcor. 32V DC to 110V AC, 60 cy. 1 Ph. 0.45 Amps. New.....$17.50

DYNAMOTOR — Type PE94C. For use with SCR522 Transmitter-Receiver. Brand new in export cases $9.50

AMPLIDYNE—G. E. Model 5AM21JJ7. 4600 R.P.M. Motor Compound wound. 150 Watts. Input: 27V. DC. Output: 60V. DC Sig Corps. U. S. Army MG-27-B. New.....$26.50

AMPLIDYNE—Edison type 5AM31NJ18A. Input: 27 volts 44 Amps., 3500 RPM. Output: 60V DC at 8.8 amps. 530 Watts. New.....$22.50

INVERTER—G.E. Model 5D-21NJ3A. Input: 24V. DC, Output; 115V. 400 cy. 485 Va. New...$24.50

INVERTER—Leland Elec. Co. Model PE206A. Input: 28V. DC, 38 Amps. Output, 80V., 800 cy. 485 VA. New $17.50

PE 218 INVERTER—G. E. J8169172. Input: 28V. DC, Output: 115, 400 cycles at 1.5 KVA...$24.50

GENEMOTOR—Carter 6V DC to 400 V DC at 375 mils. New $38.50

D.C. MOTOR—G.E. Model 5BA50LJ2A. Armature 27V D.C. at 8.3A. Field 60 V D.C. at 2.5A. RPM 4000. H.P. 0.3. New $22.50

MOTOR GENERATOR M.G. 164. Holtzer-Cabot Motor: 440V, 3PH, 60 cy., .90A, 1/3HP, 1750 RPM. Generator: 70V, 3Ph, 146 Cy., .140KVA Exciter: 115DC, 1A. New.....$67.50

BC-348 RECEIVER PARTS
for Models C, E, H, K, L, M, P, R.

Dial Mechanism assemblies. 1st, 2nd, 3rd, 4th I.F. transformers. C.W. osc. and xtal filter trans. with xtals. All R.F. coils. Front panels. Shock mounts. Large quantity misc. hardware sub assemblies, etc. Write your requirements.

MISCELLANEOUS EQUIPMENT

TS-127/U Lavoie Freq. Meter—375 to 725 MC.
TS-47APR Test Set—40 to 500 MC.
213-A DuMont C.R. Modulation Monitor.
BC1203B APN-4 Test Set.
6255A H.P. Interpolation Osc.
TS-23/APN Test Set.
TS-487/U Peak to Peak VTVM.
BC-231AE Freq. Meter.
LM-13 Freq. Meter.

MICROWAVE RECEIVERS

AN/APR-1 Receivers and tuning units TN-1 (38 to 95 MC) TN-2 (76-300 MC) TN-3 (300-1000 MC).
AN/APR-4 Receivers and tuning units TN- 16 (38-95 MC) TN-17 (76-300 MC) TN-18 (300-1000 MC).
R11A/APR-5A Receivers. 1000 to 6000 MC Range.

MODEL AN/APA-10
PANORAMIC ADAPTER

Provides 4 Types of Presentation:
(1) Panoramic (2) Aural
(3) Oscillographic (4) Oscilloscopic

Designed for use with receiving equipment AN/ARR-7, AN/ARR-5, AN/APR-4, SCR-587 or any receiver with I. F. of 455kc, 5.2mc, or 30mc.

SUMMARY OF CHARACTERISTICS:

SENSITIVITY: "A" channel, 400 microvolts or less per ¼" beam deflection. "B" channel, 400 microvolts or less per ¼" beam deflection. "C" channel, 1 volt or less per ¼" beam deflection.
RESOLUTION: 12 kilocycles at 3 db down from peak, sweep control at maximum, using CW signal.
PRESENTATION: Panoramic ("A" & "B" channels): Oscillographic, "C" channel.
SWEEP WIDTH: Channel A, ± 50 kc (100 kc overall) Channel B, ± 500 kc (1 Mc overall) Channel C, ± 1 Mc (2 Mc overall).
CATHODE RAY SWEEP: Oscillatory or non-oscillatory (Servo) Variable Sawtooth Generator, 25 to 40,000 cycles per second.
AUDIO OUTPUT: 50 milliwatts into 600 or 8000 ohm load.
VERTICAL AMPLIFIER: Single stage, ± 2db from 30 cycles to 100 kc or higher. Amplifier out position permits direct connection to one vertical plate through coupling capacitor.
HORIZONTAL AMPLIFIER: Single stage, ± 2db from 30 cycles to 100 kc. No provision for direct connection to deflection plates.
CATHODE RAY TUBE VOLTAGE: Cathode to accelerating anode; 1200V DC for 115V A.C. input.
SENSITIVITY OF CATHODE RAY OSCILLOSCOPE: Maximum through Amplifier. Horizontal: 10 volts peak to peak per inch. Vertical: 1.5 volts peak to peak per inch.
DIRECT TO VERTICAL PLATE: 150 volts peak to peak per inch.
NOISE: No disturbance in excess of 25,000 microvolts between 200kc to 200Mc generated by equipment.
Overall Dimensions: 19-9/16" x 10⅛" x 7⅝".
Weight: 40 lbs.

Power Requirements: 115V, A.C. 60 cycles, 1 phase. With 21 tubes including 3" scope tube, for operation on 115 V. 60 cycle source. **PRICE**.....$245.00

AN/APA-10 80 Page Tech Manual.....$2.75

LINEAR SAWTOOTH POTENTIOMETER
W.E KS-15138

Has continuous resistance winding to which 24 volts D.C. is fed to two fixed taps 180° apart. Two rotating brushes 180° apart take off linear sawtooth wave voltage at output.

Brand New $5.50

G. E. SERVO AMPLIFIER

Type 2CV1C1 Aircraft Amplidyne control amplifier, 115 volts—400 cycles. Dual channel. Employs 2-6SN7GT and 4-6V6GT tubes. Supplied less tubes. New $22.50

400 CYCLE TRANSFORMERS

AUTO. 400 cy. G.E. Cat No 80G194. **KVA .945—520P. Volts 460/345/230/115. New $4.95**

FILAMENT. 400/2600 cy. Input: 0/75/80/85/105/115/125V. Output: 5V3A/5V3A/5V3A/5V3A/5V6A/5V6A/6.3V6A/6.3SA. New $2.95

THYRATHRON POWER. 400/1600 cy. Raytheon UX-8876, 400/1600 cy. Pri: 115, Sec: 58-0-58V at 1.5A, 6.3V at 1.2A. Test r.m.s. 1780. New...$2.75

PLATE WECO KS9580. 400/800 cy. Pri: 115V. Sec: 1350-0-1350 at .057A (2700 V Total). Electat shided. Wt. 2.5 lbs. New.....$2.95

Plate. Thordarson 2T46B89. 1650 VA. Pri: 105-120V. 500 cy. 1 PH. Sec: 5500V. Center tapped. 1.5KV insulation. Brand new.....$49.50

SCOPE PL. & FIL. WECO 9856. 400/2400 cy Pri: 115. HV Wdg. 1135V at .008A. Fil. Wdgs. 6.4V4A/2.5V1.75A/6.4V.6A. Electat shided. Wt. 1.4 lbs. New $2.75

FILAMENT. 400/2400 cps. WECO KS9553. Pri: 115V. Sec: 8.3V1.25A/6.3V1.5A Electat shided. Wt. 0.5 lbs. New $1.95

PLATE & FIL. 400/2600 cy. Pri: 0/80/115V. Sec: #1=1200VDC at 1.5MA. Sec. #2=400VDC at 130MA. Fil. Secs: 6.4V4.3A/6.35V0.8A. (ins. 1500V)/5V2A/5V2A $4.95

RETARD. 400 cy. WECO KS9598. 4 Henry 100MA $1.75

60 CYCLE TRANSFORMERS

FILAMENT. Raytheon Hypersil Core. Pri: 115V. Sec: 6.3V2A/6.3V2.4A/6.3V2.2A/6.3V0.6A Ins. for 1700V $5.95
High Rectance Trans. G. E. type Y-3502A—60 cy., Voltage 11200-135. Inductance H.V. Winding 135 Henries. Output: Peak Voltage 22.8KV. Cat. 8318065G1. New $89.50
High Voltage Trans. Westinghouse Pri: 115, 60 cy. Sec: 15,000 C.T., 60 MA. Good for Hi-Pot test set up $24.50

PULSE TRANSFORMERS

PULSE. WECO KS-9563. Supplies voltage peaks of 3500 from 807 tube. Tested at 2000 Pulses/sec and 5000V peak. Wdg. 1-2=18 ohms. Wdg. 1-3=12 ohms. L of Wdg. 1-3=973-.982H at 100 cps. $3.00
PULSE. WECO KS-161310, 50 KC to 4MC. 1⅝" Dia. x 1⅞" high. 120 to 2350 ohms. New $1.95

RAYTHEON VOLTAGE REGULATOR

Adj. input taps 95-130V., 60 cy. 1 Ph. Output: 115V, 60 Watts, ½ of 1% Reg. Wt. 20 lbs. 6¾" H x 8¼" L x 4⅝" W. Overload protected. Sturdily constructed. Treptcalised. Special.....$14.75

HIGH VOLTAGE CAPACITORS

.25 MFD., 20KV $26.50
.25 MFD., 15KV 22.50
.5 MFD., 25KV.....34.50
1 MFD., 15KV 34.50
1 MFD., 7.5KV 12.50

SOUND POWERED PHONES

Western Electric No. D173212, Type O. Combination headset and chest microphone. Brand new including 30 ft. of rubber covered cable.....$17.50
Automatic Elec. Co. No. GL643AO. Similar to above but including Throat microphone in addition to chest microphone. Brand new with 30 ft. rubber covered cable $10.00
U. S. Instrument Co. No. A-260. Complete with 30' cable and plug. Brand new.....$13.50
W. E. type TS-10M Handset. New.....$16.50

PARABOLOIDS

Spun Magnesium dishes 17⅛" dia. 4" deep. Mounting brackets for elevation and azimuth control on rear 1½ x 1⅝" opening in center for dipole. Brand new, per pair.....$8.75

SWEEP GENERATOR CAPACITOR

High speed ball bearings. Split stator silver plated coaxial type 5/10 mmfd. Brand new.....$2.50

WESTERN ELECTRIC CRYSTAL UNITS

Type CR-1A/AR. Available in quantity—following frequencies—fundamentals.
5910—6350—6370—6470—6510—6610—6670—6690—6940—7270—7350—7380—7390—7420—7580—9730—Kilocycles.

$1.25 each

All prices indicated are F O B Bronxville, New York. Shipments will be made via Railway Express unless other instructions issued.

ELECTRONICRAFT
INC.
27 MILBURN ST. BRONXVILLE 8, N. Y.
PHONE: BRONXVILLE 2-0044

All merchandise guaranteed. Immediate delivery, subject to prior sale.

All Prices Subject to Change Without Notice

Reliance Specials

TIMING MOTOR — $1.95
8 RPM 115V 60 cyc
E. Ingraham Co.

GEAR ASSORTMENT
100 small assorted gears. Most are stainless steel or brass. Experimenters dream!.....Only $6.50

VERNIER DIAL or DRUM (From BC-221)
DIAL—3½" dia. 0-100 in 360°. Black with silver marks. Has thumblock. DRUM—0-50 in 180°. Black with silver marks .....either, 85¢

SOUND POWER HANDSET
Brand New!
Includes 6 ft. cord. No batteries or external power source used. $17.60 ea.

Sound Powered Chest Set RCA—With 24 Ft. Cord
$17.60 per pair

Variac—General Radio 100W removed from equipment — $10.00

400 CYCLE INVERTERS
Leeland Electric Co.
#10800 In: 28 V.D.C., 92 A. 8000 R.P.M. Out: 115V, 400 Cyc. 1 Phase, 1500 V.A. 90 PF.....$12.95

3AG FUSES

AMP	Per 100	AMP	Per 100	AMP	Per 100
½	$4.50	1	3.00	6	$3.00
¾	4.00	1½	3.00	10	3.00
¾	$4.00	5	3.00	15	3.00
				20	3.00

DELAY NETWORK—ALL 1400Ω
T 113—Approx. 1.2 micro sec. delay.....
T 114—Approx. 2.2 micro sec. delay..... } 95¢ each
T 115 Similar to T 114 with tap brought out....

BEARINGS

Mfg. No.	ID	OD	Thickness	Price
MRC5528-1	5 1/2	6 1/2	1/2	$3.50
MRC7026-1	5 15/64	6 15/64	9/16	3.50
Timken 37625	4 5/16	6 1/4	29/32	4.25
MRC-7021-200	4 1/8	5 9/32	23/64	2.95
Fafnir 85545	2 1/16	3 5/8	1/4	1.00
MRC 106 M2	1 17/64	2 7/16	25/64	1.75
MRC 106 M1	1 13/64	2 7/16	25/64	1.60
Federal LS 11	1 1/8	2 1/2	5/8	1.75
Norma S 11 R	1 1/8	2 1/8	3/8	1.25
Fafnir B 541	1 1/16	1 1/2	9/32	.55
Hoover 7203	5/8	1 9/16	7/16	.90
Norma 203 S	5/8	1 9/16	7/16	.90
Schatz	3/4	1 3/4	9/16	1.00
NS 5202-C13M	1/2	1 3/8	1 3/8	1.00
ND 1208	25.64	1 5/32	11/32	.55
Fafnir S 2K	3/8	7/8	7/32	.45
MRC 39 R1	11/32	1 1/32	5/16	.45
ND CW 8808	5/16	5/16	13/32	.45
MRC 38 R3	5/16	55/64	9/32	.45
Fafnir 33K5	3/16	1/2	5/32	.25

NEEDLE BEARINGS
TORRINGTON B108 1/2" wide . 5/8" 13/16" 30¢

Brand New METERS—Guaranteed
0-1 Amp. R.F. 2½". $3.29 | 0-80 Amp. D.C. 2½" $2.25
0-10 ma D.C. 3½"... 3.95 | 0-7.5V. A. C. 3½"... 3.46

SELENIUM RECTIFIERS
Full Wave 200 Ma 115V.....$1.79
Half Wave 100 Ma 115V......91
SPAGHETTI SLEEVING—assortment—99 feet.....$1.00

TYPE "J" POTENTIOMETERS

150	8D	2000	8D	5000	3/8"	50K	8D*
300	8D	2000	1/2"	10K	3/8"	70K	8D
300	3/8	2000	8D*	10K	8D*	80K	8D
400	3/8	2500	1/2"	15K	1/4"	100K	3/8
500	3/8	2500	8D	15K	8D*	200K	8D*
1000	7/8	3000	3/8	25K	3/8"	250K	8D
1000	8D*	4000	3/8	25K	8D*	500K	1/2"
1500	8D	5000	8D*	30K	8D*	1 Meg	8D

* Split locking bushing — $1.50 each

JONES BARRIER STRIPS

Type	Price	Type	Price	Type	Price
2-140Y	$0.13	4-141W	$0.30	9-141Y	$0.64
3-140¾W	.19	5-141	.26	10-141	.50
6-140	.25	5-141¾W	.37	17-141Y	1.17
10-140¾W	.33	7-141	.36	2-142	.21
2-141	.13	7-141¾W	.49	5-142	.69
2-141¾W	.24	8-141¾W	.58	2-150	.39
3-141W	.26	9-141	.64	3-150	.54

TIME DELAY RELAY
Raytheon CPX 24166 KS 10193-00 Sec.
• 115 V., 60 cycle • Adj. 50-70 Seconds • 2½ second recycling time—spring return • Micro-switch contact, 10A • Holds ON as long as power is applied • Fully cased •
ONLY $6.50

AN CONNECTORS
IMMEDIATE SERVICE
PHONE! WIRE! WRITE! YOUR NEEDS

NEW COAXIAL CABLES

	Ohms	Price per 1,000 Ft.		Ohms	Price per 1,000 Ft.
RG-6/U	70	$150	RG-38/U	71	$450
RG-7/U*	97.5	85	RG-57/U	55	60
RG-8/U	70	160	RG-59/U	72.5	150
RG-21/U	53	100	RG-61/U	67.5	295
RG-22A/U*	95	150	RG-54/U	58	65
RG-24/U	125	240	RG-55/U	53.5	65
RG-25/U	45	575	RG-57/U*	95	100
RG-26/U	45	75	RG-58/U*	53.5	60
RG-27/U	48	270	RG-59/U*	73	70
RG-29/U*	53.5	50	RG-77/U*	45	100
RG-34/U	71	175	RG-78/U	45	50

Add 25% for orders less than 1,000 feet.
*No minimum order—others 250' minimum.

COAXIAL CABLE CONNECTORS



15¢ UG 175/U	$1.30 83-1F	30¢ ANGLE	80¢ 83-1J	40¢ 83-1R	50¢ HOOD
83-1AC	$ .42	83-22J	$1.40	UG58/U	$ .63
83-1AP	.36	83-22SP	1.15	UG59A/U	2.25
83-1F	1.30	UG-12/U	.83	UG60/U	2.40
83-1H	.69	UG13/U	.63	UG85/U	2.05
83-1J	.80	UG19B/U	1.95	UG87/U	1.75
83-1R	.40	UG21/U	.67	UG88/U	1.25
83-1SR	.15	UG22/U	1.10	UG167/U	2.80
83-1SS	.15	UG24/U	.67	UG175/U	.18
83-2AP	2.00	UG25/U	.60	UG176/U	.15
83-2H	.25	UG27/U	.83	UG201/U	2.85
83-2J	1.65	UG27A/U	2.95	UG206/U	.63
83-2R	1.30	UG29/U	.83	UG281/U	.60
83-2SBP	2.10	UG30/U	2.50	UG290/U	1.60
83-2SAP	1.10	UG57/U	2.30	UG499/U	1.25

DIFFERENTIAL
115 V., 60 Cyc. #C78248 — $3.95 ea.
3⅛" dia. x 5¾" long
Used between two #C78248's as dampener. Can be converted to 3600 RPM Motor in 10 minutes. Conversion sheet supplied. (Converted).....$4.50
Mounting Brackets — (Bakelite for selsyns, and differentials shown above.....35¢ pair

2J1G1 SELSYNS $2.95
BRAND NEW 400 CYCLE
Can be used on 60 cycle

POSTAGE STAMP MICAS

mmf	mmf	mmf	mmf	mmf	mmf	mfd	mfd	mfd
4	23	47	85	220	500	910	.003	.0062
5	24	50	90	240	510	.001	.0033	.0065
7	25	51	100	250	560	.0011	.0035	.0068
7.5	26	56	110	270	580	.0012	.0036	.007
8	27	60	120	300	600	.0013	.0039	.0075
8.2	30	62	125	350	620	.00136	.004	.008
10	33	68	130	370	650	.0015	.0044	.0082
13	35	70	150	390	680	.001625	.005	.009
18	39	75	160	400	750	.002	.0051	.01
20	40	80	175	430	800	.0026	.0056	
22	43	82	180	470	820	.0027	.006	

Price Schedule

8.2	mmf to .001 mfd	5¢
.0011	mfd to .001625 mfd	7¢
.002	mfd to .0082 mfd	12¢
.01	mfd	22¢

SILVER MICAS

mmf	mmf	mmf	mmf	mmf	mmf	mfd	mfd	mfd
10	40	82	155	275	430	680	.002	.0039
18	47	100	170	300	466	700	.0023	.004
20	50	110	180	325	470	800	.0024	.0047
22	51	115	200	350	488	875	.0026	.005
23	60	120	208	360	500	900	.0027	.0051
24	62	125	225	370	510	.001	.00282	.0056
27	68	130	240	390	525	.0011	.002826	.006
30	68	135	250	400	560	.0016	.003	.0082
39	75	150	270	410	570	.001625	.0033	

Price Schedule

10 mmf to .001 mfd	10¢
.001625 mfd to .0024 mfd	20¢
.00282 mfd to .0082 mfd	50¢

FILAMENT TRANSFORMER
Pri., 115V., 60 Cyc. — Sec. } 6 V. @ 35 A. or 12 V. @ 18 A. or 24 V. @ 9 A. — $6.50

PULSE TRANSFORMERS
UTAH—9262 9278 9340
WESTERN ELECTRIC—D166173 D161310
KS86096, KS9365, KS9565, KS9800, KS9662, KS13161
GENERAL ELECTRIC—8C2731, 80-G-5
JEFFERSON ELECTRIC—C-12A-1318
CROSLEY—W-226262-4
DINION COIL—TR1048, TR1049
also 852-7250-2A; 852-7251-2A; T-1-229621-60

PRECISION RESISTORS—¼ WATT—30¢

2	10.43	12.32	14.98	62.54	125	414.3
2.5	10.84	13.02	15.8	79.81	147.5	705
3.5	11	13.52	16.37	105.8	220.4	2,193
5	11.25	13.89	32	123.8	301.8	3,300
6.68	11.74				366.6	59,148

PRECISION RESISTORS—½ WATT—30¢

1	10.58	70	290	2,220	8,909	33,300
.2	11.1	71	298.3	2,250	9,000	35,588
.25	13.15	75	389	2,500	10,000	36,000
.334	13.3	80	397	2,550	12,000	37,000
.444	13.52	87	400	3,330	13,333	39,000
.502	15	90	500	3,400	14,825	40,000
.557	18.75	97.8	600	3,427	15,000	41,700
.627	20	100	607	3,500	15,750	43,766
.75	21.5	120	705	3,995	15,755	45,000
1	25	123.8	723.1	4,000	15,810	47,000
1.01	30	125	783	4,161	16,000	50,000
1.02	34.75	147.5	800	4,285	16,700	56,000
2	40	148.7	855	4,300	17,000	58,000
2.04	44.73	150	900	4,451	19,980	59,905
2.5	45	178	970	4,750	20,000	68,000
2.54	46	179.5	1,060	5,000	20,150	70,000
3.07	49	180	1,100	5,714	21,300	75,000
3.25	50	210	1,150	5,900	22,500	78,012
3.7	52	220	1,200	6,000	23,300	80,000
3.87	55.1	230	1,264	6,500	25,000	90,000
5.24	60	235	1,375	7,000	26,667	92,000
5.26	61	240	1,400	7,300	30,000	100,000
5.89	65	250	1,490	7,500	31,500	120,000
7	66	260	1,500	8,000	32,700	140,000
7.6	66.6	270	1,573	8,500	32,888	180,000
8	69	286	1,876	8,900	33,000	400,000

PRECISION RESISTORS—1 WATT—35¢

.1	2.58	27.4	179.5	1,000	6,000	34,000
.11	2.6	28	206	1,800	7,000	35,000
.147	2.66	30	215	1,900	7,500	37,000
.2	3	35	250	2,000	7,800	40,000
.25	3.1	38	270	2,200	8,000	45,000
.31	3.39	43.6	300	2,215	8,250	50,000
.4	4.29	45.5	312	2,250	9,000	55,000
.861	4.3	49.75	321.7	2,413	10,000	56,000
1	4.7	50	400	2,500	12,000	60,000
1.01	5.21	54.25	420	3,055	12,420	65,000
1.166	60	425	3,300	12,500	68,000	
1.17	10.5	71	1,000	5,221	15,000	70,000
1.21	12.8	75	565	4,572	18,000	75,000
1.25	15	80	800		20,000	80,000
2	18	100	1,000	5,221	25,000	84,000
2.5	25	112.8	1,200	5,400	30,000	90,000
2.55						95,000

1 WATT—45¢

100,000	175,000	296,000	390,000	550,000
105,000	195,000	300,000	399,000	560,000
120,000	200,000	310,000	400,000	590,000
125,000	220,000	320,000	413,000	600,000
132,000	245,000	340,000	423,000	645,000
145,000	249,000	348,000	450,000	650,000
149,500	250,000	350,000	500,000	700,000
150,000	260,000	375,000	520,000	750,000
166,100	270,000	376,000	522,000	876,457

1 MEGOHM 1 WATT 1%—65¢; 5%—45¢
2 WATT—60¢

4,385	5,000	6,000	10,000	23,000

OIL FILLED

MFD	V.D.C.	Price	MFD	V.D.C.	Price
.125	35,000	$35.95	.5-.1	2,000	1.95
.125	27,000	28.95	.3	2,000	1.75
.25	20,000	19.95	.1-.1	2,000	1.65
.1	12,000	2.95	.02	2,000	.79
1	10,000	12.75	2	1,500	1.79
.15-.15	8,000	2.75	1	1,000	1.50
.02	8,000	1.89	6	1,000	2.25
.1	7,500	1.95	4	1,000	1.89
.05	7,500	1.75	3	1,000	1.59
.03	7,500	1.69	2	1,000	.90
.1-.1	7,000	1.96	1.02	1,000	.65
.1	7,000	1.85	1	1,000	.65
.02-.03	7,000	1.75	1	800	1.48
1	6,000	5.95	1	800	.55
.1	6,000	2.75	8-8	600	1.49
.03-.03	6,000	1.85	8	600	1.95
.01-.03	6,000	1.35	7	600	1.75
2	5,000	5.95	4	600	1.49
.25	5,000	2.95	4 x 3	600	1.95
2	4,000	4.95	4	600	.69
.3 x .2	4,000	2.50	1	600	.49
.1	4,000	2.25	8	500	1.55
.06	4,000	1.45	4	500	.98
.1	3,500	1.95	4	1,200	.39
.25	3,000	2.25			
.1	3,000	1.75			
4	2,500	4.95			
8	2,000	4.95			
6	2,000	4.65			
4	2,000	4.25			
3	2,000	3.75			
2	2,000	2.95			

2 mfd 4,000 V.D.C. G.E.
$3.95

OILED FILLED A. C. CONDENSORS

MFD.	V.A.C.	Price	MFD.	V.A.C.	Price
.2	750	$ .49	30	330	$6.50
8	660	4.95	25	330	5.95
6	660	4.95	20	330	5.50
5	660	4.50	15	330	4.50
4	660	4.25	10	330	3.95
2	660	3.25	6	330	2.95
1	660	2.15	4	330	1.95
28	440	4.95	3	330	1.25
15	440	4.95	2.5	330	.98
8	440	3.50	2	330	.85
6-3	440	3.95	10	220	2.95
4.4	375	2.15			

1N34 Crystal Diode.....79¢
Minimum Orders $3.....All orders f.o.b. PHILA, PA.

RELIANCE MERCHANDIZING CO.

Arch St. Cor. Croskey Phila. 3, Pa. *Telephone Rittenhouse 6-4927*

ELECTRO—THE BEST FOR ELECTRONIC SURPLUS

Amertran "TRANSTATS" Voltage Regulator

11.5 KVA. 50/60 cy. Commutator range 0-115 V. Max. Amps. 100. Reconnection diagram available for 230 V. 50 A operation. BRAND NEW. Factory Cases $225.00

SUPERIOR POWERSTAT

Type 1126-3Y. Pri.: 230V, 3 ph, 60 cy. Output: 0-270 Volts 7 KVA. May be separated and used as three 0-115V, 1 ph, 60 cy, 2.0 KVA units. Brand New $100.00

Transtat .25 KVA. Fixed winding 115/1/60. Commutator range 103-126 V. Max AMPS. 2.17..... $9.45
.5 KVA Fixed Winding 115/1/400 Commutator range 92-115 V Max Amps. 5.5..... $4.50

TRANSFORMERS

All have 115V 60 cy Primary

Hammond RE14032. Sec. #1 thru 4: 5V @ 2A; Sec. #5: 5V @ 6A..... $4.25
Amertran #7180. Sec. 2. 5VCT @ 25VA..... $3.95
KV Trans #1523. Sec. #1: 5V @ 20A; Sec. #2: 5V @ 10A..... $12.50
Thordarson Type T-6F68. Sec. 6.3V @ 2.7A., 5KV Ins..... $4.50
Hammond REL10350. Sec. #1: 580VCT @ 55MA; Sec. #2: 5V @ 2A; Sec. 3: 6.3V @ 2A..... $3.95
Raytheon UX8724. Sec.: 0.5V @ 0.5MA..... $1.35
Federal W15-38. Sec. #1: 300V @ 10MA; Sec. #2: 25V @ 500MA; Sec. #3: 6.3V @ 630MA; Sec. #4: 6.3V @ 450MA..... $3.95
Thordarson T92R21. Sec. #1: 770VCT @ 200MA; Sec. #3: 6.3VCT @ 3A; Sec. #3: 6.3V @ 1.5A; Sec. #4: 5V @ 3A..... $5.50
W.E. #KS8606. Sec. #1: 108V @ 177MA; Sec. #2: 5.13V @ 4A; Sec. #3: 6.3V @ 1A; Sec. #4: 2.5V @ 7.5A..... $3.95
Westinghouse Type GF. Sec. 20V @ 200VA..... $5.25
Raytheon U7420. Sec. #1: 225V @ 180MA; Sec. #2: 6.3V @ 2.5A..... $3.25
Bendix 530178. Sec. 1.5V @ .005 MADC..... $1.25
Raytheon UX6906A. Sec. #1 & #2: 6.3V @ 600MA Sec. #3: 6.3V @ 2.25A..... $4.25

The following 115V 400 cy Primary

Raytheon UX8547. Sec. 1000V @ .0025A; Sec. #2: 6.15V @ 700MA..... $3.95
Sperry 702719. Sec. #1: 700 VCT @ 315MA; Sec. #2: 200VCT @ 100MA; Sec. #3: 18V @ 600MA; Sec. #4: 6.3V @ 16A; Sec. #5: 5V @ 6A..... $4.35
Raytheon UX8302C. Sec. #1: 6.3V @ 4.7A; Sec. #2: 5V @ 3A; Sec. #3: 6.3V @ .6A..... $3.50
Sperry #702541. Sec. #1: 1800VCT @ 60MA; Sec. #2: 350VCT @ 120MA; Sec. #3 & #4: 5V @ 3A; Sec. #5: 6.3V @ 5A; Sec. #6: 6.3V @ 2A..... $5.25
Sperry #702523. Sec. #1: 740V @ 12MA; Secs. #2 & 3: 2.5V @ 3A; Secs. #3 & 4: 6.3V @ 2.25A..... $3.25
W.E. #SP1035. Sec. #1: 900V @ 410MA; Sec. #2: 875V @ 410MA; Sec. #3: 780V @ 410MA..... $3.25
Federal #RA6404-1. Sec. #1: 550-0/165/550 @ 200MA; Secs. #2 & 3: 5V @ 3A; Sec. #4: 6.3V @ 2A; Sec. #5: 25V @ 2.2A..... $4.00
W.E. #KS8986. Sec: 990/875/780VCT @ 420MA..... $3.25
Raytheon UX8496A. Sec: 5V @ 5A 13.5KV Test..... $3.50
Raytheon UX7358. Sec: 1-6500V @ .005A..... $4.25

Stancor Modulation A3871. For single 6L6 (class) A1 Pri: 4500 Ohms; Sec: 8500 Ohms..... $1.75
Raytheon Output UX7489A. Pri: 3600 Ohm 70MA; Sec: 720 Ohm 0-MA..... $1.75
Raytheon Pulse WX5137. Pri: 4KV 1 Mu. Sec.? Sec: 16KV 16A..... $6.75
G.E. #8G457. Pri: 1/1.5/3.6/8/10V; Sec: 50-50V 100W..... $2.95
Raytheon #U7658B. Pri: 270V 60 cy; Sec: 13.5V @ 450MA..... $2.00
G.E. #8G350. Pri: 450V; Sec: 6V @ 3VA..... 95¢
Federal RA6403-1. Audio. Pri: 8000 Ohm @ 9MA; Sec: 600 Ohm..... $1.6
Federal RA6408-1. Audio. Pri: 2500 Ohm; Sec: less than 1-Ohm..... $1.65
Amertran #3882 Audio. Output. Pri: 4000/1000 Ohms @ 0-MA; Sec: 4000 Ohms. DB level: +28..... $1.65
Raytheon Interstage UX8442. Pri: —40V; Sec: +40V..... $1.00
W.E. Oscilloscope Input #ES677584-1 SC#4G1670A/T5..... 95¢
Federal Driver RA6407-1. Pri: Tapped Unbalanced 15000 Ohms @ .006A DC; Sec: 1770 Ohms; 200 to 5000 cy. ±1½DB..... $1.75

DAVEN SOUND ATTENUATORS

Type 350-A. Network, ladder, linear, imped. 30/30 ohms. 2DB attenuation. 10 W dissipation..... $3.9

Westinghouse Watthour Meters

Type CS. 240V/60cy/1ph 15 Amp., 3 Wire, new $12.50
Type CS. 120V/60cy/1ph 15 Amp., 2 Wire, new $9.50
Type CA. 120/60cy/1ph 15 Amp., 2 Wire, new $9.50
W.E. Test Set 1-115..... $8.50
MT/ARCS Mounting Base provides anti-shock mtg for any 3 units Trans or Rec. of the ATA or ARC5 equip..... $1.00

MINE DETECTOR SCR 625

Detects metallic objects (ferrous or non-ferrous) to a depth of approx. 6 ft. Find outboard motors on the bottom of lakes, locate underground piping, treasure, metallic fragments in lumber, etc. New, complete with inst. book, $65.00. Used but like new $45.00

MOTORS AND GENERATORS

G.E. Model 5BA10A522, 24VDC, 0.55A, 10 oz/in torque 1400RPM..... $5.95
Universal Elec. #323, 115VDC, 1.2A 5000RPM..... $4.95
W.E. #KS8603, 24VDC, 0.8A, 5000RPM, Shunt wound..... $2.95
G.E. #5BY9E5, Permanent Magnet type, 140VDC, .025A 1800RPM..... $8.95
EMC, SPN37952, 32VDC, 1/30HP, Gear reduced to 21RPM..... $12.95
Gen'l Industries, 115VAC, 60cy, .65A 80RPM geared to 20-30RPM..... $3.95
Elec. Spec. Type JAI, 24VDC, 15A ¼HP, 3800 RPM..... $14.95
Warren Synch. Type B3, 115VAC, 60cy, 4W, 12 RPM..... $5.95
Elcor #M24718, 24VDC, 0.32A, 1800 RPM..... $5.95
Flyer Type 1623, 110VAC, 25cy, 30W 78RPM, gov. cont..... $7.95
Dynamic Hi-Press Axial Flow Fan, Mod 5868CR4, 24-28VDC, ⅛HP, 8000RPM, 225CFM. Used..... $8.95
Lear #C004, 24VDC, 1.5A 7500RPM SW..... $8.95
Oster Shunt Motor, Type E-7-5, 27½ Volts DC, 1/20 HP 3650 RPM..... Price $7.50
Oster Series Motor, Type C-2HP-1A, 27.5 Volts DC 1/100 HP 7000 RPM..... Price $8.50
Westinghouse #1171391, 27VDC, ⅛HP, 6.5A, 5000 RPM, Series..... $9.95
Emerson #1610212, 24VDC, 160 oz/ft torque, 100 RPM..... $9.95
Elinco F-10 Rate Generator, 2 ph 1.3 volts/100 RPM..... $17.95
Autosyns, Pioneer AY-59D..... $24.95

DC SERVO MOTORS

White Rodgers Elec. Co. (6905X-46). 24 VDC @ .65 Amps. Torque 50 in/lbs. ½ RPM reversible, comp. w/limit switch, relays and selenium rectifiers on top of motor, to keep AC out of motor, 5X5X4. $12.95

Pioneer Gen-E-Motor Dynamotor #S82669. Input 18V; Output 450V @ 150MA..... $3.95
CONVERTERS PU-16/AP, input 28VDC; output 115 VAC 400 cy. 6.5A..... $59.50
INVERTERS PU-7/AP, input 28VDC; output 115 VAC 400 cy. 21.6A..... $59.50
INVERTERS PE-218, Input 28VDC; output 115VAC 400 cy at 1.5 KVA..... $29.6

WIRE WOUND RHEOSTATS

Standard Brands

#241D, 250/250 ohms 50W w/½" shaft..... 95¢
#241D, 300/300 ohms 50W w/½" shaft..... 95¢
#241D, 400/400 ohms 50W w/½" shaft..... 95¢
#50D, 50/30 ohms 50W w/½" shaft..... 95¢
Model J, 16/16 Ohms 50W w/½" shaft..... $1.25
Model J, 0.5 ohms 50W..... 55¢
Model J, 5 Ohms 50W..... 95¢
Model J, 75 ohms 50W..... 95¢
Model J, 150 ohms 50W..... 95¢
Model J, 800 ohms 50W..... $1.25
Model J, 1000 ohms 50W..... $1.25
Model J, 5000 ohms 50W..... $1.25
Model H, 60 Ohms 25W..... 75¢
60 Ohms 25W..... 85¢
Model H, 100 Ohms 25W..... 75¢
Model H, 175 Ohms 25W..... 75¢
Type PR, 15 Ohms 25W..... 75¢
All size potentiometers and rheostats in stock. Write us your requirements on all carbon or wirewound.

BC-375E Transmitter complete w/tuning units. Brand New..... $50.00

DECK ENTRANCE INSULATORS

(Bowl and Flange Type)

Mfd. by Ohio Brass Co. heavy galv. metal flange 10⅝" D., pore, bowl set in rubber gaskets. Top bell 7⅝" D. brass feed thru rod 10½" L. Insul. dist. between top bell and flange 6½"..... $3.9

HEAVY DUTY TRANSFORMERS

G.E. Cat. #7479965. Pri: 230V 60 cy Sec: 16.4/8.2VCT; 11/5.5V @ 60A, 8¾ll 9½L 6⅛W..... $25.0
G.E. Cat. #7796365. Pri: 203.5V 60 cy Sec: 6.3V @ 250 Amperes..... $39.50
G.E. Cat. #7479971. Pri: 230/208V 50/60 cy; Sec: 1365/1300/1235VCT 735VA. 7⅛ x 5½ x 8⅛..... $29.50
G.E. Cat. #7479972. Pri: 230/208V 50/60 cy; Sec: 2450/2350/2210VMS. 2.85 KVA..... $49.5
G.E. Cat. #7475695. Pri: 115V 60 cy. Sec: 3530/3720/3910 V. M.S. 1.31KVA..... $47.50
Maloney Elec. REL10383. Pri: 115/230V 50/60 cy. Sec: 0/21000 Volts @ 100 MA DC. Half Wave. Oil Filled. 16"D 16"W 20"H excl. of ins..... $125.0

HIGH VOLTAGE REACTORS

Cat. #26F628 rated 0.1 Mu-F @ 12KV DC.... $ 4.95
#7530 rated 2 x .1 Muf @ 7500 VDC..... 17.50
Cat. #14F64 rated 0.25 Mu-F @ 20KV DC..... 17.50
Cat. #14F71 rated 0.25 Mu-F @ 32.5 KV DC.. 35.00
Cat. #A7548 rated 2x.25 Mu-F @ 6000 VDC.... 12.50
CD Paper rated 0.5 Muf @ 25 KV DC..... 45.00
#RC-2151 rated 2x.5 Muf @ 9000 VDC..... 25.00
Cat. #120063 rated 0.65 Mu-F @ 12.5 KV DC.. 15.00
Type FP rated 1.0 Mu-F @ 10 KV DC..... 32.50
Cat. #14F63 rated 1.0 Mu-F @ 15 KV DC..... $37.50
Cat. 15F5 rated 1.0 Mu-F @ 20 KV DC..... 48.00
Cat. #A28734 rated 1.0 Mu-F @ 25 KV DC..... 55.00
#TK60020 rated 2.0 Muf @ 6000 V DC..... 22.50
Cat. #14F338 rated 4.5 Muf @ 7500 V DC..... 35.00
Cat. #14F13 rated 5.0 Muf @ 10 KV DC..... 45.00

ELAPSED TIME METERS

Mfd. by R. W. Cramer Co. Type RT-2H. 0-10,000 hours by tenths. 115 Volts 60 cycle. Large Quantity Available..... $9.75

REACTORS AND CHOKES

Raytheon #U11010. Rated 10H @ 1.2 A DC.... $49.95
G.E. Cat. #7479974. Rated 2.5H @ 2.3A DC.. $37.50
G.E. Cat. #7479964. Rated 50H @ .025A DC.. $27.50
Ind. #CK3016. Rated @ 20H @ 60MA DC..... $2.95
Thordarson #T48853. Rated 6H @ 80MA DC.. $1.50
Raytheon #U-7423. Rated 1.2-1.6H @ 0.0MA DC $2.25
Raytheon. #U-6315. Rated 0.016H @ 14A DC. $8.50
Raytheon #UX8887D. Rated 30H @ .03A DC.. $120.00
Volt Test..... $5.25
G.E. Cat. #7472403. Rated 5H @ .035A DC. 4KV Test..... $2.35
Thordarson #T45921. Rated 7H @ 0.9A DC 10KV Test..... $19.50
Raytheon UX9114A. Rated 0.100H @ 1.4A DC. $3.00
Zenith 85G40. Rated 150H @ 1.0 MADC..... $2.25
Raytheon UX9116. Rated 0.30H @ 2.0A DC.. $3.00
Raytheon WX-5148. Dual. Rated 1.75/1.75 @ 0.25/0.25A DC..... $3.50
V.E. Sine Wave Generator KS5913L02 16V 2 Ph. 1725 RPM, driven by W.E. motor KS5913L01. 115V 60 cy. 1 Ph. 1/50 HP 1725 RPM..... $17.95
G.E. SIGNAL GENERATORS TVFL EX-1-A, designed for aligning 152-162MC FM receivers. Complete less crystal..... $24.50
JACK BOX BC-1366, contains plugs, selector switch, potentiometer, etc..... 25¢
G.E. VOLTAGE REGULATOR MODEL 3GVD11B6, for use w/115V 60 cy supply, 23-35KV complete w/10 Tubes..... $49.7

RELAYS

G.E. #CR2791- B10034, 3PDT, 6VDC, 15A Contacts..... $1.25
Allied D09D28. 3PDT 6VDC, 15A contacts..... $1.35
Leach Type 1054ARV. 3PST on make, 3PST on break, 20-32 VDC, 15A contacts..... $1.25
G.E. #CR2791-B100F3. DPDT 24 VDC 5A contacts 75¢
G-M #13013. DPDT 24 VDC 15A Contacts..... 75¢
Price #311. DPDT, 28 VDC, 10 Amp cont. 1900 ohm coil..... 95¢
G-M #13020. DPST on make, 3PST on break, 24VDC, 15A contacts..... $1.25
Allen Bradley X89309. SPST double make, 24VDC 200 A..... $2.50
A-B Bulletin X95545, type B6B, SPST Double Make, 24 VDC, 200 Amp..... $2.50
Dunco Thermal Time Delay 115 VAC 60 Cy, SPST, 1 min delay..... $1.7

RECTIFIERS

IT&T Selenium, Bridge, #EE29, 10 plates 1" dia. Input 18VAC Output 14VDC @ .15A..... $2.25
IT&T Selenium, Half Wave, #FE64, 4 plates 1⅝" dia. Input 18VAC Output: 7.5VDC @ .45A..... $1.00
Westinghouse #1603B copper Oxide. Half Wave, 4 plates 1⅝" D. Input 4VAC Output 3VDC @ .25A. $1.75
G.E. Model 6RS5F10, Selenium, Full Wave, 24 plates 1" D. Input 54VAC Output 40VDC @ 2A..... $3.9
B-L #BL20281. Selenium, Full Wave, 24 plates 1" D. 220VAC Output 180VDC @ .0075A..... $3.9
Westinghouse #854029A, Copper Oxide 13 plates 3⅝" D. Bridge, Input 60VAC Output 45VDC @ .32A.. $9.95

HEAVY DUTY COPPER OXIDE RECTIFIERS

FEDERAL TEL & RADIO DC POWER SUPPLY, Input: 220 volts 60 cy 3ph. Output: 28 volts DC 130 Amperes cont. duty. Complete w/ meters. Like new..... $275.00

HAMMETT ELECTRIC RECTIFIERS MODEL 8PS-100B. Input: 220 volts 60 cy 3 ph 13A. Output: 15 volts at 130 Amperes. 30 Volts at 65 amperes, cont. duty. Complete w/volt and ammeters. Like new..... $225.00

MALLORY RECTOSTARTER TYPE APS-20. Input: 230 Volts 60 cycle 3 ph. Output: 12 VDC at 600A for 1 min. 200A for 1 hr., 130A cont. Output: 24VDC at 300A for 1 min., 100A for 1 hr., 65A cont. Complete w/volt and ammeters. Like new..... $225.00

ALL MERCHANDISE BRAND NEW UNLESS OTHERWISE NOTATED

ALL PRICES F.O.B. BOSTON. ORDERS ACCEPTED FROM RATED CONCERNS ON OPEN ACCOUNTS NET 30 DAYS. MINIMUM ORDER $3.00

ESCO ELECTRO Sales Co.

Dept. E 110 PEARL STREET BOSTON 10, MASS. LIberty 2-7890

METERS

3 MA DC 2½" R—Simpson black scale.....$3.35
500 Microamps. DC—2½" round—Sun.....4.50
1 ma. DC Fan type—4" scale (rem. from equipt) 3.95
500 ma. DC 2½" R.—General Electric.....2.95
2 amp. RF 2½" Sq.—Simpson.....3.15
5 amp. AC 4½" R.—IBT.....4.11
10 amp. RF 3½" R.—Simpson.....4.95
50 amp. AC 3½" R.—General Electric.....4.11
3 amp. RF 3½" R.—Weston.....6.00

MAGNETRONS

2J21A	2J36	2J61	706CY
2J22	2J37	2J31	706FY
2J26	2J38	5J23	706GY
2J27	2J39	5J29	714AY
2J31	2J48	700B	718AY
2J32	2J61	700C	718BY
2J33	2J65	700D	720B/C/DY
2J34	2J69	704AY	725A
		706BY	730A

KLYSTRONS

2K23	2K33	417A	723A/B
2K25	2K45	707A	726A
2K26	2K54	707B	726B
2K29	2K55	723A	5611

OIL-FILLED HIGH VOLTAGE ISOLATION TRANSFORMERS

Pri. 400V 60 cy. Sec. 115V 200VA Insulated for 50KV DC—G. E. Form EIR—30"H x 13"D.....$125.00
Pri. 115V 60 cy. Sec. 115V 250VA Insulated for 58KV DC—G. E. Form EIR—29"H x 12½" D....$125.00

VOLTAGE DIVIDER

G.E. Cat. 8248886G-1 and 9001934G-1 17,248,400 ohms 35KV 7801 ratio wire wound shielded oil-filled 40"H x 12"D.....$77.50

2φ LOW INERTIA SERVO MOTORS

KOLLSMAN Type 938-0240—85/68V 100 cy 5 watts 2650 RPM—new.....$12.95
DIEHL Type FPE-25-11 75V 60cy 4 watts—new.....$34.50

OIL FILLED CONDENSERS

MFD	VDC	Price	MFD	VDC	Price
2	600	.1	2500	5	.69
4	600	1.65	1-1	2500	3.85
4	600	R'd 1.65	.32	2500	15.50
4	600	1.85	3.2	4000	2.95
5	600	R'd 1.85	1	5000	4.85
10	600	R'd 1.95	.01-.03	6000	1.65
.5-.9	1000	1.95	.1	7000	1.79
1	1000	.62	.045	16KV	4.70
2	1000	.89	.05	16KV	4.95
4	1000	1.85	.075	16KV	8.95
8	1000	2.45	.25	20KV	10.95
1	1500	.89	50	220VAC	4.95
4	1500	2.95	7	660VAC	4.25
.1-.5	2000	.87	8	660VAC	4.50
1	2000	1.95			

HIGH VOLTAGE TRANSFORMERS

G.E.—Pri. 115V 60 cy
Sec. 6250V 80 MA—12.5 KV ins.....$18.50
G.E.—Pri. 115V 60 cy. Sec. 6250/3850/2600V 86 MA 12.5 KV ins.....$18.50
Raytheon—Pri. 115V 60 cy. Sec. 8500/6450V CT 43 MA Hermetically sealed.....$22.50

CRYSTAL DIODES

1N21	$1.19	1N23	$1.49	1N34	$ .79
1N21A	1.69	1N23A	3.25	1N38	1.66
1N21B	4.00	1N23B	5.25	1N45	.94
1N22	1.09	1N27	1.79	1N52	1.05

ANTENNAS

AT-38A/APT (70 to 400MC).....$13.70
AT-49/APR-4 (300 to 3300MC).....13.70
DZ-2 Loop antenna with pedestal.....22.50
AN-74B (125 to 150MC).....3.25
AN-65A (P/O SCR-521).....1.50
AN-96A (P/O SCR-521).....1.75
AIA-3CM conical scan.....125.00
ASB Yagi—5 element 450 to 560MC.....7.00
ASB Yagi—Double stacked 6 element.....12.70
ASA Yagi—Double stacked 370 to 430MC.....29.40



WESTINGHOUSE HYPERSIL TRANSFORMER

PRI-115V. 60CY ¾ KVA
SEC #1 - 240V - 1.58A
SEC #2 - 240V - 1.56A
WT. 30 LBS.

$14.50 EACH

Terms 20% cash with order, balance C. O. D. unless rated. All prices net F.O.B. our warehouse, Phila., Penna., subject to change without notice.

COAXIAL CONNECTORS

83-1AC	$ .42	83-1R	$ .45	83-22AP	$1.10
83-1AP	.30	83-1RTY	.65	83-22R	.60
83-1F	1.30	83-1SP	.50	83-22SP	1.15
83-1H	.10	83-1SPN	.50	83-16A	.10
83-1J	.80	83-1T	1.30	83-18S	.15

FULL LINE OF JAN APPROVED COAXIAL CONNECTORS IN STOCK

UHF	N	BN	BNC	
UG-7	UG-23	UG-37	UG-102	UG-175 UG-254
UG-12	UG-24	UG-57	UG-103	UG-176 UG-255
UG-18	UG-27	UG-58	UG-104	UG-185 UG-260
UG-19	UG-27A	UG-83	UG-106	MX-195 UG-264
UG-21	UG-29	UG-85	UG-108	UG-197 UG-274
UG-21B	UG-30	UG-86	UG-109	UG-201 UG-275
UG-22	UG-34	UG-87	UG-146	UG-206 UG-290
UG-22B		UG-88	UG-166	UG-236 UG-291
			UG-167	UG-306
			UG-171	

M-358	MC-277	PL-259A	PL-325
M-359	MC-320	PL-274	SO-239
M-359A	PL-258	PL-284	SO-264
M-360	PL-259	PL-293	TM-201
93-C	49120	D-163950	ES-685696-5
93-M	49121A	D-166132	ES-689172-1

TYPE "J" POTENTIOMETERS

Resis.	Shaft	Resis.	Shaft	Resis.	Shaft
50	SS	5K	1/4"	50K	3/8"
50	9/16"	5K	3/8"	50K	1/2"
100	SS	5K	1/2"	100K	SS
200	SS	10K	SS	150K	1/2"
250	1/8"	10K	3/8"	200K	3/8"
500	SS	10K	1/2"	250K	SS
500	5/16"	15K	SS	250K	3/4"
500	1/2"	15K	1/2"	250K	3/8"
500	5/8"	20K	SS	500K	SS
650	1/2"	25K	SS	500K	1/4"
1K	SS	25K	1/4"	500K	7/16"
2K	3/8"	30K	1 1/8"	1 Meg	SS
2500	SS	40K	SS	2.5 Meg	SS
4K	SS	50K	SS	5 Meg	SS
5K	SS	50K	1/4"		

DUAL "JJ" POTENTIOMETERS

50	SS	500	SS	1 Meg SS
100	SS	1K	SS	2.5 Meg SS
250	SS	2500	SS	5 Meg SS
350	SS	10K	SS	10K/25K 3/8"

TRIPLE JJJ POTENTIOMETERS

100K/100K/100K—⅜" 20K/150K/15K—⅜"

SOUND POWERED TELEPHONES

U. S. NAVY TYPE M HEAD AND CHEST SETS
U.S.I. A.-250 W.E. D-173013
A.E. GL832BAO
ANY TYPE—$14.88 EACH
TS-10 Type Handsets.....$8.92 ea.

F. W. BRIDGE SELENIUM RECTIFIERS

AC Volts Input	— 18	AC Volts Input	— 40
DC Volts Out	— 14.5	DC Volts Out	— 34
1.3 Amps	$3.85	0.6 Amps	$4.60
2.4 Amps	4.95	1.2	5.95
6.6 Amps	7.75	3.2	8.95
13.6	12.75	6.0	15.50
17.5	15.75	9.0	17.50
26	22.75	12	26.95
39	35.50	18	32.50
52	39.50	25	42.50
70	49.50	36	55.50

130 VAC ½ WAVE STACKS

75MA	$ .85	150MA	$1.30	250MA	$1.75
100MA	1.10	200MA	1.57	400MA	2.60

GENERATORS

- Eclipse-Pioneer type 716-3A (Navy Model NEA-3A) Output—AC 115V 10.4A 800 to 1400cy. 1 φ; DC 30 Volts 60 Amps. Brand New.....$59.50
- Eclipse-Pioneer type 1235-1A. Output—30 Volts DC 15 Amps. Brand New—Original Packing. $15.50

THYRATRONS & IGNITRONS

OA4G	FG-41	FG-271	722A
C1A	FG-57	393A	873
1C21	FG-67	394A	884
2A4G	FG-81A	GL-415	885
2B4	91	KU-610	1645
2D21	FG-95	KU-623	1904
2D23	FG-105	KU-628	2050
3C31	FG-166	KU-634	2051
4C35	FG-172	WL-652	5550
C5B	FG-178	WL-672	5551
oC22	RX232A	WL-677	5552
C6J	FG-235A	WL-681	5557
FG-17			5560
FG-33			

TEST EQUIPMENT

- I-222A Signal Generator.....* $79.50
- I-72K Signal Generator.....* $148.50
- Vibrotest Mod. 210 Megger.....* $45.00
- C-D Quietone Filter Type 1F-16 110/220 V AC/DC 20 Amps.....* $9.00
- TS-127/U Freq. Meter w/cases.....* $89.50
- TS-143/CPN Oscilloscope.....* $86.00
- Dumont 175A Oscilloscope.....*$225.00
- LM-20 Frequency Meter.....* 49.50
- Gen. Radio 757-P1 Power Supply.....* $27.00
- I-130 A Signal Generator.....* $78.00
- TS-6/AP Frequency Meter.....* $42.00
- L & N KS-7470 Null Volt Test Set.....* $60.00
- A.W. Barber Labs. VM-25 VTVM.....* $86.00
- TS-10A/APN Delay Line Test Set.....$45.00
- TS-19/APQ-5 Calibrator.....$75.00
- REL W-1158 Frequency Meter 100-220 Mc.$32.95
- CWI-60AAG Range Calibrator for ASB, ASE, ASV and ASVC Radars.....$39.95
- CRV-14AAB Phantom Antenna for Transmitters up to 400 MC.....$11.75
- 3 CM. Pickup Horn Antenna.....$9.95
- Gen. Radio 736A Wave Analyzer.....* $600.00
- I-138A Signal Generator—10 cm.....* $185.00

All Items New Except Where Noted * (Exc. Used Condition)

MISCELLANEOUS EQUIPMENT

Amperex 1B98 Gamma Counter.....$ 9.87
Powerstat 1225—115/230V Input—0-270V out @ 3 amp.....37.00
ElMAC 25 T6 Ionization Gauge.....5.95
ATR Inverters 6VDC to 110 VAC 60 cy 75W..22.95
ID-6/APN-4 Indicator.....29.50
R-7/APS-2 Receiver.....49.50
R-78/APS-15 Receiver.....49.50
FL-8 1020 cycle filter.....1.75
RM-29 remote control unit.....8.95
RM-14 remote control unit.....8.95
RTA-1B 12/24 V dynamotor.....40.00
BC-1206-CM2 Receiver.....12.95
CV-230/MPG-1 Radar Console.....575.00
G.E. Type JP-1 portable current transformer..32.50
ASB-4 Radar equip. Complete.....89.75
AN/APS-13 loss tube.....12.95
T-9/APQ-2 loss tube.....12.50
RCA AVR-15 Beacon Recvr.....15.50
TBY Trans-Recvr.....29.95
Pioneer Type 800-1B inverter—28VDC to 120V 600 cy 7 amp AC (used).....22.85
G.E. Inverter—28VDC to 120 VAC 800 cy 750VA (used).....39.50
Navy SD-5 Radar Complete.....1200.00
Navy DP-14 Direction Finder complete.....385.00

PULSE TRANSFORMERS

UTAH 9288 9278 9285

G.E. 68G-627
G.E. 68G828
G.E. 68G929G1
G.E. 80G13
G.E. K-2468A
G.E. K-2744B
AN/APN-9 (901756-501)
AN/APN-9 (901756-502)
AN/APN-9 (352-7250)
AN/APN-9 (352-7251)
Westinghouse PH-1
Westinghouse 132-AW
Westinghouse 139BW2F

UTAH 9318 9340 9390

Westinghouse 232-AW2
Westinghouse 232-BW2
AN/APN-4 Block Osc.
Philco 352-7149
Philco 352-7150
Philco 352-7071
Philco 352-7172
Raytheon UK-7388
W.E. D-161310
W.E. D-163247
W.E. D-163325
W.E. D-164681

AN/APA-23 RECORDER

Sweeps any receiver through its tuning range and permanently records frequency and time of received signals on paper chart. Power input—(motor) 27V DC 1.3A, and (recorder) 80/115V AC 60-2000 cy 135W.

Originally designed to record pulse or sine-wave modulated signals received by AN-APR-1, AN/APR-2, AN-APR-4, AN/APR-5, BC-348, S-27, SX-28. BRAND NEW.....$147.

SPRAGUE PULSE NETWORKS

7.5 E3-1-200-67P, 7.5 KV, "E" Circuit 1 microsec, 200 PPS, 67 ohms Imped. 3 sections.....$4.30
7.5 E3-200-67P, 7.5 KV, "E" Circuit 3 microsec, 200 PPS, 67 ohms Imped. 3 sections.....$6.75
7.5 E4-10-60-67P, 7.5 KV "E" Circuit 4 sections, 10 microsec, 60 PPS, 67 ohms Imped.....$8.25
15 E-4-91-400-50P, 15KV "E" circuit .91 microsec, 400 PPS, 50 ohms imped. 4 sections.....$12.00
15-A-1-400-50P, 15KV "A" Circuit, 1 microsec, 400 PPS, 50 ohms imped.....$37.50
15 E7-2-200-50P, 15KV "E" Circuit, 2 microsec, 200 PPS, 50 ohms Imped., 7 sections.....$42.00

SYNCHROS

Size 1, 3, 5, 6, 7 and 8 generators, motors, control transformers, differential generators, and differential motors in stock.

AY-101D	5G	N	C-78248
AY-120D	5N	X	C-79249
AY-130D	6DG	2J1F1	C-78410
1F	6G	2J1G1	C-78411
5B	7DG	2J1H1	C-78415
5CT	7G	C-44968-6	C-79331
5D	A	C56791	C-78254
5DG	B	C-69405-2	C-78679
5F	M	C-69406-1	

SEND FOR COMPLETE LISTING
SYNCHRO CAPACITORS IN STOCK

LECTRONIC RESEARCH LABORATORIES
715-19 ARCH ST. PHILA. 6, PA.
Telephones - MARKET 7-6771 - 2 - 3

RADAR COMMUNICATIONS EQUIPMENT COMPANY MICROWAVE

23,000 to 27,000 Mc BENCH TEST PLUMBING

½" to ¼" Waveguide

TR-ATR-SECTION. Choke to cover.....$4.00
FLEXIBLE SECTION 1" choke to choke.....$5.00
"S" CURVE CHOKE to cover.....$4.50
ADAPTER, round to square cover.....$5.00
FEEDBACK to Parabola Horn with pressurized window.....$27.50
90° TWIST.....$10.00
"K" BAND DIRECTIONAL COUPLER.....$49.50 ea.
LOW POWER LOAD.....$20.00

SHUNT TEE.....$35.00
WAVEGUIDE LENGTHS 2" to 6" long, gold plated with circular flanges and coupling nuts $2.25 per inch
APS-34 ROTATING JOINT.....$49.50
RIGHT ANGLE BEND E or H Plane, specify combination of couplings desired.....$12.00
45° BEND E or H Plane, Choke to cover.....$12.00
MITERED ELBOW, cover to cover.....$4.00

8500-9500 MC BENCH TEST PLUMBING

AN/APS-15A "X" Band compl. RF head and mod. inch 725-A mag and magnet, two 723A/B klystrons (local osc. & beacon) 1B24, **TR,** rcvr ampl. duplexer, KW apx. input: 115, 400 cy. Modulator pulse duration .5-2 microsec., apx. 15KV. PK. Pulse, with all tubes incl. 715B, 829B, BKR 73, two 72's. Complete pkg.....$375.00
90 DEGREE TWIST, 6" long.....$8.00
BULKHEAD FEED-THRU ASSEMBLY.....$15.00
PRESSURE GAUGE SECTION 15 lb. gauge and press nipple.....$10.00
PRESSURE GAUGE, 15 lbs.....$2.50
DUAL OSCILLATOR-BEACON MOUNT. P/O APS10 Radar for mounting two 723A/B klystron with crystal mts, matching slugs, shields.....$42.50
DUAL OSCILLATOR, MOUNT. (Back to back) with crystal mount, tunable termination attenuating slugs.....$18.50
DIRECTIONAL COUPLER. UG-40/U Take off 20 DB.....$17.50
ROTARY JOINT. Choke to choke.....$10.00
2K25/723 AB RECEIVER local oscillator Klystron Mount. Complete with crystal mount. Iris coupling and choke coupling to TR.....$22.50
TR-ATR DUPLEXER section for above.....$8.50
CU 108/APS 31 Directional Coupler 25 DB.....$25.00
723AB MIXER—Beacon dual Osc. Mnt. w/zial holder.....$12.00
TR-ATR SECT APS 15 for 1B24 w/724 ATR cavity w/1B24 & 724 Tubes. Complete.....$21.50
STABILIZER CAVITY with bellows.....$21.50
3 CM 180° BEND, with pressurizing nipple.....ea. $6.00
3 CM. 90° BEND, 14" long 90° twist with pressurizing nipple.....ea. $6.00
3 CM. "S" CURVE 18" long.....ea. $5.50
3 CM. "S" CURVE 4" long.....ea. $4.50
3 CM. RIGHT ANGLE BENDS. E" plane 18" long cover to cover.....ea. $6.50
3 CM. CUTLER FEED DIPOLE. 11" from parabola mount to feed back.....ea. $8.50
3 CM. DIRECTIONAL COUPLER. One way waveguide output.....ea. $15.00
2J42 PULSE MODULATOR, 14 Kw max. rating, 7kw min. Plate voltage pulsed 5.5 kv, 6.5 amp. .001 duty cycle, 2.5 usec pulse length max. filament 6.3v. amp. Includes magnetron mtg. and blower. Requires 3C45 and 2-3B21.....$75.00
3 CM SECTOR SCANNING ANTENNA, 18" dish, cutler feed dipole, 24 vdc drive motor.....$75.00
APS-3 RADAR, new and complete, using 725A magnetron.....$950.00
TS 36 X BAND POWER METER 1¼" x ¾" waveguide; thermistor bridge with indicating meter, complete.....$175.00
"X" BAND PREAMPLIFIER, consisting of 2-723 A/B local oscillator-beacon feeding waveguide and TR-ATR Duplex sect. incl. 60 pic. IF amp....$47.50
15 DEG. BEND 10" choke to cover.....$4.50
5 FT. SECTIONS choke to cover. Silver plated..$14.50
18" FLEXIBLE SECTION.....$17.50
TR CAVITY for 724 A/B TR Tube.....$3.50
724 TR Tube (41 TR 1).....$2.50
SWR MEAS. SECTION, & L with 2 type "N" output probes MTD full wave apart. Bell size guide..$10.00
ROTARY JOINT with slotted section and type "N" output pickup.....$17.50
WAVEGUIDE SECTION 12" long choke to cover 45 deg., twist & 2½" radius, 90 deg. bend.....$4.50
TWIST 90 deg. 5" choke to cover w/press nipple $6.50
WAVEGUIDE SECTIONS 2½ ft. long silver plated with choke flange.....$5.75
ROTARY JOINT choke to choke w. deck mount..$17.50
3 CM. MITRED ELBOW "E" plane unplated...$12.00
1¼ x ⅝" Waveguide Tunable Termination. Precision adjust.....$65.00
LOW POWER TERMINATION.....$25.00
MAGIC TEE.....$45.00
90 DEGREE ELBOWS, E or H plane.....$12.50
WAVEGUIDE LENGTHS. Cut to size and supplied with 1 choke, 1 cover, per length.....$2.00 per ft
BI DIR-COUPLER WG output calibrated — 25 db nominal.....$17.50
FLEX SECTIONS, 12" Rubber Coated.....$14.50
MITRED ELBOW H Plane UG51-UG52.....$12.00
6" ST. SECT. choke to cover.....$3.50
APQ 13 Constant Z Rotat Jnt.....$22.50
CG 98B/APQ 13 12" Flex. Sect. 1¼" x ⅝" OD.....$10.00
WAVE GD. RUN 1¼" x ⅝" Gd. consists of 4 ft. sect. w/RT angle bend on one end, 2" 45 deg bend on other end.....$8.00
SLUG. TUNER ATTENUATOR W.E. guide. Gold Plated.....$6.50
APS-10 TR/ATR DUPLEXER section with additional iris flange.....$10.00
WAVEMETER, 8500 to 9400 Mcs., with calibration Micrometer adjust head. Reaction type.....$85.00
90 DEGREES ELBOWS. E or H plane, 2½" radius

APS-4 COMPLETE 3 CM. RADAR SYSTEM. 40 KW peak transmitter, pulse modulator, receiver, using 723AB power supply operating from 115V 800 Cycle, a.f.c. antenna system. Complete radar set neatly packaged in less than 16 cubic feet. Less receiving Type Tubes, but including all others, in used but excellent condition—This price for laboratories, schools and experimental purpose only. See our ad in Electronics for July, 51.

3000 MC BENCH TEST PLUMBING

10 CM RF PACKAGE, using 2J22 magnetron, freq. range 3267-3333 mc, complete with power supply and pulser giving apx. 20 kv @ 30 A. 1 usec, 1000 PPS. Power output 265 kw. ⅞" rigid coax plumbing thruout. Uses 417A klystron mixer, 6AC7 preamp. Pulser is 715 B HARD TUBE. Complete RF unit, pulser unit, receiver front en, new, with tubes. Requires 115v, 400 cy ac primary source.....$385

POWER SPLITTER: 726 Klystron input dual "X" output.....$5.00
MAGNETRON COUPLING FOR TYPE 720 MAG......$35.00
10 CM WAVEMETER WE type B43549 Transmission type. Type N Fittings Veeder Root Micrometer dial, Gold Plated W/Calib Chart P/o Freq. Meter X66404-A. New.....$99.50



RC 224-SCR 717 ANTENNA

Radar antenna designed for 10 cm 360 degree rotation, Apx. 15 degree tilt. Heavy base capable of great weight support and high wind stress. Brass gear train. Equipped with 30" parabola, ⅞" rigid coax pressurized, 28 VDC drive motor, position indicating selsyns. New, as illustrated, with 3000 MC pressurized feedback dipole..... **$87.50**

MICROWAVE ANTENNA EQUIPMENT

3 CM ANTENNA WITH DISH 14". Cutler Feed horizontal and vertical scan with 28 V DC drive motor and drive mechanism. Complete. New as shown.....$125.00
Relay System Parabolic reflectors approx. range 2000 to 6000 Mc. Dimensions 4½' x 3'. New.....$75.00
Dipole for above.....$12.00
TDY "Jam" Radar rotating antenna, 10 cm. 30 deg. beam, 115 V AC drive. New.....$150.00
10 CM Horn, Rectangular-to square-to circular RF assembly ending in horn, radiating circularly polarized beam. Waveguide input. Complete with flange $50.00
Parabolic Reel. Radiation pattern approx. 25 deg. in horizontal, 33 deg. in vertical planes.....$35.00
Cone Antenna, AS 125 A/B, 1000-3200 mc. Stub supported, with type "N" connector (as shown) $4.50
S.F. Radar Antenna. 10 cm. approx. 30° dish comp. with Selsyn and 150V drive motor.....$185.00
With motor driven turntable echo box.....$70.00

MICROWAVE TUBES

MAGNETRONS

Tube	Frq. Range	Pk. Pwr. Output	
2J27	2965-2992 mc.	275 KW	$29.00
2J31	2820-2860 mc.	265 KW	38.50
2J21-A	9345-9405 mc.	50 KW	12.50
2J22	3267-3333 mc.	265 KW	29.00
2J26	2992-3019 mc.	275 KW	37.50
2J32	2780-2820 mc.	285 KW	
2J38 Pkg.	3249-3263 mc.	5 KW	39.50
2J39 Pkg.	3267-3333 mc.	87 KW	39.50
2J49	9000-9160 mc.	58 KW	75.00
2J61	3000-3100 mc.	35 KW	75.00
2J62	2914-3010 mc.	35 KW	75.00
3J31	24,000 mc.	50 KW	85.00
5J30			
718DY	2720-2890 mc.	250 KW	35.00
720BY	2800 mc.	1000 KW	75.00
720CY	2860 mc.	1000 KW	75.00
725-A	9345-9405 mc.	50 KW	50.00
730-A	9345-9405 mc.	50 KW	50.00
700	A, B, C, D		35.00
706	AY, BY, DY, EY, FY, GY		55.00

KLYSTRONS

723A 723A/B—2K25

"CW" MAGNETRONS

QK 62 3150-3375 mc.
QK 59 2675-2900 mc.
QK 61 2975-3200 mc.
QK 60 2800-3025 mc.

New, Guaranteed.....Each $87.50

CR—TR—PULSE TUBES

705A	721	3EP1
3DP1	3FP7	5J30
3GP1	5CP1	15R

MANY OTHER TYPES AVAILABLE. SEND YOUR REQUIREMENTS.

APN-9 SPARES

MFR'S PT#	MFR'S PT#
352- 7250-2	352-7295-2
352-7251-2	352-1554-S

LARGE QUANTITY AVAILABLE

PULSE EQUIPMENT

MIT. MOD. 3 HARD TUBE PULSER: Output Pulse Power 144 KW (12 KV at 12 Amp). Duty Ratio: .001 max. Pulse duration: 5, 1.0, 2.0 microsec. Input voltage: 115 v, 400 to 2400 cps. Uses 1-715B, 4-829-B, 2-7T's. New.....$110.00
APQ-13 PULSE MODULATOR. Pulse Width .5 to 1.1 Micro Sec. Rep. rate 624 to 1348 Pps. Pk pwr. out 35 KW Energy 0.018 Joules.....$40.00
TPS-3 PULSE MODULATOR. Pk power 50 amp. 24 KW (1200 KW pk): pulse rate 200 PPS. 1.5 microsec. pulse line impedance 50 ohms. Circuit—series charging version of DC Resonance type. Uses two 705 A's as rectifiers. 115 v. 400 cycle input. New with all tubes.....$49.50
APS-10 MODULATOR DECK. Complete, less tubes.....$75.00

VARISTORS

D-167178.....$ .95
D-172155.....$2.25
D-172307.....$1.75
D-167208E.....$1.85
D-172175.....$1.65
D-168687.....$ .95
D-171812.....$ .95

THERMISTORS

D-166288.....$1.50
D-167332 (tube).....$1.50
D-170396 (bead).....$1.50
D-167613 (button).....$1.50
D-164699 for MTG "X" band Guide. $2.50

UHF CRYSTALS IN21 IN22 IN23

140-600mc Directional Antenna

140-310mc cone and 300-600 mc cone, each consisting of 2 end fed half wave conical sections with enclosed matching stub for reactance changes with changing frequency.

New: complete with mast, guys, cables, carrying chest.....$49.50

AN MPG-1 Antenna. Rotary feed type high speed scanner antenna assembly, including horn parabolic reflector. Less internal mechanisms. 10 deg. sector scan. Approx. 12'L X 4'W X 2'H. Unused....$250.00
Gov't Cost—$4500.00

DBM ANTENNA. Dual back-to-back parabolas with dipoles. Freq. coverage 1,000-4500 mc. No drive mechanism.....$65.00

30' SIGNAL CORPS RADIO MASTS

Complete set for erection of a full flat top antenna. Of rugged plymold construction telescoping into 3 ten-foot sections for easy stowage and transportation. A perfect set-up for getting out. Supplied complete: 2 complete masts, hardware, shipping crate. Shipping wt. approx. 300 lbs. Sig. Corps #2A259-223-A. New.....$39.50 per set

COMPLETE SELECTION OF RADAR REFLECTORS, PEELS UP TO 12 FT. IN LENGTH, DISHES UP TO 10 FT. IN DIAM.

All merch. guar. Mail orders promptly filled. All prices, F.O.B. N.Y.C. Send M.O. or Chk. Only shipping chgs. sent C.O.D. Rated concerns send P.O.

COMMUNICATIONS EQUIPMENT CO.

131 Liberty St., New York, N. Y. Dept. E8 P. I. PLIBHNER **Phone: Main 4-8373**

MICROWAVE COMMUNICATIONS EQUIPMENT COMPANY SONAR



RADAR EQUIPMENT MARK 4

TRANSMITTER SPECIFICATIONS:

Frequency (Mc) . 700.
R-f oscillator . . 700 magnetron.
R-f transmission system . . ⅞" coax.
Modulator type . Hard tube.
R-f peak power (kw) . . . . . 20.
R-f average power (kw) . . 0.046.
Pulse rate(pps) . 1639.3.
Pulse width (μs) . . . . . 1.5.
Mounting . . . . . Below deck.

OPERATING CHARACTERISTICS:

Minimum range (yards) . . 1,000
Maximum range measuring capabilities (yards) 100,000
Power supply.—2.7-3 kva, 90-130 volts (adjustable power transformer), 60 cps, single phase.

RECEIVER SPECIFICATIONS:

Type . . . . superheterodyne.
Stages: Mod 0; 1 r. f. . . . } 4 i. f.;
Mod 1, 2, 3; 2 r. f } 1 video.
Local oscillator . . . . . 316 A.
Mixer . . . . . 703 A.
Intermediate frequency (Mc) . . . . 32.
Sensitivity (μv): Mod 0 . . . . . 17.
Mod 1, 2, 3 . . . . . 4.
Special features . . . . AGC (Mod 1, 2, 3 only).

FREQUENCY

The transmitter uses a magnetron oscillator, the operating frequency being partially determined by the physical dimensions of the tube. Four classes of tubes are available, having nominal frequencies of 685, 695, 705, and 715 megacycles. The receiver is designed to cover continuously the frequency range of 550 to 720 megacycles.

MODULATION GENERATOR

The modulation generator, the top unit in the cabinet, contains a 1639-cycle oscillator, a pulse generating circuit, and a rectifier-doubler and filter network. Nonlinear coils are used for the generation of sharp pulses from the sine wave current output of the oscillator. These pulses, when passed through the pulse amplifier in the transmitter, are approximately 1 microsecond in duration at the top, and 2 microseconds at the base. Two outputs are used for synchronization of the range-indicating units: one, a 1639-cycle sinewave, is a portion of the oscillator output: the other is a 29.5-kilocycle sinewave obtained from the pulse by doubling and filtering.

RADIO RECEIVER

The receiver employs a converter tuned at the input with coaxial-line sections for maximum power transfer, a beating oscillator, four intermediate-frequency (i-f) amplifier stages, a detector and a low-frequency amplifier for monitoring observation.

POWER CONTROL PANEL

The front panel of the power control unit, contains the LOAD VOLTAGE, PLATE CURRENT, and PLATE VOLTAGE meters, the LOAD, MAG FIL, and PLATE CAP variable transformer controls, the RADIO SET-STANDBY HEATERS and PLATE voltage switches, and the indicator lamps. The variable transformer voltage regulators are mounted on the back vertical panel of the frame.

RADIO TRANSMITTER

Below the power control panel in the cabinet is the radio transmitter. It houses the complete high-frequency transmitting oscillator and the pulse amplifier which controls its operation. The high voltage supply is automatically connected when the unit is fully in place in the cabinet. The transmitter output is connected to the duplexing panel through a coaxial line mounted on the frame.

HIGH VOLTAGE RECTIFIER

The lowest panel in the cabinet is the high voltage rectifier, a full-wave single-phase rectifier employing two high vacuum tubes suitable for low average current drain incident to pulse operation and capable of supplying the plate potential required for transmitter.

DUPLEXING PANEL

To permit the use of a common antenna and transmission line, an arrangement of coaxial transmission line sections and a special gas-filled tube are provided.

PRICE COMPLETE WITH TUBES (AS ILLUSTRATED) $625

SONAR — SONAR — SONAR

Magneto-striction heads - - - High power oscillators - - - Rochelle Heads and hydrophones - - - Training hoist mechanisms - - - Complete Sonar Systems, i.e. QBC, QBE, QBF, QCL, QCQ, etc.

write *write* *write*

TEST SETS

TS 102/AP	TS 250/APN
TS 62/AP	TS 89
TS 36/AP	I-203-A
TS 12 UNIT 2	TS 110/AP
TS 69/AP	BC 438
TS 33/AP	CS60-ABW
CW60-ABM	I-158
LU-1	I-222
LU-3	I-185
TS 159	
TS 226	TS 268/U

SEND FOR FURTHER INFO. & PRICE

PULSE NETWORKS

15A—1-400-50: 15 KV, "A" CKT. 1 microsec 400 PPS, 50 ohms imp. $42.50
G.E. 26G3-5-2000-5012PT, 6KV "F" circuit, 3 sections .5 microsecond, 2000 PPS, 50 ohms impedance $8.50
G.E. 23E (3-84-810) (6-2.24-405) 20P4T: 3KV "F" CKT Dual Unit: Unit 1, 3 sections, 84 Microsec. 810 PPS, 50 ohms imp.: Unit 2, 8 Sections, 2.24 microsec. 405 PPS, 50 ohms imp. $8.50
7.5E3-1-200-67P, 7.5 KV, "E" Circuit, 1 microsec 200 PPS, 67 ohms impedance, 3 sections. $7.50
7.5E4-16-60.67P, 7.5 KV, "E" circuit, 4 sections 16 microsec. 60 PPS, 67 ohms impedance. $15.00
7.5E33-200-6FT, 7.5 KV, "E" Circuit, 3 microsec 200 PPS, 67 ohms imp, 3 sections. $12.50

MICROWAVE ANTENNA EQUIPMENT

AS 17/APS

Radar antenna designed for 10 cm 360 degree rotation, Apx. 15 degree tilt. Heavy base capable of great weight support and high wind stress. Brass gear train. Equipped with 30" parabola, ⅞" rigid coax pressurized, 28 VDC drive motor, position indicating selsyns. New, as illustrated, with 3000 MC pressurized feed-back dipole **$87.50**

SA Radar, 200 MC bedspring array. Complete with drive mechanism, etc., like new. $850.00
ASD 3 CM sector scan antenna. Complete with cutler feed dipole, 15" parabola, drive motor, position indicating selsyns, rotary joint. $37.50
Bellini-Tosi Direction Finder Cross Loop Assy's for Navy Dav. Radar. New and complete $275.00
AS14A/AP, 10 CM pick up dipole assy, complete w/ length of coax and "N" connectors. $3.50
AS46A/APG-4 Yagi Antenna, 5 element array. . $22.50
30" Parabolic Reflector Spun Aluminum dish. . . . $4.85

All merch. guar. Mail orders promptly filled. All prices F.O.B. N.Y.C. Send M.O. or Chk. Only shipping chgs. sent C.O.D. Rated concerns send P.O.

COMMUNICATIONS EQUIPMENT CO.

131 Liberty St., New York, N. Y. Dept. E8 P. J. PLISHNER **Phone: Main 4-8373**

Transmitters
40 Watt Output
Three Famous
V.F.O. Drivers
Available
4—8.3MC. $8.95
8.3—?MC. 2.95
3749A (ARC5)
Used Good Cond.

VARIABLE TRIMMER CONDENSERS

C890	15	MMF
C881	20	MMF
C993	50	MMF
C677	60	MMF

38c ea.

CAPACITORS CERAMICON

MMF.	MMF.	MMF.
3	35	82
3.1	47	125
4	50	200
11	51	240
13	60	250
14	62	345
15	65	350
20	70	500
220		1000
25		

$7 per 100

NEW!! ELECTROLYTIC CONDENSERS

ELECTROLYTICS
Prong Mount
D. Y. Type

Mfd.	Volt
80	150
60	300
40	250
80	250
80	300
30	300
100	150
20-20	400-25
2x30	25
20-10	150
40-20	150-25
150-50	25
40	150
2x10	150
10-2x20	400-50

Price..... 18c ea.

Mfd.	Volt
2x20(60)	450(350)
2x30(20)	350
80-40(150)	450(350)
2x40(20)	350(25)
20-10(30)	450(50)
50-40	425

Price..... 49c ea.

250-1000	
10-8	
2x15-1200	
150-1.6	
10-50-00	
350-100-50	
1000-500	
6	
1000	

Price..... 69c ea.

80	500
80	400
80	450
100	350
2x4	500
2x8	450
20-80	450-350
15-10	450
80-10	400
80-20	450-350
3x8	150
3x10	150
800	15
30	450
33	450
2x10	350
2x15	350
8	450
20-10	350-300
2x15-20	350-25
2x10-20	450-25
2x8-10	35

Price..... 29c ea.

80	500
40	450
100	400
90	450
2x10	450
2x20	400
2x20	450
20-8	500
2x80	300
40-10	450-350
40-35	450-350
80-20	450
80-10	450
3x16	350

8-80	450-50
40-80	400-300
40-10	475
90-10	350
3x10	450
50-40	450
90-10	350
40-15	450
2x30	350
10	450
2x16	450
20-10 (80)	450 (50)
20 (250-100)	150 (15)
80-50	450-50
2x8 (10)	450 (25)
10-15 (20)	350 (25)
2x16-25	450-50
2x10-20	450-25
10-10-20	450

Price..... 39c ea.

MINICAPS PIGTAIL

Mfd.	Volt	Price
2	50	$0.10
4	50	.10
4	100	.15
4	150	.10
4	220	.15
5	25	.10
5	50	.10
5	150	.10
8	.25	.15

Mi-Lar-Lyt

6	100	.15
8	150	.15
6	350	.20
10	50	.15
10	150	.20
12	450	.23
16	100	.20
16	150	.22
16	300	.30
16	450	.40
20	25	.10
20	50	.15
20	80	.18
20	350	.30
24	350	.30
25	25	.10
30	300	.25
30	450	.30
40	150	.22
40	450	.40
50	25	.22
50	50	.25
50	150	.30
100	50	.50
250	15	.50
500	6	.50
500	25	.75
1000	6	1.20
2000	6	1.35
1200	1.5	1.10
8-8	450	.60
8-16	450	.65
10-10	150	.30
10-10	450	.38
16-16	450	.70
20-20	150	.40
20-20	450	.80
40-20	450	.95
50-50	150	.40
50-50	150	.35
70-70	175	.85

AVAILABLE
1,000,000
BATHTUBS
250,000
HIGH VOLT
CONDENSERS
WRITE OR
PHONE FOR
LISTS

LARGE ASST. OF PIGTAIL MICAS IN STOCK WRITE

AC COND.
Motor Starting
Fig. C

13- 15	220	$1.20
20- 34	110	1.00
26- 30	220	1.35
43- 85	110	1.25
43- 48	110	1.25
50- 72	110	1.35
53- 80	220	1.50
61- 69	320	1.60
64- 72	110	1.25
72- 87	110	1.25
75- 84	110	1.35
88-104	110	1.50
107-129	110	1.65
130-157	110	1.75
130-150	70	1.50
150-180	110	1.85
156-191	110	1.85
161-180	110	1.75
189-210	110	1.95
200-220	110	1.95
270-300	110	2.10
324-300	110	2.40
378-420	110	3.00
433-480	110	2.75
485-580	110	2.95

WRITE FOR LISTINGS

EE89A TELEPHONE REPEATER

Used to extend range of field telephones, teleg. & 20 cyc. ringing possible over lines complete w/395 tube & phone. Feather-weight. Price $9.95

Heineman Ckt Bkrs for AC-DC operation. AM 1510M 7 Amp
1614 80 Amp
1614 50 Amp
Price each....$1.10

932 PHOTO TUBE

Gas Photo-tube having S1 response, particularly sensitive to Red and Near Infrared Radiation. Can be used with incandescent light source. Send for Data.
Price..... 75c

MICA CAPACITORS

THE CONDENSERS LISTED BELOW ARE NEW, UNMARKED, TESTED FOR CAPACITY. MFG BY SOLAR

XQ Lug Type E 1200 VT MMF	Price
28	$.25
28	.25
28	.25
35	.25
85	.25
85	.25
100	.25
125	.25
130	.25
140	.25
150	.25
200	.25
200	.25
210	.25
225	.25
250	.25
275	.25
300	.25
600	.25
750	.35
750	.35
925	.35
1000	.40
1150	.40
1175	.40
1300	.40
1500	.40
1500	.40
2000	.45
2250	.45
2500	.45
2500	.45
2575	.45
3000	.50
3450	.50
3900	.50
4000	.55
4200	.55
4550	.60
5500	.60
6000	.60
10000	.60
11500	.60
13500	.60
15500	.60

XQ Lug Type E 2500 VT	
15	30c
28	30c
25	30c
30	30c
35	30c
50	30c
100	30c
130	30c
215	30c
250	30c
290	30c
500	30c
750	30c
850	30c
1150	35c
1175	35c
1750	35c
1850	35c
2000	40c
2075	40c
2100	40c
2150	40c
2250	40c
2600	40c
2500	40c
2550	40c
2600	40c
6700	50c
6500	50c
8500	50c
10000	50c
11500	60c
16750	50c
30000	60c

XM Screw Type D 1200 VT	
38	35c
48	35c
50	35c
125	35c
144	35c
425	35c
500	35c
600	35c
1100	35c
1300	40c
1700	40c
2000	40c
2500	40c
4000	50c
4200	50c
5000	50c
5600	50c
5600	50c
6300	50c
6700	50c
6500	55c
8500	55c
10000	60c
11500	60c
16750	60c
30000	60c

XM Screw Type D 2500 VT	
38	40c
50	40c
100	40c
250	40c
500	40c
1150	45c
1250	45c
1700	45c
2000	50c
2900	50c
3000	50c
4450	55c
4750	55c
4900	55c
6000	60c
6900	60c
6900	60c
7000	60c
7400	60c
8000	60c
10000	65c
12000	65c
15000	65c
16750	65c
17000	65c
17250	65c
19700	70c
20000	70c
21000	75c
26000	75c
30000	80c

XM Screw Type G 5000 VT	
15	45c
21	45c
50	45c
140	45c
235	45c
250	45c
295	45c
300	45c
375	45c
400	45c
450	45c
490	45c
500	45c
575	45c
750	45c
850	45c
1000	50c
1150	50c
1250	50c
1500	50c
1700	55c
1850	50c

SELSYN TESTER

Magnesyn Instrument Field Tester AAF 43G23330 Spec. 40772. To test individual mag. ind. & Xmitters, for isolating Faults in magnesyn systems. Brand new $99.00

HEADSETS

Dynamic Mike and Headset Combination. A high quality, efficient unit, used in B-19 tank Xmtrs. Mike and phones complete new $3.75

AUDIO TRANSFORMERS

ITEM		
AT666	Input 6 ohms: 250K ohms	$8.75
AT SUB	Multimatch Subconcer 200 ohms 15K ohms C. T.: 100K ohms/20K ohms	.69
AT070	Input to Grid 250 ohms: 60K ohms Hi Fi	1.19
AT566	Input to Grid, 500/200 ohms: 50K ohms..	.95
AT353	Output PP 6L6 to 300/20/12/16 ohms 25 Watt	2.95
AT871	UNIV. Output, Hi Fi, Pri 20K ohms sec. 15/7.5/5/3.75/1.25/500 ohms	2.75
AT554	Interstage, 10K ohms: 250K ohms 15db Level	1.95
AT765	Input 600 ohms to 50K ohms	.79
AT449	Driver 5K ohm to 4K ohm PP6L6 to PP805 Class B	3.89
AT21	Dual XFRMR 300 ohms: 300 ohms and 600 ohms: 250K ohms	1.35
AT415	Output 18K ohms CT to Line 125 ohms 175W	2.95
AT649	Input. Line 500 ohms T grid, 75K ohms..	.79

WHOLESALE ONLY

Phone or Write for Quantity & Price
Digby 9-4124
ATT. MR. C. ROSEN

MICA CONDENSERS
SILVER MICAS
OIL CONDENSERS
ELECTROLYTICS
H.V. MICAS
PRECISION RESISTORS
PYRANOLS
TUBE CLAMPS
TIN. CABLE CLAMPS
DYNAMOTORS
INVERTERS
POWER TRANSFORMERS
FILTER CHOKES
ANTENNAE
AUDIO TRANSFORMERS
400 cy. TRANSFORMERS
SHOCK MOUNTS
MAGNETRONS
PULSE TRANSFORMERS
CONTROL BOXES
TUBES
A.C. AND D.C. RELAYS
VIBRATORS
UG CONNECTORS
HEADSETS
MICROPHONES
INSULATORS
BINDING POSTS
WAFER SWITCHES
CERAMICONS
FERRULE RESISTORS
PL 54 PLUGS
JK type PLUGS
BATHTUB CONDENSERS
CIRCUIT BREAKERS
ARC-3 PARTS
BC 375 PARTS
MK. II PARTS
EE-8 PARTS
A/C HARDWARE
A/C FITTINGS

INSULATORS

Feeder Support IN81-IN82 Porc. Standoff 1-½ H x 1-3/16 D	10¢ ea., 10 for 75c
Feed Thru IN84-X81. Complete w/Hdwre	15¢ ea., 10 for $1.25
Feed Thru Lapp Bowl Slm to X83 for 2¾" hole. 6¾ L x 3" dia.	$1.25 ea.
ANT Insulators, IN86 3¾ L x 1 x 1	18c ea., 10 for $1.50
Feeder Spreaders 2-11/16 x 7/16" 3" C to C Holes	Price 10c
Feeder Spreaders 2½" L x ¾" Sq. 1¾ C to C Holes	Price 8¢ ea.
Locke Suspension Ins Cat # CAL 61240. 1⅝" L x 2" D	Price $19.95
Telephone Knob Insulator Whitetail Tatum # 4. Heavy Glass.	Price $2.29

Many Others—Write

ANTENNA MAST

Are you in a dead spot? If you can't get a good T. V. Picture, here is a Sig. Corp. Ant. mast 30' high of rugged plywood construction to solve your problem. It telescopes into 3 ten ft. sect. for easy storage. Easy to Mnt. Comp. with stakes & rods.

Ea. $19.95

BC 605 INTERPHONE AMPLIFIER

Easily converted to an ideal intercommunications set for office — home — orfactory. Complete w/conversion diagram for 110V operation. Brand New . $4.49

MOBILE MOD. KITS

T-103 Mike to 6J5 grid; T-102 6J5 to Modulators. PP 6V6 or PP 6L6; T-104 Mod. Trans. PP 6V6 or PP 6L6 to 829, 833, or 2E26. COMP. KIT & DIAG..... $2.98

PRECISION RESISTORS

1.01	128	2230	30000
3	150	4300	33000
5	200	5000	35000
5.05	250	7500	40000
10.1	300	8500	50000
18	430	10000	55000
43.5	668	12000	57000
50	800	17000	75000
75	920	17300	We ship
82	1000	20000	type in
120	1100	25000	stock
125	1450		

Above Ea. 30¢ Ten For...$2.50

100000	150000	200000	
120000	170000	220000	500000

Above Ea. 40¢ Ten For...$3.50
1,000,000 ohms.....Each 75¢

W. E. PRECISION RESISTORS

D-164886A 2.65 ohms
D-164886AA 3.83 ohms
D-167026 13,500/10,800 ohms
D-162025AT 1400/135/270 ohms
D-164285 40,600/1500 ohms
Price .75¢ ea.



UPRIGHTS

Mfd.	Volt	Type	Cat. No.	Price
.0025	1500	2TT	D164209	30¢
.03	600	2ST	RO3	25¢
2.0515	600	2TT		45¢
.05	400	2BT	616M	25¢
.05	600	2BT	C51481918-20	28¢
.05	600	2BT	7700BR	28¢
3x.05	600	3BT	NJOCA190	30¢
3x.05	300	3BT	CA193	30¢
.125-.05	400	2TT	CMR481380-40	25¢
.1	600	2BT	616M-1484Z	30¢
.1	600	2BT	R11-616MB	35¢
.1	400	2BT	418CB	30¢
.1	600	2BT	7701BR	35¢
.1	600	2BT	CP69B1AF101K	35¢
.1	400	2BT	XMRBW4-1	30¢
.1	600	2BT	C89B1AF104	35¢
2x.1	600	2BT	P9711	39¢
3x.1	400	3BT	CA255	39¢
3x.1	400	3TT	ROBC	39¢
3x.1	400	3BT		39¢
3x.1	600	3TT	C168B5EF104V	42¢
3x.1	600	3BT	7710BR	42¢
3x.1	600	3BT	CD516	42¢
2x125	400	2TT		
.25	800	2WTT		69¢
.4	600	2BT	M-7725BR	30¢
.25	600	2BT	C168B1EF254K	30¢
.5	600	2BT	8O3	32¢
.5	600	2BT	PO8	32¢
.5	400	2TT	416T	30¢
.5	600	2BT	616MB	32¢
2x.5	250	2TT	A-8B515	30¢
2x.5	400	3BT	418MCB	35¢
2x.875	400	2BT	CW8-P-72076-503	39¢
1	400	2TT	305-16058	35¢
1	600	2BT	616MCB	38¢
1	600	2BT	YAB6100	38¢
1	250	2TT	CRY48553-15	39¢
1	100	1BT	104M59	25¢
1	600	2BT	616MCB	38¢
1	400	2BT	416MCB	35¢
1.75	50	2TT	CRY48861	45¢

All mer. guar. Mail orders promptly filled. All prices F.O.B. N.Y.C. Send MO or Chk. Only shipping chgs. sent C.O.D. Rated concerns send P.O.

MIN. ORDER $3.00

COMMUNICATIONS EQUIPMENT CO.

MIN. ORDER $3.00

131 Liberty St., New York, N. Y. Dept. E-8 Chas. Rosen Phone: Digby 9-4124

BRAND NEW U. S. GOV'T. SURPLUS GUARANTEED

HIGH POWER TR. MICA

G-1 TYPE		G-2 TYPE		G-3 TYPE		G-4 TYPE
.0001	6KV	.0001	10KV	.00015	20KV	.0002 25KV
.00015	5KV	.00015	10KV	.00015	20KV	.002 20KV
.0002	6KV	.0002	10KV	.0003	20KV	.0025 25KV
.0008	6KV	.000247	12KV	.0004	20KV	.004 15KV
.0047	6KV	.0003	10KV	.00045	15KV	.005 8KV
.005	5KV	.00037S	10KV	.0005	20KV	.01 15KV
.01	4KV	.0004	5KV	.001	20KV	
.032	2KV	.0005	10KV	.0011	20KV	
.04	1KV	.00057	10KV	.0024	15KV	
.051	1.5KV	.00065	10KV	.004	12KV	
.08	1.5KV	.001	6KV	.25	1.6KV	
.09	1.5KV	.003	6KV	.25	6.5KV	
		.003	8KV			

OTHER H.V. MICAS

.0001	12.5KV	.01	7KV
.007	15KV Type 75A	.02	8.5KV
.01	5KV		

H.V. GLASS FERRULE RESISTORS

Ohms	Watts	Ohms	Watts	Ohms	Watts
1	15	1000	50	6300	40
2	20	1000	90	6500	120
2.2	15	1250	20	7500	15
4	90	1500	20	8000	90
5	15	1500	50	8200	40
6.2	15	1500	120	10,000	15
10	15	1600	40	10,000	40
15	90	1800	15	10,000	90
20	15	2000	15	12,000	15
20	90	2000	20	12,500	15
26	20	2000	50	12,500	90
32	90	2000	90	12,500	120
40	90	2000	120	13,000	20
40	120	2500	15	15,000	120
50	15	2500	20	16,000	M-O-M
60	20	2500	50	16,000	50
100	15	2875	38	16,000	90
100	50	3000	20	20,000	50
125	90	3000	50	20,000	120
150	50	3100	40	25,000	90
160	20	3100	90	25,000	120
200	50	3150	15	35,000	120
270	90	3150	90	40,000	90
400	20	3300	20	50,000	MFC
600	40	4000	20	1000,000	120
630	90	4000	50	300,000	MFC
800	50	4500	20	500,000	M-O-M
1000	15	5000	40	600K	MFC
1000	15	5000	50	4.0 Meg.	MFB
1000	20	6000	50	40.0 Meg.	M-O-M
1000	40	6000	120	100 Meg.	MVP

NOISE FILTERS

MALLORY NF.1-1	SOLAR ER 102
MALLORY NF12-6 EG	SOLAR ED-101
MALLORY NF12-7	SOLAR EF-100
SPRAGUE JX-51	SOLAR EF-102
SPRAGUE JX-55D	SOLAR EF-104
SOLAR EA 107	SOLAR EL-109
SOLAR EA 109	SOLAR EL-111
SOLAR EA 121	SOLAR EL-113
SOLAR EA 142	SOLAR FL 14, EV106
SOLAR EA 125L	SOLAR FL16, EV-125

LEVER SWITCHES

Over 100 Varieties in Stock of Mossman #4101 Series

1% PRECISION RESISTORS

Standard Brand

Ohms	Ohms	Ohms	Ohms
6.	500	5910	72K
24.	636	6000	75K
28.	680	6550	76100
34.8	733	6800	83700
35.7	743	7000	90K
36.6	750	7500	100K
40.	946	15K	110K
47.7	1000	17K	115K
75.	1250	18350	120K
78.8	1280	19500	125K
80.	1477	20500	130K
88.	1485	21K	140K
100	2000	22K	145K
107.88	2142	29500	220K
110	2170	30K	235K
125	2500	32K	260K
200	2800	33800	347K
215	3460	37500	390K
225	3500	38140	500K
248	3760	39K	750K
280	4280	40500	800K
286	4500	47710	1.0 Meg.
300	5000	60K	4.0 Meg.
370	5294	61K	10.0 Meg.
400	5470	61430	
450	5500	70K	

POWER RHEOSTATS

Ohms	watt	ea.	Ohms	watt	ea.
.5	25	1.98	225	50	2.53
.5	50	2.81	250	25	2.23
.5	150	5.93	250	50	2.53
1	50	2.81	300	50	2.53
2	50	2.81	300	100	4.27
2	100	4.68	350	25	1.98
2	225	8.59	350	100	4.26
2	300	8.42	370	25	1.98
3	100	4.67	375	150	6.59
3	225	6.58	400	25	1.98
3x3	300	29.95	400	75	3.98
4	225	6.68	500	25	1.98
5	25	1.97	500	75	3.98
5	100	4.68	500	50	2.53
6	25	2.23	500	100	4.39
6	75	3.98	500	150	6.68
7	25	1.98	565	150	6.60
8	50	2.53	750	25	2.23
10	25	2.23	750	150	5.95
10	100	4.27	1000	25	1.98
12	25	2.23	1000	150	5.93
12	50	2.53	1200	225	7.20
15	25	1.98	1250	50	2.64
15	75	3.98	1250	150	6.59
15	100	4.36	1500	25	2.53
20	50	2.53	1500	50	2.65
25	25	2.23	1500	150	6.24
50	25	1.98	2000	25	2.23
50	50	2.53	2000	50	2.53
60	25	1.98	2222	150	6.24
75	25	1.98	2500	150	6.24
75	75	3.98	2500	25	2.23
75	100	4.39	2500	50	2.53
80	50	2.53	2500	100	4.68
80	500	12.46	3000	25	2.39
100	25	1.98	3000	100	4.68
100	50	2.53	5000	25	2.53
100	100	4.39	5000	50	2.85
125	25	2.53	7500	50	2.85
150	50	2.53	7500	100	5.31
175	25	2.53	10000	50	3.12
185	25	1.98	10000	100	5.51
200	25	1.98	15000	25	3.29
200	100	4.27	20000	150	8.43

Specify whether shaft required is for knob or screwdriver adjust.

SELECTOR SWITCHES

Pole	Pos	Deck	Type	Each
1	11	1	Bak-n/shtg	.60
1	21	3	Bak-n/shtg	.59
2	2	1	Cer-shtg	.50
2	6	2	Bak-n/shtg	.60
2	11	2	Bak-n/shtg	.75
3	4	2	Bak-n/shtg	.58
3	3	2	Cer-n/shtg	.98
6	11	6	Bak-n/shtg	1.95
10	5	5	Cer-shtg	2.25
16	2	4	Bak-n/shtg	1.35

Many other types in stock

"AN" CONNECTORS

Large Variety Available At Great Savings

Send your specs and let us quote

BIRTCHER TUBE CLAMPS

#926-A
#926-A1
#926-A14
#926-B
#926-B1
#926-B7

FROM **35c.**

#926-B22
#926-C
#926-C1
#926-C5
#926-C10
#926-C24

MICROSWITCHES

A-#Y2-RS13 SPST "S" plunger, metal housing norm. op. ..... .59
B-#B-RS10 SPDT Type "S" plunger, 2-circuits: one op and one cl ..... .59
#WZ-RL8 (not illus.) SPST leaf actuator, norm. cl. ..... .59
#R-RL2T (not illus.) SPST 10a 125 vac roller plunger, norm. closed ..... .59
C.G.E. SWITCHETTE 10a/115voltsAC
#CR-1070-C103A3 SPST closed.. .59
#CR1070-C103E3 SPST open .. .59
#CR1070-C103R3 SPST closed.. .59
#CR1070-C123C3 DPST op/cl.... .59
(Many other types in stock)

OIL CONDENSERS

Mfd.	Voltages Avail.
.1	2-6-20K
.25	2-3-3½-4-5K
.5	600-1½-3K
1	600-1-1½-2-5-6
2	400-600-1-1½-2-3-4K
4	600-700-1-1½K
6	400-600-1½-2K
8	600
10	600-2½K
15	600-1K
30	90-vac. 3-ph
100	230-vac. 3-ph
3x4	500
3x8	600
4x3	600
4x8	600
3x10	90-vac

Special Prices on Request

BATHTUBS



Mfd.	Voltages Avail.
.033	400
.05	2-4-600
.1	4-6-1K
.15	600
.25	2-4-600
.35	400
.5	4-6-1K
.75	600
1	1-2-4-6-1K
2	4-600
4	50-100
8	500
25	25-50-75
40	25
50	25
100	15
200	12
300	6
2x.01	2-400
2x.02	6-1500
2x.045	600
Discs .055	600
.2x.05	6-1500
.1x.05	200
.1x.5	400x50
2x.1	4-600
2x.16	600
2x.2	600
2x.25	4-600
.3x.5	500
2x.5	4-600
1x.05	500
1x.1	300
1x.5	200
2x1	600
2x10	25
2x200	9
3x.001	600
3x.05	600
3x.1	4-600
3x.25	4-600
3x.5	100-600
.015x.03x.045x.06x.12/600	

Also available CHANNEL Types. Special Prices on request.

SHOCKMOUNTS

100P-1	1 lb.	.18
100P-2	2 lb.	.15
100PR-2	2 lb.	.15
100P-3	3 lb.	.15
100P-6	6 lb.	.20
150P-4	4 lb.	.20
150PH-8	8 lb.	.45
100PL-1	1 lb.	.15
150P-7	7 lb.	.25
150P-6	6 lb.	.35
200PD-15	15 lb.	.59
200PHN-35	35 lb.	.75
204P-112	112 lb.	.98

TERMINAL BOARDS

5 terminal	.90
8 terminal	1.67
12 terminal	2.49

TYPE "J" POTENTIOMETERS

TYPE "J" $1.50 TYPE "JL" $1.75 TYPE "JJ" $2.95

ohms	ohms	ohms	ohms	ohms
50*	250*	100 K*†	500-500*†	130 K-130K*†
65*†	400†	100 K†	600-600†	150 K-150K*†
200†	500†	125 K*	1500-1500†	250 K-250K*†
300†	10 K*†	200 K*	2000-2000*†	350K-5K†
400*†	15 K*†	250 K*	2000-50K*	350K-25K†
500†	20 K*†	250 K†	2200-24K†	300K-300K*†
600*†	25 K*†	500k*†	20K-2000†	350K-350K*†
750†	30 K*†	1meg*	25K-10K†	500K-75K*†
1000*†	50K*†	1meg†	35K-5000†	1meg-1meg*†
1500*†	80K†	2meg*	50K-50K*	2meg-2meg*†
2000*†		2meg†	100K-100K*	4meg-4meg*†

TYPE "JJJ" $4.95

ohms	ohms
20K-200K-20K†	750K-750K-750K†
45K-27K-250*†	800K-800K-800K†
700K-700K-700K†	1meg-1meg-1meg†

* 1/8" screwdriver slotted shafts.
† Knob type shaft.

TRANSMITTING MICAS

mfd.	wv	type	ea.	mfd.	wv	type	ea.
.0001	600	4	.36	.0015	600	4	.36
.0003	600	4	.36	.00162	600	4	.42
.00045	600	4	.29	.002	600	4	.69
.00095	2500	9	.57	.002	1200	4	.72
.0001	600	4	.29	.0025	600	4	.39
.0001	2500	9	.57	.003	600	4	.43
.00015	600	4	.36	.004	600	4	.45
.0002	600	4	.29	.005	1200	9	.99
.00025	600	4	.29	.0047	600	4	.47
.0005	600	4	.29	.005	2500	9	1.36
.0005	2500	4	.75	.006	600	4	.54
.0005	2500	9	.77	.01	600	4	.65
.0006	2500	9	.85	.01	1200	9	1.41
.0007	600	4	.36	.02	600	4	.92
.00075	600	4	.36	.02	1250	9	2.12
.001	600	4	.36	.025	600	4	1.08
.0009	600	4	.36	.03	300	4	.99
.001	600	4	.36	.03	600	4	1.34
.001	1200	4	.54	.043	600	4	1.75
.001	1200	9	.57	.05	300	4	1.19

(Many other sizes in stock)

"UG" and "UHF" CONNECTORS

UG-9/U	UG-25/U	83-1F
UG-18/U	UG-27/U	83-1J
UG-12/U	UG-27/AU	83-1AP
UG-14/U	UG-57/U	83IRTY
UG-15/U	UG-58/U	83-1SP
UG-16/U	UG-87/U	83-1R
UG-18/U	UG-88/U	83-1D
UG-19/U	UG-123/U	83-1SPN
UG-20/U	UG-185/U	83-22R
UG-20/U	UG-206/U	CN 49120
UG-21B/U	UG-260/U	CN 49121A
UG-22/U	UG-290/U	CN 49181
UG-24/U	83-1AC PRICES ON REQUEST	

Jones Connectors

P-101-¼	.25
P-101-⅜	.30
S-101-D-MOD	.33
S-302-AB	.25
S-304-CCT	.25
P-306-AB	.18
P-306-CCT-L	.30
S-306-FHT	.24
S-308-AB	.21
P-312-AB	.24
P-312-CCT-L	.42
P-315-FHT	.40
P-315-EB	.30
P-315-CCE	.29
S-315-AB	.36
S-318-AB	.43
P-324-FHT	.74
P-324-EB	.44
S-330-AB	.84
S-404-AB	.33
P-406-AB	.32
S-406-CCT	.50
S-406-CCT	.80
S-2408-SB	.80
P-2412-SB	.81
S-2412-CCE	.87
S-502-DB	.97
P-508-CE	2.16
P-510-CE	3.04
P-512-CE	3.82

Jones BARRIER STRIPS

2-140-Y	.13
6-140-Y	.33
10-140-¾W	.53
8-240	.40
18-240	.80
4-141-W	.30
4-141-¾W	.30
7-141-Y	.49
12-141-Y	.82
13-141-Y	.90
15-141-Y	1.02
2-142-Y	.29
4-142-Y	.38
9-142	.48
9-150	.53
4-150-Y	.33
4-151	1.30
5-151	1.80
4-152	1.80
2002	.04
2000	.07
8-54	.22
8-4	.18
4-140-Y	.23
17-240 on 21	.63
20-160-R/L	.51
20-161-R/L	.52

Many other types in stock

MALLORY PUSH SWITCH

#2001	S.P. make cont., non-L	.52
#2003	S.P.D.T., non-lock	.56
#2003L	S.P.D.T., lock	.56
#2004	D.P., make 2 non-L	.64
#2004L	D.P., make 2 lock	.64
#2006	D.P.D.T., non-lock	.78

HUNDREDS OF OTHER ITEMS AVAILABLE

Open a/c to Rated Concerns. Prices net FOB our whse NYS *and subject to change without notice*

ALEXANDER MOGULL CO., INC.

161 Washington St., N. Y. 6, N. Y. WOrth 4-0865

NOW AVAILABLE

ANTENNAE
RESISTORS
TRANSFORMERS
DYNAMOTORS
CONDENSERS
CABLES & CORDS
SOCKETS
INSULATORS
TUBES
METERS

CONTROLS
SWITCHES
JACKS
COILS
RECEIVERS
KEYS
HEADSETS
BREAKERS
RADAR
TRANSCEIVERS

$62 Million Inventory

OF

ELECTRONIC AND ELECTRICAL AVIATION COMPONENTS

Recently Acquired from

HEATH CO. OF BENTON HARBOR, MICH.

WRITE · WIRE · PHONE

For Information on

EQUIPMENT TO FILL YOUR PRODUCTION NEEDS

OFFERED BY

242 Territorial Rd.
Benton Harbor, Mich.
Phone: 5-7271

HARMAR CO.

1003 Union Trust Bldg.
Cincinnati, Ohio
Phone: Main 3155

"Since radio began" M·R has been identified with

HIGH QUALITY LOW PRICES IMMEDIATE DELIVERY

WE WANT TO BUY

FOR *Any Quantity New or Used* CASH

- **TEST EQUIPMENT**—meters—bridges—oscillators—etc.
- **TELEVISION**—sets—front ends—packs—strips—etc.
- **RADIOS**—record players—intercoms—cabinets—etc.
- **ACCESSORIES**—changers—motors—irons—phones—microphones—etc.
- **COMPONENT PARTS**—resistors—condensers—hardware—etc.
- **TUBES**—all types—receiving—transmitting—radar—etc.
- **AMPLIFIERS & RECORDERS**—all types—tape, wire, and disc.
- **BATTERIES**—all types—dry—wet—etc.
- **MACHINERY**—screw machines—turret lathes—millers—grinders—etc.

ALSO ALL TYPES OF GOVERNMENT SURPLUS

WHAT HAVE YOU?

All Inquiries and Offers Held in Strict Confidence
All Deals Processed Strictly According to Agreement

WHAT DO YOU NEED?

Wire—Write—Phone—BArclay 7-3588—Mr. Marino—Mr. Tanza—Mr. Bender—Mr. Hewitt

WE ARE PROUD TO OFFER

DIVERSITY RECEIVING EQUIPMENT

BRAND NEW! EXPORT PACKED!

Includes many spare parts . . . tubes, oscillators, transformers, condensers, meters, resistors, etc. Manufactured by Schuttig & Company, Washington, D. C. ..... ONLY **$299.50**

Write for free descriptive folder.

Also Brand New Latest BC-223 AX Transmitter—Pneumatic Rams—ARC-5 Variable Condensers—New I.F.'s for I.F.F.'s

MARINO RADIO CO.

Television, Radio and Electronic M·R *Supplies*

203 GREENWICH STREET (Near Fulton St.) NEW YORK 7, N. Y.

BArclay 7-3588

RELAYS ARE OUR SPECIALTY WE HAVE OVER 200,000

WE ALSO HAVE LARGE STOCKS OF:

AN Connectors	Controls	Relays
APC's	Crystals	Resistors
Binding Posts	Filters	Servo Xfmrs.
Cable	Fuses	Shock-Mounts
Capacitors	Hardware	Sockets
Ceramicons	Iron Core Slugs	Spaghetti
Ceramics	Knobs	Switches
Chokes	Potentiometers	Transformers
Circuit Breakers	(sine-cosine)	Tubes
Coils	Pulse Xfmrs.	And Others

MINIATURE RELAYS

55251 **TELECHRON**, 24VDC, SPST n.o. 300 ohm, #R174 ..... $ .90

55340 **PRICE**, 24VDC, SPST n.o. 300 ohm #R170 ..... .90

55342 **TELECHRON**, 24VDC, Makes 3 Breaks One, 300 ohm, Anti-Capacity Arms, Low Loss Bakelite Insulation, #R171 ..... 1.25

55526 **COOK**, 24VDC, Makes 2, Breaks One, 300 ohm, Ceramic Insulation, #R107 ..... .95

55531 **RBM** 12—24VDC, Makes 4, Breaks two, 150 ohm, #R405 ..... 1.25

55589 **RBM**, 24VDC, DPST n.o. 300 ohm, #R245 ..... ea. 1.25

55636 **G.E.** 24VDC, SPDT, 250 ohm, #R402 ..... ea. 1.25

55637 **G.E.** 24VDC, Double Make, 300 ohm, #R108G 1.00

55837 **RBM**, Same as R108G, #R108R 1.25

55837 **ALLIED**, Same as R108G, #R108 ..... 1.50

D163221 **AMER. TOTALIZATOR**, 24VDC, SPDT, 300 ohms, Anti-Capacity Arms, #R134 ..... 1.25

GUARDIAN, 24VDC, SPST, n.o. 300 ohms, Anti-Capacity Arm, Ceramic Insulation, #R106 ..... .59

23012-0 **RBM**, 24VDC, SPDT, 250 Ohms, #R172 ..... 1.25

7251 **ARC** 24VDC SPDT 300 ohm #R406 ..... 1.25

7252 **ARC**, 24VDC, DPST n.o. 300 ohm, Anti-Capacity Arms, Ceramic Insulation, #R354 ..... 1.25

A13415 **CLARE**, 12VDC, DPST n.o., 120 ohms, #R246 ..... 1.25

A21577 **CLARE**, 24VDC, DPST n.o., 250 ohms, #R352 ..... 1.15

P3LEACH (Pair on Bakelite Strip) Each relay: 6VDC, SPDT, 125 ohms, #R353 ..pr. 2.25

ZH77628-1 AUTOMATIC, 12VDC, Make One, Break Two, 640 ohms Dual Telephone Type Contacts #R244 ..... .85

7472679 **G.E.** 3VDC, SPST n.o., 30 ohms, #R59A ..... .59

2VDC, SPDT, 125 ohms, #R173 ..... .60

73A23 **ALLIED**, 24VDC, Make 3, Break one, 300 ohms, #R403 ..... ea. 1.25

TB 302 PRICE, 24VDC, Make 3, Break one, 300 ohms, #R404 ..... ea. 1.25

PULSE XFMRS

DONGAN TR 1043-A461 Ratio 1:1 high power pulse modulation driver xfmr for final. Ea. winding approx. 8 ohms d-c; 200mh; 260T #30 wire #T152 ..... $3.25 ea.

W.E. (coreless type) A quasi-differentiating xfmr. Pri. when tuned with a .01 mfd resonates at 5630 cps. Split wound secondary terminates into 10000 ohms Army SC# 2C2270/TZ ..... $2.25 ea.

W.E. K89564 1:1 ratio—high repetition rate $1.19 ea.

FREED #12524 2:1 ratio—high repetition rate $1.49 ea.

HORIZONTAL blocking osc. xfmr ..... 69¢ ea.

VERTICAL blocking osc. xfmr ..... 69¢ ea.

SERVO OUTPUT XFMRS

PP6L6 to Servo mechanism with 10% feed-back winding. Mu metal core ..... $3.50 ea.

DUAL unit PP6V6 to Servo mechanism with 10% feedback winding and 6SN7 to Servo mechanism. Both in 1 can. Mu Metal Core ..... $3.95 ea.

AMERTRAN FILTER REACTOR

0.5 hy at 2.5 amps DC, 2.3 ohms, 2.5 KV insul., 5½"x7"x8" overall ..... $12.95 each

TS2A VARIABLE CERAMICONS

CAPAC. 1.5 to 7; 1.5 to 7.5; 3.5 to 30; 5 to 40 .28 ea., $25.00/c

FEEDTHRU 35mmf±10% ..... 10 ea.; 9.00/C

H-F TIE POST

Low-Loss Yellow Bakelite Insulation, pictured actual size (4-40 Thread) $7.50/C $60.00/M

HI-VOLTAGE GLASS TO METAL SEALS (FEED THRU)

MANY TYPES AND SIZES.

Send us blueprints or samples for our Quotes.

TERMS

Write Us Your Needs for Immediate Quote
PRICES FOB OUR PLANT. Min. Order $5.00

Universal general corp.
324 CANAL ST N Y 13, WA 5 9842

REAL VALUES!

SCR 625 FAMOUS ARMY MINE-DETECTOR

for prospectors—miners—oil companies — plumbers —etc.,—etc.,—etc.

This unit is being offered now at a considerable reduction in price. Recently advertised at $79.50 it is now available in the same brand new wrappings in suitcase style carrying case (less batteries) at

$59.50

WHILE THEY LAST!

CABINET CH-118

Olive drab in color, this cabinet has a full length interlock access door on the rear. The front takes the standard 19" panels with 60 inches of height and 20 inches deep. It is shock mounted on a heavy steel platform and has a two-inch protrusion fully covering one side to accommodate wave trap and wiring. Louvered vents allow air circulation top and bottom. Each F.O.B. Chicago **$34.50**

RA 52—RECTIFIER

A transtat controlled rectifier to produce high voltage DC from 110 VAC 60 cycle source. Up to 11,500 volts DC at 50 watts. Metered high voltage (0-15KV) and current (0-20 MA). New **$74.50**

BC 768

Radio Receiver Chassis Complete except for 13 tubes. This chassis with standard 19" panel front contains the receiver for 493.5 MC complete with power supply and an additional low voltage power supply that originally supplied the keyer BC 770 as described below. 110 VAC 60 cycles is the primary voltage.

Five 10 mfd-600 VDC oil filled GE condensers are used as filters. Five stages of 49 MC IF's.

Two of 10.4 MC, 6.3 VAC Transformer and of course power transformers—chokes and miscellaneous parts. All units are in good condition as removed from new equipment. Even the salvage value is a great deal more than the low price of **$9.95**

BC-769 Transmitter P/O BC-100, less tubes..$6.95
BC-770 Keyer P/O BC-100, less tubes..... $4.95

COMPASS INSTALLATION

MN-26 C Remotely controlled commercial type navigation receiver. Freq. range 150 to 1500 KC in three bands. Has twelve 6 volt tubes, 24 V dynamotor and band switch motor, new...$39.95
MN-28C, Control box for above, new..... 9.95
MN-52 Loop control unit, new..... 4.45
MN-20E Loop (manually rotatable), new..... 9.95
Loop transmission cable 168" long, new..... 9.95
MC 124 Mechanical cabling, new, per length 2.45
IN-4D Left-right indicator, new..... 9.95
Plugs, set of three, new..... 3.75
Manual, covering complete set, new..... 1.95

MISCELLANEOUS SPECIALS!

	New
RA 10 DA Receiver.....Used $17.50	$24.95
BC 347 Interphone Amplifier.....	2.95
BC 442 Loss Condenser.....Used $1.49	1.95
APS 13 UHF Antenna, Pair.....	.98
I-97 Bias Meter.....Used $3.95	4.95
RL 42 Antenna Gearbox Motor and Reel .....Used $4.95	7.50
One Tube Interphone Amplifier—Small compact aluminum case fully enclosed 2¼" x 3⅝" x 2⅝", Less Tube.....	.79
40 Amps Circuit Breaker.....	.59
I 82 F Five Inch 360 degrees compass indicator and Selsyn receiver.....	4.95
A 81-2 Transmitters Selsyn for I 82 indicator	2.45
(Both I 82 & Trans. Selsyn for $7.00)	
	New
PE-101 Dynamotor	2.75
Thermal converter Weston Type D, model 507, range .12 amp.....	.59
BC-1023 Marker Beacon Receiver, complete with tubes, shock mount and instruction manual	9.95
BC-923 27-38 MC. FM Receiver complete with tubes .....Used $24.50	
BC-924 27-38 MC. FM Transmitter, complete with tubes .....Used $19.95	
BC-684 27-38 MC. FM Transmitter, less dynamotor .....Used $19.95	
10 meter modification kit for BC-610.....	3.95
SCR-183 complete 12 volt set with all coils, tubes, dynamotor and control units.....	49.50
ARB Control Box.....	1.95
ARB2 Control Box.....	.39

CATHODE RAY TUBES

3FP7 — $1.95 5BP4 — $3.95 5GP1 — $3.95
4AP10 — 1.95 5FP7 — 1.95

Shipments FOB warehouse. 20% Deposit on orders. Minimum order $5.00. Illinois residents, add regular sales tax to remittance. Prices subject to change without notice.

ARROW SALES, Inc.
Dept. LB
1712-14 S. Michigan Ave. Chicago 16, Ill.
PHONE HArrison 7-9374

DEPENDABILITY IN ELECTRONICS

WE ARE NATIONAL DISTRIBUTORS OF PARTS, TUBES AND EQUIPMENT. WE SOLICIT INQUIRIES FROM ORGANIZATIONS WHO APPRECIATE INTELLIGENT SERVICE AND HONEST PRICES, PARTICULARLY AT THESE CRITICAL TIMES.

NORMAN RADIO DISTRIBUTORS INC.
94-29 MERRICK BOULEVARD JAMAICA, N.Y.- REpublic 9- 1651

★ ★ ★ ★ ★ ★ ★ ★ ★ ★

COMMUNICATION DEVICES CO.

2331 Twelfth Ave.
New York 27, N. Y.
Cable: COMMUNIDEV Tel. AD-4-6174, 5

★ ★ ★ ★ ★ ★ ★ ★ ★ ★

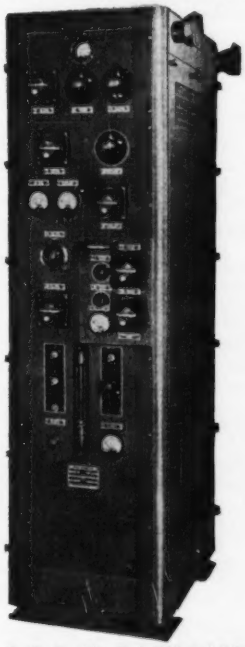

R.C.A. Model MI-8167

TRANSMITTERS

Point-to-point communications

Freq. Range: 2000 to 20,000 Kcs.
Output: 350 Watts C.W.
250 Watts Radiotelephone
Input: 190 to 250 Volts AC 50/60 cps.
Size: 60" high, 17" wide, 27" deep
Tubes: 807s, 813s, 805s, 866s
Master Oscillator unit built-in, fully shielded and stable. All self contained including antenna network. Crystal Multiplier units (available) fits in place of M.O. unit. Speech amplifier is only external unit and has 110/220 v. AC input, four stages, high gain. Total net weight, 625 lbs.

Complete! New! Quantities!

★ ★ ★ ★ ★ ★ ★ ★

Other Choice Selected Transmitters, Receivers and Combinations. Handy-Talkies, Walkie-Talkies, Portable Radars Also Available.

Pictorial listings on request.

★ ★ ★ ★ ★ ★ ★ ★ ★ ★

TEST EQUIPMENT

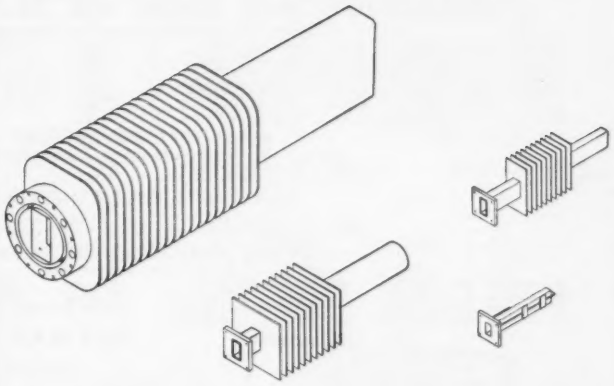

HI POWER X BAND TEST LOAD, dissipates 350 watts of average power for ⅜" x 1¼" waveguide, VSWR less than 1.15 bet. 7 and 10 KMC.....$150.00

S Band Test Load TPS-55P/BT, 50 ohms $12.00

HI POWER S BAND TEST LOAD, dissipates 1000 watts of average power, for 1½" x 3" waveguide. Range 2500 to 3700 MC.

X Band Pick-up Horn, AT-48/UP with coaxial fitting $10.00

TS-62 X Band Echo Box with r.f. cable and pick-up antenna.

TS-33 X Band Frequency Meter. 8500-9600 Mcs. Crystal detector and 50 micro-amp. meter. Indicates Resonance. Connection for scope available.

TS-45A-APM-3 Signal Generator. 8700-9500 mc., 110 V. 60-800 cps.

30 MC I.F. STRIP, VIDEO, and AUDIO AMPLIFIER AND 110-Volt 60-2600 cps POWER SUPPLY. Bandwidth 10 mc; new, part of SPR-2 Receiver.

AMPLIFIER STRIP AM-SSA/SPR-2 contains I.F. amplifier, detector, video amplifier, pulse stretcher and audio amplifier and Rectifier Power Unit PP-155A/SPR-2 bandwidth 10 mc, center frequency 30 mc, sensitivity 50 microvolts for 10 milliwatts output. Power supply 80/115 V ac, 60-2600 cps 1.3 amps. Send for schematic...$85.00 less tubes

S Band Signal Generator Cavity With Cut-Off Attenuator. 2300-2950 mc., 2C40 tube, with modulator chassis....$30.00

UPN-1 S Band Beacon Receiver-Transmitter $75.00

TS-155 S BAND SIGNAL GENERATOR and Power Meter.

S-Band Mixer, tunable by means of slider, type N connector for the R.F. and local oscillator input, U.H.F. connector for the I.F. output, variable oscillator injection. $30.00

S Band Crystal Mixer, variable oscillator injection $17.50

TS-110 S Band Echo Box 2400-2700 mc. portable $110.00

X Band Thermistor Mounts, VSWR less than 1.4 8500-9600 MC Fixed triple tuned, ½" x 1" waveguide.....$40.00 Fixed triple tuned ⅜" x 1¼" waveguide $50.00

X Band Crystal Mount, ½"x1" waveguide $25.00

UG80/U ½"x1" to ⅜"x1¼" adapter. $5.00

ESTERLINE Angus recording Milliammeter 60 cycles, 110V. AC 1 ma full scale. $160.00

TS-89 Voltage Divider for measuring high video pulses, ratios 1:10 and 1:100 transmission flat within 2 db 150 c.p.s. to 5 mc., with cable for attaching to synchroscope $30.00

Waveguide Below Cut-off Attenuator L 101-A U.H.F. Connectors at each end calibration 30-100db $15.00

HYPERSIL CORE CHOKE, 1 Henry, Westinghouse L-422031 or L 422-32....$3.00

PULSE INPUT TRANSFORMER, permalloy core, 50 to 4000 kc., WE-161310, impedance ratio 120 to 2350 ohms..$3.00

X Band attenuator, 1¼"x⅝" guide, single guillotine type, 0-30 db, V.S.W.R. 1.2 maximum, calibrated $85.00

High Voltage motor operated switch, 18 KV., 5 Amps peak, Schweitzer-Conrad No. QA-35582 .....$50.00

TEST SETS

TS—36	TS—100	TS—126
TS—47	TS—125	TS—226

ELECTRO IMPULSE LABORATORY

62 White Street Red Bank 6-0404 Red Bank, N. J.

BRAND NEW—GUARANTEED—SURPLUS—

TYPE N.A.F. AMMETERS & VOLTMETERS

REPLACEMENT AND SPARES FOR EXISTING AIRCRAFT

30 Amp are with internal shunt, all higher ranges require external shunt

C-30	R-17-A-5720	30 Amp	Westinghouse AX	C-120	C-17-A-5730	120 Amp	Weston 606—T224 P
C-30	R-17-A-5720	30 Amp	Weston 606—T202 P	C-120	R-17-A-5730	120 Amp	Westinghouse AX
D-30	R-17-A-5740	30-0-30 Amp	Weston 606—T203 P	D-120	R-17-A-5765	120-0-120 Amp	Westinghouse AX
C-60	R-17-A-5725	60 Amp	General Electric DW-53	C-240	R-17-A-5735	240 Amp	Weston 606 T223 P
C-60	R-17-A-5725	60 Amp	Weston 606—T205 P	C-240	R-17-A-5735	240 Amp	Sutton-Horsley
C-60	R-17-A-5725	60 Amp	Westinghouse AX	C-240	R-17-A-5735	240 Amp	Westinghouse AX
D-60	R-17-A-5745	60-0-60 Amp	Westinghouse AX	D-240		240-0-240 Amp	General Electric DW-53

N.A.F.-1091 VOLTMETERS

all are 30 Volt and require external shunt, *Requires AN Connector

A-30	R-17-V-770	30 Amp	Weston 606—T201 P	B-60	——	60 Amp	General Electric DW-53*
A-60	——	60 Amp	General Electric DW-53	A-120	——	120 Amp	General Electric DW-53

N.A.F.-1091 VOLT-AMMETERS

E-30	R-17-V-880	30 Volt	General Electric DW-53
E-30	R-17-V-880	30 Volt	Westinghouse AX

OTHER AIRCRAFT INSTRUMENTS

all ammeters require external shunt

D-2 Ammeter	R-17-A-6739	20-0-100 Amp	Hickok	Voltmeter	400 cycle	40 Volt	Weston 517
D-2 Ammeter	R-17-A-6739	20-0-100 Amp	Weston 506	Voltmeter	400 cycle	40 Volt	Westinghouse NA-33
F-1 Ammeter	Spec. 94-32284	150 Amp	Westinghouse	Fuel Flow Indicator	Breeze par AB-1 270 Degress		Weston 545—81
E-1 Ammeter	Spec. 94-32173-A	300 Amp	Westinghouse				

ONLY A PARTIAL LISTING
OVER 75,000 METERS IN STOCK
AMMETERS
VOLTMETERS
MILLIAMMETERS
MICROAMMETERS
SPECIAL METERS
A.C.—D.C.—R.F.

TYPE N.A.F. AND OTHER SHUNTS

All are 50 M.V. Lightweight Aircraft Type

30 Amp	NAF—1091
50 Amp	MSA—500
60 Amp	NAF—1091
120 Amp	NAF—1091
150 Amp	Spec. 94-32204 (F)
200 Amp	MSB—201
240 Amp	NAF—1091
300 Amp	MSB—301 (E-1)

We specialize in electrical instruments. Over 75,000 meters in stock. Send for our latest circular showing our complete line of surplus-New-Guaranteed meters.

MARITIME SWITCHBOARD
INSTRUMENTS—ACCESSORIES
338 Canal St., N. Y. 13, N. Y.
Worth 4-8217

Orders accepted from rated concerns, public institutions and agencies on open account, others please send 25% deposit, balance C.O.D. or check with order. All prices FOB our warehouse, N.Y.C.

UNUSED

AN PLUGS
AN RECEPTACLES

We own and offer all parts listed!

Immediate delivery from our Baltimore warehouse!

Pieces	Part No.	Insert
53	AN3100-8S-1P	M
81	-12S-3S	B
650	-12-5P	B
2098	-12-5S	B
586	-14S-1S	B
69	-14S-4P	B
141	-14S-6P	M
73	-14S-6S	M
65	-14S-7S	B
96	-14S-7S	
328	-16S-4S	B
41	-18-4S	B
99	-18-8S	B
448	-18-12S	B
314	-18-12S	
70	-18-22P	M
50	-20-21S	M
698	-22-5S	B
65	-24-5P	M
37	-32-6P	B
45	-32-7P	B
314	-32-7S	M
281	-32-14P	B
132	-32-14S	B
358	-36-19P	B
77	AN3102-8S-1P	M
440	-10S-2S	B
828	-10S-2S	M
577	-12S-3P	M
70	-12S-3S	B
172	-12S-3S	M
330	-16S-5P	B

Pieces	Part No.	Insert
734	-16-13P	B
1488	-18-4S	B
1607	-18-5S	B
1122	-20-3P	B
207	-22-1S	B
227	-22-5S	B
349	AN3102-24-1S	B
82	-PR28-1P	M
34	-28-11S	B
70	-32-11P	B
154	-32-1S	B
66	-32-6P	M
38	-32-7P	M
62	-32-15P	M
34	AN3106-8S-1P	M
61	-8S-1P	B
116	-8S-1S	B
809	-10S-2P	M
275	-10S-2P	B
177	-10S-2S	B
50	-10S-2S	M
466	-10S-2S	B
506	-10SL-3S	B
2737	-10SL-4S	B
248	-12S-3S	
373	-12S-4P	B
351	-12S-4P	M
250	-12S-4S	M
191	-12-5S	B
138	-16-2S	B
68	-16S-4S	B
200	-16S-4P	M
45	-16-13S	M
200	-18-1S	B
269	-18-5P	B

Pieces	Part No.	Insert
4711	-18-6S	B
278	-18-10S	M
20	-20-5P	B
878	-20-12S	
49	-20-25S	M
56	-20-27S	B
510	-22-19P	B
72	-22-27S	B
78	-24-3P	B
38	-28-11P	B
22	-32-7P	M
173	-32-7S	
153	-32-14S	B
43	-32-16S	M
68	-44-1P	B
145	AN3108-8S-1S	B
324	-8S-1S	M
1013	-10S-2S	M
815	-10S-2S	B
72	-12-5P	B
102	-14S-2P	M
1062	-14S-2S	B
438	-16S-1S	B
411	-16S-4P	B
1759	-16S-4P	M
430	-16S-5P	B
65	-16S-5S	M

UNUSED

ELECTRONIC COMPONENTS

Pieces	Part No.	Description
35	RA-10-DB	Receiver
20	TA12B	Transmitter
150	DA-1F	Dynamotor
35	MR-9B	Control Box
9000	45	Bulb
11000	1667	Bulb
1000	987	Bulb
300	AN3135-1	Bulb
97	FT213	Mount
54	FT293	Mount
6	RTA1B	Transceiver

Pieces	Part No.	Insert
152	-16-11S	M
137	-16-11S	B
2947	-18-4P	B
147	-18-4S	M
1437	-18-5P	B
404	-18-6S	B
233	-18-9P	B
97	-18-11S	M
556	-22-19P	B
42	-28-1S	M
26	-28-2P	M
235	-28-12S	
106	-28-16P	B
169	-28-17S	M
20	-32-1S	M
24	-32-6P	M
70	-32-7S	B
152	-32-14S	B

M—Melamine
B—Bakelite

WRITE—WIRE—PHONE

COMMERCIAL SURPLUS SALES CO.
4101 CURTIS AVENUE, BALTIMORE 26, MD.
TELEPHONE: CURTIS 3300

COAXIAL CABLES

"JAN" APPROVED
Available From Stock



RG. No.	Price Per Thous. Ft.	RG. No.	Price Per Thous. Ft.
RG5U	$100.00	RG27U	$450.00
RG6U	160.00	RG29U	50.00
RG7U	120.00	RG34U	250.00
RG8U	150.00	RG39U	180.00
RG9U	247.00	RG41U	400.00
RG9AU	275.00	RG54U	75.00
RG10U	245.00	RG54AU	60.00
RG11U	150.00	RG55U	110.00
RG12U	245.00	RG57U	125.00
RG13U	225.00	RG58U	70.00
RG14U	300.00	RG58AU	125.00
RG17U	650.00	RG59U	70.00
RG18U	950.00	RG62U	75.00
RG19U	1,250.00	RG63U	175.00
RG20U	1,550.00	RG65U	650.00
RG21U	295.00	RG71U	200.00
RG22U	150.00	RG74U	250.00
RG24U	450.00	RG77U	80.00
RG25U	495.00	RG78U	80.00

Please add 25% to prices shown for length under 500 feet of a type.

"UHF" Coaxial Connectors

NEW "JAN" APPROVED

THIS MONTH'S SPECIAL

No.	Jan. No.	Description	1-99	100 to 999	1000 and Over
83-1R	SO239	Receptacle	$.55	$.50	$.40
83-1SP	PL259	Plug	.55	.50	.48
83-16B	UG176U	Adapter	.18	.17	.15
83-18S	UG175U	Adapter	.18	.17	.15
83-1SPN	PL259A	Plug	.60	.55	.50
83-776	UG203U	Plug	.85	.75	.75
83-1RTY	———	Receptacle	.75	.65	.65
83-1H	UG106U	Hood	.12	.10	.10
83-1HP	———	Hood	.27	.24	.24
83-76S	UG177U	Hood	.31	.25	.25
83-1AC	———	Cap & Chain	.61	.50	.45
83-1BC	———	Cap & Chain	.35	.31	.30
83-1T	N358	T Connector	1.50	1.40	1.40
83-1AP	N359	Adapter	.35	.30	.28
83-1AP	M359A	———	.80	.75	.70
83-1J	PL258	Junction	1.00	.90	.85
83-1F	PL274	Feed Thru	1.50	1.40	1.35
83-2SP	UG109U	Twin Plug	.90	.90	.90
83-2R	UG103U	Receptacle	.90	.90	.90
83-2SAP	UG104U	Adapter	1.40	1.25	1.10
83-2SJ	UG105U	Junction	1.50	1.40	1.40
83-2ST	UG196U	T Connector	1.65	1.50	1.50
83-2SF	PL275	Feed Thru	2.00	1.80	1.75
83-2SP	PL295	Plug	1.94	1.75	1.70
83-2R	SO265	Receptacle	1.44	1.30	1.25

LIFE ELECTRONIC SALES

345 BROADWAY NEW YORK 13, N.Y.
Digby 9-4154

CONDENSERS • TRANSMITTING MICAS
BATHTUBS • UPRIGHTS • SOCKETS
CONTROLS - RHEOSTATS - MANY OTHERS

SEND US YOUR NEEDS FOR OUR QUOTATION

TELEPHONE RELAYS

CLARE, TYPES C, D & E
COOKE, AUTOMATIC—ELECTRIC
ALL TYPES of COILS and PILE-UPS
CLARE TYPE K MINIATURE TELEPHONE RELAYS.
4 POLE DOUBLE THROW COIL—24 V. DC. 300 OHM. PRICE — $1.50 ea.

Send Us Your Specifications For Our Quote

Chase

Electronic Supply Co.
222 Fulton St.
New York 7, N. Y.
HOllis 4-5033

FOR SALE:

One TS-146/UP X-band FM signal generator in good condition. Best offer.

FS-1338, Electronics
520 N. Michigan Ave., Chicago 11, Ill.

MARKTIME
5 HOUR SWITCH

A 10 amp. timing device. Pointer moves back to zero after time elapses. Ideal for shutting off radios and TV sets when you go to bed. Limited supply at this special PRICE..... **$4.90**

Also available in 15 min.-30 min.-1 hr. at $5.90 ea.

Steven-Arnold Resonant Relay. Only two types in stock. 442 and 240 CPS either one..... **$4.50**

Both for $8.00

ALNICO — LUCKY PURCHASE ENABLES US TO OFFER YOU THESE MAGNETS — 7% COBALT — Actual Size

39¢ EACH 3 FOR $1.00

ISOLATION TRANSFORMER $1.95

Nat. known mfrs. 50 watt 2 windings, 115 V. to 115 V. 60 cy. Ideal to prevent shocks from small radios and medical and electronic devices.

ELAPSED TIME METERS **$15.50**

GONIOMETERS
Micro Switch
Solenoids
Relays
Electric Counters

EST. 1923 **BLAN** EST 1923

64 Dey St., New York 7, N. Y.

Genuine TELECHRON Motors

2 RPM $2.90
3.6 RPM 3.15
1 RPM 3.95
60 RPM 4.30
One of Each $12.00

CH 4 pole 30 ampere 115v. AC relay. **$4.90**
GE 3 ampere Mercury Switch ⅛" glass tube....3 for **$2.50**

ANNUNCIATOR DROP
250 ohms, will drop on 12 volts or more
$1.00

8 CONDUCTOR CO.—139 CABLE
shielded or unshielded
2 No. 14 and 6 No. 20. Write for samples

HOLTZER-CABOT M.G. 218. CONVERTER
400 CYCLE 110V A.C. 1 AMP. ½ H.P. D.C., 110V MOTOR **$49.50**

WESTON Model 528
3 Amp. and 15 Amp. A.C.
With test leads in a leather case.
Made for U. S. Army for Refrig Motor Testing **$18.75**

1951 TV Remote Control Motor Unit
Ready to attach to any device that needs turning from remote point. A complete $30.00 unit made by one of the greatest Video Companies. Sorry, can't name it here! **$13.95**

PERFORMANCE GUARANTEED

TEST EQUIPMENT

We believe we stock the most comprehensive variety of military and commercial electronic test equipment available. A partial list follows:

TS-1ARR	TS-87/AP	TS-226A	BC-906/D
TS-3A/AP	TS-89/AP	TS-233/TPN-2	BC-949/A
TS-8A/U	TS-96/TPS-1	TS-268	BC-1060/A
TS-10A/APN-1	TS-98/AP	TS-270A/UP	BC-1066/A
TS-12	TS-100	TS-323	BC-1201/A
TS-13	TS-101AP	I-56	BC-1203
TS-14	TS-102/AP	I-95/A	BC-1287/A
TS-15B/AP	TS-108/AP	I-106/A	BC-1277
TS-16/APN	TS-110/AP	I-122	BE-67
TS-19	TS-118/AP	I-145	LAD
TS-27/TS	TS-125/AP	I-177	LAP
TS-32A/TRC-1	TS-131/AP	I-178	LAG
TS-33	TS-153	I-208/A	LU2
TS-34	TS-155A/AP	I-212	LU3
TS-34A	TS-170/ARN-5	I-222/A	OAA-2
TS-35A	TS-173/UR	I-225	TTS-4BR
TS-36	TS-174	I-233	TTX-10RH
TS-45/APM-3	TS-175	IE-21/A	TSS4SE
TS-47/APR	TS-184/AP	IE-36	TSX4SE
TS-51/APG-4	TS-197/CPM-4	IF-12/C	
TS-82	TS-203/AP	BC-221	
TS-69/AP	TS-204/AP	BC-376	

Each piece guaranteed. All accessories and instructions furnished.

(We will purchase your test equipment at highest prices. Send your list for a prompt reply.)

Cable: WESLAB Telephone: WE 5-4500

Weston Laboratories

Weston 93, Mass.

SILVERPLATED REFLECTOR—Overall Dimensions 4⅝", Reflecting Surface 4¼", Depth 1⅝", Individually boxed 25¢ ea. $20.00 per 100.

Eastern Air Device J50 Centrifugal Blower, 115 volt 60 cycles 0.1 amp. 1 PH 10 C.F.M. Continuous duty 1.0 M.F.D. Capacitor start with Capacitor $10.75; without Capacitor $10.25

Eastern Air Device J50E Dual Centrifugal Blower, 115 volt 60 cycles 0.1 amp. 1 PH 20 C.F.M. Continuous duty 1.0 M.F.D. Capacitor start with Capacitor $18.75; without Capacitor $18.25

Miniature lamp T1¾, 3 volt .19 amp. Airplane Indicator, Amb. Ctd.
10 for $1.00
100 for $8.50

VOLTMETER Weston 833 130v. A.C. 400 cycles 2¼ flush bakelite Aircraft mounting black scale Fluorescent numerals removed from new equipment $3.50

AMMETER, 150/300 dual range Triplet 341A 3½" rectangular flush bakelite 5 amp Movement @ $4.95 with external current transformer for 150 amp. Only $7.50

Square D Circuit Breakers Push Type AN3161-35 35 amp. @ 30 volt D.C. $1.15 each

Square D Bat Handle Circuit Breaker Type AN3160-10 30 volt @ 10 amp $1.25 each

SEND FOR FREE BULLETIN

A. Cottone Company — Telephone Dlgby 9-2188-9 — Electronic Mechanical & Optical Components — 526-540 CANAL ST., NEW YORK 13, N.Y.

ALL PRICES F.O.B. N. Y. CITY

FOR SALE

ELECTRICAL STEEL

We can offer about 26,000# of Hi-Grade Strip—.005 x 12⅜" "Hipersil" 3¼% Transformer grade — In Coils weighing about 900# each—Material new and prime but outside wrap weather discolored.

GLOBE TRADING COMPANY
1815 Franklin Detroit 7, Michigan
Phone—WOodward 1-8277

OFFERS FROM TEXAS

POWER PLANTS — PE-84c—LeRoi-Westinghouse 25 to 32 Kva Heavy Duty 900-Rpm. Gas or Gasoline. Magneto ignition., Battery start. Switchboard, Maxim silencer. Completely automatic. Skid mounted. Recommended for rugged duty. Wt. 5350-lb. ..... Each $2500.00
Spare Parts Kit for PE-84c. 460-lb. Each $275.00

MARINE COMMUNICATIONS — Loud Speakers. Navy "Battle Announcing Reproducers". Bulkhead mounting. Approved for hazardous locations. Resistant to submersion, blast, steam. Excellent voice fidelity. Sizes 5 to 25 watts. Write for details.
Receivers, Navy RBL-3. 15 to 600 Kcs. Used, good condition ..... Ea. $115.00
Transmitters, West. Type TDE-2 for 230-VDC. Complete, 756-lb. Used, operating condition. Each $900.00
Transmitters, West. Type TBK-20 power supply. 730-lb. Used, operating condition ..... Each $600.00

CONTROLLER COMPONENTS—60-cyc AC Magnetic Contactor, G.E. 3-pole/50-amp/600-volt. BO coils & arc chutes, three reversible interlocks. Holding coil 110-VAC. ..... Ea. $18.50
Magnetic Contactor, 2-pole/100-amp/600-volt. BO coils & arc chutes, two interlocks. Mtd on ebony panel 11" x 17" ..... Each $21.00

Voltage Sensitive Relay. West. Type SV, glass housing with target. Hand calibrated for pickup any preset 55 to 135 volts. Dropout is 98% of pickup setting. Two reversible contacts. Each $13.50

LABORATORY TEST VOLTAGES—M-G Unit. Motor Single Phase Synchronous 60cyc/1ϕ/115v/22.5a/1800Rpm. Direct coupled Alternator 3,000 cyc/115v/1Kw & DC Gen 150v/1Kw & DC Gen 500v/.125Kw & DC Gen 1000v/.3Kw. Short-time 300% overload. Compact, with controls. Mfg. F.T.&R. Co. Wt. 485-lb. ..... Ea. $325.00

RIGID COAXIAL CABLE—1-⅝" x ⅝" Hard. Ceramic bead. 51.5-ft. 20-ft. joints. Ea. $40.00. Solder connectors $2.00. Solderless, $10.00. Right-angle $12.50. Expansion joint $100.00. Rotary joint $140.00. Gas seal $24.00. Union, solderless $34.50. Wall entrance flange $3.00. ⅜" x ¼" Hard. Ceramic bead. 66-ft. 20-ft. joints Ea. $22.50. Solderless connectors $3.00.
⅛" Flexible, Ceramic bead. 96-ft. 36-ft. lengths, ends fitted with Amphenol 93-M Connector. Not gas or watertight. ..... Each, $10.50

HIGH VOLTAGE CABLE—Okonite Corp. Single, shielded #10-AWG. Portable. Neoprene jacket. Rated 25,000-VAC. Steady-state dialectric strength exceeds 100,000 volts.

CUNNINGHAM ENGINEERING COMPANY
4798 PORT ARTHUR HIGHWAY BEAUMONT, TEXAS

SELENIUM RECTIFIERS

F.W.B., FWCT, 3ϕ, Volt. DBLR, etc.

Finest materials, workmanship and immediate deliveries
COMPARE OUR PRICES.

Full Wave Bridge Types

AMPS	12 V. AC/14 V. DC	36/28	54/40	110/100
1	....	2.50	....	....
2	2.50	3.00	6.00	9.00
4	4.00	6.00	8.00	....
6	6.00	....	....	....
8	6.00	8.00	....	....
12	8.00	11.50	....	....
24	13.00	22.00	....	....

—Selen. Rect. Transformer New, Herm. Sealed 110 V. 60 cy/ϕ, 12, 18, 24, 30, & 36 V. @ 4 amps. $3.95
—New General Radio Model 50-B variacs @ ..... $100.00 ea.

SPECIAL TYPES TO ORDER
Inquire for quantity prices

BARRY ELECTRONICS CORP.
136 Liberty St. New York 6, N. Y.
Phone: REctor 2-2563
25% deposit with orders—or send full remittance to save C.O.D. charges—rated firms (D&B) net 10 days. "EXTEND YOUR D.O.'s"
All merchandise fully guaranteed

TUBES

TYPE	PRICE	TYPE	PRICE	TYPE	PRICE	TYPE	PRICE
*1A5GT	.75	7G7	1.20	VT61	.50	841	.43
*1LC5	1.25	7H7	.85	VT128	.65	851	75.00
1LG5	1.25	12A5	.90	VU111S	.50	861	40.00
*1Q5GT	.80	12A6	.75	1B24	15.00	864	.73
1R4	.75	12C8	1.05	1N21 XL	.90	869B	29.50
*1T4	.85	12F5GT	.65	1N22 XL	1.60	872A	3.50
3D6	.60	12H6	.75	2C26A	.25	954	.37
*5Z4	1.00	*12K8GT	1.00	2C34	.50	1616	1.95
6AB7	1.10	12J5GT	.65	2C44	1.00	1619	.85
6AK5	1.75	12SH7	.90	2X2/879	.60	1625	.47
6B8	.95	12SJ7	.85	3C24	2.50	1626	.48
*6B8G	.85	12SR7	.80	3E29	14.00	1629	.65
*6C5	.75	14X7	1.15	6C21	25.00	1630	.98
6H6	.75	28D7	1.00	23D4	.60	1631	1.27
*6J8G	1.05	36	.65	211	.80	1632	.75
*6K7	.80	38	.65	215A	.17	*1641	1.50
6K7GT	.70	39/44	.65	307A	4.95	1642	.65
*6L7G	.72	*50	1.00	371B	.75	2051	1.50
6N7	1.00	*57	.65	393A	9.18	*5670	5.90
6R7G	.71	76	.65	471A	2.75	*5814	4.55
6S7G	.75	*77	.65	532A	2.75	7193	.25
6SH7	.75	*85	.75	705A	1.25	8012	3.50
6SH7GT	.80	*117Z6GT	.90	715B	15.00	8020	2.25
6SN7GT	1.05	1005	.45	717A	1.25	9001	1.75
6SN7GTA	1.20	4A21	.75	724B	6.50	9002	1.50
6U7G	.65	615	.15	801	.75	9003	1.80
*7A6	.75	MX468U	.75	805	4.98	9006	.30
7C4	.77	10Y	.55	807	1.75		
7E5 (1201)	.85	VT52	.50	813	8.50		

Items marked * do not have name of standard manufacturer on tube. They are FIRST QUALITY (not seconds) and meet full specifications with our 100% guarantee. Samples to quantity users.

ALL LISTINGS ARE QUALITY GUARANTEED. INQUIRIES REGARDING THESE AND OTHER REQUIREMENTS GIVEN PROMPT ATTENTION.

PARTS

TRANSFORMERS

PLATE TRANSFORMER, 5000 volt, center tapped, 350 MA. Primary 115 volt, 60 cycle. Unmounted and not potted, overall dimension 6½ inches x 6 inches x 7 inches, weight 37 lbs. ..... New. $25.00

PULSE TRANSFORMER

68G828-G1 ..... New. $5.50

SWITCHES

ROTATING SWITCH, Ceramic Construction, 3 Pole, Double Throw, Shaft beyond bushing, ½ inch New. $1.00

CORDS

CD-133, Rubber Covered PL-55 Plug with 18 inch Rubber Cord ..... New. $ .50

CE-652 ..... New. $25.00

TELEPHONE, SA-WP, Similar to WE 83B, 5 foot, Red ..... New. $1.10

TELEPHONE, Patch, WE D171060, 6 foot, Green New. $1.10

PLUGS

TELEPHONE PLUG, Equivalent to PL-55, with Screw Terminals Inserted, Samples furnished to quantity users.... New. $.30

BUTTERFLY CONDENSER

SPECIFIED RANGE, 74-320 MC, NEW, EXCELLENT CONDITION..... $12.50

All items subject to prior sale. Shipments BEST WAY C.O.D. if desired. Rated accounts net ROG.

T. R. LOWENTHAL CO.

ELECTRONIC COMPONENTS

Technical Radio Since 1919

1205 WEST SHERWIN AVENUE, CHICAGO 26, ILLINOIS
PHONE: ROGERS PARK 4-0784

American & Canadian enquiries to our Agents:

POLAS MERCANTILE

115 Broadway

New York, 6

Telephone: Rector 2-B595

ALL OTHER ENQUIRIES TO LONDON

HALTRON

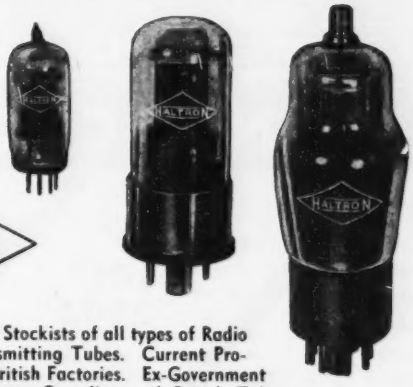

Leading Exporters and Stockists of all types of Radio Receiving and Transmitting Tubes. Current Production of main British Factories. Ex-Government Surplus, American, Canadian and British Tubes in Original Brands. Suppliers to Foreign Governments, Airlines, etc.

HALL ELECTRIC LTD

89, CHARLOTTE ST., LONDON, W.1. Phones: MUSEUM 9661 (5 lines) Cables: HALLECTRIC, LONDON

THE BEST IN ELECTRONIC SURPLUS

AVAILABLE FROM OUR STOCK FOR IMMEDIATE DELIVERY

TRANSMITTERS

T4/FRC, with Modulator **MD 1/FRC**, and **PP-1/FRC** Power Supply.
RCA-ET 4332 and 4336.
TDE, TBK, 8010, 8019, for Ships.
ATD, for Aircraft.
BC-319, BC-604, BC-684, etc.
GE-2.5 KW, 2.0 to 20.0 mc, Al. MANY OTHERS!

TRANS-RECEIVERS

SCR-284, SCR-509 & 510, SCR-511, SCR-609 & 610, SCR-522, LINK Model 1498, TCS with 12/24/230 DC and 110V. AC Power Supplies, SCR-508/528/608/628.

AUDIO SOUND

Beachmaster 250 W.; Western Elec. Model HLAS—500W.; RCA 25W. (12V.)
Mobile; RCA MI-2817-E Amplifier, 1,000 Watts (2—500 watt Channels); **W.E. Speaker Units** D-173246 (25-30 Watts) and D-173232A (50-60 Watts).

TEST EQPT.

BC-221, TS-174, TS-47/APR, TU-57, TU-56, TS-45, TS-143, I-148, TS-305, others.

RADAR

SCR-545-A, Complete in Trailer Truck, with or without 25 KVA Gas-Engine Generator Unit.
TPS-1 Portable, Ground-Based Search Radar, PPI and Class A scopes.
SF-1 Ship Radar, Complete, NEW, with many boxes of Spares.
MARK V Training Radar, for schools, training.

RECEIVERS

RBM, RBS, RBO, BC-312, BC-342, BC-348, DZ-2 Direction-Finders with Loops, **SCR-206** Direction Finders with Loops, **SCR-291 Goniometers** and Accessories, R-2/ARR3. Others.

SPECIAL

Wilcox 36A Rectifier-Power Supply, for 3 KW modulated transmitter.
RADIOSONDE AN/AMQ-1, Meteorological Balloon transmitter with self-contained instruments.
"SNOOPERSCOPE" TUBES, British Infra-Red Image Converter Tubes, with matching Bausch & Lomb front-end Lens.
SOUND-POWERED HEAD-CHEST SETS, RCA-2454-B, all New, export-packed.
32V. DC to 110V. AC KATO Converters, NEW, good to 300 watts.
Teletype, Wheatstone Perforator and Boehme Keying Head, Excellent Condition.

TELEMARINE COMMUNICATIONS COMPANY

CABLE ADDRESS: TELEMARINE, N. Y. Phone—LOngacre 4-4490
540 W. 27th St., N. Y. 1, N. Y.

WHOLESALE ONLY

ELECTRONIC COMPONENTS
AIRCRAFT EQUIPMENT
HYDRAULICS
RADIO & ELECTRONIC SURPLUS
13933-9 Brush St. Detroit 3, Mich.
Phone Townsend 9-3405

ELECTRONIC TUBE-MAKING MACHINERY

For manufacturing radio tubes, electronic tubes, cathode-ray tubes, lamps. New and used. Reasonably priced, satisfaction guaranteed.
AMERICAN ELECTRICAL SALES CO.
67 E. 8th St. New York, N. Y.

-CONNECTORS-

AN
"3100"
"3101"
"3102"
"3106"
"3108"

Black and Mellomyne Inserts in Stock

101 & 102 A & B Shell Types In Stock

Catalog On Request **CLAMP—ALL SIZES**

FOR TYPES AVAILABLE SEE ELECTRONICS BUYER'S GUIDE

QUICK SERVICE OUR SPECIALTY

WILGREEN

99 Murray St., New York 7, N. Y.
For Immediate Delivery
Write or Phone - WORTH 2-7423-4-5

COLUMBIA ELECTRONICS LTD.

TELEVISION CAMERA

350 line resolution. Easily converted to present RMA standards. Circuits available with camera. Complete, like new.

TEST EQUIPMENT
Complete Line!

SIGNAL GENERATOR 804-C
DUMONT 224-A OSCILLOSCOPE
I-77 HICKOK TUBE CHECKER
I-208 FM SIGNAL GENERATOR
RPC MODEL 644 MULTIMETER
FERRIS MICROVOLTER MOD. 18-C.

IE-36 (New)	**TS-100/AP**
I-139 METER	**TS-102A/AP**
I-212	**TS-111/CP**
TS-3/AP	**TS-127/U**
TS-5/AP	**TS-155**
TS-10B/APN	**TS-170/ARN-5**
TS-15A/AP	**TS-182/UP**
TS-19/APQ-5	**TS-184A/AP**
TS-34/AP	**TS-250/APN**
TS-36/AP	**TS-375/U**
TS-61/AP	**UPM-1(Complete)**

RC-184 IFF EQUIPMENT
Brand New. Complete.

COMPLETE RADAR
APS-4 MARK 16
APS6

RECEIVERS
APR-4 APR-5

SCR-720 EQUIPMENT
SCR-584 PARTS

HEADSETS
HS-33 Brand New

MK-20A/UP — New, INDIVIDUALLY BOXED

SCR-291 DIRECTION FINDING EQUIPMENT—NEW

MP-22 MAST BASE With Hardware and Bracket. **U/16 U PLUGS** MG19A—New R5/ARN-7

VARIAC TRANSTAT AMERTRAN
Input 0-115 V., 50-60 cycles; output 115 V 100 amps. 11.5 Kva. Excellent condition.

SEE COLUMBIA ELECTRONICS AD ON PAGE 346

COLUMBIA ELECTRONICS LTD.
524 S. San Pedro St., Los Angeles 13 CALIF.
Cable Address: COELECT
ALL ITEMS SUBJECT TO PRIOR SALE

SOUNDTRONICS SPECIALS

STANDARD BRAND RESISTORS
1/3 W to 2 Watt
Jobbers Quantities

Aerovox Type 1084 cond. .1mfd 1000 W.V.
6¢
$5.60 Per Hundred

14 Pin T.V. Socket
Mica .....28¢ Blk'd .....18¢

Muter Ceramic Cond 600V 15, 22, 33, 56, 75, 82, 180, 220 Mfd.....5¢ ea.: $4.50 Per 100

TRANSFORMER POWER SUPPLY

115 v 60 cy 300 v @ 55 ma 6.3 v. @ 2 Amps. Has 5y3. 2-H Hy chokes, 3-30 mfd Filters. Pilot. Term Strip. Meas. 5" x 5" x 6". Completely wired 6.85

TG, 10 KEYERS complete with tubes.....$32.50

RG, 10 μ, 52 Ω coax armored cable.....12¢ Ft.

RG, 11 μ, coax cable, 9" with pl 259 on each end.

TYPE J AB POTS
200 Ω S. D. Shaft 2000 Ω S. D. Shaft
600 Ω ½" Shaft 6500 Ω S. D. Shaft
15 K Ω S. D. Shaft
85¢

W. W. Pots. 4 Watt, 5K, 10K, 20K.....40¢ ea.

Phase Shift Capacitor #D150734.....$3.95

SLI Radar Complete in Good Cond.....$450.00

SA3 Radar Complete except Ant & Ped....$385.00

SCR 296 Radar Units and Racks. Write Requirements.

1 or 2% Prec W. W. Res. 12K, 17K, 20K, 30K, 33K, 40K, 43K, 50K, 84K, 150K, 200K, 220K, 500K.....45¢ ea...1 Meg. .....65¢

F. W. SEL. BRIDGE RECTIFIERS

18 V. IN. .14 V OUT		40 V IN. .34 OUT	
1.3 Amps.	$ 2.90	.6 Amps.	$ 3.30
2.4 Amps.	3.85	1.2 Amps.	4.40
6.6 Amps.	5.45	3.2 Amps.	6.55
13 Amps.	9.90	6.0 Amps.	11.70
17.5 Amps.	12.50	9.0 Amps.	13.75

RECT. CAN OILS

1 MFD 400 V Upright MTGS 1¼" x 1¾" x ⅞" 18¢

2X.5 400 V Upright MTGS 1¼"x1¾"x⅞".....18¢

3X.1 600 V Upright MTGS 1¾"x1½"x9/16"....24¢

LARGE STOCK SPECIALIZED OILS

Amphenol 91-MC 400.....18¢

3 CM Flex. Wave Guide 2" Long Sq to Sq Flange $1.75

Weston 663 Type 5 Multi-Tester. Used but Guar. $22.50

Bendix FREQ Control Unit for 60 V Control of Gen. # CAL 111000. Complete with Tubes. Less Case $45.00

Arrow H & H 5 P.D.T. Turn Switch 10A CR5V. Single ⅞" Hole Mtg.....95¢

Sprague Noise Filter 7 Amps—130 VAC, 400 V.D.C. #JX65 .....$1.15

12" x 24" x ½" Hair Felt. Ideal for Sound Deadening .....12¢ ea.

Large Quantity of Mica, Silver Mica, Trans. Mica Cond at Jobbers Prices.

SOUNDTRONICS LABS.
632 Arch St., Phila. 6, Pa. MA 7-2115

SURPLUS EQUIPMENT

POWER RHEOSTATS

Hardwick-Hindle and Ward Leonard (Mfg.) 5 Ohms; 100 Watt; 4.48 amps 100 Ohms; 100 Watt; 1.0 amp.
Boxed, Brand New with Knob
$2.50 each—$25.00 per dozen

PIONEER AUTOSYNS

AY-1.....26 volt-400 cycle.....$4.95
AY-5.....26 volt-400 cycle.....$3.95
(Has hollow shaft)

PIONEER TORQUE UNITS

TYPE 12602-1-A ..... $70.00 each
TYPE 12604-3-A ..... $70.00 each

SYNCHROS

1F Special Repeater (115V, 400 Cycle)..... $15.00 each

C 78248 Transmitters (115V, 60 Cycle)..... 20.00 each

SERVO MOTOR 10047-2-A-Pioneer; 2 Phase: 400 cyc; with 40: 1 Reduction Gear .$10.00 ea.

400 CYCLE MOTORS

AIRESEARCH, 115V, 400 Cps. Single Phase 6500 rpm, amp. 1.4, torque 4.6 in. oz. H.P. .03
$10.00 ea.

400 CYCLE MOTORS

Eastern Air Devices Type JM6B; 200 VAC: 1 AMP; 3 Phase; 400 Cyc; 6000 RPM.....$12.50 ea.

. . . . INVERTERS . . . .

PE 218 LELAND ELECTRIC
Output: 115 VAC; single phase PF 90; 380/500 cycle; 1500 VA.
Input: 25-28 VDC; 92 amps; 8000 RPM; Exc. volts 27.5.
Brand New . . . $39.95 ea.

12116-2-A PIONEER
Output: 115 VAC; 400 cycle; single phase; .45 amp.
Input: 24 VDC; 5 amp. **$90.00**

12130-1-A PIONEER
Output: 115 VAC; Single phase; 400 cycle; Amps .88; 100 VA. Input: 18-28 VDC; 20 amps.
$80.00 ea.

10486 LELAND ELECTRIC
Output: 115 VAC; 400 cycle; 3 phase; 175 VA; .80 PF. Input: 27.5 DC; 12.5 Amp; Cont. Duty.
$90.00 ea.

5AS131NJ3 GENERAL ELECTRIC (PE-118)
Output: 115V; 400 CYC; 1 ϕ at 1500 VA; PF 0.8 W.E. Spec. K8-5601L1. Input: 26 VDC at 100 Amps. .....**$29.50 ea.**

5D21NJ3A GENERAL ELECTRIC: Output: 115 VAC; KVA 485; PF 1; 400 cycle; single phase. Input: 27 VDC; 35 Amp..... **$25.00 ea.**

5AT121JJ2B GENERAL ELECTRIC
Output: 115 VAC; 400 cycle; 3 phase; 175 VA; 80
Output: 115 VAC; 400 CYC; 750 VA; 3 Phase; and 26 VAC; 400 CYC; 250 VA; Single Phase; Input: 24VDC; 55 AMP.....**$95.00 ea.**

10563 LELAND ELECTRIC
Output: 115 VAC; 400 cycle; 3-phase; 115 VA; 75 PF. Input: 28.5 VDC; 12 Amp..... **$80.00 ea.**

SEND YOUR REQUEST FOR ALL TYPES OF SYNCHROS
PLEASE ENCLOSE FULL AMOUNT WITH ORDER
ALL PRICES F.O.B. PASADENA UNLESS OTHERWISE SPECIFIED
EQUIPMENT FULLY GUARANTEED

C and H Sales Company
BOX 356-E EAST PASADENA STATION • PASADENA 8, CALIFORNIA

D.C. MICROAMMETERS
O-200 Ua 3" sq. G.E. DO-50.....$ 9.00
O-50 Ua 3" sq. G.E. DO-50..... 13.00

PORTABLE INSTRUMENTS
Molded Bakelite Case 7"x4½"x3"

D.C. MICROAMMETERS
5...10...50...microamperes

THERMOCOUPLE MILLIAMMETERS
1.5...5...10...milliamperes
Available in multiple range combinations

PRECISION ELECTRICAL INSTRUMENT CO.
146 Grand Street New York 13, N. Y.

TEST CHAMBER

Hot and cold; age 1942; used six months, like new;
Inside dimensions 30" x 59" x 28" high;
Temperature control—minus 57° F to plus 125° F;
Electric heating bank 6 KW; Servel Air Compressor, 2-stage; 7½ H.P., 3/60/220 AC
Fans for circulation; inspection in operation
Guaranteed condition; F.O.B. Brooklyn.

Kings County Machinery Exchange
408 Atlantic Ave. Brooklyn 17, N. Y.

WESTINGHOUSE TYPE HQS
PHASE SELECTOR RELAYS

For Selective-Pole Carrier Relaying. *Brand New, Complete.* Original cost $650.00 per set. 3 units per set. Only 40 sets in stock. Write for circular available.

$95.00 each

ELECTRO SALES CO., INC.
108-110 Pearl St., Boston 10, Mass.

FOR SALE:
GOOD USED STEM MACHINES
and other glass working equipment.

HAYDU BROTHERS
PLAINFIELD, NEW JERSEY

BRAND NEW STANDARD BRAND TUBES

OA2	1.55	2V3G	.98	7E5	.79	450TH	39.50	801A	.49	865	1.39
OA3/VR75	1.49	2X2	.59	7E6	.69	450TL	44.50	802 RK25	2.95	866A	1.30
OB2	1.59	3A4	.69	7F7	.95	530	12.50	803	3.95	869B	39.50
OB3/VR90	1.25	3B7/1291	.49	10Y	.75	531	7.50	805	3.95	872A	3.75
OC3/VR105	1.25	3B22/EL1C	2.75	12A6	.79	533	175.00	807	1.49	874	1.49
OD3/VR150	1.05	3B26	3.75	24G	1.95	559	3.95	808	4.95	876	.59
1B22	3.25	3C24	1.95	39/44	.49	700A	24.50	810	12.75	879	1.43
1B24	1.75	3C28	4.95	45 Spec.	.35	701A	4.95	811	2.95	931A	6.95
1B27	19.95	3D6/1299	.49	1851H	9.50	702A	3.49	812	2.95	954	.35
1B29	4.75	3D23	4.95	205B	3.95	703A	6.25	813	7.95	955	.55
1B36	14.95	4A1	1.75	211	.75	704A	1.00	814	3.95	956	.69
1B56	47.50	4-250A	34.50	217C	18.00	705A	2.89	828	11.95	957	.35
1D8GT	.89	4B28/5R8S4	4.75	354R	18.95	707A	12.95	829	11.95	958A	.49
1L4	.89	4E27/257B	15.95	354TH	19.95	707B	17.50	829B	14.95	959A	.69
1R4/1294	.69	4J22	149.50	354TL	19.95	708A	4.75	830B	3.75	1608	4.95
2C22/7193	.35	4J26	159.75	285A	10.95	710A/8011	.98	832A	12.95	1609	4.95
2C26	.39	4J34	195.00	286A	18.95	713A	1.25	832B	9.95	1613	.99
2C34/RK34	.29	4J35	195.00	304TH	13.95	714AY	5.95	833A	49.50	1616	5.95
2C40	4.95	4J42/700A	27.50	304TL	12.95	715A	6.95	836	5.95	1619	.45
2C44	1.49	5D21	24.50	307A	4.95	715B	12.75	837	1.65	1626	1.95
2E22	3.50	6AJ5	2.25	310A	6.95	715C	24.50	838	4.95	1628	.45
2J22	7.95	6B8	.98	316A	1.50	721A	4.95	843	.75	1629	.45
2J26	24.50	6C8	.88	329A	8.95	722A	2.49	846	49.95	1629	.35
2J36	89.50	6C21	19.95	331A	11.95	723A/B	17.95	851	49.95	1636	3.25
2J61	37.50	6J4	5.95	353A	6.95	724B	3.49	860	9.95	1642	.98
2J62	37.50	7A7	.89	371B	.95	725A	12.95	861	24.50	1851	1.75
2K25	24.95	7C4	.49	388A	1.50	730A	13.95	864	.75	2051	1.49

7193	.35
8011	.95
8011A	4.95
8020	11.95
8021	2.89
8025A	7.95
9001	1.50
9002	1.35
9003	1.25
9004	.65
9005	1.00
9006	.35
C5B	8.95
C6A	6.95
C6J	5.95
CRP72	1.98
E1148	.35
FG81A	8.95
HY114B	.75
HY615	.29
REL5	175.00
RK25	2.95
RK34	.29
RK72	1.65
RK73	1.65
VT90	1.75
VT98	175.00

VT127	2.50

CATHODE RAY TUBES**

2CP1/S1	1.95
3DP1	4.95
3FP7	1.95
4AP10	4.95
5AP1	3.49
5FP7	3.95
7BP5	18.95
7BP7	6.95
9LP7	12.95
10BP4	18.95
12LP4	21.50
12LP4A	22.25
14BP4	26.50
16DP4A	34.00
16RP4	37.00
17BP4A	37.00
19AP4A	42.00
19AP4B	42.00
20CP4	68.50

TUNGAR BULBS
6 AMP
#289414 ... 4.75
Westinghouse Rectigon

MARITIME INTERNATIONAL COMPANY

11 State Street, New York 4, N. Y. Cable Address "Foxcroft" Phones: DIgby 4-3192–3

OA2	$ 1.60	872-A	$ 2.50
OB2	1.65	892-R	200.00
1B27	18.50	955	.40
IL2I (GE)	5.00	9002	.90
IN2I	.80	9005	1.50
IN2I-B	3.00	9006	2.00
IN23-B	4.00	CE25	.75
2D2I	1.60	100TH	9.50
2E22	1.25	250TH	19.95
2E24	4.75	304TH	12.95
2E26	3.75	304TL	12.95
2E30	2.20	450TH	35.00
2J26	5.00	F-123-A	6.95
2J32	25.00	HK57-B	5.00
2J38	85.00	HK254	7.00
2J61	22.50	RK20-A	5.00
2K25	24.95	RK28-A	5.00
2K28	35.00	RK34	.27
2K45 (WE) (3 cm. Klystron)	150.00	RK38	12.50
3B25	3.95	RK47	5.00
3DP1-A (RCA)	3.50	RK59	.75
4-250-A	27.50	RK60	1.50
5BP1	4.95	RK-63/250TH	19.95
5D21	19.95	RK-65/5D23	24.95
5FP7	1.75	RKR72	1.40
5JP1	22.50	RKR73	1.50
10Y	.45	T-40	3.00
15E	1.50	VR150	1.00
35TG	3.50	WL-677	25.00
2II	.65	0Z4/0Z4G	.65
300-B	7.00	1A7GT	1.05
310-A	6.75	1B3GT	1.25
371-B	.90	1X2A	1.60
374-A	7.00	3B4	.97
707-A	10.95	5U4G	.80
707-B	19.95	5V4G	1.10
715-A	6.50	5X4G	.90
715-B	12.95	6AH6	1.25
725-A	6.95	6AK5	1.25
809	2.25	6AL5	.60
810	10.00	6AU5GT	1.50
811	2.35	6BL7GT	1.50
812	2.75	6BY5G	1.65
813	8.95	6C4	.90
829	9.50	6J5GT	.80
829-B	13.50	6T8	1.50
832	5.95	12AT7	1.35
832-A	10.00	12AU7	1.10
837	1.50	12BH7	1.70
851	55.00	25L6GT	.95
866-A	1.00	35L6GT	1.25
		35Z5	.85
		50L6GT	.85

Many others in stock—Write. Compare our Prices.
G.R. Model 50-B Variacs (New) $100.00
BC-611—Walkie-Talkies ..... Pr. 150.00

BARRY ELECTRONICS CORP.

136 LIBERTY ST., N. Y. 6, N. Y.
Phone: REctor 2-2563
25% deposit with order—or send full remittance to save COD charges—rated firms (D&B) N/10
All merchandise fully guaranteed

A. C. Power Anywhere with Katolight Plants and Generators



Three 400-cycle, 40 KW, three-phase, AC generators, 120/208 volt, 1714 rpm, $850.00.



Two 10 KW complete light plants, 1200 rpm, 115/230 volt, single-phase; 120/208 or 220/440 volts, three-phase, $1150.00.

The above offered subject to prior sale.

Manufacturers of motor-generator sets, high-frequency generators, rotary converters, A.C. and D.C. generators.

KATO ENGINEERING COMPANY

105 Maxfield Avenue
Mankato, Minnesota

COMPASS

COMMUNICATIONS CO.
393 GREENWICH STREET
NEW YORK 13, N. Y.
BEEKMAN 3-6570
CABLE ADDRESS: COMPRADIO

- **TUBES** This Month's Special:

New Standard Brands, Only

723A/B	24.50	1B22	3.50
2K25	35.00	1B29	3.50
2K26		3B24	5.50
2K29	27.50	3E29/829B	
2K45	170.00		14.75
2K54		8025A	7.00
2K55		4J52	300.00

We stock

- **RADAR**
  Marine, Ground & Airborne
- **SONAR**
- **TRANSMITTERS**
  from 25 watts to 5 kilowatts
- **RECEIVERS**
- **BEACONS**
- **LORAN**
- **RADIOTELEPHONES**
- **TEST EQUIPMENT**
- **TELEPHONE EQUIPMENT**
  Portable and Stationary Switchboards and Supplies
- **MOTOR GENERATORS**
- **RECTIFIERS**
- **POWER SUPPLIES**

Our Export Department Available
For Special Service To Overseas Customers
WE MAINTAIN OUR OWN FULLY EQUIPPED TESTING LABORATORY IN THE SAME BUILDING AS OUR WAREHOUSE TO TEST ANY ITEM WE SELL.
We guarantee everything we sell

"SEARCHLIGHT" Opportunity Advertising

—to help you get what you want. —to help you sell what you no longer need.

Take advantage of it—For Every Business Want

"Think SEARCHLIGHT First"

PHOTOCON SALES

1062 N. Allen Ave. SYcamore 4-7156
Pasadena 7, Calif. RYan 1-8271

WRITE FOR NEW 24 PAGE
SURPLUS SALES CATALOG

WE WILL BUY YOUR NEW OR CLEAN USED ELECTRONIC SURPLUS: ARC-1, ARC-3, BC-224, BC-348, BC-312, BC-342, ATC, ART-13, APS-13, BC-221, LM's, TS-12, TS-13, TS-23, TS-34, TS-35, IE-19A, I-222, SCR-522, TS-100, I-100, or any BC, I, IE, TS, APR.

APR4, APR5A, APR7, TS-34, 804CS2, APA-38, BC-348, ART-13, TS-12, ARC-1
WRITE FOR PRICES

L. & N. 8662 Potentiometer	EXCELLENT	$300.00
L. & N. 4725 Wheatstone Bridge with 2420C Galv.nometer	NEW	350.00
Weston 769 Electronic Analyzer	LIKE NEW	225.00
Weston 799 Insulation Tester 0-10,000 meg.	LIKE NEW	75.00
Weston 779 Analyser	LIKE NEW	125.00
Weston 665 Volt-ohm-Milliameter, case, and model 666 socket selector	LIKE NEW	100.00
Bristol Dynamaster Recorder-Controller KRQ1531 for Resistance Thermometers 130-145 ohm.	LIKE NEW	500.00
Bristol Pyromaster Potentiometer Recorder Controller KR531 0-10M.V.	EXCELLENT	400.00
Variac—General Radio Type 50A 0-135V. @ 50 amps.	EXCELLENT	95.00
APN-1 Altimeter Indicator 0-1MA. shunt, 250° dial	NEW	2.95
2" Aircraft Meter 1-0-1 milliameter scale calibrated 50-0-50	NEW	1.95
McG7S-G-1 Onan Motor Generator Motor 115/230V. 60 cy. single phase. Generator 115V. AC. 480 cy. 5.3 amps, 26V.D.C. @ 4 amps	NEW	190.00
Wes.on Model 506 Voltmeter 0-20,000 volts with 4 Model 505 multipliers	NEW	39.50

One of the largest and most complete electronic surplus stocks in the country. We have thousands of tubes, capacitors, plugs, accessories, transmitters-receivers, test equipment, etc. Send us your requirements.

TERMS: Prices f.o.b. Pasadena, California. 25% on all C.O.D. orders. Prices subject to change without notice.

METER RESISTORS STANDARD BRANDS

High-quality, HV ferrule types with clips.

IRC: 4 megs; 1 ma max.	$1.75
Weston: 10 megs.	4.75
Weston: 4 megs.	2.75
Sprague: 10 megs.	3.95
Sprague: 12.5 megs.	4.95

HEAVY DUTY RESISTORS

5000 ohms 50 W.—vitreous enamel	ea. 45¢
5000 + 1000 + 1500 Ohm 50 W. enamel	.45¢
50000 ohms 100 W. enamel	.75¢
75000 ohms 200 W. enamel	$1.19
100,000 ohms 100 W. IRC enamel	.95¢

STANDARD BRAND SYNCHRO CAPACITOR

MOD. #2 TYPE #9C
30-30-30 Mfd. Delta Connected. 90 V. 60 Cyc. Oil filled. Top Term. Size: 5" x 6" x 8". Wt. 14.8 Lbs. Tested at 1250 V.D.C. New $10.95

TRANSMITTING MICA

W.E. #D96163 90 Mmfd. 4 Amps. @ 6 Mc. Shielded. Gnded. case and standoff terminal. New $2.85

SPECIAL VARIABLE CONDENSER

5 gang, 15 to 400 Mmf. per section. Ceramic insulation and ceramic shaft isolates each Rotor. Phosphor bronze rotor contact wipers, ⅜" x ⅜" shaft. Ball bearings. Gangs individually shielded. Split rotor end plates for tracking. Overall Size: 2¾" x 3⅝" x 7". Cadmium plated. New, each $3.75

SPECIAL FIL. TRANSFORMER

Type #UX-6899. 29000 Volts Test. Prim: 115 V. 60 Cyc. 2—Secs.: 5 Volts @ 5.5 Amps. ea. New $14.95

BLOCKING OSC. TRANSFORMERS

C-12A. 3 windings. 5, 14 and 2 Ohms D.C. respectively. Completely shielded with mounting ears on base. Standoff terminals on side. Diagram on adjacent side $1.39

RAYTHEON PULSE TRANSFORMER

1000 RMS #UX-8693. Herm. Sealed. 6 Term. New $2.45

POWER TRANSFORMER G-698

Shielded Bottom Terminals
H.V. 500-0-500 @ 150 Ma. D.C. (2) 6.3 V Ct. @ 2.5 Amps. 5 V.Ct. @ 3 Amps. New $3.95

POWER TRANSFORMER #8845

Herm. sealed Ceramic term. 6.3 V. @ 9 A.
215-0-215 V. @ 15 Ma. 5 V. @ 2 A.
Size: 3" x 3¼" x 4½". Approx. 4 Lbs. New..$1.25

TUBES

9GP7	$4.95
MIL-531	$2.95

OUNCER TRANSFORMERS

W-226262-4
AF Output. Pri. Impedance: 10,000 Ohms. Sec. Impedance: 4000 Ohms, tapped at 250 Ohms. Metal can: 1⅝" Lg. x 1" O.D. Overall. 10% at 75 Mw. 400 Cyc. 20% at 75 Mw. @ 250 Cyc. Response: 250 to 2500 Cyc. ± 2 DB Glass sealed. New $1.19

#7254502
Pri. Impedance: 5000 Ohms. Sec. Impedance: 250 Ohms. Size 1⅝" Lg. x 1" Overall. Diagram on Case. Hermetically sealed. New ..... .99¢

SPECIAL FILTER COND.

3 x .3 Mfd. @ 4000 V.D.C. Oil filled. Standoff term. Size: 2¼" x 3⅛" x 7⅛". Approx. wt. 3¼ Lbs. New $3.95

MOBILE GENERATOR FILTERS

Tobe #1107. 6-30 V.D.C. 55 Amps. Completely Shld., Ideal for Aircraft, Marine or Amateur installations. Size: 2⅜" x 4" x 6⅛". Shpg. Wt. Approx. 2½ Lbs. $1.95
Sprague #JK-41. 30 V.D.C. 55 Amps. Shielded heavy threaded post terminals $1.95
Dhigm-Lwa. #RF 4-75. 50 V.D.C. 75 Amps. Shielded. Top Terminals $1.95

LINE FILTER

Tobe Filterette #1166. 250 V.A.C./D.C. @ 30 Amps. Completely shielded. Size: 1" x 3⅛" x 6". Shpg. wt. approx. 2½ Lbs. New ..... 21¢ $2.45/doz.

SELENIUM RECTIFIERS

Half wave (Ratings with 500 Mfd. Cap. on Output
#1A5....A.C. Input: 18V., D.C. Output: 14 V. @ 500 Ma. New ..... .95¢
#1H4....A.C. Input: 28V., D.C. Output: 24 V. @ 750 Ma. New ..... .75¢

JACKS, TELEPHONE TYPE

(Ckt. Fits .265" D. Plug) New ..... 21¢ $2.45/doz.

CIRCUIT BREAKERS

Heavy duty moulded case. 250 V.A.C. 35 Amps. (G.E. and Trumbell) Double Pole Single Switch. New $3.50
Type M (Sq. "D"). 120-240 V. 20 Amp. Double pole and double switch. New $3.25
Trum. #J-584 2 pole 120 V.A.C. 35 Amps. Dual switch. New $1.95

LINEN PHENOLIC TUBING

O.D. 1⅝" 3/32" wall. Over 3 Ft. long. Unvarnished orange linen finish ..... .45¢ Lgth.

AC OR DC SOLENOID

Pull type. Laminated "U" core, laminated "T" moving pole, in center. Riveted construction. Angle brackets for horizontal mtg. Travel distance of pole, 1¼". Winding, 400 turns #23 enameled wire. DC resis. 2.6 ohms. For 9 to 12 volts, 60 cycle AC, or 7 to 10 volts DC. Two 8" insulated leads. NEW!! ..... EACH $1.19

Quantity prices on request! Quantities limited. 25% deposit required on all C.O.D. orders.
Prices subject to change without notice.

UNITED SURPLUS MATERIALS

312 S. HALSTED STREET CEntral 6-4897 CHICAGO 6, ILLINOIS
Electronic, Aviation, Telephone & Teletype Parts and Equipment

Oil Condenser Specials

10 mfd—600 V. ..... $.75
Three term. bot. mntg. channel type. Dims. 3¾"x3½"x2". Two 5 mfd sections rated 400 V. at 72 degs. "C". 1000 V. test. Meets commercial specs. for 600 V. operation up to 40 degs. "C". Ideal for filter or power factor application where ruggedness and quality are paramount. Carton of 24 weight 42 lbs. $.65 ea.

16 mfd—600 V. $1.75
Dual 8 mfds. hermetically sealed and packed. Tobe type PT-SC-11 measuring 3¾"x2⅝"x2⅛". Stud mntg centers 2". Plugs into standard four prong socket. Quantity discount.

8 mfd—1000 V. $2.39
Dual 4 mfds. hermetically sealed and packed, measuring 3⅜"x3¾"x2 7/16". Case of 10 $2.10.

4 mfd—600 V. Type TLA.... $1.40
4 mfd—600 V. Type TLAD... $1.65
.2 mfd—1000 V. ST Bathtub.. $ .19
1 mfd—600 V. ST Bathtub... $ .48

Large quantities of bathtub, channel and upright oil conds. from 25V. to 25KV. Trans. and rcvng micas. Stand brand pots. (AB) wire wound pots and 25W. rheos. Inquiries solicited.

MONMOUTH RADIO LABS
BOX 159 OAKHURST, N. J.

EMPLOYMENT . . . EQUIPMENT . . . BUSINESS

OPPORTUNITIES

Whatever your need—
think "SEARCHLIGHT" FIRST

SAVE $$ ON BRAND NEW TUBES

0A2	$1.49	3A8GT	$1.49	6L6G	$2.00	12SN7GT	$1.10	723A/B	$14.95
0B2	2.00	3B24	4.95	6L7	1.10	12SQ7GT	.75	724B	2.50
0C3/VR105	1.25	3C22	59.50	6SA7	.90	12SR7	.98	725A	6.95
0D3/VR150	1.50	3Q4	.98	6SG7	1.10	15E	1.70	730A	9.95
1B22	3.25	3S4	.98	6SN7GT	.98	24G/3C24	1.50	811	2.75
1B24 Sylv	16.95	4E27	14.95	6SJ7GT	.98	25L6GT	.89	813	9.95
1B27	17.95	4J31	85.00	6SK7	.98	25Z6GT	.89	829B	14.95
1B35	29.95	4J52	249.00	6SL7GT	.98	35/4A	.45	832	6.95
1N23	1.29	5BP4	4.95	6SN7GT	.98	EF50	.89	832A	9.95
1N23B	4.95	5D21	19.95	6SQ7	.75	58	.98	833A	39.50
1N4/1294	.89	5J23	24.50	6SR7	.98	CRP72	.98	836	1.95
1S5	.98	6A3	1.60	6ST7	.98	RK/RT72	.98	837	1.95
1T5GT	1.10	6AB7	1.29	6V6GT	.90	RK/RT73	1.10	872A	2.75
1V	.75	6AC7	1.20	7B4	.83	76	.75	874	1.15
2C40	6.95	6AJ5	1.70	7C23	59.50	80	.75	884	1.75
2C51	4.95	6AK5	1.39	7F7	1.10	83	1.45	1616	1.38
2J21A	14.95	6AL5	1.49	7V7	1.10	VT127A	1.25	1622	2.10
2J22	6.95	6AR6	4.49	7Z4	.89	211/VT4C	1.45	1624	1.69
2J31	34.50	6AS6	1.00	12A6	.89	250R	9.95	1625	.45
2J32	34.50	6BE6	1.39	12C8	1.10	304TL	12.50	2050	1.75
2J33	37.50	6BL7GT	1.75	12CP7	12.95	307A	4.75	2051	1.25
2J34	37.50	6H6	.82	12H6	.89	417A	12.95	8020	1.75
2J35	89.50	6J5	5.95	12J5GT	.70	WL530	18.95	8025	5.95
2J56	199.50	6J4	5.95	12K8	.98	700A/B/D	16.95	9001	1.75
2J62	34.50	6J5GT	.65	12SG7	.98	706CY	39.50	9002	1.50
2K25	39.50	6J6	1.45	12SH7	.98	706GY	49.50	9003	1.75
2K29	34.50	6K4	3.19	12SJ7	.98	715A	14.95	9004	.69
3A5	1.50	6K7	.85	12SK7	.98	715B	11.90	9005	1.75
		6L6	2.25	12SL7GT	.98	717A	1.19		

1000's OF OTHER TYPES IN STOCK! 25% DEPOSIT WITH ORDER—BALANCE C.O.D.

We carry a complete stock of Radio & TV Tubes and Electronic Parts. Send us your requirements.

J. S. H. SALES CO.

Dept. E-3, 7552 Melrose Ave., Los Angeles 46, Calif.

WE PAY HIGHEST PRICES FOR SURPLUS STOCKS OF TUBES AND ELECTRONIC PARTS. Send us your list!

HIGH FREQUENCY EQUIPMENT

We design high frequency equipment. Let us know your needs.

GE-Leland Murray MG sets 5 HP Motor 440/220 3 ph 60 cy. generator self excited 3 ph 400 cy 120/208 volts 3 KVA direct conn. $650.

Large quantity transformers 115/6.3 volts 25VA to 150VA.

Several Selsyn generators various types 115 volts 60 cy.

EDWARD WOLF CO.
360 Norfolk St. Dorchester, Mass.
Geneva 6-6278

COAXIAL R F CONNECTORS

Prompt Delivery!

SO239	.89		
UG-21B/U	$1.30	UG-176/U	.20
UG-22B/U	1.35	UG-260/U	1.65
UG-27A/U	2.80	UG-261/U	1.35
UG-58A/U	1.40	UG-262/U	1.40
UG-58/U	1.05	UG-290/U	1.20
UG-88/U	1.25	PL-258	1.95
UG-107B/U	3.50	PL-259A	.75
UG-173/U	.20	PL-274	1.35
UG-175/U	.20	PJ-055B	.98

New Merchandise—Guaranteed

THE RADIOVISION COMPANY
56 Lispenard Street
New York 13, N. Y. BArclay 7-2685

WANTED

WANTED
YOUR SPARE SURPLUS EQUIPMENT
DYNAMOTORS • SELSYNS • AUTOSYNS • INVERTERS • TRANSMITTERS
RECEIVERS • TEST EQUIPMENT
Please send list stating condition and lowest price.
No Quantity Too Small or Too Large!
C. & H SALES COMPANY
BOX 356-SE EAST PASADENA STATION • PASADENA 8, CALIFORNIA

WESTERN ELECTRIC VACUUM TUBES
Types 101F, 102F, 272A, 274A or B, 310A or B, 311A, 313C, 323A, 328A, 329A, 348A, 349A, 352A, 373A, 374A, 393A, 394A, 121A Ballast Lamps.
W-6863, Electronics
330 W. 42nd St., New York 18, N. Y.

WILL BUY
MN-26-K or -J
COMPASS RECEIVERS
APN-9, TS-67, R-89B/ARN-5, ARC-1, ARC-3, ART-13, BC-221, BC-348, SCR-522, MN-53, MN-61, RA-1, MN-31 MI-32 ARN-7, ANY BENDIX OR AIRCRAFT RADIO EQUIPMENT, DYNAMOTORS, INVERTERS, TEST EQUIPMENT WITH "TS-" OR "I-" PREFIXES
State Condition and Best Price
AIRCRAFT RADIO INDUSTRIES, INC
70 E. 45 St. New York 17, N. Y.

WE PAY TOP DOLLAR
for all types of
SURPLUS ELECTRONIC EQUIPT.
Regardless of Condition. Ready Cash for:
- ART-13 Xmitter
- DY-17 Dynamotor
- TS-12 Test Sets
- TS-13 Test Sets
- MN-26 J or K
- BC-312 • BC 342
- BC-611 Handie Talkie (or any part)
- I-100 Test Sets
- BC-348 Rcvr.
- BC-788A, AM, B or C
- I-152A, AM, B or C
- ARC-1 • ARC-3
- Teletype Equipment
- Any Test Equipment
- TS-67

Plus anything you have in Electronics Equipment. Send your complete list, present condition and asking price to:
WEST REGION ELECTRONICS
Dept. E-4
1437 S. Norton Ave., Los Angeles 19, Calif.

SURPLUS WANTED
GOULD GREEN
252 Greenwich St. N. Y. C. 7

WANTED
BOONTON Q METERS
Reply:
W-1332, Electronics
330 W. 42nd St., New York 18, N. Y.

WANTED
DYNAMOTORS
DM-34, DM-35, DM-36 and DM-37. Must be new. Any quantity.
W-9414, Electronics
330 W. 42 St., New York 18, N. Y.

COLUMBIA ELECTRONICS LTD.

EQUIPMENT WANTED!

We want to buy all types of surplus electronic equipment. We are one of the largest buyers in U. S. We buy more because we give every seller top prices and a fair deal. TELL US WHAT YOU HAVE. USE COUPON BELOW—AND MAIL TODAY!

Use following numbers to indicate conditions: N-1, brand new; N-2, used, like new; N-3, used.

ITEM	CONDITION	PRICE WANTED

To: COLUMBIA ELECTRONICS LTD., 524 S. San Pedro St., Los Angeles 13, Calif.
Name .....
Address .....

SEE COLUMBIA ELECTRONICS AD ON PAGE 342

WANTED
Tubes, Test equipment, Condensers, & general inventories. Highest prices paid.
W-9948, Electronics
330 W. 42nd St., New York 18, N. Y.

NEED ART-13; ARC-1; ARC-3; DY-17; TS-12; TS-13; MN-26 J or K; BC-342; BC-312; I-100; BC-348; BC-611 Handie Talkie (or any part); BC-788 A, AM, B or C; I-152A, AM, B or C; TS-67; teletype; test or any other equipment. Will trade. Write:
BOB SANETT (W6REX)
4668 Dockweiler, Los Angeles, California

WANTED
Teletypewriters complete, components or parts. Any quantity and condition.
W-6864, Electronics
330 W. 42 St., New York 18, N. Y.

If there is anything you want that other readers can supply
OR . . . something you don't want— that other readers can use—
Advertise it in the
SEARCHLIGHT SECTION

★★ CHEAPIES ★★

WILLARD MIDGET 6V STORAGE BATTERY

3 amp hr. rating. Transparent plastic case, 3 ¾" x 1 13/16" x 2 ¾". Uses standard electrolyte. **$1.95**

C197/ARC-3 CONTROL BOXES.....$1.95
DZ-2 COMPASS RECEIVERS. Freq. range 15 to 1525 Kc in 6 bands. 5 gain tuning condenser. Requires external pwr. supply or dynamotor. Complete with 8 tubes. FB for radio tuners, hi-fidelity systems. Exlnt. shape, only.....$24.95

BC-906 LAB. PRECISION FREQ. METER
Range 150-225 MC. For upper TV channels or other uses. Easily modified for lower TV channels. Contains 0-500 DC Micro-Ammeter. Operates on simple DC power (1.5V and 45 V.) Precision Vernier dial. Diode-Triode tube. With aluminum carrying case. Less antenna and charts..... **$7.95**

TURBO SUPERCHARGER AMPLIFIERS. Case and chassis make a nice foundation for test equipment or converter or transmitter use. Contains resisters, condensers, tube sockets, other useful parts. 1000's sold at two & three times this low price. While they last, less tubes.....98¢
APG-15 ANTENNAS. A powerful microwave antenna, AS-217-APG 15B, 12 CM dipole and 15" Parabola housed in weatherproof Radome 16" dia. 24V DC spinner motor for conic scan.....$9.95

APT-1 AND APQ-2 TRANSMITTERS
Originally used as jammers—now for ham use. Perfect foundation for mobile or home transmitter. Built-in noise generator and amplifier which use standard tubes. APT-1 approx. 30-70 Mc, FB for 10 and 6 meters. APQ-2 approx. 450 Mc, FB for citizens band, relay stations and experimental use. Complete original circuit intact, less tubes and blower. Shpg. Wt. approx. 35-lbs. **$9.95**

ORDER DIRECT FROM THIS AD!
Prompt, speedy shipment. Cash with order. Minimum order $3.00. 25% deposit on C.O.D. orders. Shipments by truck or RR express collection. California buyers please add state sales tax. All prices subject to change. All merchandise subject to prior sale.

ALVARADIO SUPPLY CO.
Dept. L-16,
341 S. Vermont Ave., Los Angeles 5, Calif.
DUnkirk 8-2211

RADAR
SCR 545A Search and Track. Complete trailer, power supply and spare parts. Nearly new. Write for description and price.

PORTABLE PUMP ASSEMBLY
Leland, 110 v. 60 c. 1 ph., 1/3 H.P. motor and D. Roper #2 hydraulic pump. 300 lbs. PSI max., 125 lbs. PSI continuous @ 3.25 gallons per min.....$52.00

SEARCH LIGHT
Signaling, 12" Curtis Lighting, Inc. 115 v. a-c or d-c, 1000 watt. Complete w/bulb. Comes w/mounting assembly that gives 360° horizontal rotation and 180° vertical rotation.....$27.50

WATER COOLING HEAT EXCHANGER:
10 KW, Westinghouse RU-3-B. includes radiator, fan, pump, visual & electrical temperature & pressure indicators. 110 v. 60 c. Complete in steel housing 24"x31"x52" $165.00

MOTOR
Bendix 1/15 HP, 115 v. 60 c. 1 ph. 1725 RPM..$4.75

GENERATOR
Bendix model NEA3. Output 115 v. a-c 10.4 amps, 800 cy. SP, and 28.5 v. d-c, 60 amps @ 2400 RPM. Self excited, splined drive. New. Orig packing..$27.50

BATTERY CHARGER TRANSFORMER
G. E. Cat. #WS-9931G. Pri. 105-115-125 v. 60 c. Sec. 105-90-75-60-45-30 v @ 6 amps. each side of center tap. Voltage reduced 10% and 20% thru tapped primary; two x 5v. 18 amp. C.T. (Tungar filaments) and two x 7 v. 10 amp. 7½" h. x 8-¾" w. x 5¼" d. Wt. 56 lbs. New, orig. packing. G. E. price $52.00...$17.50
2 for $30.00

NEW!
- low prices
- values
- equipment
- components

Note: All merchandise not designated as new is guaranteed to be in excellent to new condition.

EPCO
1527 E. 7th St.
Los Angeles 21, Calif.

POWER SUPPLY COMPONENTS

TRANSFORMERS
Plate, American Transformer Co. Spec. 29103. Pri. 115 v. 60 cy. 10.4 KVA. Sec. 17,000 v., 520 amps., 35 KVA test...$65.00
Plate, American Transformer Co. Spec. 29108. Same as above but center-tapped to handle 1 amp @ 8500 v.....$75.00

Filament, American Transformer Co. Spec. 29106. Type WS, .050 KVA, 50/60 cy 2⅛". .35 KVA test, 12 KV d-c operating. Pri. 115 v., Sec. 5 v., 10 amps w/integral stand-off insulator and socket for #371, 872, etc. rectifier tubes.....$12.50
2 for $22.50—4 for $40.00

CAPACITORS
9.12 mfd., 1265 v. 60 c. a-c or 4000 v. d-c power factor correction 5.8 KV. A.S. Cat. #3S2S908.....$17.50
.35-.25, 6000 v. d-c or .125 @ 12,000 v. d-c., Fast Cat. #A7548, oil.....$3.75
1.25/1.25 mfd., 7500 v. Cat. #32SF340.....$12.50
2x.15 mfd., @ 8000 v. or .075 mfd. @ 16,000 v. Vitamin Q.....$2.00

RESISTORS
Fixed, w.w. 100,000 ohm, 200 w. ferrule ends.....$1.00
Fixed, w.w. 5,000 ohm, 200 w. ferrule ends.....$1.00

METERS
3" Westinghouse & Weston 0-1 ma. d-c movement, calibrated 0-4 or 0-20 KV Mod. 301, NX35.....4.95
3" Westinghouse & Weston 0-120 amp. a-c calibration. 3 amp f.s. deflection. Includes doughnut current transformer 40/1 ratio. Mod. NA35 & 476.....$8.50

RELAY
Magnetic overload. Allen-Bradley #810, 6.3-18.1 amps. 600 v. max.....$7.95

RECTIFIER
Dry Disc, 6.5 v. a-c FWCT 2.2 v. d-c @ 3 amps.....$ .75 4 for $2.00

TRANSTAT
115/230 v. 50/60 c. 0-260 v. 2.5 amp output.....$17.50 2 for $30.00

CONTACTOR
Allen-Bradley & Westinghouse, 115 v. 60 cy. coil, DPST, 15 amps.....$4.95

HIGH VOLTAGE RECTIFIER POWER SUPPLY
Variable output 0-15,000 v. d-c @ 500 mils. Input 115 v. 60 cy. SP. Army type RA-38. Size 65½" x 53¾" x 56¾". Wt. 2040 lbs. Units are new, complete with spare tubes and remote control. Write for detailed information.

PANEL METERS also Lab Instruments
Special
L & N No. 4870 Conductivity Bridge
L & N No. 3430A Type Wheatstone Bridge
For Panel Meter Listing refer to our ad July Electronics
AMERICAN ELECTRONICS
29 South Park Ave.
Rockville Centre, L. I., N. Y.
Tel. Rockville Centre 6-0207

TUBE REBUILDING
Large Transmitting and Power types
Economical • Guaranteed
FREELAND PRODUCTS CO.
700 DRYADES ST., N. O., LA.

New "SEARCHLIGHT" Advertisements
received by August 3rd will appear in the September issue subject to limitations of space available.
Address copy to Classified Advertising
ELECTRONICS
330 West 42nd St. New York 18, N. Y.

3,000 CYCLE GENERATOR FOR SALE
Driven by 3 phase, 60 cycle, 220/440 volt motor. Output 2 KVA. 115 volts. In Perfect Condition. Never Used for More than 10 Minutes at a Time; Total Operation 2 hours.
FS-9861, Electronics
330 W. 42 St., New York 18, N. Y.

SURPLUS COMPONENTS FOR SALE
Bathtubs, oils, micas, xformers, chokes, relays, trimmers, sockets, odd items, etc.
Surplus lots purchased.
EMPIRE ELECTRONICS
Box 41, Midwood Stat., Brooklyn 30, N. Y.
Phone BRyant 9-1229

If there is anything you want—
or something you don't of this paper can supply want that other readers —or use—advertise it in
SEARCHLIGHT SECTION
CLASSIFIED ADVERTISING DIVISION

FOR SALE
Beryllium Copper Strip
.0062 (+ — .0005) x 5" x 60"
No. 1 — ½ & ¾ Hard
700# Available
GLOBE TRADING COMPANY
1815 Franklin Street Detroit 7, Michigan

CONDENSERS
OUR SPECIALTY
OIL FILLED & TRANSMITTING MICA TYPES
All Values and Voltage Ratings
We Invite Your Inquiries
TECHNICAL RADIO PARTS CO.
557 McDonald Ave., Brooklyn 18, N. Y.

BRAND NEW — IMMEDIATE DELIVERY
ONE OR A THOUSAND—PRICED RIGHT

METER. 0-25 ma. Basic S.F. n.c. 6 v.d.c. 385 Movement d.c. 2½" sq. ohms, 15 ma. oper., hys. @ 400 ma.—each 21 3V scale and blank face 13 ma. opens. Copper ohms. reverse, zero adj., mtg. stud for delay clamp. **$1.25** each.

W.E. RELAY 2D-166672 **$1.95** 3½ x 4 x 7", Wt. 15 lbs., each **$9.95**.

RAYTHEON DOUBLE CHOKE. Type WX-5140. Two sep. secs., each 1.5 ohms, 8 ma coil, SPDT, dble break, 3 amp contacts, 110 or 220 v., d.c. each **$1.25**.

ANTENNA RELAY—Advance 400—1B DPDT plus SPNO—¼" pure silver contacts. 110VDC — 4200 ohms coil—w. or w/o term. strip as illustrated each **$8.95**.

6V. WILLARD STORAGE BATTERY NT-6 Min. plastic 3½ x 3 x 1⅞". Stiffened. Dry 1½ lbs.—each **$2.95**

WARD LEONARD 4 CIRCUIT CONTACTOR 115V. 60 cy. 15 amp., contacts, double make, 4 sep. ckts. 5 x 5 x 5"...each **$7.95**



TERMINAL BOARD—TM—184—Linen base bakelite, 15 x 4 x ⅜" 28 nickel pl. piercing posts, cap. up to ⅛" wire dia. **$0.95** each.

G.E. RELAY—CR2791—B109P36, 10,000 ohms, 8 ma coil, SPDT, dble break, 3 amp contacts, 110 or 220 v., d.c. each **$1.25**.

RADIO DEVELOPMENT & SALES CO.
See our ads in May and June Electronics for other bargains
323 ATLANTIC AVE. UL ster 5-0488 BKLYN 2, N. Y.

"T A B" TUBES

THAT'S A BUY

TESTED—GUARANTEED

Prices Subject to Change

OA2	1.69	2C43/		6A6	.89	6L6G	1.69	10Y	.49	25Z6GT	.69	F127A	18.89	802	4.69	9003	1.98
OA3/VR75	1.56	464A	16.95	6A7	1.39	6L6GA	1.69	12A	.89	32L7GT	1.49	RX215	9.95	803	9.98	9004	.79
OA4G	1.33	2C44	1.29	6A8GT	1.49	6N7	1.39	12A6	1.39	35C5	10.98	WE215A	9.95	804	8.45	9005/RCA	1.95
OB2	1.69	2C51	5.95	6AB4	.79	6N7	2.39	12A6	.89	35	.59	227A	2.65	805	4.98	9006	.29
OB3/VR90	1.28	2C52	5.98	6AB5/6N5	1.33	6N6G	1.69	12A7	1.29	34	.69	231	1.20	806/866Jr.	1.98		
OC3/		2D21	1.69	6AB7/1853	1.39	6N7GT	1.29	12A8GT	.79	35/51	.89	242C	8.49	826	2.39	Sub-Miniatures	
VR105	1.43	2E5	1.19	6AC3GT	1.89	6P6GT	.89	12AH7GT	.79	35A5	.79	244A	4.15	829	2.45	2E36	1.49
OD3/		2E22	1.45	6AC7	.99	6Q7	.89	12AL5	1.11	35B5	.79	247A	9.95	829	12.98	2E43	1.39
VR150	1.98	2E24	5.05	6AD7G	1.49	6R7	.99	12AT6	.89	35C5	.89	249B	3.75	829B	14.98	2E45	.79
OY4	2.52	2E25A/		6AE5	1.39	6S8	1.39	12AT7	.89	35D5	1.11	250TH	21.79	832	10.98		
OZ4	.79	HY65	5.15	6AF5G	.89	6S4	.98	12AU6	.89	35L6GT	.79	250TL	21.29	832A	12.98	CK501AX	1.26
C1A	9.75	2E26	3.85	6AF6G	1.33	6S7G	.89	12AU7	.79	35TG	4.95	HK254	15.49	833A	48.98	CK502AX	1.79
C1A/	.49	2E30	2.25	6AG5	.89	6SH7GT	.89	12AV6	.79	35W4	.49	262B	3.98	836	5.98	CK503AX	1.79
1A3	1.10	2J21	10.65	6AG7	1.99	6SA7GT	.89	12AV7	1.09	35Y4	.69	274B/5R4	1.50	837	1.39	CK504AX	1.79
1A4P	.79	2J21A	9.75	6AH5G	1.49	6SB7Y	1.19	12AW6	1.79	35Z3	.79	300	27.50	838	3.98	CK506AX	1.79
1A6GT	.79	2J22	11.95	6AH6	1.49	6SC7	1.39	12AX7	.89	35Z4GT	.69	304TH	26.98	843	1.98	CK509AX	1.26
1A6	1.49	2J32	38.50	6AJ5	1.16	6SD7GT	.99	12AY7	5.95	35Z5GT	.89	304TL	24.98	845	5.95	CK522AX	1.79
1A7GT	.89	2J32	69.95	6AK5	1.39	6SF5	.89	12BA6	.79	REL36/6J4	.49	307A/	851	60.00	5.49	CK525AX	1.79
1AE4	1.80	2J34	49.50	6AK5W	2.98	6SF7	.89	12BA7	.79	36	.65	RK75	6.45	860	12.98	CK526AX	1.98
1B3/8016	.89	2J36	125.00	6AK6	1.49	6SG7	.89	12BD6	1.75	37	.69	310A	6.98	861	49.98	CK528AX	1.79
1B4P	.89	2J37	18.95	6AL5	.69	6SH7GT	.99	12BE6	.89	38	.89	316A	2.98	864	.99	CK529AX	1.98
1B5/25S	.99	2J38	25.50	6AL7GT	1.29	6SJ7	.89	12BF6	.85	39/44	.59	327A	2.50	865	1.39	CK531DX	.98
1B7GT	1.29	2J39	49.50	6AN5	5.95	6SK7GT	.89	12BH7	1.29	CRC540	.59	350B	5.95	866A	1.39	CK532DX	.98
1B21/471A	2.85	2J48	28.50	6AN8	.89	6SL7GT	.89	12C8	1.39	TZ40	3.98	353A	4.50	867	25.98	CK533AX	1.79
1B22	3.25	2J49	39.45	6AQ6	.89	6SN7GT	.79	12F8GT	.79	HY40Z	3.75	354	24.98	872A	2.45	CK534AX	.89
1B23	9.90	2J50	27.50	6AQ7GT	1.19	6SN7WGT	2.25	12H6	.89	41	.79	355A	14.15	GE872A	4.98	CK536AX	.89
1B24	3.75	2J52	240.00	6AR8	.79	6SQ7GT	.89	12J5GT	.89	42	.69	367A	3.95	874	1.98	CK537AX	4.98
1B24S1v.	26.00	2J54B	49.50	6AR8	2.98	6SR7	.69	12J7GT	.99	43	.85	371B	98	878	1.95	CK538DX	.98
1B26	3.98	2J56	199.50	6AS5	.79	6SS7	1.09	12K7GT	.89	45	.69	388A	.79	884/6Q5G	1.89	JRP5676	2.98
1B27	24.00	2J61	55.00	6AS6	.79	6ST7	1.39	12K8	.89	45S/VT52	.59	388A	2.49	885	1.27	CK5697	5.98
1B32/532A	3.98	2J62	49.45	6AS7G	4.98	6SU7GTY	3.37	12Q7GT	.79	45Z3	.69	393A	9.95	893A	250.00	JRP5784	5.78
1B37	18.00	2K25	49.95													CK5704	2.98
1B41	49.95	2K25/														5829	5.98
1B40	5.98	723AB	49.95													5875	1.98
1B46	49.75	2K28 mtd	37.25	6AT6	.59	6SZ7	1.05	12S8GT	.98	45Z5GT	.89	394A	4.90	922	.98	C'Ray Tubes	
1B53	49.95	2K29	39.95	6AU5GT	1.49	6T7G	.89	12SA7GT	.89	46	.89	FP400	15.98	923	1.75	2AP1	8.95
1B56	45.95	2V3G	1.29	6AU6	1.49	6T8	1.29	12SC7	1.39	47	.99	X640	15.98	925	1.59	3AP1	12.95
1E1C	3.49	2W3GT	1.29	6AV5GT	1.29	6U4GT	.89	12SF5GT	.79	48	2.39	WL414	63.95	929	1.33	3AP1A	14.25
1C3GT	.89	2X2	.69	6AV6	.59	6U5/6G5	.99	12SF7GT	.59	RK48A	14.85	417A	8.95	930	1.05	3BP1	7.95
1C6	.79	2X2A	1.89	6AW6	1.09	6U7G	.89	12SG7	.89	49	.83	GL434	14.98	931A	4.98	3BP1A	14.98
1C7G	.89	2X2/	.69	6AX5GT	.79	6U7G	1.10	12SH7	1.10	50	1.19	446A/	954	.29	1.65	3FP7	3.85
1D5GP	.99	3A5	1.49	6B4G	1.39	6V6	2.25	12SJ7GT	.79	EF50	.98	2C40	1.19	955	.49	3FP7A	4.98
1D7G	.89	3A8GT	1.59	6B6G	1.19	6V6GT	.89	12SK7	.79	50A5	1.19	446B	1.75	956	.29	3GP1	4.98
1D8GT	.89	3B4	2.89	6B8	.89	6V6GT	1.18	12SL7GT	.89	50C5	.79	450TH	47.50	958A	.99	3HP7	2.85
1E5	.99	3B5	.98	6B8G	.89	6V7G	1.99	12SN7GT	.89	50C5	.79	450TL	44.50	958A	.98	3HP14	14.98
1E7G	.99	3B7/1291	.69	6B7	1.19	6V8	1.49	12SQ7GT	.79	50C6	1.49	GL451	.89	SD968	.98	3JP1	15.95
1F4	.69	3B23/KK32	25.98	6B8G	.89	6W4GT	.69	12SR7	.98	50L6GT	.98	460	.99	959	.98	3JP1/2	19.95
1F5G	.79	3B24	5.98	6BA6	.98	6W4WGT	.98	12X4	.90	50X6	.89	HF200	15.95	FM1000	1.50	3JP14	16.95
1F6	.89	3B25	4.50	6BA8	1.98	6W5GT	.98	12X5	.90	50X6	.89	HF300	15.95	FM1000	1.50	4AP10	4.85
1F7G	.89	3B26	3.95	6BA6	.79	6W6GT	.89	12Z3	.89	50Y6GT	.79	WL468	13.95	CK1005	.89	5AP1	14.98
1G4GT	.89	3B28	3.45	6BC5	1.19	6W7G	1.33	14A4	1.09	50Y7GT	.79	GL502A	4.45	CK1007	.89	5BP1	6.98
1G5G	.89	3C6/XXB	1.49	6BC5	.69	6X4	.49	14A7/12B7	.99	52	.99	RH507	9.98	R1100	5.00	5BP4	6.98
1G6GT	.79	3C22	9.98	6BC7	1.23	6X5GT	.49	14AF7	.53		.69	527	35.00	R1130	12.00	5CP1	14.98
1H4G	.89	3C31/C1B	3.45	6BD6	.89	6Y5	1.85	XXD	1.19	55	1.06	GL538	49.49	E1148	.39	5FP7	7.85
1H5GT	.89	3C45	13.85	6BF5	.79	6Y6G	.89	14B8	.99	56	.85	WL531	45.75	HY1231Z	5.98	5FP14	18.98
1H6GT	.79	3D6/1299	.69	6BF6	1.49	6Y7G	.89	14B8	.89	57	.79	WL532A	3.89	1288	1.99	5HP1	9.75
1J5G	1.39	3D21A	1.95	6BG6G	1.19	6Z5/12Z5	1.18	14C5	1.09	58	.79	544	4.98	1613/6F6X	1.05	5HP4	9.75
1J6GT	.79	3E29	14.95	6BH6	.89	6Z7G	.89	14C7	.89	58	1.45	GL546	4.98	1619	1.98	5JP2	24.75
1L4	.69	3LF4	1.29	6BJ6	.99	6ZY5G	.89	14E6	.99	59	1.78	550P1	19.95	1618	1.98	5MP1	9.75
1LA4	1.19	3Q4	.79	6BL7GT	2.75	7A4/XX6	1.89	14E7	1.09	HY69	2.75	575A/975	13.75	1619	.29	7BP1	14.98
1LB4	1.29	3Q5GT	.79	6BQ5	1.49	7B5	1.89	14F7	1.59	70A7	1.59	WL579	10.49	1620	5.75	7BP7	8.85
1LC6	1.29	3S4	.79	6BQ6GT	1.19	7A6	.79	14F8	1.29	70L7GT	1.59	WL579B	12.98	1622	2.26	9JP1	18.39
1LC5	.79	3V4	.79	6C4	.69	7A7	.99	14H7	.99	71A	.79	601B	.19	1625	.49	10P14	14.85
1LC6	.89	4-1000A	89.50	6C5GT	.79	7A8	.89	14J7	1.19	72	.98	HY615	.19	1626	.49	12DP7	24.50
1LD5	.99	4B22		6C6	.89	7AD7	1.49	14N7	.89	CRP72	1.37	WL615	18.98	1629	.49	12GP1	12.45
1LE3	.99	EL5B	9.95	6C7	1.26	7AF7	.89	14O7	1.09	73	1.67	KU627	18.00	1630	.97	12LP4	49.98
1LG5	1.29	4B27	4.98													902	24.35
1LH4	.89	4B32	10.95													905	8.65
1LN5	.79	4C25/														913	2.45
1N5GT	.99	HK54	5.98													914	11.98
1N6G	.98	4C33	59.00	6C8G	.89	7AG7	1.99	14R7	1.19	NR74	.29	WL632A	8.98	1631	1.25	914A	45.00
1P5GT	.79	4C35	54.21	14S7	42.50	7AH7	1.19	14S7	1.09	75	.79	WL670A	11.98	1634	1.98	Vacuum	
1Q5GT	.69	4C36	15.98	6CB6	.89	7B4	.79	14W7	1.09	HY75	4.59	701A	6.98	1633	.75	Capacitors	
1Q26	69.00	4E27/257	17.85	6CD6G	2.49	7B5	.79	14X7	1.23	76	.79	702A/702B	2.65	1634	1.98	MMf-Kv	Ea.
1R4/1294	1.29	4J31	75.00	6D4	2.85	7B6	.79	14Y4	.99	77	.79	703A	6.75	1635/KK48	1.98	50-1	7.25
1R5	.79	4J42/700	19.00	6D6	.88	7B7	.89	15	.98	78	.89	704A	1.85	1644	.95	50-15	7.98
1S4	1.19	4J47	240.00	6D7G	.88	7B8	.89	15E	1.98	79	.98	705A/8021	1.25	2050	1.98	6-20	15.98
1S5	.79	4J52	295.00	6D8	.89	7C4/1203A	.79	15R	.98	80	.69	707A	13.50	2051	1.50	12-20	9.98
1S21	9.95	4T4/2	5.95	6D8	.89	7C5	.79	FG31	3.98	FG81	1.69	707B	24.95	R4340	36.00	20-20	15.98
1T4	.79	4X-500F	85.00	6E5	1.39	7C6	.99	18	.98	81	1.69	710A/8011	1.75	5516	7.75	50-20	9.98
1T5GT	.89	5AZ4	1.35	6E7	1.49	19	.99	82	1.19	713A	1.69	5517/				85-20	9.98
1U4/5910	.69	5C22	59.95	6E8	5.95	7C23	774.00	19BG6G	1.79	82V	1.39	NL714	.85	CK1013.	3.39	75-20	14.98
1U5	.79	5C36/C9B	9.90	6F5	.79	7E5/1201	1.25	19J6	1.89	83	1.89	715A	7.90	5600A	5.95	6-25	18.75
1V	.79	5D21	26.38	6F6	.89	7E6	.89	19T8	1.89	83V	1.89	715B	15.98	5654	4.79	12-32	12.95
1V2	.79	5J23	13.65	6F6GT	.79	7E7	.99	20	1.17	84/6Z4	.79	715C	48.98	5656	4.98	20-32	18.75
1X2	.99	5J29	12.40	6F7	1.39	7F7	1.09	RK20A	8.95	85	.79	717A	1.59	5670	5.98	50-32	18.75
1Z2	8.98	5J37	99.00	6F8G	1.29	7F8	2.19	RX21	2.50	89	.75	718BY	48.45	5686	4.23	75-32	22.75
2A3	1.98	5R4GS§pec		6G6G	1.29	7G7/1232	1.29	22	.98	VR92	.25	718CY	48.45	5687	8.75	100-32	22.75
2A4G	1.19	5R4GY	2.25	6H6GT	.59	7L7	1.29	24A	1.10	100TH	8.89	720CY	45.00	5725	5.98	Magnar Built	
2A5	.69	5T4	1.99	6H6	.89	7J7	1.09	24A	1.10	100TH	8.89	728CY	45.00	5725	5.98	16X597	3.49
2A6	.49	5U4G	.59	6J4	6.98	7K7	1.29	24G/3C24	1.98	FG105	29.95	721A	5.98	5726	4.39	20X672	2.49
2A7	.69	5V4GA	1.39	6J5GT	.79	7L7	1.19	25A6	1.49	VU111	.45	722A/287	2.75	5812	2.29	21T283	6.75
2B7	.89	5W4	.89	6J6	1.29	7N7	1.19	25A7	3.17	HY114B	.79	723A	9.75	5814	5.49	28X938	2.89
2B22/		5X4G	.79	6J7	1.09	7Q7	.79	25AC5GT	1.59	HY115/145	.79	723A/B	14.49	UX6453	.69	859483	2.95
GL559	4.75	5Y3GT	.49	6J8G	1.19	7S7	.79	25AV5GT	.79	117L7GT	1.59	724A/B	34.50	8002R	99.50	Ballast	
2C21/1642	.69	5Y4G	.79	6K4	3.49	7S7	1.49	25BQ6GT	1.19	117N7GT	1.79	724D	12.95	8005	5.85	1A1	.49
2C22/7193	.39	5Z3	.99	6K5GT	1.09	7T7	1.03	25C6	1.18	117P7GT	1.39	725A	7.75	8012	1.25	4A1	1.79
2C26	.79	5Z4	1.29	6K6GT	.79	7V7	1.39	25L6GT	.69	117Z3	.59	726A	7.98	8013A	5.98	6-11	.49
2C34/RK34	.69	6A4/	7.45	6K7	.85	7W7	1.19	25N6	1.49	117Z4GT	1.39	726B	24.98	8014A	28.95	9-2	.49
2C39	23.98	6A3	1.59	6K8	.99	7X7/XXFM	1.19	25W4GT	.89	117Z6GT	1.19	726C	69.98	8020	1.25	9-3	.49
2C40	6.98	6A4	1.89	6L5G	.79	7Y4	.69	25Y5	.79	117Z7GT	1.49	730A	12.98	9001	1.98	10-4B	.49
2C43	26.75	6A5G	2.39	6L6	1.99	7Z4	.69	25Z5	.79			801A	.98	9002	1.65	13-4	.49

Use Your Priority for **SPEEDY DELIVERY** Extend Your DO and Contract Number

Sell Your **SURPLUS TUBES & EQUIPMENT** - Send List & Prices

ATTENUATORS—Top Mfrs
500/500 ohm/20 step. Bal. Ladder $0.98
"T" 5000 ohm/10 step 9.98
7470 & 1063 ohm/12 step 2.98
Dual 13000 ohm/20 step 2.98
Dual 25000 ohm/20 step 2.98
1000000 ohm/20 step 3.98
Variable Atten. 600 ohm step ..... imped/30 ..... 10.98

COAXIAL CONNECTORS

A. 80239/831R	Receptacle		.65c
B. PL259/8318PN	Plug		.65c
C. AN3102-8S-1S	Plug		.65c
D. M359/CSX48192	Angle Adapter		.65c
F. UG22/U	Panel Jack		$1.49

Write for Connector Listing

LINE FILTERS

10Amp/130vacdc Cad USN 0.1 to 1000 Mc's $1.29
30Amp/250vacdc Cad USN 0.1 to 1000 Mc's $3.98
2 for $6.00
80Amp/600vac/250vac. Fltrs both sides of line. SOLAR "Rim-O-Stat". New $9.98; 100Amp/usable 110 vacdc GE 2 for $1.98

New Thrift-Lite Lifetime Photo-Flash
Complete, Ready-To-Shoot. Not a Kit. Rated at twice no. of pix taken in life-time. 1/1000 sec. flash, every 15 sec. True daylite color. Usable all cameras Oper. 115 VAC. w/lite. AC40 ..... $44.50
Complete Outfit. Incl Battery Portapack, Synchronizer & Cable for KODAK or COMPUR Shutters. Complete $69.95

New Meter Specials
Immediate Delivery. No Priorities Needed
Brand New—Weston 301, 3" Sq. Panel Mtg.
0-50 Micro Amps $16.98
0-1 Ma DC (Reads 5 Kv) less multiplier 7.50
0-150 Volts AC Rect. 1000 ohms/V 9.98
0-800 Volts DC, 1000 ohms/V 12.98
—20 +3 VU, Vol. Level Indicator. $16.98

FULL-WAVE BRIDGE RECTIFIERS

18 VAC Input	14 VDC Output
2 Amps $2.48	12 Amps $7.98
4 Amps 3.98	24 Amps 11.98
8 Amps 5.98	
36 VAC Input	28 VDC Output
2 Amps $2.70	8 Amps $7.45
4 Amps 5.45	12 Amps 9.95

Const. Voltage Regulator
60 Watts RAYTHEON, Inpt 95-130 V 60 Cyc; Output 115 V/.58 Amps./½% Reg. New $14.98
810 VA Powerstat—230 V, 50/60 cyc, Oper 115 V AC, Bench or Wall Mtg, New $19.98

Infrared Snooperscope
Image-Converter Tube HiSensitivity simplified design 2" dia. Willemite screen—Resolution up to 350 lines/in. Complete data & tube, each ..... $4.98; 2 for $9.49

MICROWAVE
Klystron Mtg. Assy (723AB) & Cplng to Two Type "N" Co-Ax Fittings $6.98
1 Micro Second Delay Line, Millen. 2.95
2.5 Kv Pulse Transformer Pri 4Kv, 50-1500 ohm Imped. Permalloy Core. WCco. $14.98
PLATE TRANFORMERS—115 V 60 Cyc Inpt 7500 or 15000 V Dbir/35 ma. $18.98
3000 V/10 ma. Cad H. V. Insul. 4.98

Sylvania
S6/6W/120V.15
Watchs G7/ 7W/120V .19
Med Screw Base
15W/125V .08
25W/125V .08
Neon Bulbs
NE16/991. .39
NE20 .15
NE30 .35
NE45/2W .27
NE51/NE2H .10
Bull's Eye Lite
Dialco Type
Chromed Less
Bulb .59; 2/.98
Tubes Gtd Exc
Open Fil &
B'kage Via
R'Exp Only

Xtal Diodes
Many Late
Dates—Latest
Tan Specs
1N21 ..... .89
1N21A 2.00
1N21B ..... .49
1N23 ..... 26.70
1N23A 1.29
1N23B 5.49
1N25 ..... 7.45
1N26 ..... 6.98
1N27 ..... 3.50
1N29 ..... 3.50
1N32 ..... 18.00
1N34 ..... .89
1N35 ..... 1.98
1N38 ..... 1.42
1N48 ..... 5.45
1N46 ..... .89
1N48 ..... .79
1N51 ..... .52
1N53 ..... .52
1N54 ..... .89
1N55 ..... 2.98
1N56 ..... .89
1N57 ..... .89
1N58 ..... 1.19
1N60 ..... .49
1N61 ..... 1.98
1N62 ..... Write
1N63 ..... 3.89
1N64 ..... .75
1N67 ..... 1.95
K34 ..... 1.39
CK705 ..... .77
CK706 ..... .84
CK707 ..... 1.88

Thermistors
D167019 Vol Limiter 2.95
D168391 Thermocouple 1.00
D170396 HF Pwr Meas. .99
Ie Bulb Time Delay .90

Varistors
CW20259/USN
Sic. 2.95
WEco 49A 1.98
WEco 41A 1.50

Xtal Freq Stds
1000Kc 3.49
4700Kc ..... .98
5000Kc 2.98

Hi-Fi Xtals
5010/5025/5055 Kc. Ea. 14.98

Tubes Gtd Exc
Open Fil & B'kage Via R'Exp Only

Money Back Guarantee (Cost of Mdse Only) **$5 Min. Order FOB NYC. Add Shpg. Charges & 25% Dep. Tubes Gtd via R-Exp. only. Prices Subject to Change Without Notice. Phone: WOrth 2-7230.**

THAT'S A BUY — **"T A B"** — THAT'S A BUY

DEPT. 8E SIX CHURCH ST. NEW YORK 6, N.Y., U.S.A. — CORNER CHURCH & LIBERTY STS. ROOM 200

INDEX TO ADVERTISERS

Ace Engineering & Machine Co., Inc. 305
Acheson Colloids Corp. 221
Acme Electronics, Inc. 301
Acme Wire Co. 164
Adams & Westlake Company, The 10
Advertising Council 350
Aeronautical Communications Equipment, Inc. 181
Aerovox Corp. 62
Aircraft-Marine Products, Inc. 20
Airpax Products Company 172
Alden Products Co. 288
Allegheny Ludlum Steel Corp. 241
Allen Co., Inc., L. B. 311
Allen Manufacturing Company 150
Allied Control Company, Inc. 46
American Gas Accumulator Company 192
American Lava Corp. 39
American Phenolic Corporation 154
American Smelting & Refining Co. Federated Metals Division 60
American Television & Radio Co. 188
American Time Products, Inc. 56
Amperex Electronic Corp. .... Third Cover
Amperite Company, Inc. 276
Ampex Electric Corporation 194
Andrew Corporation 275
Antara Products Division of General Dyestuff Corp. 64, 65
Arkwright Finishing Company 216
Arnold Engineering Company 251
Art Wire & Stamping Co. 297
Automatic Electric Sales Corporation 28, 29

Ballantine Laboratories, Inc. 182
Barry Corporation 78
Bead Chain Manufacturing Co. 276
Bell Aircraft Corporation 232
Bell Telephone Laboratories 74
Bendix Aviation Corporation Eclipse-Pioneer Division 296
Red Bank Division 237
Bentley, Harris Mfg. Co. 16
Berkeley Scientific Corporation 222
Bird Electronic Corp. 306
Birmingham Sound Reproducers, Ltd. 147
Bircher Corporation 180
Bishop Manufacturing Corporation 200
Boeing Airplane Company 263
Boonton Radio Corporation 141
Borg Corp., George W. 304, 305
Bowser, Inc. 192
Brand & Co., Inc., William 190
Bridgeport Brass Co. 231
Brooks Radio & Television Corp. 289
Brown Electro-Measurement Corp. 283
Bruning Company, Inc., Charles 271
Brush Development Company 152, 227
Burnell and Company 71
Bussmann Mfg. Co. 243

Calnivar Company, Microwave Div. 73
Cambridge Thermionic Corp. 282
Cannon Electric Co. 258
Centralab, Div. Globe-Union, Inc. 11, 12, 13
Chase Brass & Copper Sub. of Kennecott Copper Corp. 208
Chicago Telephone Supply Corporation 24, 25
Chicago Transformer Div. of Essex Wire Corp. 236
Cinch Manufacturing Corp. 133
Clare and Co., C. P. 43
Cleveland Container Company 232
Clippard Instrument Laboratory, Inc. 224
Cohn Corporation, Sigmund 281
Collins Radio Company 54
Compass Communications Company 244
Condenser Products Company 9
Continental-Diamond Fibre Company 157
Cornell-Dubilier Electric Corp. 207
Corning Glass Works 185
Corry-Jamestown Mfg. Corp. 264
Coto-Coil Co., Inc. 184
Craft Manufacturing Co. 206
Cramer Co., Inc., R. W. 212
Cross Co., H. 311
Crowley & Co., Inc., Henry L. 22

Daniels, Inc., C. R. 285
Dano Electric Company 305
Daven Co., The 215

Defense Research Board 307
Delco Radio Div., General Motors Corp. 167
Dial Light Company of America 156
Dielcam Corp. 283
Dow Corning Corporation 311
Driver Company, Wilbur B. 8
Driver-Harris Company 222
DuMont Laboratories, Inc., Allen B. 217
du Pont de Nemours and Co., (Inc.) E. I. Polychemicals Dept. 159
Durant Manufacturing Co. 295
DX Radio Products Co. 274

Eastern Air Devices, Inc. 297
Eastman Kodak Company Industrial Photographic Div. 175
Edin Company, Inc. 279
Edison, Inc., Thomas A. 294
Elcor, Inc. 191
Eisler Engineering Company, Inc. 293, 311
Eitel-McCullough, Inc. 61
Electra Mfg. Co. 310
Electric Indicator Co. 262
Electrical Industries, Inc. 287
Electrical Reactance Corp. 40
El-Tronics, Inc. 311
Electronic Associates, Inc. 248
Electronic Tube Corp. 204
Electrons, Inc. 266
Electro Tec Corporation 283
Empire Devices, Inc. 308
Erie Resistor Corp. 189

Fairchild Camera & Instrument Corp. 58
Federal Telephone & Radio Corporation 225
Ferroxcube Corp. of America 47
Fidelity Chemical Products Corp. 272
Five Star Co. 311
Freed Transformer Co., Inc. 187
Furst Electronics 268
Fusite Corporation 211

Gair Company, Inc., Robert 309
Gamewell Company 306
General Ceramics & Steatite Corporation 239
General Electric Company Apparatus Dept. 36, 37, 48, 235, 253
Chemical Dept. 170
Electronics Dept. 27, 58
General Industries Co. 201
General Precision Laboratory, Inc. 41
General Radio Company 151
Giannini & Co., Inc., G. M. 303
Gilfillan Brothers 267
Grant Pulley & Hardware Co. 310
Graphite Metallizing Corp. 268
Grayhill 278
Green Instrument Co. 283
Gries Reproducer Corp. 265
Guardian Electric Mfg. Co. 165

Hardwick, Hindle, Inc. 213
Hathaway Instrument Co. 203
Haydon Company, A. W. 200
Haydon Manufacturing Co., Inc. 282
Heath Company 268
Heiland Research Corporation 276
Heinemann Electric Co. 183
Helipot Corporation 183
Hewlett-Packard Company 21
Hexacon Electric Company 299
Hobson Bros. 303
Holliston Mills, Inc., The 285
Houghton Laboratories, Inc. 195
Hytron Radio & Electronics Corp. 18

Improved Seamless Wire Company, The 196
Indiana Steel Products Company 52
Industrial Condenser Corp. 301
Industrial Timer Corporation 50
Instrument Resistors Company 240
International Resistance Co. 4, 5
Irvington Varnish & Insulator Co. 7, 200

FOR PRODUCT INFORMATION
Refer to the 1951-52 Issue of
ELECTRONICS BUYERS' GUIDE



—PRECISION—
SERIES ES-500A
High Sensitivity—Wide Range
5" OSCILLOSCOPE
with PUSH-PULL VERTICAL and HORIZONTAL AMPLIFIERS
20 MV. per inch "V" Sensitivity
150 MV. per inch "H" Sensitivity

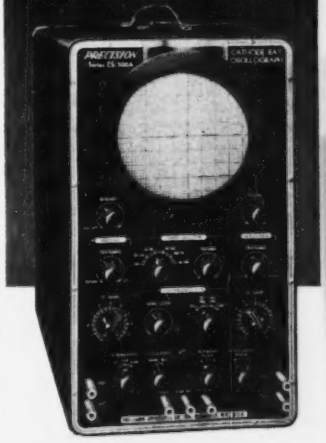

IMPORTANT FEATURES

★ **High Sensitivity, Extended Range, Push-Pull, Voltage Regulated Vertical Amplifier** — 10 cycles to 1 MC response. Input 2 megs. 22 mmfd.
★ **Frequency Compensated "V" Input Step Attenuator.**
★ **Vertical Phase-Reversing Switch.**
★ **Extended Range, High Sensitivity, Push-Pull Horizontal Amplifier** — 10 cycles to 1 MC response at full gain. Input ½ meg. and 20 mmfd.
★ **Linear Multi-Vibrator Sweep Circuit** — 10 cycles to 30 KC plus line and external sweep.
★ **4-Way Synch. Selection** — Internal Positive, Internal Negative, External and Line.
★ **"Z" Axis Modulation** terminal for blanking, etc.
★ **Internal, Phasable, 60 cycle Beam Blanking.**
★ **Sweep Phasing Control.** Wide-angle bridge circuit.
★ **Direct H and V Plate Connections;** all 4 plates.
★ **Audio Monitoring Phone Jacks.**
★ **High Intensity CR Patterns** through use of adequate high voltage power supply with 2X2 rectifier.
★ **Tube Complement and Circuit** — 6C4 "V" cathode follower, 6CB6 "V" amplifier, 6C4 "V" phase inverter. Push-Pull 6AU6's "V" CR driver. 7N7 "H" amplifier and phase inverter. Push-Pull 6AU6's "H" CR driver. 7N7 sweep oscillator. 5Y3 and 2X2 rectifiers. VR-150 voltage regulator. 5CP1/A CR Tube.
★ **7 Four-Way Lab. Type Input Terminals** — Take banana plugs, phone tips, bare wire or spade lugs.
★ **Light Shield and Mask** removable and rotatable.
★ **Extra Heavy-Duty Construction** and components to assure "Precision" performance.
★ **Heavy Gauge, Anodized, No-Glare, Aluminum Panel.**
★ **Fully Licensed** under W.E. Co. patents.

★ In louvred, black ripple, heavy gauge steel case. Size 8¾" x 14½" x 18". Complete with light shield, calibrating mask and instruction manual. **NET PRICE $189.50**

See this new "PRECISION" 5" Oscilloscope on display and available at leading radio equipment distributors.

Precision Apparatus Co., Inc.
92-27 HORACE HARDING BLVD.
ELMHURST 10, N. Y.

Export: 458 B'way, N.Y.C., U.S.A. Cables: MORHANEX
In Canada: Atlas Radio Corp. Ltd., Toronto, Ontario

It's time we got *working* mad!

As we listen to the latest insults from Moscow, we're likely to get fighting mad.

Instead, we'd better use our heads and get *working* mad.

It is clear by now that Stalin and his gang respect just one thing—strength. Behind the Iron Curtain they've been building a huge fighting machine while we were reducing ours. Now we must rebuild our defenses—*fast.*

As things stand today, there is just *one* way to prevent World War III. That is to re-arm—to become strong—and to stay that way!

This calls for better productivity all along the line. Not just in making guns, tanks and planes, but in turning out civilian goods, too.

Arms must come first. But we must produce arms *at the same time* we produce civilian goods.

We can do this double job if we all work together to turn out more for every hour we work—if we use our ingenuity to step up productivity.

All of us must now make sacrifices for the common good. But we're working for the biggest reward of all —*peace with freedom!*

THE BETTER WE PRODUCE THE STRONGER WE GROW

A PUBLIC SERVICE PROJECT ★ THE ADVERTISING COUNCIL ★

FOR A FREE COPY OF "THE MIRACLE OF AMERICA"

MAIL THE COUPON to Public Policy Committee, The Advertising Council, Inc., Dept. B.P., 25 West 45th Street, New York 19, N. Y.

Name.....

Address.....

.....



McGRAW-HILL PUBLISHING COMPANY

Jelliff Manufacturing Corporation, C. O.. 200
Jennings Radio Manufacturing Co..... 296
Johnson Co., E. F..... 291
Jones Div., Howard B. Cinch Mfg. Corp.. 289

Kahle Engineering Co..... 303
Karp Metal Products Co., Inc..... 83
Kartron..... 311
Kellogg Switchboard & Supply Company 160
Kenyon Transformer Company, Inc..... 159
Kester Solder Company..... 137
Kinney Manufacturing Company..... 161
Kollsman Instrument Corp..... 42

Laboratory For Electronics, Inc..... 284
Lambda Electronics Corp..... 291
Lampkin Laboratories..... 311
Lapp Insulator Co., Inc..... 19
Leach Relay Company..... 186
Leeds & Northrup Co..... 67
Lenkurt Electric Co..... 172
Lenz Electric Manufacturing Co..... 44
Link Aviation, Inc..... 228
Littelfuse, Inc..... 57
Louthan Manufacturing Company..... 176
Lust, Henry B..... 311

Mack Molding Company, Inc..... 208
Magnecord, Inc..... 214, 273
Mallory and Company, Inc., P. R.... 80, 135
Manning, Maxwell & Moore, Inc..... 187
Marconi Instruments, Ltd..... 276
Marion Electrical Instrument Co..... 2
Markem Machine Company..... 240
MB Manufacturing Co., Inc..... 289
McGraw-Hill Book Co., Inc..... 270
McIntosh Engineering Laboratories, Inc. 301
Metal Textile Corporation..... 188
Metals & Control Corp., General Plate Division..... 32
Mica Insulator Company..... 66
Mico Instrument Co..... 293
Millen Mfg. Co., Inc., James..... 152
Milo Radio & Electronics Corp..... 166
Miniature Precision Bearings, Inc..... 311
Minnesota Mining & Mfg. Co..... 23
Mitchell-Rand Insulation Co., Inc..... 173
Mosinee Paper Mills Company..... 170
Motorola..... 171
Muirhead & Co., Ltd..... 3
Mycalex Corp. of America..... 55

National Company, Inc..... 164
National Moldite Co..... 244
National Research Corp..... 38
Neo-Sil Corp..... 63
New Hermes, Inc..... 307
New York Transformer Co., Inc..... 250
North American Aviation, Inc..... 176, 272
North Electric Mfg. Co..... 210
Northern Radio Co., Inc..... 281
Nothelfer Winding Laboratories..... 300

Oak Ridge Products..... 302
Ohm-Art Div., Chicago Dial Co..... 26
Olympic Metals Products Co., Inc..... 286
O'Neill-Irwin Mfg. Co..... 295
Opad-Green Company..... 278

Panoramic Radio Products, Inc..... 300
Paper Machinery & Research, Inc..... 160
Paramount Paper Tube Corp..... 196
Patten-MacGuyer Co..... 293
Phalo Plastics Corporation..... 226
Pickering & Co., Inc..... 307
Pix Manufacturing Co., Inc..... 301
Pisakon Division, Libbey-Owens-Ford Glass Co..... 75
Polarad Electronics Corporation..... 297
Potter Instrument Co., Inc..... 172
Precision Apparatus Co., Inc..... 249
Precision Metal Products Co. of Malden.. 184
Precision Paper Tube Co..... 192
Presto Recording Corporation..... 45
Pyramid Electric Co..... 76, 145

Quaker City Gear Works..... 297

Radio Corp. of America..... 14, 15, 238, 215, Back Cover
Radio Materials Corporation..... 193
Radio Receptor Company, Inc..... 155
Radio Shack Corp..... 254
Radio Wire Television, Inc..... 289
Railway Express Agency, Air Express Division..... 247
Raytheon Manufacturing Co..... 113, 292
R-B-M Division, Essex Wire Corp..... 158
Reeves-Hoffman Corporation..... 202
Remler Company, Ltd..... 300
Republic Foil & Metal Mills, Inc..... 49

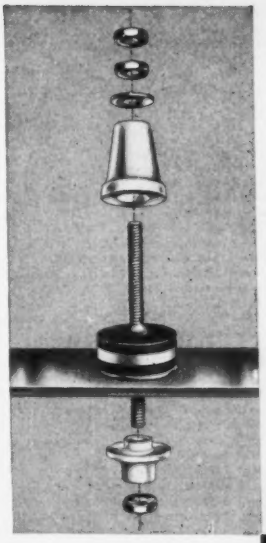

first again with

TEFLON

•

HERMETICALLY SEALED TO METALS

(Patents Pending)



for Vacuum-tight TERMINALS and FEED-THROUGH INSULATORS

for Moisture-impervious PRINTED CIRCUITS

for Electrical characteristics ranging from insulator to semi-conductor to low resistance conductor in the same unit.

for Metal Faced Teflon sheets, bars, cylinders and certain fabricated parts for particular problems.

The fluoro-carbon metal fused seal is a true hermetic seal capable of holding a vacuum for sustained periods. It is recommended where severe service conditions are encountered—vibration, shock, high and low ambient temperatures, thermal shock, extreme climatic conditions.

Because Teflon is being allocated by the Government, only those problems which bear National Production Authority Sanction can be considered at this time.

For further information, write.

UNITED STATES GASKET COMPANY

TEFLON PRODUCTS DIVISION

600 N. 10TH STREET, CAMDEN, N.J.

u.s.e.

u.s.e.

u.s.e.

u.s.e.

u.s.e.

u.s.e.

u.s.e.

u.s.e.

for quality in coils it's . .



U. S. ELECTRONICS

• *Versatility in engineering*
• *Adherence to specifications*
• *Quality production procedures*

Cathode Trap Coils • I.F. Transformers • Width Control Coils • Heater Choke Coils • Video Peaking Coils • R.F. Coils • Horizontal Linearity Control Coils • Horizontal Oscillator Coils • Oscillator and Solenoid Coils • Sound Discrimination Transformers • Sound I.F. Transformers • Picture I.F. Transformers. Write today for catalog or samples.

u.s.e.

United States Electronics Corp.
Lyndhurst, New Jersey

Resistance Products Co. 180
Rex Corporation 308
Rex Rheostat Co. 311
Richardson Company 72
Robinson Aviation, Inc. 218
Rohden Mfg. Co. 305
Runzel Cord & Wire Co. 287

Samco Products Company 147
Sangamo Electric Company 30
Sarkes Tarzian, Inc. 220
Scientific Electric Div. of "S" Corrugated Quenched Gap Co. 156
Secon Metals Corporation 307
Servo Corporation of America 274
Sessions Clock Company, Timer Div. 230
Set Screw & Mfg. Co. 176
Sigma Instruments, Inc. 70
Snyder Mfg. Co. 205
Sola Electric Company 219
Sorensen and Company, Inc. 6
Sound Apparatus Company 287
Southwestern Industrial Electronics Co. 198
Specialty Battery Company 156
Speer Resistor Corp. 249
Sponge Rubber Products Company 31
Sprague Electric Company 139
Stackpole Carbon Co. 174
Standard Electric Time Co. 40
Standard Piezo Company 164
Standard Pressed Steel Co. 291
Standard Telephones & Cables, Ltd. 260
Standard Transformer Corp. 242
Statham Laboratories 299
Staver Company, Incorporated 285
Stevens Arnold, Inc. 274
Stevens Mfg. Co., Inc., Geo. 246
Stevens Manufacturing Co., Inc. 260
Steward Manufacturing Co., D.M. 195
Stoddart Aircraft Radio Co. 277
Stokes Machine Co., F. J. 59
Stupakoff Ceramic & Mfg. Company 229
Superior Electric Co. 17
Superior Instrument Co. 272
Superior Tube Company 257
Sylvania Electric Products, Inc. 77, 149

Taylor Fibre Co. 153
Taylor Tubes, Inc. 162
Tektronix, Inc. 301
Tel-Instrument Co., Inc. 304
Telectronics Laboratory, Inc. 311
Telex, Electro-Acoustic Division 188
Thomas & Skinner Steel Products Co. 270
Transradio, Ltd. 184
Tung-Sol Lamp Works, Inc. 16A, 16B

Ucinite Co. 34
Ulanet Company, George 232
Unger Electric Tools, Inc. 291
United Manufacturing & Service Co. 177
United States Electronics Corporation 352
United States Gasket Company 351
United Transformer Co. ..... Second Cover

Varflex Sales Co., Inc. 70
Veeder-Root, Inc. 199
Victoreen Instrument Company 196
Vulcan Electric Company 287
Waldes Kohinoor, Inc. 35
Ward Leonard Electric Company 178
Waterman Products Co., Inc. 295
Weller Electric Corp. 278
Western Gold & Platinum Works 302
Westinghouse Electric Corp. 68, 69, 261
Wheeler Insulated Wire Co., Inc. 234
White Dental Mfg. Company, S. S. 280, 289
Whitehead Stamping Company 303
Wilcox Electric Company 255
Wilton Tool Mfg. Co. 285
Winchester Electronics Incorporated 299
Workshop Associates, Inc. 256

Zophar Mills, Inc. 160

PROFESSIONAL SERVICES 312

SEARCHLIGHT SECTION
(Classified Advertising)

EMPLOYMENT
Positions Vacant 313-319
Positions Wanted 313
Selling Opportunities Wanted 313

BUSINESS OPPORTUNITIES
Offered 313

EQUIPMENT
(Used or Surplus New)
For Sale 320-348

ADVERTISERS INDEX

Admiral Corporation 316
Airborne Instruments Laboratory, Inc. 314
Aircraft Armaments, Inc. 317
Aircraft Radio Industries, Inc. 346
Alvaradio Supply Co. 347
American Electrical Sales Co. 342
American Electronics 347
Applied Science Corp. of Princeton 316
Arma Corporation 318
Arrow Sales, Inc. 336
Barry Electronics Corp. 340, 344
Bendix Aviation Corp. 315
Blan 339
Boonton Radio Corp. 313
C & H Sales Co. 343, 346
Chase Electronics Supply Co. 339
Columbia Electronics, Ltd. 342, 346
Commercial Surplus Sales Co. 338
Communications Devices Co. 337
Communications Equipment Co. 330, 331, 332
Cornell Aeronautical Laboratory, Inc. 319
Cottone & Co., A. 340
Cunningham Engineering Co. 340
Electro Impulse Laboratory 337
Electro Sales Co. 328, 343
Electronic Engineering Co., of Calif. 318
Electronicraft, Inc. 326
Emerson Electric Mfg. Co. 319
Empire Electronics 347
E P C O 347
Freeland Products Co. 347
General Electric Co. 317
General Motors Corp., AC Spark Plug Div. 316
Globe Trading Co. 340, 347
Goodyear Aircraft Corp. 315
Green, Gould 346
Hall Electric, Ltd. 341
Harmar Co., The 334
Hayden Brothers 343
International Business Machines 316
Instrument Associates 323
J. S. H. Sales Co. 345
Kato Engineering Co. 344
Kellett Aircraft Corp. 318
Kings County Machinery Exchange 343
Land-Air Inc. 318
Lectronic Research Laboratories 329
Liberty Electronics, Inc. 322
Life Electronic Sales 339
Lowenthal Co., T. R. 341
Marino Radio Co. 335
Maritime International Co. 344
Mogull Co., Inc., Alexander 333
Maritime Switchboard 338
Maxson Corp., The W. L. 314
Melpar Inc. 314
Minneapolis Honeywell 319
Monmouth Radio Laboratories 345
New York Transformer Co., Inc. 313
Norman Radio Distributors, Inc. 336
Northrop Aircraft, Inc. 316
Phillips Petroleum Co. 318
Photocon Sales 345
Precision Electrical Instrument Co. 343
Radio & Electronic Surplus 342
Radio Development & Sales Co. 347
Radio Ham Shack, Inc. 320, 321
Radiovision Co., The 345
Rajah Fabrics Corp. 313
Reliance Merchandising Co. 327
Sandia Corp. 317
Sanett, Bob 346
Servo-Tek Products Co., Inc. 325
Sountronics Labs 343
TAB 348
Technical Radio Parts Co. 347
Telemarine Communications Co. 342
Universal General Corp. 336
United Surplus Materials 345
Viking Electronics Corp. 347
Wells Sales, Inc. 324
Weighman Herbert G. 313
Western Electric Co. 314
Westinghouse Electric Corp. 319
Weston Laboratories 340
West Region Electronics 346
Western Electric 314
Wilgreen 342
Wolf Co., Edward 345

This index is published as a convenience to the readers. Every care is taken to make it accurate, but ELECTRONICS assumes no responsibility for errors or omissions.

PUSH-PULL POWER

with REDUCED CAPACITANCES

250 mc. 85 watts output

300 mc. 70 watts output

430 mc. 32 watts output

AMPEREX

AX-9903/5894

NEW!

UHF and VHF Twin Tetrode for W-I-D-E Band Operation

RF Amplifier, Modulator, Frequency Doubler, Tripler

AX-9903/5894 CHARACTERISTICS

Filament Voltage	
Series	12.6 v.
Parallel	6.3 v.
Filament Current	
Series	0.9 a.
Parallel	1.8 a.
Maximum	
d.c. Plate Voltage	600
d.c. Grid #2 Voltage	250
d.c. Grid #1 Voltage	−175
Plate Dissipation (w.)	2 x 20
d.c. Plate Current (ma.)	2 x 100

COMPARE CAPACITANCES of this tube with its nearest equivalent type.

Grid to Plate	< 0.08 mmfd.	< 0.12 mmfd.
Input	6.7 mmfd.	14.5 mmfd.
Output	2.1 mmfd.	7.0 mmfd.

MOUNTING POSITION: Base up or down. Horizontal with anode leads in horizontal plane.

Fits 829B Type Socket.

- The AMPEREX AX-9903/5894 is an improved version of the 829B. The design of this tube incorporates features which produce considerably smaller output capacitances and which, therefore, result in higher resonant frequencies (approximately 500 mc. instead of 250 mc.). In addition, because of the low inductances of the connections between the cathode and screen-grid, more stable operation at high frequencies is effected.
- A most desirable design characteristic, also, is the incorporation of internal neutralizing condensers which are connected directly to the control-grids, making impossible self-oscillation in a tuned-plate, tuned-grid transmitter.
- Of importance in this new design are such features as:
  1. Direct and short connection between the pins and the anode, causing lower inductance and resistance.
  2. No insulating parts (mica or ceramics) between anodes, resulting in lower losses at high frequencies.
  3. "Screened" micas, thereby preventing possible losses due to contaminated mica.
  4. Zirconium-coated moly anodes, giving a higher degree of vacuum than possible with nickel anodes and barium getters.
- For the full story on how to use the AMPEREX AX-9903/5894 in your particular application, write to Application Engineering, Department N. Or if you prefer, ask for an AMPEREX representative to call.
- IMMEDIATE DELIVERY* Order from your local electronics parts distributor. If unavailable, write direct to our plant.

**Subject to prior sale*

AMPEREX ELECTRONIC CORP.
25 WASHINGTON STREET, BROOKLYN 1, N. Y.
In Canada and Newfoundland: Rogers Majestic Limited
11-19 Brentcliffe Road, Leaside, Toronto, Ontario, Canada
Cable: AMPRONICS

re-tube with AMPEREX

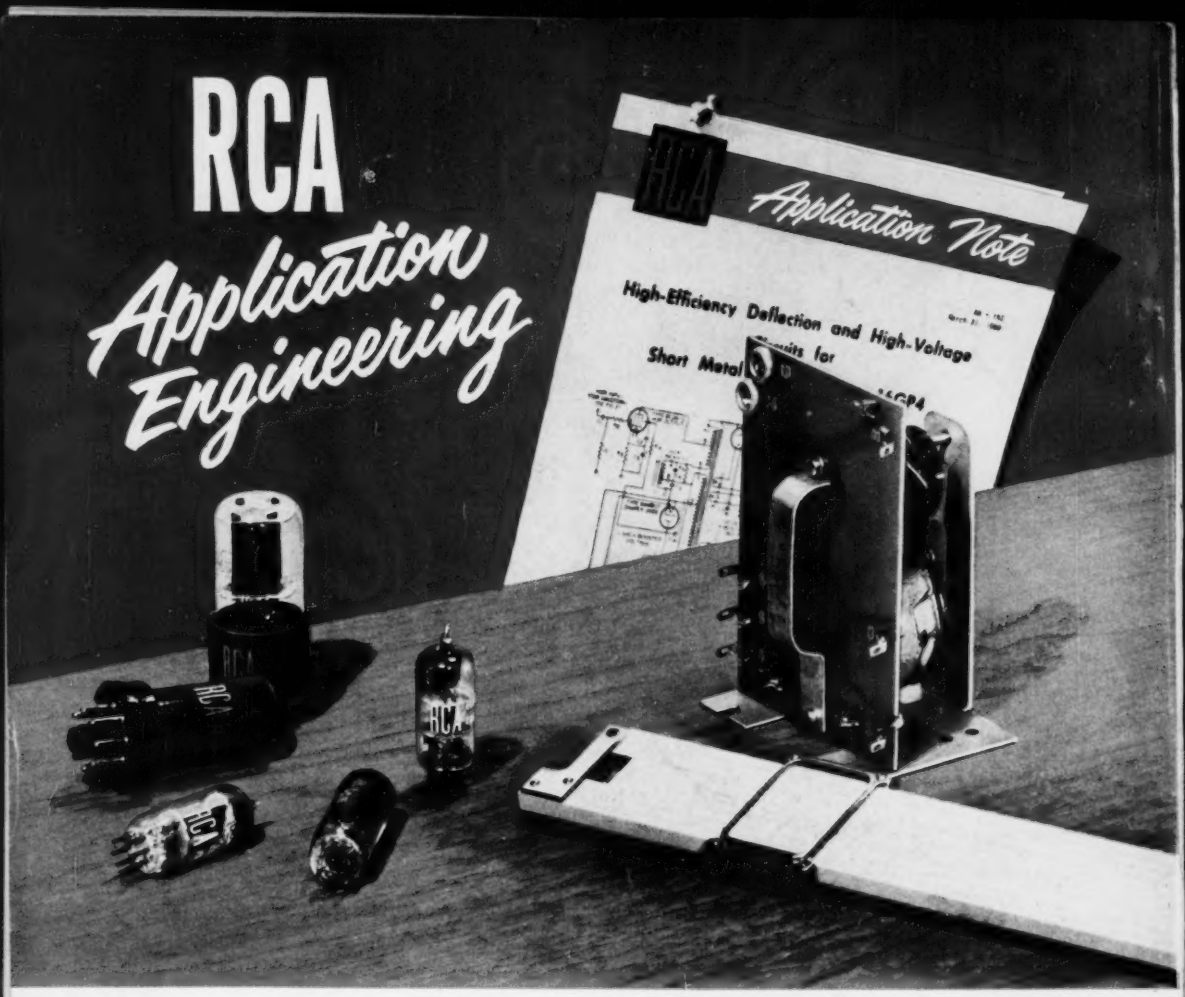

Preface to a Better Product . . .

an industry service without parallel

RCA Application Engineering is a specialized service designed to assist electronic equipment manufacturers in product development. This service is at the disposal of all RCA tube and component customers.

RCA Application Engineering offers you the collective experience of specialists in electronics who are qualified to help you with your design, specification, and production problems. These field engineers devote their time exclusively to a personal and confidential appraisal of customer's specific tube and component requirements . . . and a translation of these requirements into better products. In addition, three RCA Application Engineering Laboratories—conveniently located at Harrison, Lancaster, and Chicago . . . are available for circuit research, product investigation, performance tests, specification checks, and statistical quality analysis.

The vast and impressive experience of this Application Engineering group accounts in part for RCA's engineering leadership in the development of better tubes and components in advance of the market.

To put **RCA Application Engineering** to work for you, phone the nearest RCA office* . . . or write RCA, Commercial Engineering, Section 42HR, Harrison, New Jersey.

*(East) Harrison 6-8000, 415 S. 5th St., Harrison, N. J. (Midwest) Whitehall 4-2900, 589 E. Illinois St., Chicago, Ill. (West) Trinity 5641, 420 S. San Pedro St., Los Angeles, California.

The Fountainhead of Modern Tube Development is RCA

RADIO CORPORATION of AMERICA
ELECTRON TUBES AND COMPONENTS HARRISON, N. J.